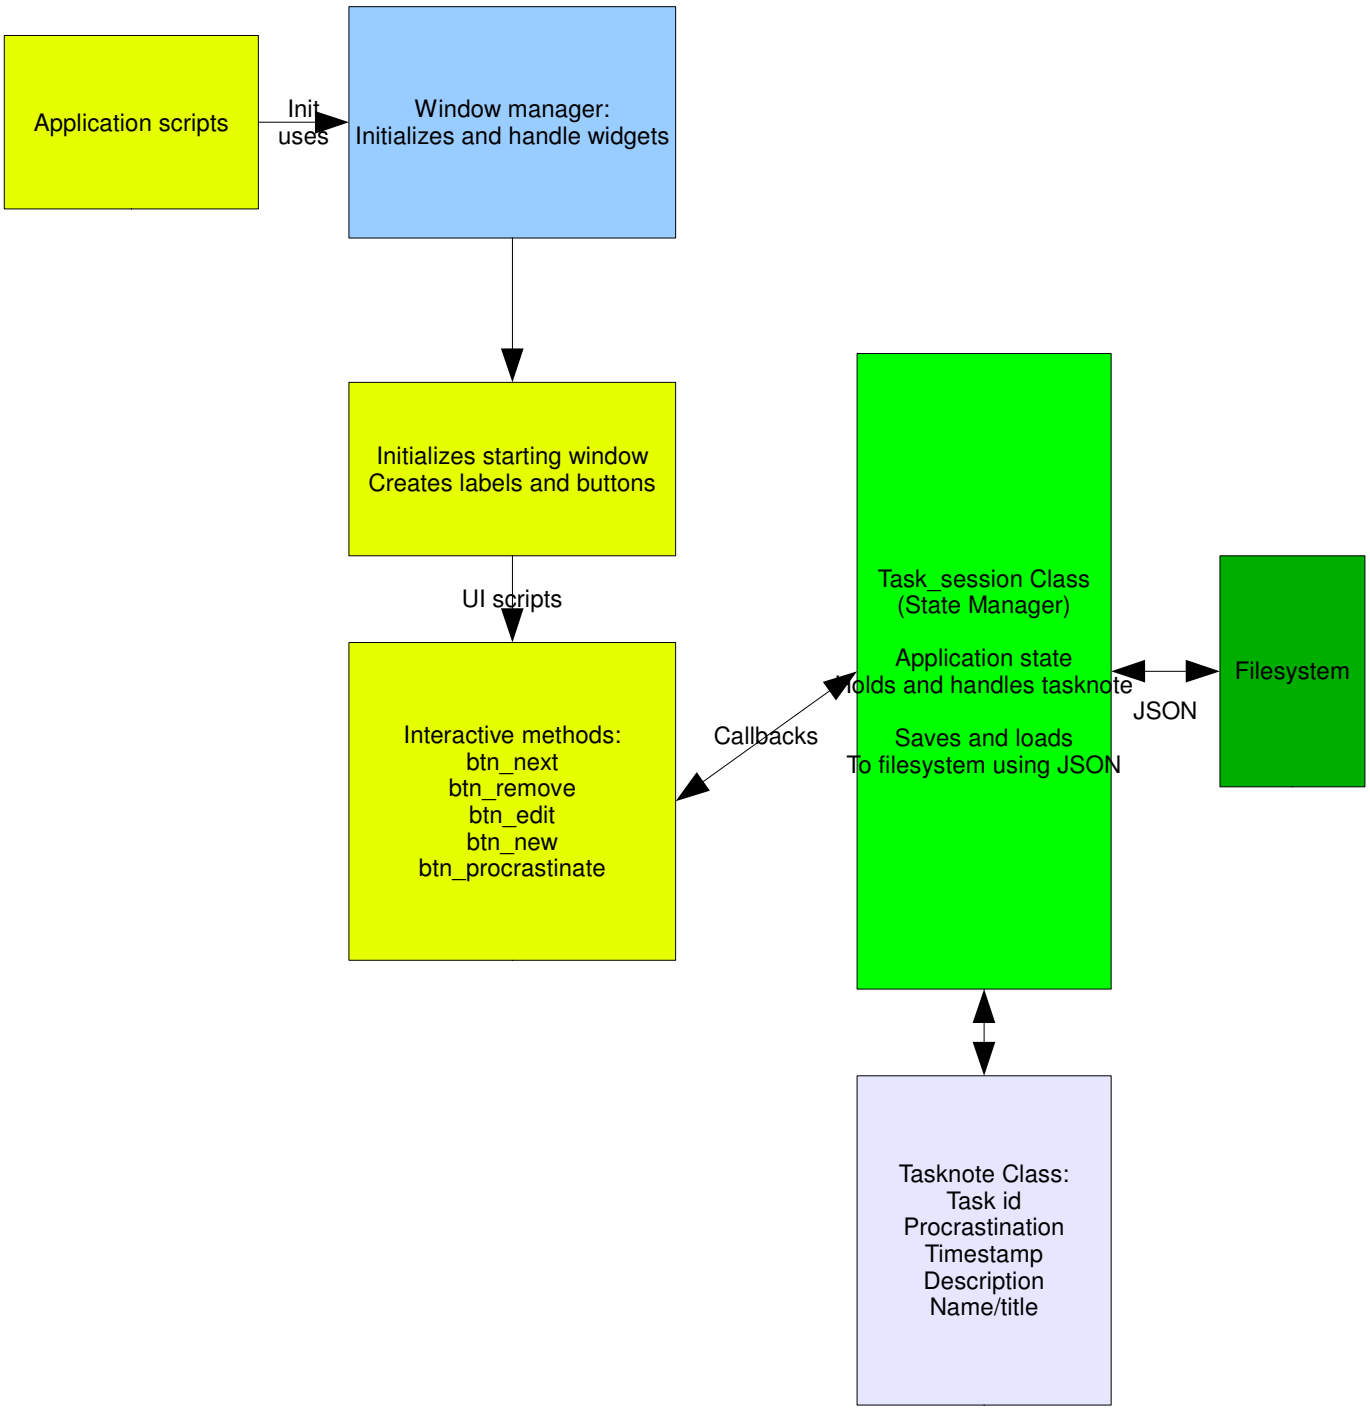
Application scripts
Init
uses
Window manager:
Initializes and handle widgets
Initializes starting window
Creates labels and buttons
UI scripts
Interactive methods:
btn_next
btn_remove
btn_edit
btn_new
btn_procrastinate
Callbacks
Task_session Class
(State Manager)
Application state
Holds and handles tasknote
Saves and loads
To filesystem using JSON
JSON
Filesystem
Tasknote Class:
Task id
Procrastination
Timestamp
Description
Name/title