

Recibidos (2) - jbravozam x La tarde del martes en An x Mensajito Interactivo | Tig x Code School - Try Git x



https://try.github.io/levels/1/challenges/1

1.1 · Got 15 minutes and want to learn Git?

Git allows groups of people to work on the same documents (often code) at the same time, and without stepping on each other's toes. It's a distributed version control system.

Our terminal prompt below is currently in a directory we decided to name "octobox". To initialize a Git repository here, type the following command:

[git init](#)

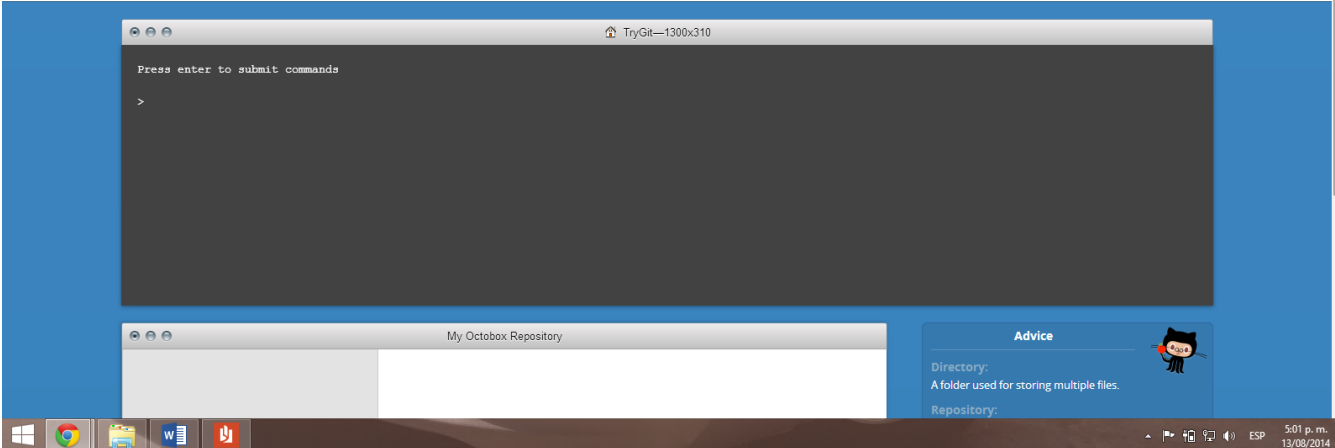

The screenshot shows the TryGit web application. At the top, there's a navigation bar with several tabs. The main content area has a blue background. On the right, there's a 'tryGit' logo featuring a black cat. Below the logo, there's a terminal window titled 'TryGit—1300x310' with a dark background and white text. The terminal shows the prompt 'Press enter to submit commands' and a single line '>'. Below the terminal, there's a file explorer window titled 'My Octobox Repository' with a light gray background. To the right of the file explorer, there's an 'Advice' box with a small cat icon and text: 'Directory: A folder used for storing multiple files. Repository:'. At the bottom of the browser window, there's a taskbar with icons for Windows, Chrome, File Explorer, Word, and a red icon. The system clock shows 5:01 p.m. on 13/08/2014.

Recibidos (2) - jbravozam x La tarde del martes en An x Mensajito Interactivo | Tig x Code School - Try Git x Outlook.com - jbravozam x

https://try.github.io/levels/1/challenges/2



1.2 · Checking the Status

Good job! As Git just told us, our "octobox" directory now has an empty repository in **/.git/**. The repository is a hidden directory where Git operates.

To save your progress as you go through this tutorial -- and earn a badge when you successfully complete it -- head over to [create a free Code School account](#). We'll wait for you here.

Next up, let's type the **git status** command to see what the current state of our project is:

[git status](#)

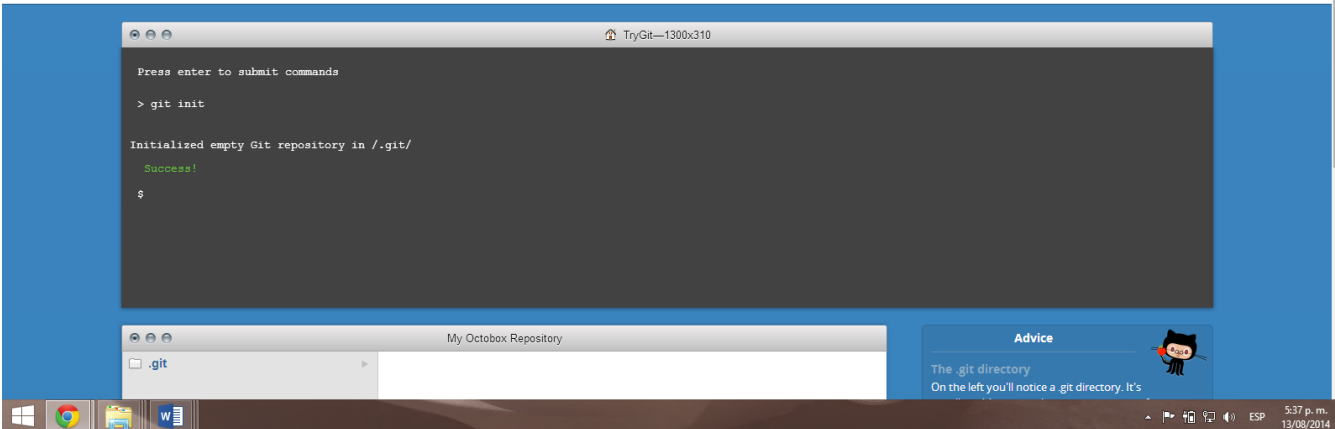

The screenshot shows the TryGit web application at the second challenge. The main content area has a blue background. On the right, there's a 'tryGit' logo featuring a black cat. Below the logo, there's a terminal window titled 'TryGit—1300x310' with a dark background and white text. The terminal shows the prompt 'Press enter to submit commands', the command '> git init', and the output 'Initialized empty Git repository in /.git/' followed by 'Success!' and a new prompt '\$'. Below the terminal, there's a file explorer window titled 'My Octobox Repository' with a light gray background. The file explorer shows a directory named '.git'. To the right of the file explorer, there's an 'Advice' box with a small cat icon and text: 'The .git directory On the left you'll notice a .git directory. It's'. At the bottom of the browser window, there's a taskbar with icons for Windows, Chrome, File Explorer, Word, and a red icon. The system clock shows 5:37 p.m. on 13/08/2014.

Recibidos (2) - jbravozam x La tarde del martes en An x Mensajito Interactivo | Tio x Code School - Try Git x Outlook.com - jbravozam x



https://try.github.io/levels/1/challenges/4

1.4 · Adding Changes

Good, it looks like our Git repository is working properly. Notice how Git says **octocat.txt** is "untracked"? That means Git sees that **octocat.txt** is a new file.


To tell Git to start tracking changes made to **octocat.txt**, we first need to add it to the staging area by using **git add**.

[git add octocat.txt](#)

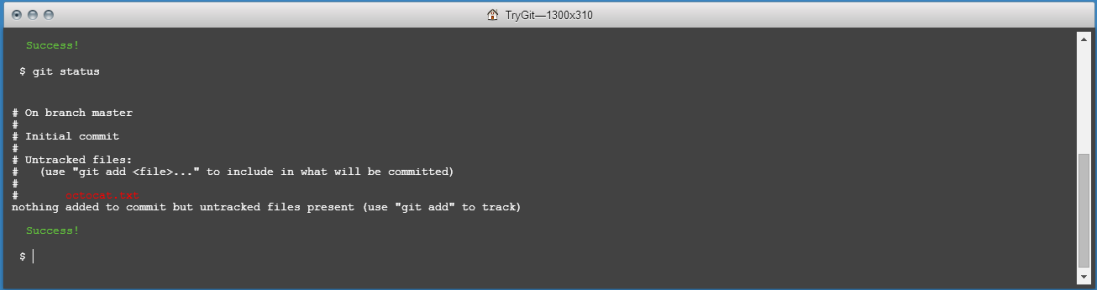


```
Success!
$ git status

# On branch master
#
# Initial commit
#
# Untracked files:
#   (use "git add <file>..." to include in what will be committed)
#
#   octocat.txt
nothing added to commit but untracked files present (use "git add" to track)
Success!
$ |
```

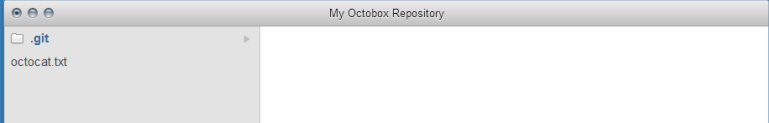

My Octobox Repository

.git
octocat.txt

Advice

staged:
Files are ready to be committed.

unstaged:
Files with changes that have not been prepared to be committed

Windows taskbar: 5:40 p.m. 13/08/2014



Recibidos (2) - jbravozam x La tarde del martes en An x Outlook.com - jbravozam x Code School - Try Git x

https://try.github.io/levels/1/challenges/5

1.5 · Checking for Changes


Good job! Git is now tracking our **octocat.txt** file. Let's run **git status** again to see where we stand:

[git status](#)

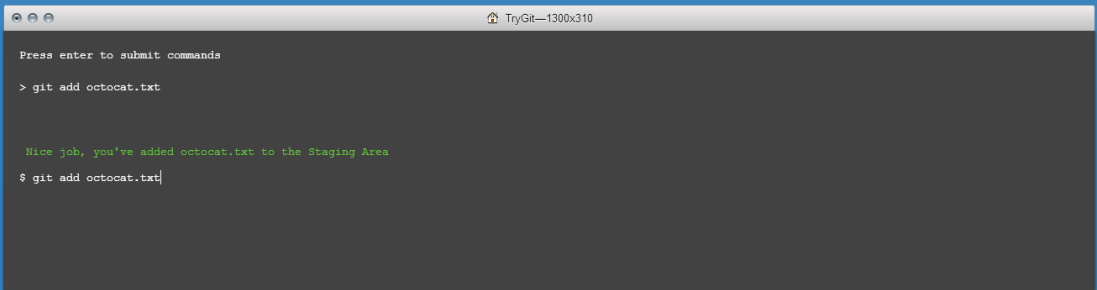


```
Press enter to submit commands
> git add octocat.txt

Nice job, you've added octocat.txt to the Staging Area
$ git add octocat.txt|
```

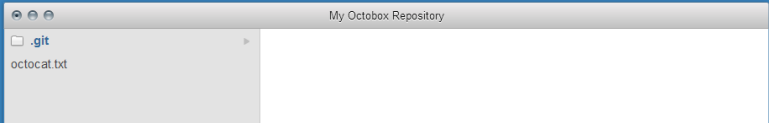

My Octobox Repository

.git
octocat.txt

Advice

add all:
You can also type `git add -A`, where the dot stands for the current directory, so everything in and beneath it is added. The `-A` ensures even file deletions are included.

Windows taskbar: 5:45 p.m. 13/08/2014


Recibidos (2) - jbravozam | La tarde del martes en An | Outlook.com - jbravozam | Code School - Try Git | <https://try.github.io/levels/1/challenges/6>

1.6 · Committing

Notice how Git says **changes to be committed**? The files listed here are in the **Staging Area**, and they are not in our repository yet. We could add or remove files from the stage before we store them in the repository.

To store our staged changes we run the **commit** command with a message describing what we've changed. Let's do that now by typing:

```
git commit -m "Add cute octocat story"
```

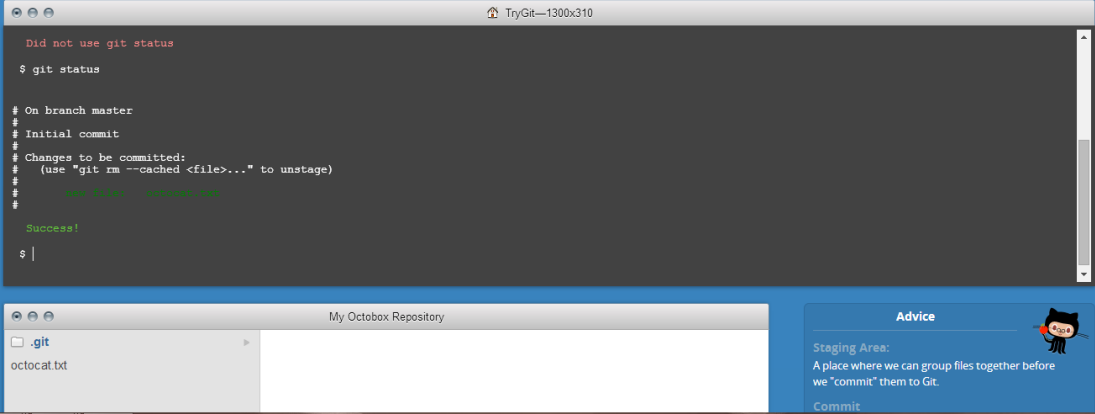

The terminal window shows the output of the `git status` command. It indicates that the repository is on the `master` branch and that there is an initial commit. It lists changes to be committed, including a new file `octocat.txt`. Below the terminal, a file explorer window titled "My Octobox Repository" shows the `.git` directory and the `octocat.txt` file.

Advice

Staging Area:
A place where we can group files together before we "commit" them to Git.

Commit

5:46 p. m.
13/08/2014


Recibidos (2) - jbravozam | La tarde del martes en An | Outlook.com - jbravozam | Code School - Try Git | <https://try.github.io/levels/1/challenges/7>

1.7 · Adding All Changes

Great! You also can use wildcards if you want to add many files of the same type. Notice that I've added a bunch of .txt files into your directory below.

I put some in a directory named "octofamily" and some others ended up in the root of our "octobox" directory. Luckily, we can add all the new files using a wildcard with **git add**. Don't forget the quotes!

```
git add '*.txt'
```

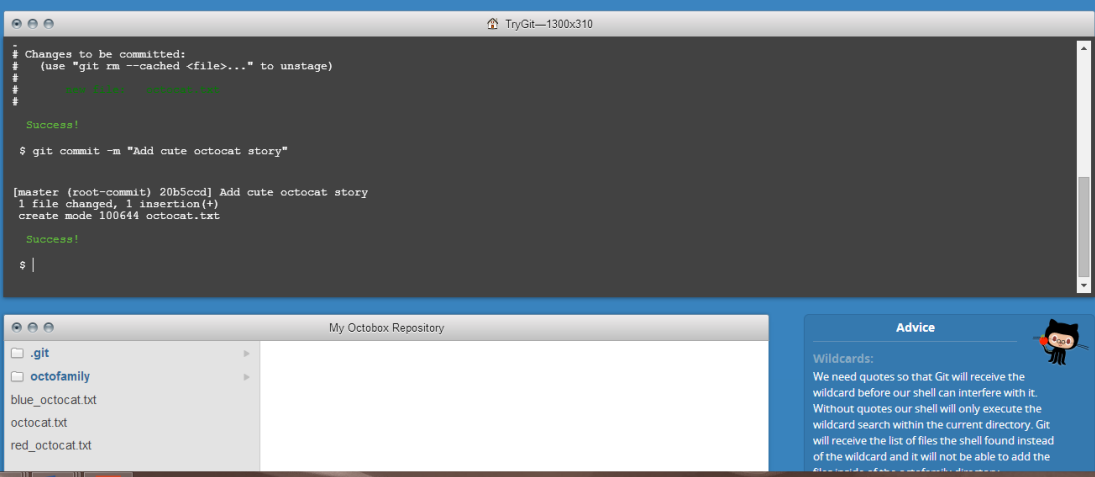

The terminal window shows the output of the `git add '*.txt'` command, which successfully staged all new files. It then shows the output of the `git commit -m "Add cute octocat story"` command, which successfully committed the changes. Below the terminal, a file explorer window titled "My Octobox Repository" shows the `.git` directory, the `octofamily` directory, and the files `blue_octocat.txt`, `octocat.txt`, and `red_octocat.txt`.

Advice

Wildcards:
We need quotes so that Git will receive the wildcard before our shell can interfere with it. Without quotes our shell will only execute the wildcard search within the current directory. Git will receive the list of files the shell found instead of the wildcard and it will not be able to add the files.

5:50 p. m.
13/08/2014



Recibidos (2) - jbravozam | 8 La tarde del martes en An | Outlook.com - jbravozam | Code School - Try Git | <https://try.github.io/levels/1/challenges/8>

1.8 · Committing All Changes

Okay, you've added all the text files to the staging area. Feel free to run `git status` to see what you're about to commit.

If it looks good, go ahead and run:

```
git commit -m 'Add all the octocat txt files'
```

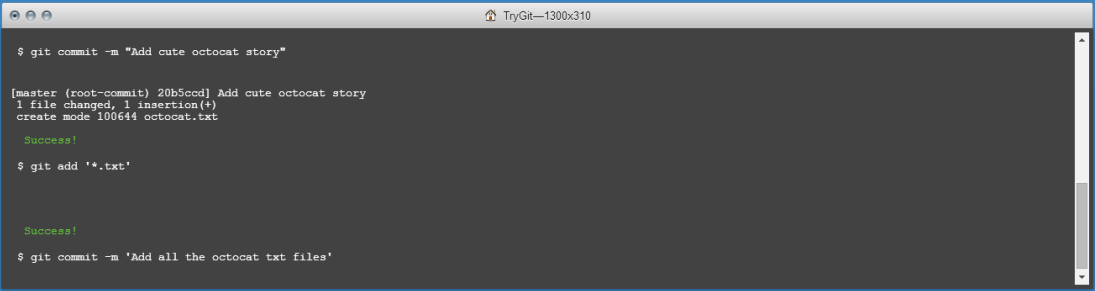

```
$ git commit -m "Add cute octocat story"


[master (root-commit) 20b5c0d] Add cute octocat story
1 file changed, 1 insertion(+)
create mode 100644 octocat.txt

Success!

$ git add '*.txt'


Success!

$ git commit -m 'Add all the octocat txt files'
```

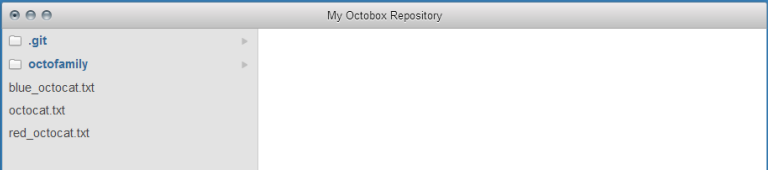

My Octobox Repository

- .git
- octofamily
- blue_octocat.txt
- octocat.txt
- red_octocat.txt

Advice

Check all the things!

When using wildcards you want to be extra careful when doing commits. Make sure to check what files and folders are staged by using `git status` before you do the actual commit. This way you can be sure you're committing only the things you want.

5:56 p. m. 13/08/2014



Recibidos (2) - jbravozam | 8 La tarde del martes en An | Outlook.com - jbravozam | Code School - Try Git | <https://try.github.io/levels/1/challenges/9>

1.9 · History

So we've made a few commits. Now let's browse them to see what we changed.

Fortunately for us, there's **git log**. Think of Git's log as a journal that remembers all the changes we've committed so far, in the order we committed them. Try running it now:

```
git log
```

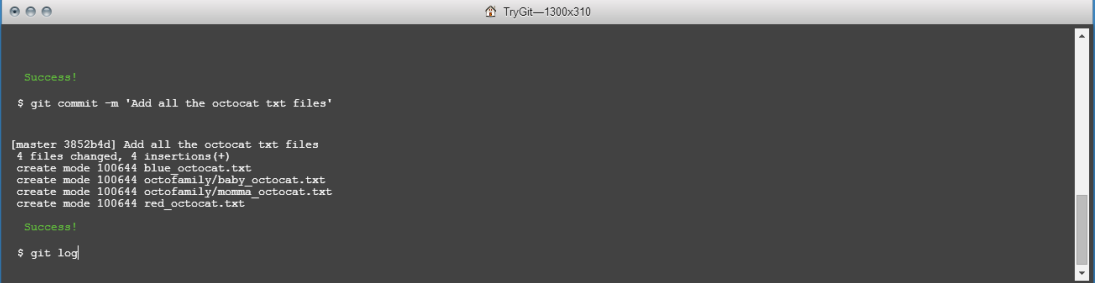


```
Success!

$ git commit -m 'Add all the octocat txt files'

[master 3852b4d] Add all the octocat txt files
4 files changed, 4 insertions(+)
create mode 100644 blue_octocat.txt
create mode 100644 octofamily/baby_octocat.txt
create mode 100644 octofamily/mommy_octocat.txt
create mode 100644 red_octocat.txt


Success!

$ git log
```

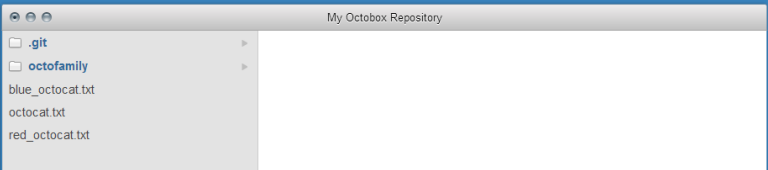

My Octobox Repository

- .git
- octofamily
- blue_octocat.txt
- octocat.txt
- red_octocat.txt

Advice

More useful logs:

Use `git log --summary` to see more information for each commit. You can see where new files were added for the first time or where files were deleted. It's a good overview of what's going on in the project.

5:57 p. m. 13/08/2014

Recibidos (2) - jbravozam x La tarde del martes en An x Outlook.com - jbravozam x Code School - Try Git x

https://try.github.io/levels/1/challenges/10


1.10 · Remote Repositories

Great job! We've gone ahead and created a new empty GitHub repository for you to use with Try Git at https://github.com/try-git/try_git.git. To push our local *repo* to the GitHub server we'll need to add a remote repository.

This command takes a *remote name* and a *repository URL*, which in your case is https://github.com/try-git/try_git.git.

Go ahead and run **git remote add** with the options below:

➔ **git remote add origin https://github.com/try-git/try_git.git**

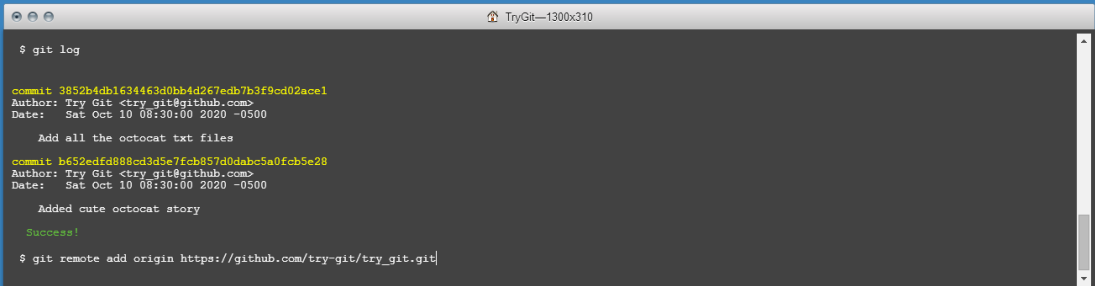

```
$ git log

commit 3852b4db1634463d0bb4d267edb7b3f9cd02ace1
Author: Try Git <try_git@github.com>
Date: Sat Oct 10 08:30:00 2020 -0500


    Add all the octocat txt files

commit b652edfd888cd3d5e7fcb857d0dabc5a0fcb5e28
Author: Try Git <try_git@github.com>
Date: Sat Oct 10 08:30:00 2020 -0500

    Added cute octocat story

Success!

$ git remote add origin https://github.com/try-git/try_git.git
```

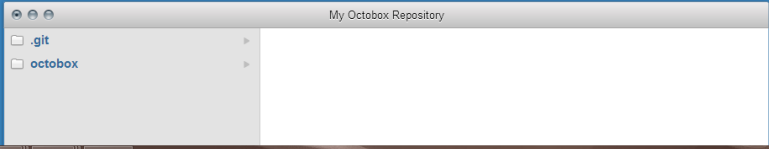

My Octobox Repository

- .git
- octobox

Advice

git remote:

Git doesn't care what you name your remotes, but it's typical to name your main one `origin`.

It's also a good idea for your main repository to be on a remote server like GitHub in case your machine is lost at sea during a transatlantic boat.

5:58 p. m. 13/08/2014

Recibidos (2) - jbravozam x La tarde del martes en An x Outlook.com - jbravozam x Code School - Try Git x Bienvenido a Facebook x


https://try.github.io/levels/1/challenges/11

1.11 · Pushing Remotely

The push command tells Git where to put our commits when we're ready, and boy we're ready. So let's push our local changes to our **origin** repo (on GitHub).

The name of our remote is **origin** and the default local branch name is **master**. The **-u** tells Git to remember the parameters, so that next time we can simply run **git push** and Git will know what to do. Go ahead and push it!

➔ **git push -u origin master**

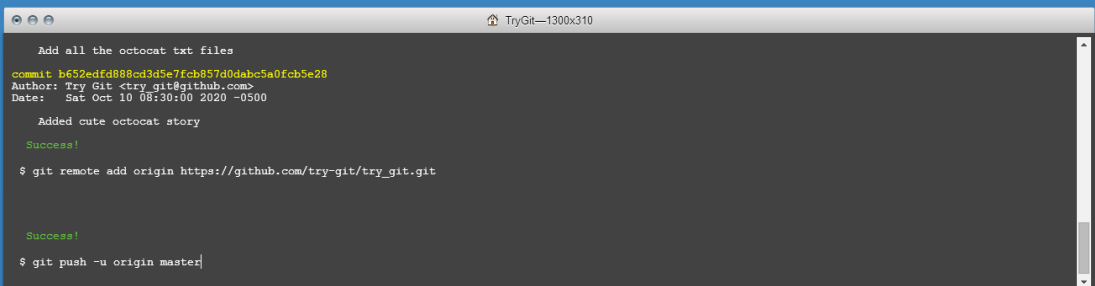

```
    Add all the octocat txt files

commit b652edfd888cd3d5e7fcb857d0dabc5a0fcb5e28
Author: Try Git <try_git@github.com>
Date: Sat Oct 10 08:30:00 2020 -0500


    Added cute octocat story

Success!

$ git remote add origin https://github.com/try-git/try_git.git

Success!

$ git push -u origin master
```

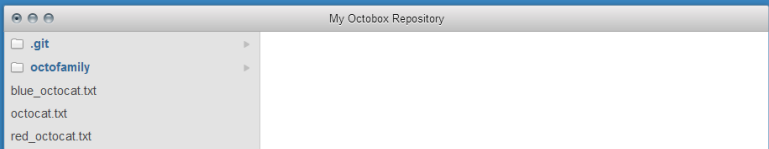

My Octobox Repository

- .git
- octofamily
- blue_octocat.txt
- octocat.txt
- red_octocat.txt

Advice

Cool! Stuff:

When you start to get the hang of git you can do some really cool things with *hooks* when you push.

For example, you can upload directly to a webserver whenever you push to your master remote instead of having to upload your site.

5:59 p. m. 13/08/2014

Recibidos (2) - jbravozam x La tarde del martes en An x Outlook.com - jbravozam x Code School - Try Git x Bienvenido a Facebook e x



https://try.github.io/levels/1/challenges/12

1.12 · Pulling Remotely

Let's pretend some time has passed. We've invited other people to our github project who have pulled your changes, made their own commits, and pushed them.

We can check for changes on our GitHub repository and pull down any new changes by running:

[git pull origin master](#)

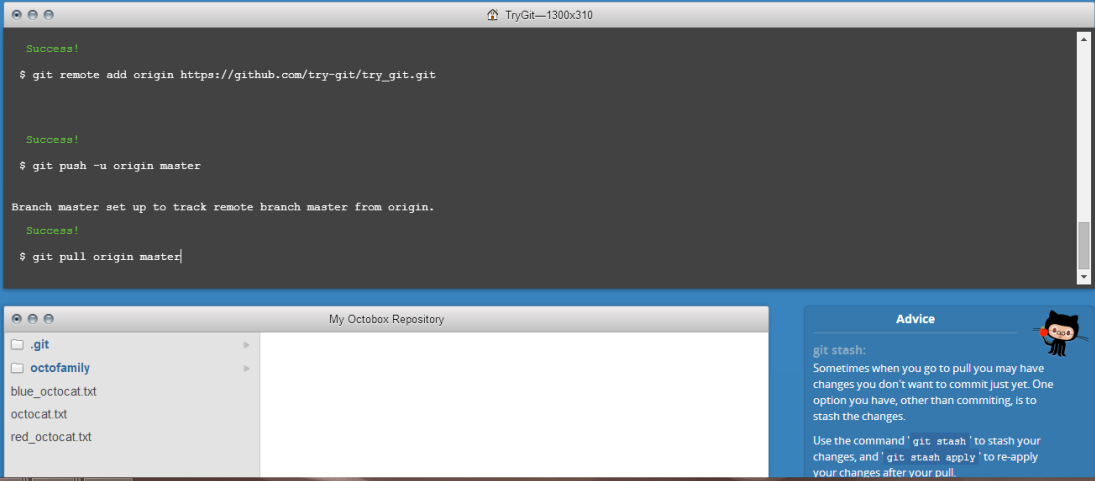

TryGit—1300x310

```
Success!
$ git remote add origin https://github.com/try-git/try_git.git

Success!
$ git push -u origin master

Branch master set up to track remote branch master from origin.
Success!
$ git pull origin master
```

My Octobox Repository

- .git
- octofamily
- blue_octocat.txt
- octocat.txt
- red_octocat.txt

Advice

git stash:

Sometimes when you go to pull you may have changes you don't want to commit just yet. One option you have, other than committing, is to stash the changes.

Use the command 'git stash' to stash your changes, and 'git stash apply' to re-apply your changes after your pull.

6:01 p.m. 13/08/2014

Recibidos (2) - jbravozam x La tarde del martes en An x Outlook.com - jbravozam x Code School - Try Git x Bienvenido a Facebook e x



https://try.github.io/levels/1/challenges/13

1.13 · Differences

Uh oh, looks like there have been some additions and changes to the octocat family. Let's take a look at what is **different** from our last commit by using the **git diff** command.

In this case we want the diff of our most recent commit, which we can refer to using the **HEAD** pointer.

[git diff HEAD](#)

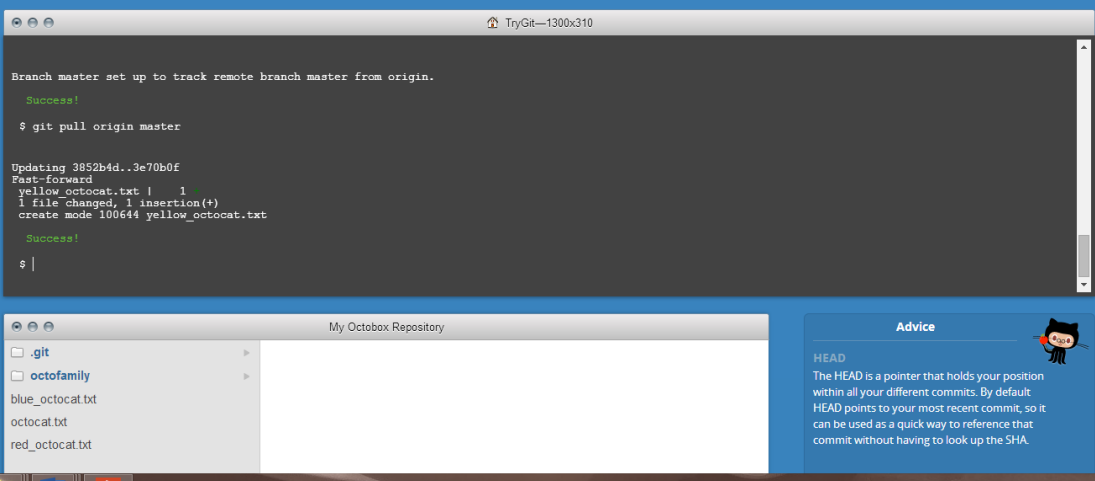

TryGit—1300x310

```
Branch master set up to track remote branch master from origin.
Success!
$ git pull origin master

Updating 3852b4d..3e70b0f
Fast-forward
 yellow_octocat.txt | 1
 1 file changed, 1 insertion(+)
 create mode 100644 yellow_octocat.txt
Success!
$ |
```

My Octobox Repository

- .git
- octofamily
- blue_octocat.txt
- octocat.txt
- red_octocat.txt

Advice

HEAD

The HEAD is a pointer that holds your position within all your different commits. By default HEAD points to your most recent commit, so it can be used as a quick way to reference that commit without having to look up the SHA.

6:01 p.m. 13/08/2014

Recibidos (2) - jbravozam x La tarde del martes en An x Outlook.com - jbravozam x Code School - Try Git x ¡Bienvenido a Facebook e x


https://try.github.io/levels/1/challenges/14

1.14 · Staged Differences

Another great use for **diff** is looking at changes within files that have already been staged. Remember, staged files are files we have told git that are ready to be committed.

Let's use **git add** to stage **octofamily/octodog.txt**, which I just added to the family for you.

[git add octofamily/octodog.txt](#)

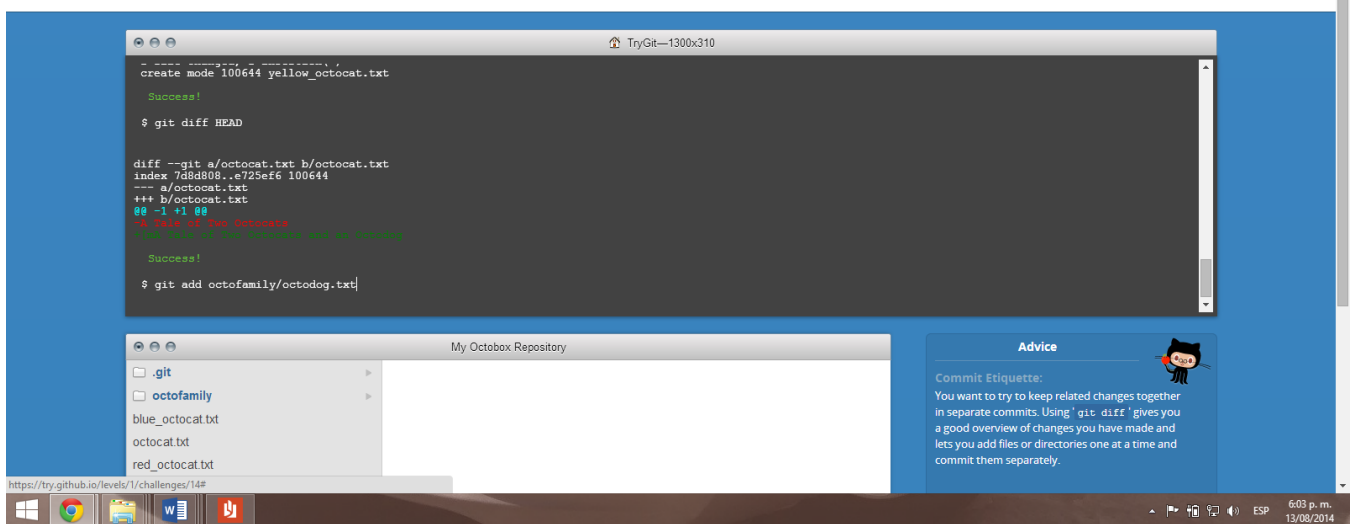

```
TryGit—1300x310
create mode 100644 yellow_octocat.txt
Success!
$ git diff HEAD

diff --git a/octocat.txt b/octocat.txt
index 7d8d808..e725ef6 100644
--- a/octocat.txt
+++ b/octocat.txt
@@ -1,1 @@
-A Talk of Two Octocats
+A Talk of Two Octocats
+A Talk of Two Octocats and an Octodog
Success!
$ git add octofamily/octodog.txt
```

My Octobox Repository

- .git
- octofamily
- blue_octocat.txt
- octocat.txt
- red_octocat.txt

Advice

Commit Etiquette:

You want to try to keep related changes together in separate commits. Using 'git diff' gives you a good overview of changes you have made and lets you add files or directories one at a time and commit them separately.

https://try.github.io/levels/1/challenges/14#

6:03 p.m. 13/08/2014


Recibidos (2) - jbravozam x La tarde del martes en An x Outlook.com - jbravozam x Code School - Try Git x ¡Bienvenido a Facebook e x

https://try.github.io/levels/1/challenges/15

1.15 · Staged Differences (cont'd)

Good, now go ahead and run **git diff** with the **--staged** option to see the changes you just staged. You should see that **octodog.txt** was created.

[git diff --staged](#)

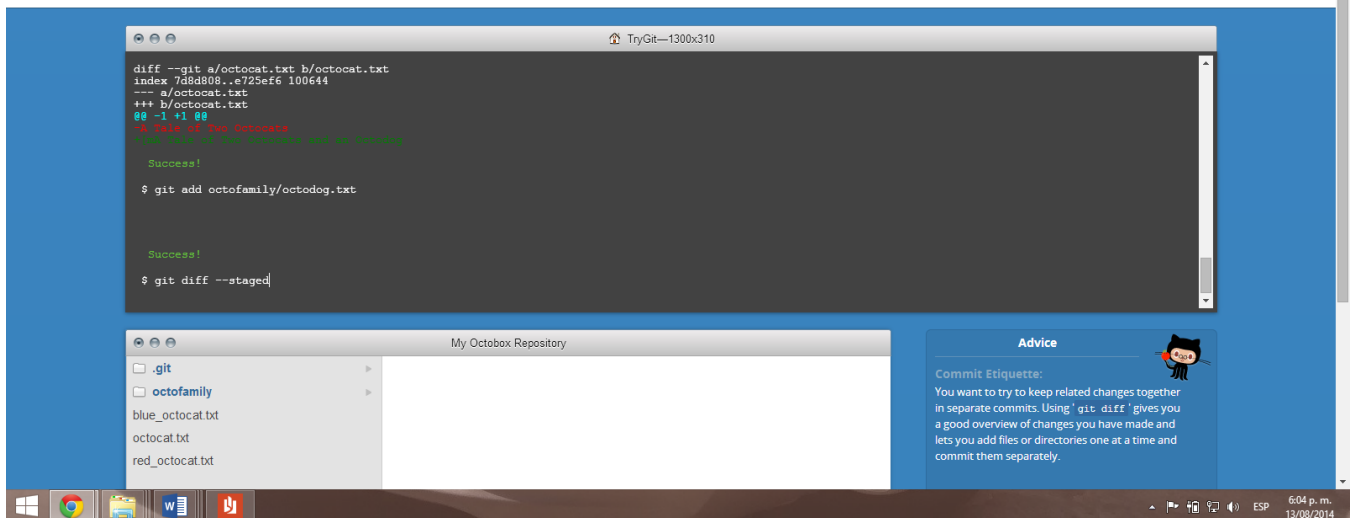

```
TryGit—1300x310
diff --git a/octocat.txt b/octocat.txt
index 7d8d808..e725ef6 100644
--- a/octocat.txt
+++ b/octocat.txt
@@ -1,1 @@
-A Talk of Two Octocats
+A Talk of Two Octocats
+A Talk of Two Octocats and an Octodog
Success!
$ git add octofamily/octodog.txt
Success!
$ git diff --staged
```

My Octobox Repository

- .git
- octofamily
- blue_octocat.txt
- octocat.txt
- red_octocat.txt

Advice

Commit Etiquette:

You want to try to keep related changes together in separate commits. Using 'git diff' gives you a good overview of changes you have made and lets you add files or directories one at a time and commit them separately.

6:04 p.m. 13/08/2014

Recibidos (2) - jbravozam x La tarde del martes en An x Outlook.com - jbravozam x Code School - Try Git x https://www.facebook.co x




← → ↻ https://try.github.io/levels/1/challenges/17

1.17 · Undo

git reset did a great job of unstaging octodog.txt, but you'll notice that he's still there. He's just not staged anymore. It would be great if we could go back to how things were before octodog came around and ruined the party.

Files can be changed back to how they were at the last commit by using the command: **git checkout -- <target>**. Go ahead and get rid of all the changes since the last commit for **octocat.txt**

→ **git checkout -- octocat.txt**

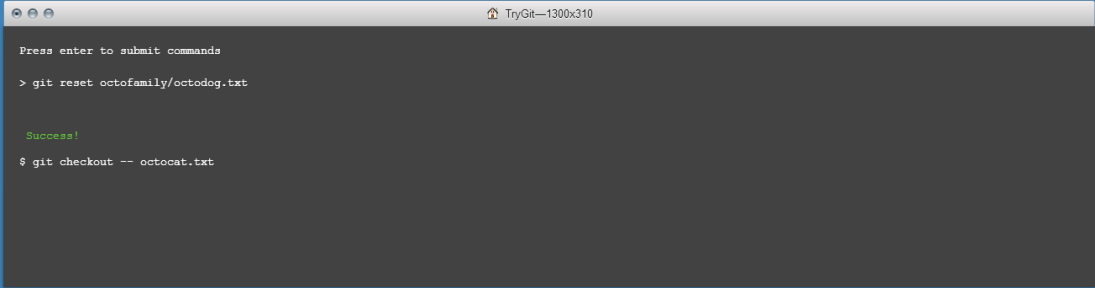

Create a free account on Code School to save your progress!

6:14 p.m. 13/08/2014

Recibidos (2) - jbravozam x La tarde del martes en An x Outlook.com - jbravozam x Code School - Try Git x




← → ↻ https://try.github.io/levels/1/challenges/18

1.18 · Branching Out

When developers are working on a feature or bug they'll often create a copy (aka. **branch**) of their code they can make separate commits to. Then when they're done they can merge this branch back into their main **master** branch.

We want to remove all these pesky octocats, so let's create a branch called **clean_up**, where we'll do all the work:

→ **git branch clean_up**

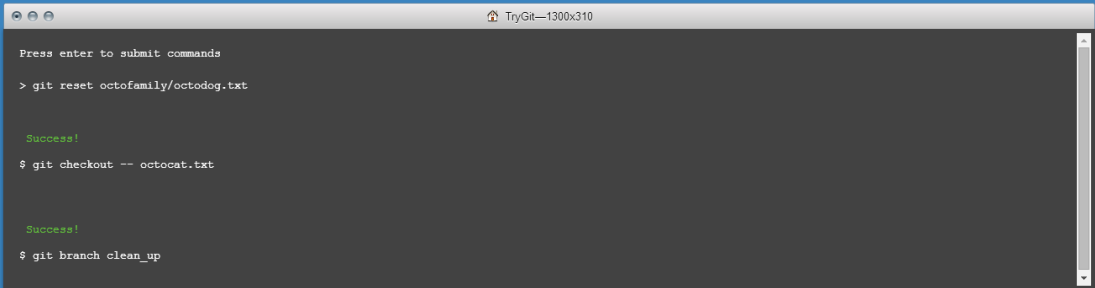

Create a free account on Code School to save your progress!

6:37 p.m. 13/08/2014

Recibidos (2) - jbravozam x La tarde del martes en An x Outlook.com - jbravozam x Code School - Try Git x


https://try.github.io/levels/1/challenges/19

1.19 · Switching Branches

Great! Now if you type **git branch** you'll see two local branches: a main branch named **master** and your new branch named **clean_up**.

You can switch branches using the **git checkout <branch>** command. Try it now to switch to the **clean_up** branch:

➔ **git checkout clean_up**

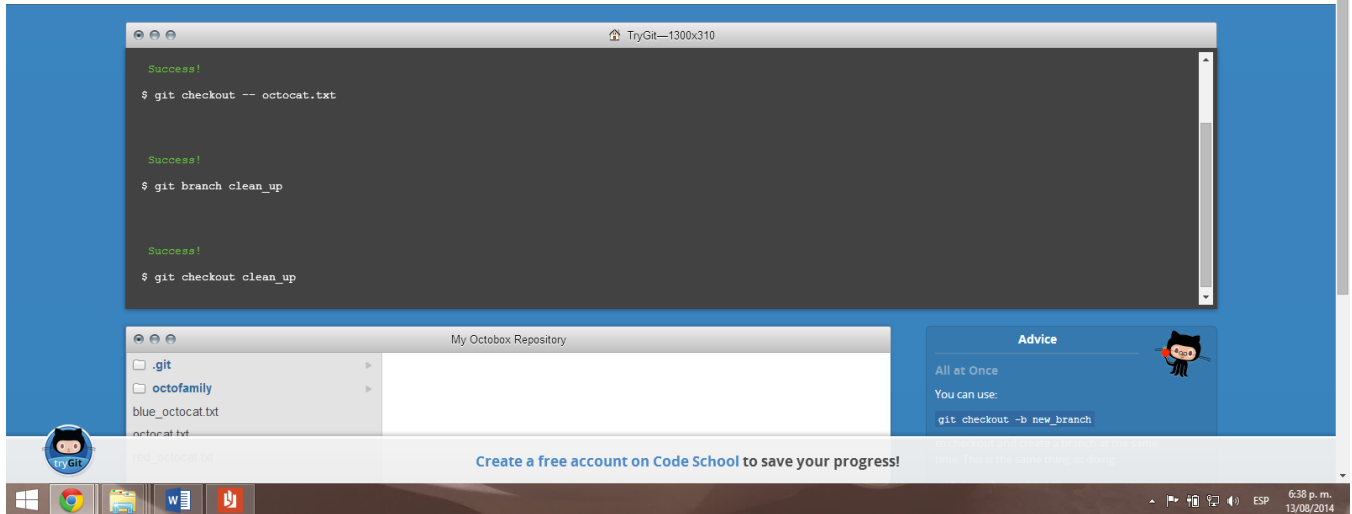

TryGit—1300x310

```
Success!
$ git checkout -- octocat.txt

Success!
$ git branch clean_up

Success!
$ git checkout clean_up
```

My Octobox Repository

- .git
- octofamily
- blue_octocat.txt
- octocat.txt

Advice

All at Once
You can use:
git checkout -b new_branch

Create a free account on Code School to save your progress!

6:38 p.m. 13/08/2014

Recibidos (2) - jbravozam x La tarde del martes en An x Outlook.com - jbravozam x Code School - Try Git x


https://try.github.io/levels/1/challenges/20

1.20 · Removing All The Things

Ok, so you're in the **clean_up** branch. You can finally remove all those pesky octocats by using the **git rm** command which will not only remove the actual files from disk, but will also stage the removal of the files for us.

You're going to want to use a wildcard again to get all the octocats in one sweep, go ahead and run:

➔ **git rm '*.txt'**

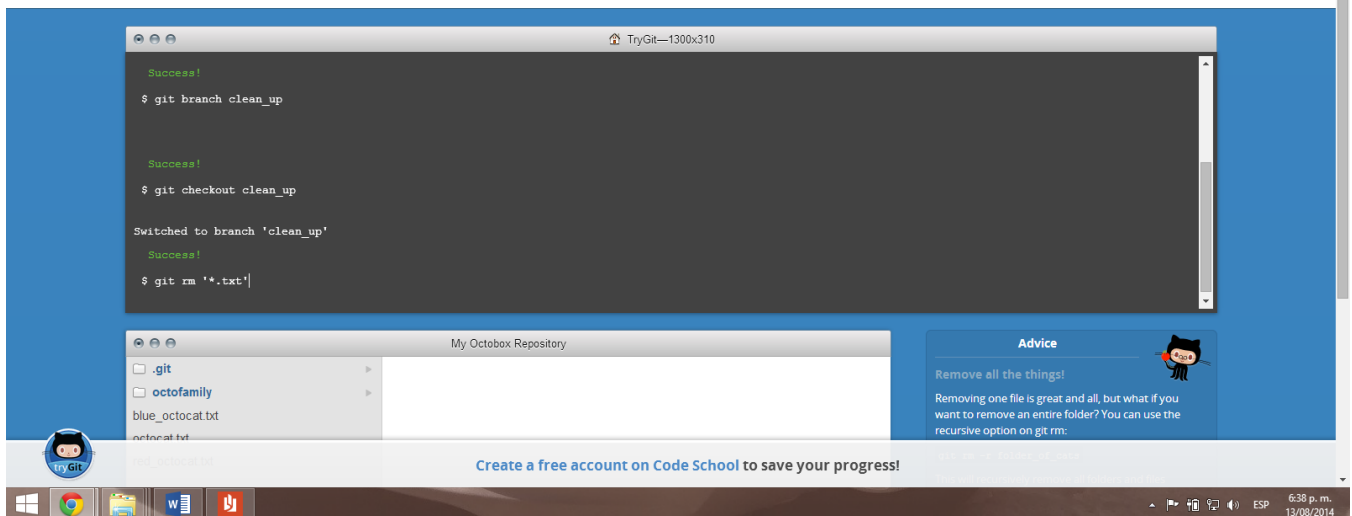

TryGit—1300x310

```
Success!
$ git branch clean_up

Success!
$ git checkout clean_up

Switched to branch 'clean_up'
Success!
$ git rm '*.txt'|
```

My Octobox Repository

- .git
- octofamily
- blue_octocat.txt
- octocat.txt

Advice

Remove all the things!
Removing one file is great and all, but what if you want to remove an entire folder? You can use the recursive option on git rm:

Create a free account on Code School to save your progress!

6:38 p.m. 13/08/2014

Recibidos (2) - jbravozam x La tarde del martes en An x Outlook.com - jbravozam x Code School - Try Git x



https://try.github.io/levels/1/challenges/21

1.21 · Committing Branch Changes

Now that you've removed all the cats you'll need to commit your changes.


Feel free to run **git status** to check the changes you're about to commit.

[git commit -m "Remove all the cats"](#)

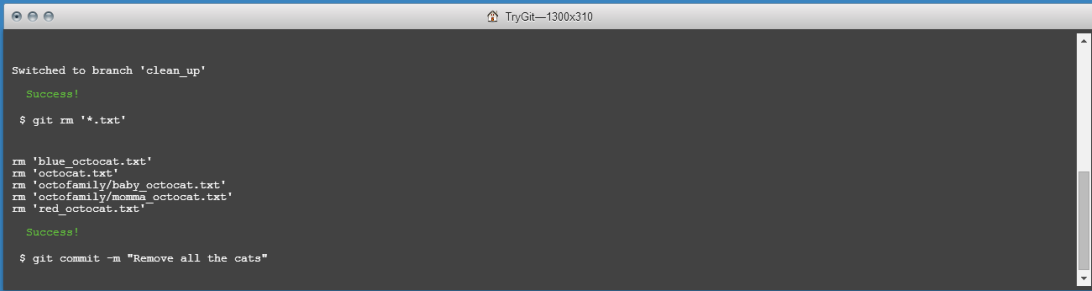

```
Switched to branch 'clean_up'
Success!
$ git rm '*.txt'

rm 'blue_octocat.txt'
rm 'octocat.txt'
rm 'octofamily/baby_octocat.txt'
rm 'octofamily/mamma_octocat.txt'
rm 'red_octocat.txt'
Success!
$ git commit -m "Remove all the cats"
```

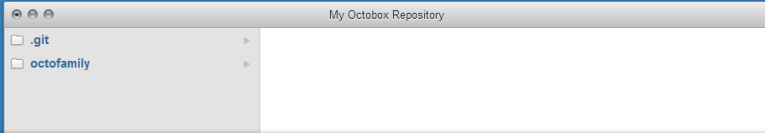

My Octobox Repository

Advice

The '-a' option

If you happen to delete a file without using 'git rm' you'll find that you still have to 'git rm' the deleted files from the working tree. You can save this step by using the '-a' option on 'git commit', which auto-removes deleted

Create a free account on Code School to save your progress!

6:39 p.m. 13/08/2014

Recibidos (2) - jbravozam x La tarde del martes en An x Outlook.com - jbravozam x Code School - Try Git x



https://try.github.io/levels/1/challenges/22

1.22 · Switching Back to master

Great, you're almost finished with the cat... er the bug fix, you just need to switch back to the **master** branch so you can copy (or **merge**) your changes from the **clean_up** branch back into the **master** branch.


Go ahead and checkout the **master** branch:

[git checkout master](#)

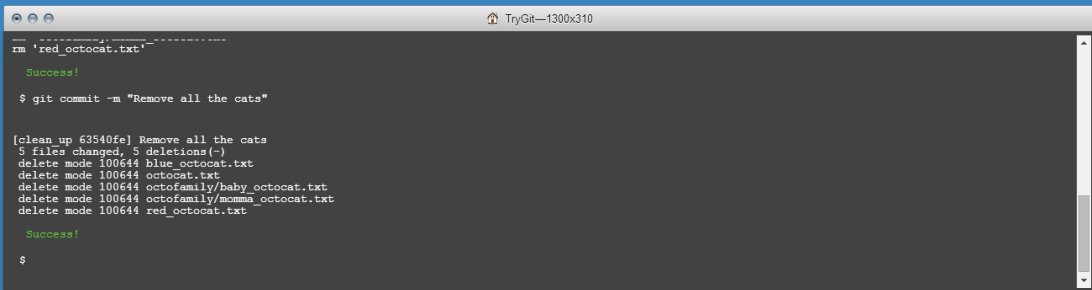

```
rm 'red_octocat.txt'
Success!
$ git commit -m "Remove all the cats"

[clean up 63540fe] Remove all the cats
5 files changed, 5 deletions(-)
delete mode 100644 blue_octocat.txt
delete mode 100644 octocat.txt
delete mode 100644 octofamily/baby_octocat.txt
delete mode 100644 octofamily/mamma_octocat.txt
delete mode 100644 red_octocat.txt
Success!
$
```

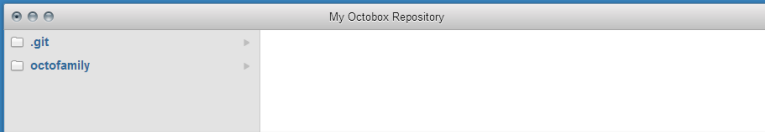

My Octobox Repository

Advice

Pull Requests

If you're hosting your repo on GitHub, you can do something called a pull request.

A pull request allows the boss of the project to look through your changes and make comments

Create a free account on Code School to save your progress!

6:41 p.m. 13/08/2014

Recibidos (2) - jbravozam x La tarde del martes en An x Outlook.com - jbravozam x Code School - Try Git x


https://try.github.io/levels/1/challenges/23

1.23 · Preparing to Merge

Alrighty, the moment has come when you have to merge your changes from the **clean_up** branch into the **master** branch. Take a deep breath, it's not that scary.

We're already on the **master** branch, so we just need to tell Git to merge the **clean_up** branch into it:

[git merge clean_up](#)

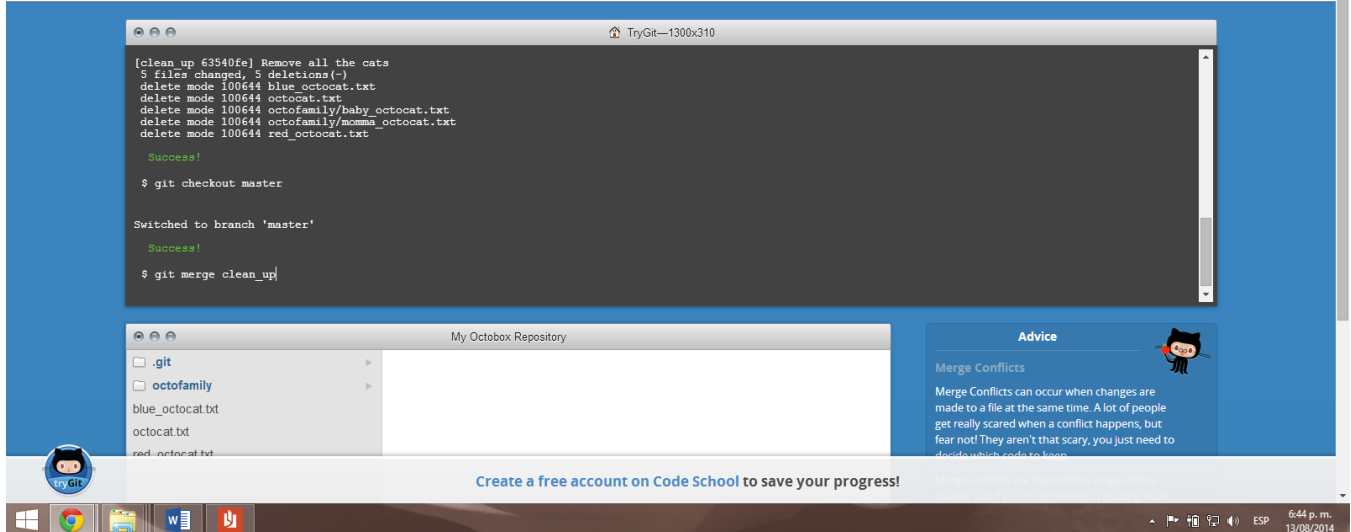

```
[clean up 63540fe] Remove all the cats
5 files changed, 5 deletions(-)
delete mode 100644 blue_octocat.txt
delete mode 100644 octocat.txt
delete mode 100644 octofamily/baby_octocat.txt
delete mode 100644 octofamily/momma_octocat.txt
delete mode 100644 red_octocat.txt

Success!

$ git checkout master

Switched to branch 'master'

Success!

$ git merge clean_up
```

My Octobox Repository

Advice

Merge Conflicts

Merge Conflicts can occur when changes are made to a file at the same time. A lot of people get really scared when a conflict happens, but fear not! They aren't that scary, you just need to decide which code to keep.

Create a free account on Code School to save your progress!

6:44 p. m. 13/08/2014

Recibidos (2) - jbravozam x La tarde del martes en An x Outlook.com - jbravozam x Code School - Try Git x


https://try.github.io/levels/1/challenges/24

1.24 · Keeping Things Clean

Congratulations! You just accomplished your first successful bugfix and merge. All that's left to do is clean up after yourself. Since you're done with the **clean_up** branch you don't need it anymore.

You can use **git branch -d <branch name>** to delete a branch. Go ahead and delete the **clean_up** branch now:

[git branch -d clean_up](#)

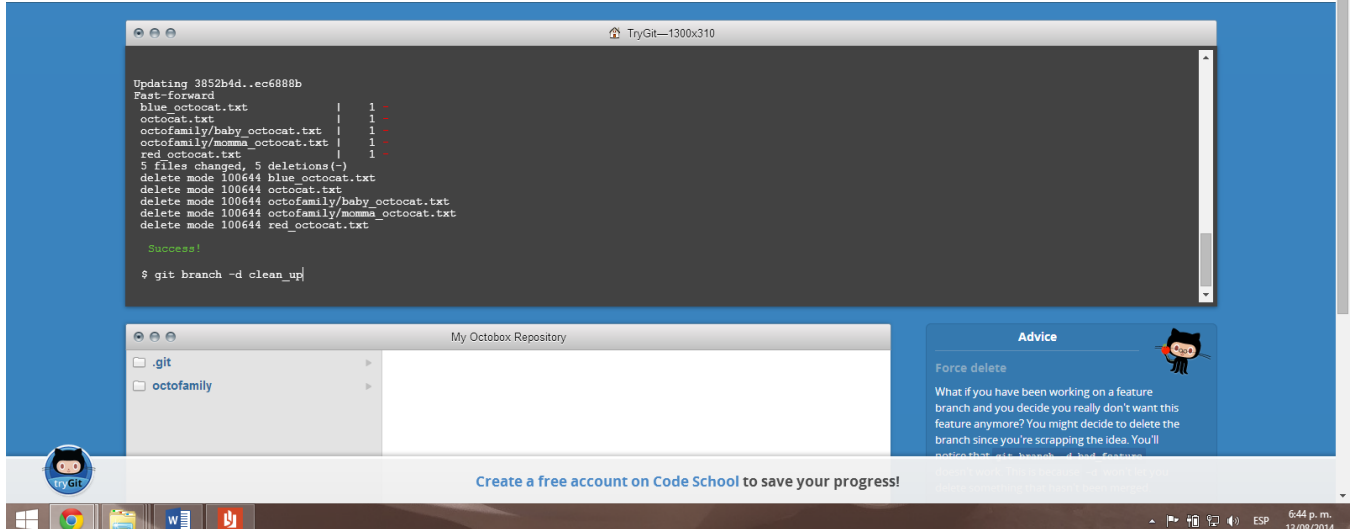

```
Updating 3852b4d..ec6888b
Fast-forward
 blue_octocat.txt | 1 -
 octocat.txt      | 1 -
 octofamily/baby_octocat.txt | 1 -
 octofamily/momma_octocat.txt | 1 -
 red_octocat.txt  | 1 -
 5 files changed, 5 deletions(-)
 delete mode 100644 blue_octocat.txt
 delete mode 100644 octocat.txt
 delete mode 100644 octofamily/baby_octocat.txt
 delete mode 100644 octofamily/momma_octocat.txt
 delete mode 100644 red_octocat.txt

Success!

$ git branch -d clean_up
```

My Octobox Repository

Advice

Force delete

What if you have been working on a feature branch and you decide you really don't want this feature anymore? You might decide to delete the branch since you're scrapping the idea. You'll notice that **git branch -d** does feature.

Create a free account on Code School to save your progress!

6:44 p. m. 13/08/2014



Recibidos (2) - jbravozam x La tarde del martes en An x Outlook.com - jbravozam x Code School - Try Git x

https://try.github.io/levels/1/challenges/25

1.25 · The Final Push

Here we are, at the last step. I'm proud that you've made it this far, and it's been great learning Git with you. All that's left for you to do now is to push everything you've been working on to your remote repository, and you're done!

[git push](#)

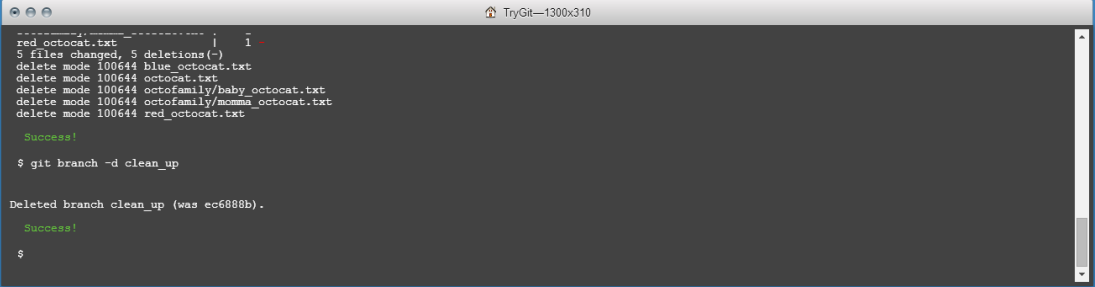


```
TryGit—1300x310
red octocat.txt | 1
5 files changed, 5 deletions(-)
delete mode 100644 blue_octocat.txt
delete mode 100644 octocat.txt
delete mode 100644 octofamily/baby_octocat.txt
delete mode 100644 octofamily/mama_octocat.txt
delete mode 100644 red_octocat.txt
Success!

$ git branch -d clean_up

Deleted branch clean_up (was ec6888b).
Success!

$
```

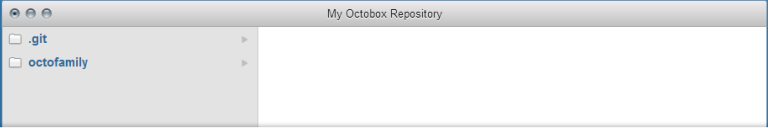

My Octobox Repository

[.git](#)

[octofamily](#)

Advice

Learning more about Git

We only scratched the surface of Git in this course. There is so much more you can do with it. Check out the Git documentation for a full list of functions.

Create a free account on Code School to save your progress!

6:51 p.m. 13/08/2014



Recibidos (2) - jbravozam x La tarde del martes en An x Outlook.com - jbravozam x Code School - Try Git x

https://try.github.io/levels/1/challenges/25

1.25 · The Final Push

Great! You now have a little taste of the greatness of Git. You can take a look at the wrap up page for a little more information on Git and GitHub, oh, and of course your badge!

[Wrap it all Up](#)

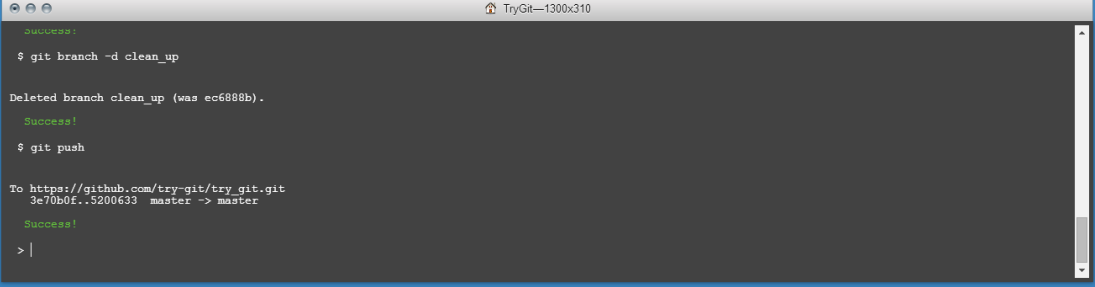

```
TryGit—1300x310
Success!


$ git branch -d clean_up

Deleted branch clean_up (was ec6888b).
Success!

$ git push

To https://github.com/try-git/try_git.git
3e70b0f..5200633 master -> master
Success!

> |
```

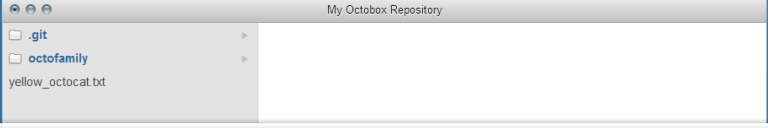

My Octobox Repository

[.git](#)

[octofamily](#)

[yellow_octocat.txt](#)

Advice

Learning more about Git

We only scratched the surface of Git in this course. There is so much more you can do with it. Check out the Git documentation for a full list of functions.

Create a free account on Code School to save your progress!

6:51 p.m. 13/08/2014

Congratulations!



Nice job completing the TryGit course from [Code School](#) and [GitHub](#). You've earned that cute little badge over there. To gaze at its perfectly symmetrical whiskers for all eternity, [sign in](#) or [create a free account](#). And let your friends know how easy it is to try Git!

Share With Your Friends



Tweet Your Progress



Continue Learning Git

If you enjoyed this course, take the next step with our **Git Real** course. We'll dive deeper into Git, focusing on topics such as, Branching, Cloning, and Rebasing.

[Continue Learning](#)



Continue Learning Git

[GitHub Training »](#)

[Free online version of Pro Git »](#)

[GitHub Learning Resources »](#)



More from Code School



[Real-time Web with Node.js](#)



[Anatomy of Backbone.js](#)