

Non recursive Predictive Parsing.

Eg:-

$$E \rightarrow TE'$$

$$E' \rightarrow TE' / \epsilon$$

$$T \rightarrow FT'$$



$$T' \rightarrow *FT' / \epsilon$$

$$F \rightarrow (E) / id$$

$$(14) F \rightarrow id.$$

$$(15) T' \rightarrow \epsilon$$

$$(16) E' \rightarrow \epsilon$$

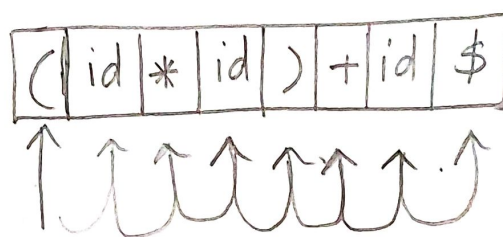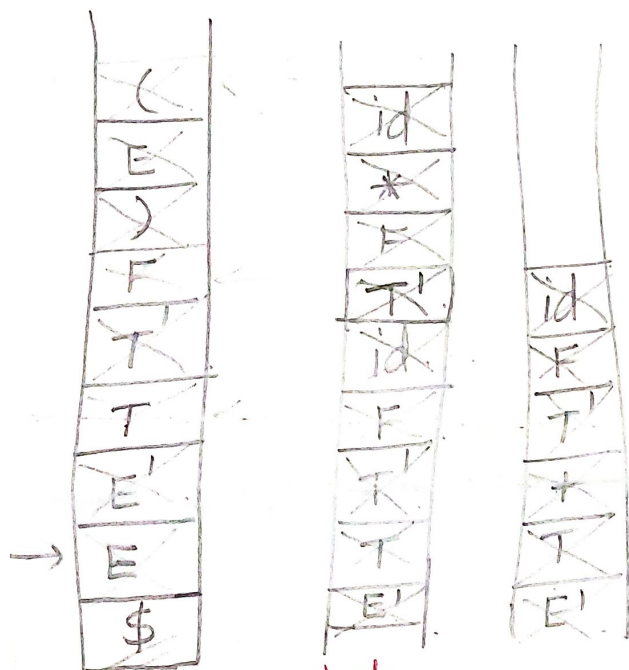

stack

	id	+	*	(	)	\$
E	$E \rightarrow TE'$			$E \rightarrow TE'$		
E'		$E' \rightarrow +TE'$			$E' \rightarrow \epsilon$	$E' \rightarrow \epsilon$
T	$T \rightarrow FT'$			$T \rightarrow FT'$		
T'		$T' \rightarrow \epsilon$	$T' \rightarrow *FT'$		$T' \rightarrow \epsilon$	$T' \rightarrow \epsilon$
F	$F \rightarrow id$			$F \rightarrow (E)$		

- ① $E \rightarrow TE'$
- ② $T \rightarrow FT'$
- ③ $F \rightarrow (E)$
- ④ $E \rightarrow TE'$

- ⑤ $T \rightarrow FT'$
- ⑥ $F \rightarrow id$
- ⑦ $T' \rightarrow *FT'$
- ⑧ $F \rightarrow id$

- ⑨ $T' \rightarrow \epsilon$
- ⑩ $E' \rightarrow \epsilon$
- ⑪ $T' \rightarrow \epsilon$
- ⑫ $E' \rightarrow +TE'$
- ⑬ $T \rightarrow FT'$

(dont push)

Input

$(id * id) + id.$

Leftmost derivation

$$\begin{array}{c} E \\ | \\ T E' \\ | \quad | \\ F T' E' \end{array}$$

$(E) T' E'$

$(T E') T' E'$

$(F T' E') T' E'$

$(id T' E') T' E'$

$(id * F T' E') T' E'$

$(id * id T' E') T' E'$

$(id * id E') T' E'$

$(id * id) T' E'$

$(id * id) E'$

$(id * id) + T E'$

$(id * id) + F T' E'$

$(id * id) + id T' E'$

$(id * id) + id E'$

$(id * id) + id$

