
A Encoded routes

Delivered model bytes stay fixed

Paths to the same value differ.

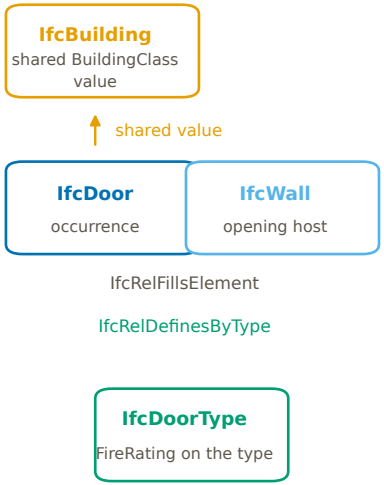

IsTypedBy alone stops at the door;
the type assignment is a second edge.

B Route effects, 60 files

Type route **3,283**

IFC2X3 IfcRelDefinesByType is encoded;
a narrow inverse lookup reports absence.

Host context **2,808**

The opening is reached through its
host, not by direct containment.

Value filter **210**

The token is readable and still rejected
by the declared fire-rating contract.

C Two independent contrasts

C1 Controlled masking

134 masks, public models, paired runs

Binary toolchain (IfcTester 0.8.5)

Obligations dropped	80
Pass changed to fail	122
Fail changed to pass	0

All 202 retained as pending, with the missing source named.

C2 One shared source

Masking one building-level value

Applicable checks	525
Removed from filtering	311
Intact-run failures inside	132

Restoring the value returns
all 311 decisions.

C1 and C2 are separate experiments and are not pooled with each other.