


A. The decision

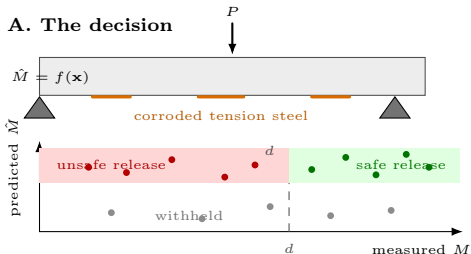

release when $\hat{M} \geq d(1 + m)$; coverage = $\Pr[\text{released}]$
unsafe-release rate = $\Pr[\text{released} \wedge M < d]$

B. Evidence protocol

random K -fold



test folds resample the same programmes,
so the safety target cannot move the estimate

source-honouring K -fold



whole programmes held out, so the estimate
follows the target

measured here (beam release, $\alpha = 0.05$)

random: estimated 0.021, realised 0.050

source-honouring: estimated 0.038, realised 0.026

neither estimate moved across $\alpha = 0.05$ –0.20

C. Audit and record

admissibility gate

fold bounds $[L, U]$ and components w_j ;

certificates $m < K$, $K \cdot L > n$,
 $K \cdot U < n$, $\max_j w_j > U$

3 structures / 6 variants excluded here

three status fields

metadata sufficiency • plan fidelity

• assignment conformance

outcome

release • release with narrowed claim

• refuse with certificate • collect provenance

Coverage is reported with every unsafe-release rate, because a protocol that refuses everything is trivially safe.