# TP_Squid

# TP Squid sur Debian 12


- Installation de squid
- Configuration de Squid
  - Element à coller dans le fichier /etc/squid/squid.conf
- adaptation à l'infra réseau dans lequel le test est fait
- Blocage de sites et de domaine avec des ACL
  - Ajout d'une ACL dans le fichier squid.conf
  - Autorisation l'accès à certains sites en fonction des heures
  - Blocage de certains sites stocké dans un fichier annexe
    - création du fichier block_domaine.txt
- Blocage de certaines extension de fichiers
  - Créer le fichier block_extensions.conf
- Restreindre l'accès à internet


## Installation de squid

```
su -
apt update && apt full-upgrade -y && apt autoclean -y && apt install squid -y
```

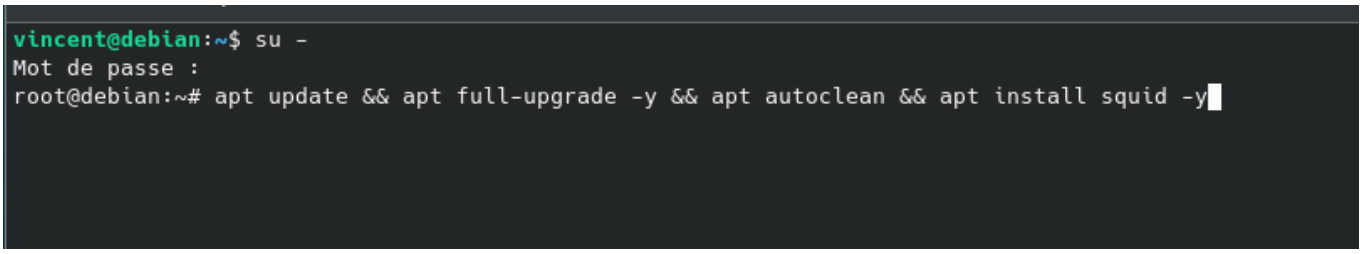


## Configuration de Squid

```
cp /etc/squid/squid.conf squid.conf.backup
#vider le fichier /etc/squid/squid.conf
> /etc/squid/squid.conf
#rééditer le fichier squid.conf
nano /etc/squid/squid.conf
```

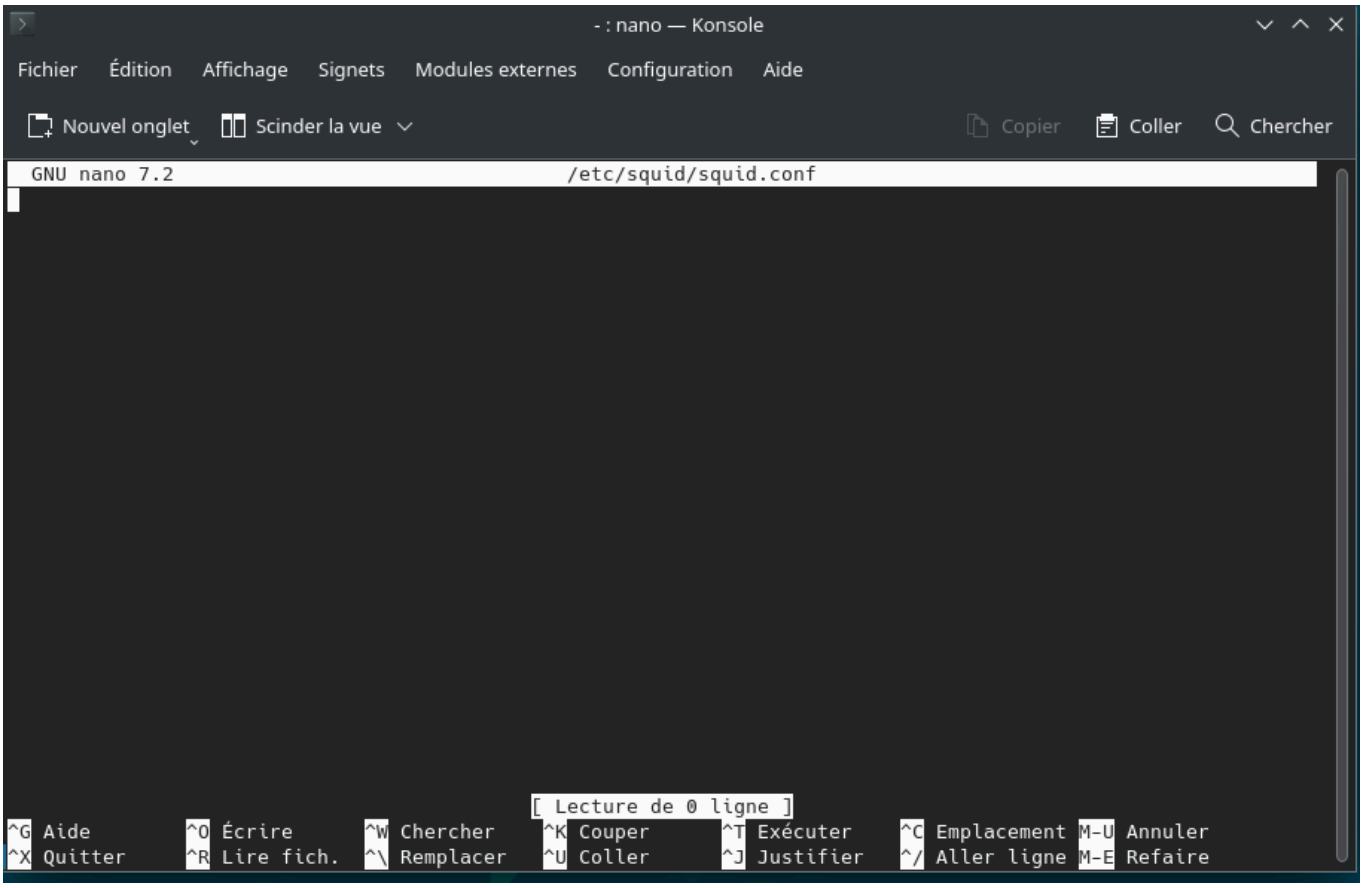


## Element à coller dans le fichier /etc/squid/squid.conf

```
acl SSL_ports port 443
acl Safe_ports port 80 # http
acl Safe_ports port 21 # ftp
acl Safe_ports port 443 # https
acl Safe_ports port 70 # gopher
acl Safe_ports port 210 # wais
acl Safe_ports port 1025-65535 # unregistered ports
acl Safe_ports port 280 # http-mgmt
acl Safe_ports port 488 # gss-http
acl Safe_ports port 591 # filemaker
acl Safe_ports port 777 # multiling http
acl CONNECT method CONNECT
http_access deny !Safe_ports
http_access deny CONNECT !SSL_ports
http_access allow localhost manager
http_access deny manager http_access allow localhost http_access deny all
http_port 3128 coredump_dir /var/spool/squid
refresh_pattern ^ftp: 1440 20% 10080 refresh_pattern ^gopher: 1440 0% 1440
refresh_pattern -i (/cgi-bin/|\?) 0 0% 0 refresh_pattern
(Release|Packages(.gz)*)$ 0 20% 2880
refresh_pattern . 0 20% 4320
```

```
cache_mem 256 MB
maximum_object_size 512 MB
```

```
GNU nano 7.2                                /etc/squid/squid.conf *
acl SSL_ports port 443
acl Safe_ports port 80
acl Safe_ports port 21 #ftp
acl Safe_ports port 443
acl Safe_ports port 70 #gopher
acl Safe_ports port 210 #wais
acl Safe_ports port 1025-65535 #unregistred ports
acl Safe_ports port 280 #http-mgmt
acl Safe_ports port 488 #gss-http
acl Safe_ports port 591 #filemaker
acl Safe_ports port 777 #multiling http
acl CONNECT method CONNECT http_access deny !Safe_ports http_acces deny CONNECT !SSL_ports http_acces allow l>
```

## adaptation à l'infra réseau dans lequel le test est fait

```
ip a
nano /etc/squid/squid.conf
#vérification du fichier conf de squid
squid -k parse
```

```
acl SSL_ports port 443
acl Safe_ports port 80 # http
acl Safe_ports port 21 # ftp
acl Safe_ports port 443 # https
acl Safe_ports port 70 # gopher
acl Safe_ports port 210 # wais
acl Safe_ports port 1025-65535 # unregistered ports
acl Safe_ports port 280 # http-mgmt
acl Safe_ports port 488 # gss-http
acl Safe_ports port 591 # filemaker
acl Safe_ports port 777 # multiling http
acl CONNECT method CONNECT
acl networklan src <ip de la machine>/24 # ici 192.168.159.138
http_access deny !Safe_ports
http_access deny CONNECT !SSL_ports
http_access allow localhost manager
http_access deny manager
http_access allow localhost
http_access allow networklan
http_access deny all
http_port 192.168.159.138:3128
```

```
coredump_dir /var/spool/squid
refresh_pattern ^ftp: 1440 20% 10080
refresh_pattern ^gopher: 1440 0% 1440
refresh_pattern -i (/cgi-bin/|\?) 0 0% 0
refresh_pattern (Release|Packages(.gz)*)$ 0 20% 2880
refresh_pattern . 0 20% 4320
cache_mem 256 MB
maximum_object_size 512 MB
```

```
  GNU nano 7.2                                                    /etc/squid/squid.conf *
acl SSL_ports port 443
acl Safe_ports port 80
acl Safe_ports port 21 #ftp
acl Safe_ports port 443
acl Safe_ports port 70 #gopher
acl Safe_ports port 210 #wais
acl Safe_ports port 1025-65535 #unregistred ports
acl Safe_ports port 280 #http-mgmt
acl Safe_ports port 488 #gss-http
acl Safe_ports port 591 #filemaker
acl Safe_ports port 777 #multiling http
acl CONNECT method CONNECT
acl networklan src 192.168.159.138
http_access deny !Safe_ports
http_acces deny CONNECT !SSL_ports
http_acces allow localhost manager
http_access deny manager
http_access allow localhost
http_access allow networklan
http_access deny all
http_port 192.168.159.138:3128
coredump_dir /var/spool/squid
refresh_patter ^ftp: 1440 20% 10080
refresh_pattern ^gopher:1440 0% 1440
refresh_pattern -i (/cgi-bin/|\?) 0 0% 0
refresh_pattern (Release|Packages(.gz)*)$ 0 20% 2880
refresh_pattern . 0 20% 4320
cache_mem 256 MB
maximum_object_size 512 MB
```

```
#activer le service squid
systemctl enable squid
#démarrer le service squid
systemctl start squid
#stopper le service squid
systemctl stop squid
#redémarrer le service
systemctl restart squid
#vérifier le statut du service squid
systemctl status squid
```

Puis aller dans Firefox

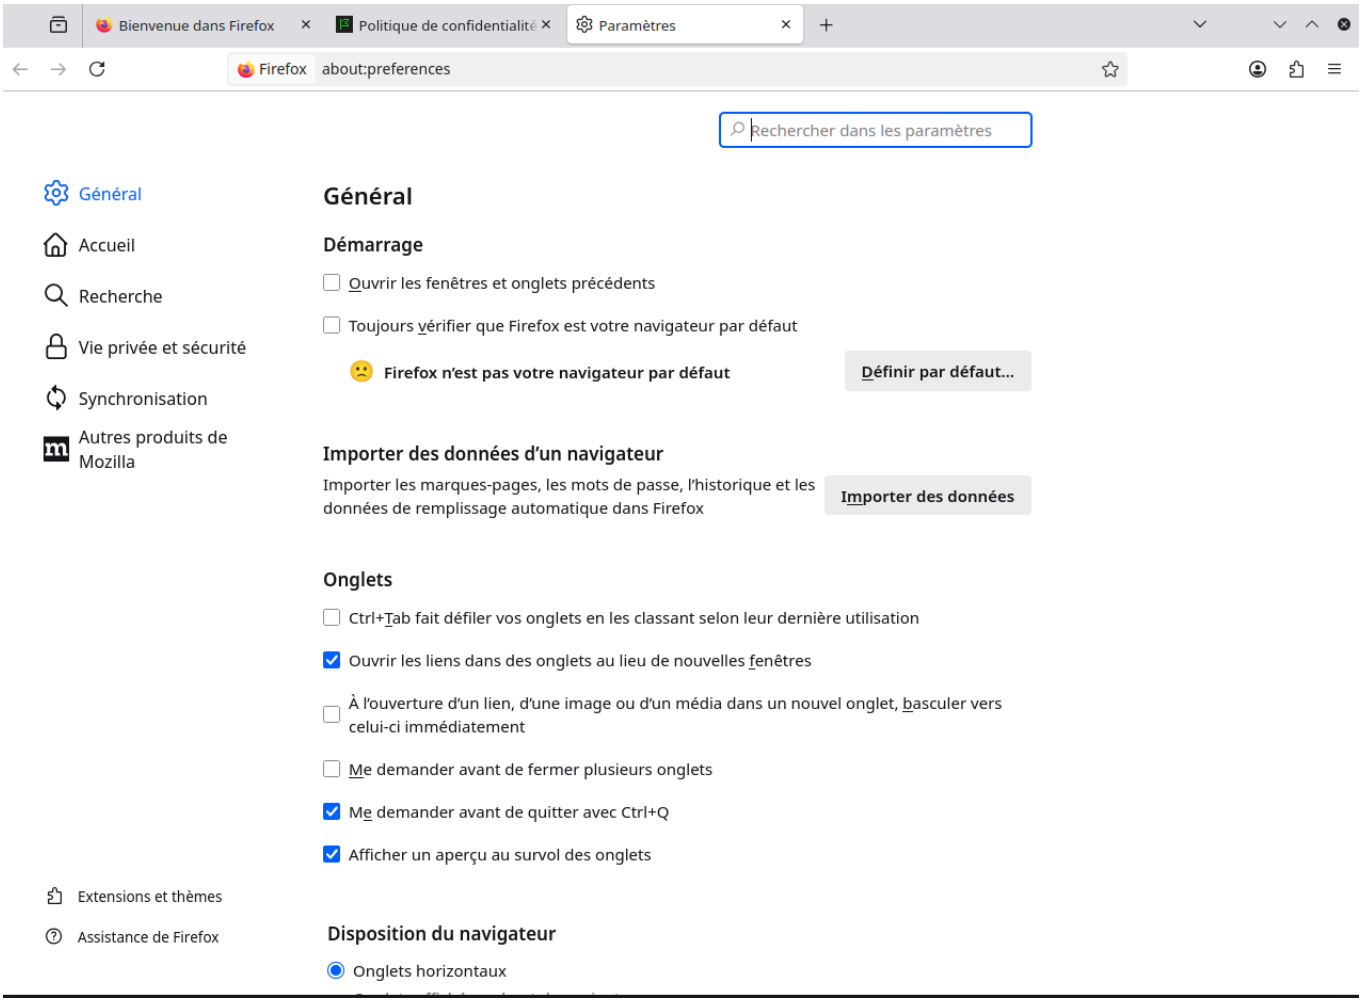

Puis aller dans les paramètres réseau

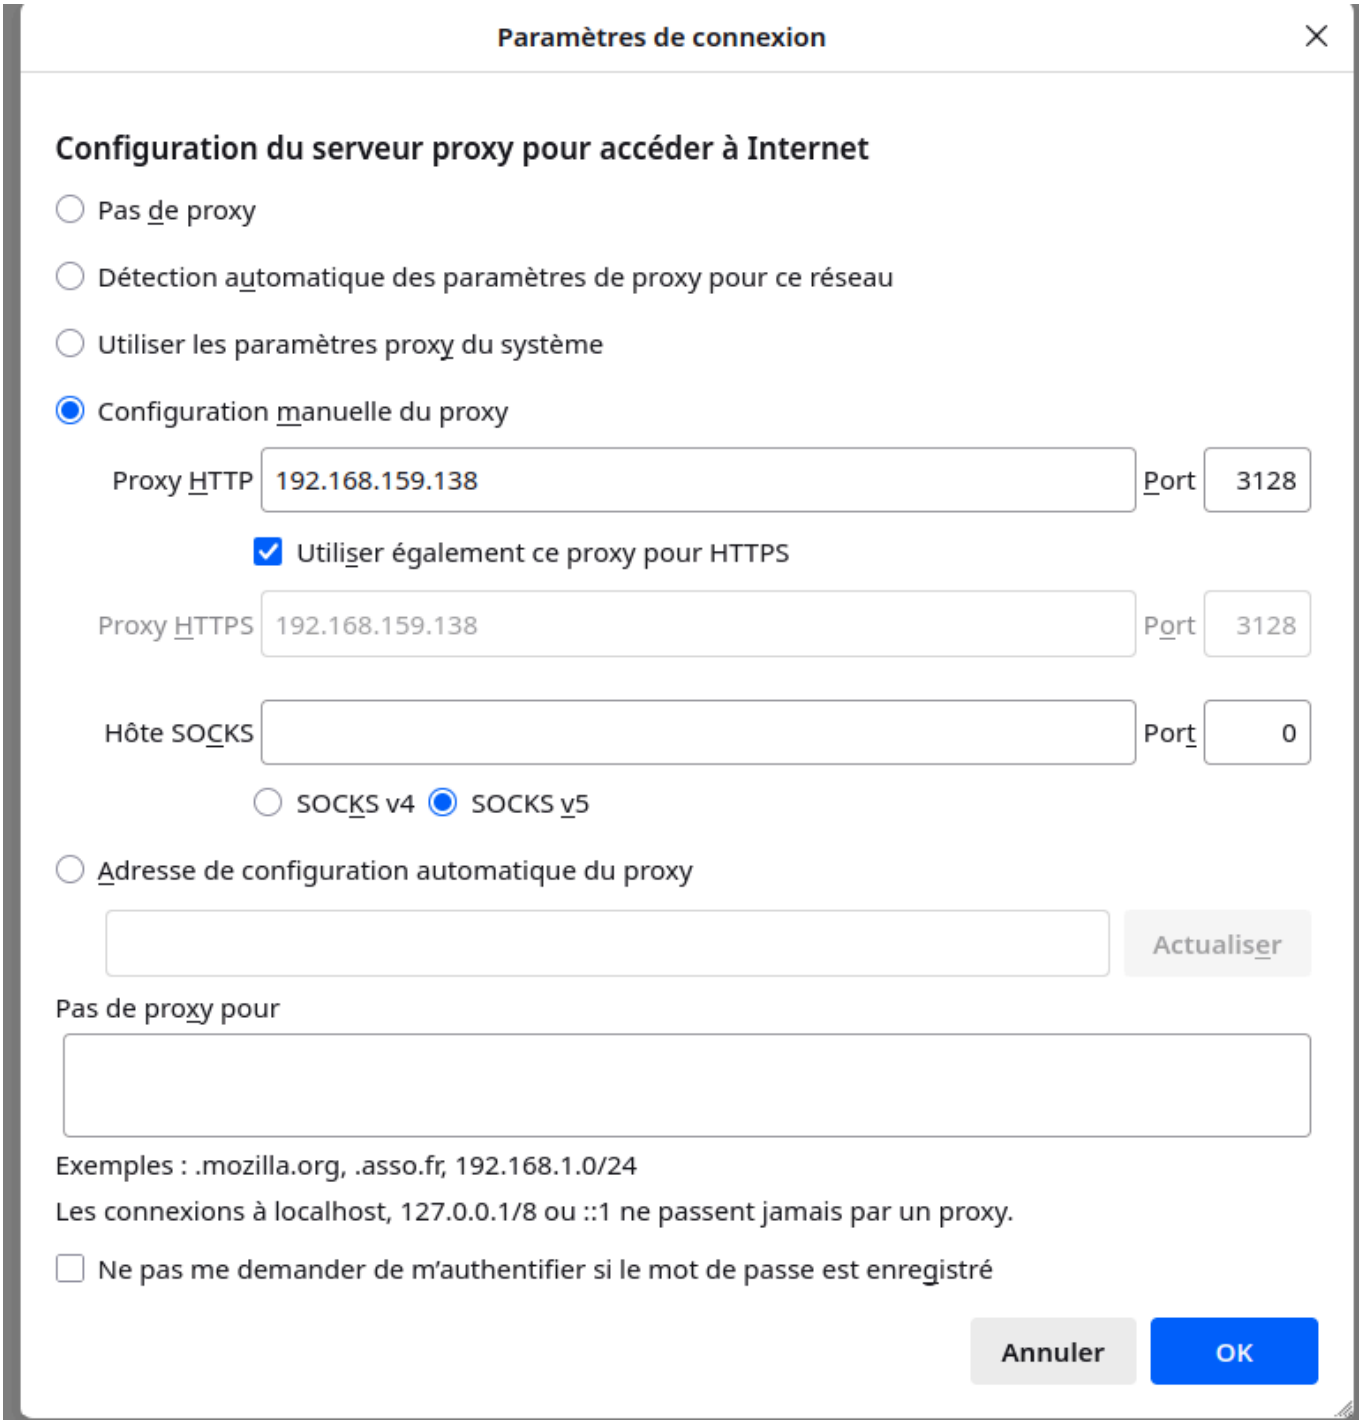


## Blocage de sites et de domaine avec des ACL

```
# voir en temps réel les logs de Squid
tail -f /var/log/squid/access.log
```

```
root@debian:~# tail -f /var/log/squid/access.log
1775326928.292   2296 192.168.159.138 TCP_TUNNEL/200 90307 CONNECT safebrowsing.googleapis.com:443 - HIER_DIRECT/64.
233.166.95 -
1775326928.532    521 192.168.159.138 TCP_MISS/200 330 GET http://detectportal.firefox.com/success.txt? - HIER_DIREC
T/34.107.221.82 text/plain
1775326928.756    494 192.168.159.138 TCP_TUNNEL/200 39 CONNECT push.services.mozilla.com:443 - HIER_DIRECT/34.107.2
43.93 -
1775326929.001    981 192.168.159.138 TCP_MISS/200 330 GET http://detectportal.firefox.com/success.txt? - HIER_DIREC
T/34.107.221.82 text/plain
1775326931.044      2 192.168.159.138 TCP_DENIED/403 3442 GET http://facebook.fr/ - HIER_NONE/- text/html
1775326931.299      0 192.168.159.138 TCP_HIT/200 13051 GET http://debian:3128/squid-internal-static/icons/SN.png -
HIER_NONE/- image/png
1775326931.337      0 192.168.159.138 TCP_DENIED/403 3464 GET http://facebook.fr/favicon.ico - HIER_NONE/- text/html
1775326983.932     23 192.168.159.138 TCP_MISS/200 412 GET http://detectportal.firefox.com/canonical.html - HIER_DIR
ECT/34.107.221.82 text/html
1775326983.939      4 192.168.159.138 TCP_MISS/503 3550 GET http://detectportal.firefox.com/success.txt? - HIER_DIRE
CT/2600:1901:0:38d7:: text/html
1775326983.939      0 192.168.159.138 TCP_MISS/503 3550 GET http://detectportal.firefox.com/success.txt? - HIER_DIRE
CT/2600:1901:0:38d7:: text/html
1775327093.745 170677 192.168.159.138 TCP_TUNNEL/200 9391 CONNECT content-signature-2.cdn.mozilla.net:443 - HIER_DIR
ECT/34.160.144.191 -
1775327095.745 170725 192.168.159.138 TCP_TUNNEL/200 34029 CONNECT merino.services.mozilla.com:443 - HIER_DIRECT/151
.101.129.91 -
1775327095.746 171480 192.168.159.138 TCP_TUNNEL/200 17149 CONNECT ads.mozilla.org:443 - HIER_DIRECT/151.101.129.91
-
1775327097.748 171657 192.168.159.138 TCP_TUNNEL/200 4913 CONNECT ads-img.mozilla.org:443 - HIER_DIRECT/151.101.1.91
 -
1775327098.750 171970 192.168.159.138 TCP_TUNNEL/200 4917 CONNECT firefox.settings.services.mozilla.com:443 - HIER_D
IRECT/151.101.65.91 -
1775327098.752 172132 192.168.159.138 TCP_TUNNEL/200 3833 CONNECT push.services.mozilla.com:443 - HIER_DIRECT/34.107
.243.93 -
1775327099.751 172719 192.168.159.138 TCP_TUNNEL/200 3714 CONNECT services.addons.mozilla.org:443 - HIER_DIRECT/151.
101.193.91 -
1775327101.754 176434 192.168.159.138 TCP_TUNNEL/200 549706 CONNECT firefox-settings-attachments.cdn.mozilla.net:443
 - HIER_DIRECT/151.101.65.91 -
1775327104.755 180475 192.168.159.138 TCP_TUNNEL/200 16149 CONNECT firefox.settings.services.mozilla.com:443 - HIER_
DIRECT/151.101.65.91 -
```

## Ajout d'une ACL dans le fichier squid.conf

```
acl SSL_ports port 443
acl Safe_ports port 80 # http
acl Safe_ports port 21 # ftp
acl Safe_ports port 443 # https
acl Safe_ports port 70 # gopher
acl Safe_ports port 210 # wais
acl Safe_ports port 1025-65535 # unregistered ports
acl Safe_ports port 280 # http-mgmt
acl Safe_ports port 488 # gss-http
acl Safe_ports port 591 # filemaker
acl Safe_ports port 777 # multiling http
acl CONNECT method CONNECT
acl networklan src 192.168.159.138/24

#ACL de blocage de sites
acl blockYoutube dstdomain .youtube.com
acl blockFacebookFR dstdomain .facebook.fr
acl blockFacebookCOM dstdomain .facebook.com

# Refuser l'accès aux sites interdits
```

```
http_access deny blockYoutube
http_access deny blockFacebookFR
http_access deny blockFacebookCOM

http_access deny !Safe_ports
http_access deny CONNECT !SSL_ports
http_access allow localhost manager
http_access deny manager
http_access allow localhost
http_access allow networklan
http_access deny all
http_port 192.168.159.138:3128
coredump_dir /var/spool/squid
refresh_pattern ^ftp: 1440 20% 10080
refresh_pattern ^gopher: 1440 0% 1440
refresh_pattern -i (/cgi-bin/|\?) 0 0% 0
refresh_pattern (Release|Packages(.gz)*)$ 0 20% 2880
refresh_pattern . 0 20% 4320
cache_mem 256 MB
maximum_object_size 512 MB
```

```
GNU nano 7.2                                                    /etc/squid/squid.conf *
acl SSL_ports port 443
acl Safe_ports port 80 # http
acl Safe_ports port 21 # ftp
acl Safe_ports port 443 # https
acl Safe_ports port 70 # gopher
acl Safe_ports port 210 # wais
acl Safe_ports port 1025-65535 # unregistered ports
acl Safe_ports port 280 # http-mgmt
acl Safe_ports port 488 # gss-http
acl Safe_ports port 591 # filemaker
acl Safe_ports port 777 # multiling http
acl CONNECT method CONNECT
acl networklan src 192.168.159.138/24

#ACL de blocage de sites
acl blockYoutube dstdomain .youtube.com
acl blockFacebookFR dstdomain .facebook.fr
acl blockFacebookCOM dstdomain .facebook.com

# Refuser l'accès aux sites interdits
http_access deny blockYoutube
http_access deny blockFacebookFR
http_access deny blockFacebookCOM

http_access deny !Safe_ports
http_access deny CONNECT !SSL_ports
http_access allow localhost manager
http_access deny manager
http_access allow localhost
http_access allow networklan
http_access deny all
http_port 192.168.100.108:3128
coredump_dir /var/spool/squid
refresh_pattern ^ftp: 1440 20% 10080
refresh_pattern ^gopher: 1440 0% 1440
refresh_pattern -i (/cgi-bin/|\?) 0 0% 0
refresh_pattern (Release|Packages(.gz)*)$ 0 20% 2880
refresh_pattern . 0 20% 4320
cache_mem 256 MB
maximum_object_size 512 MB
```

redémarré le service squid

## Autorisation l'accès à certains sites en fonction des heures

```
acl SSL_ports port 443
acl Safe_ports port 80 # http
acl Safe_ports port 21 # ftp
acl Safe_ports port 443 # https
acl Safe_ports port 70 # gopher
acl Safe_ports port 210 # wais
acl Safe_ports port 1025-65535 # unregistered ports
acl Safe_ports port 280 # http-mgmt
acl Safe_ports port 488 # gss-http
acl Safe_ports port 591 # filemaker
acl Safe_ports port 777 # multiling http
acl CONNECT method CONNECT
acl networklan src 192.168.159.138/24

#ACL de blocage de sites
acl blockYoutube dstdomain .youtube.com
acl blockFacebookFR dstdomain .facebook.fr
acl FacebookFR_planning time MTWHF 12:00-14:00
acl blockFacebookCOM dstdomain .facebook.com

# Refuser l'accès aux sites interdits
http_access deny blockYoutube
http_access deny blockFacebookFR
http_access deny blockFacebookCOM

http_access allow FacebookFR_planning

http_access deny !Safe_ports
http_access deny CONNECT !SSL_ports
http_access allow localhost manager
http_access deny manager
http_access allow localhost
http_access allow networklan
http_access deny all
http_port 192.168.159.138:3128
coredump_dir /var/spool/squid
refresh_pattern ^ftp: 1440 20% 10080
refresh_pattern ^gopher: 1440 0% 1440
refresh_pattern -i (/cgi-bin/|\?) 0 0% 0
refresh_pattern (Release|Packages(.gz)*)$ 0 20% 2880
refresh_pattern . 0 20% 4320
cache_mem 256 MB
maximum_object_size 512 MB
```

```
GNU nano 7.2                                                    /etc/squid/squid.conf *
acl SSL_ports port 443
acl Safe_ports port 80 # http
acl Safe_ports port 21 # ftp
acl Safe_ports port 443 # https
acl Safe_ports port 70 # gopher
acl Safe_ports port 210 # wais
acl Safe_ports port 1025-65535 # unregistered ports
acl Safe_ports port 280 # http-mgmt
acl Safe_ports port 488 # gss-http
acl Safe_ports port 591 # filemaker
acl Safe_ports port 777 # multiling http
acl CONNECT method CONNECT
acl networklan src 192.168.159.138/24

#ACL de blocage de sites
acl blockYoutube dstdomain .youtube.com
acl blockFacebookFR dstdomain .facebook.fr
acl FecebookFR_planning time M T W T F 12:00-14:00
acl blockFacebookCOM dstdomain .facebook.com

# Refuser l'accès aux sites interdits
http_access deny blockYoutube
http_access deny blockFacebookFR
http_access deny blockFacebookCOM

http_access allow FacebookFR_planning

http_access deny !Safe_ports
http_access deny CONNECT !SSL_ports
http_access allow localhost manager
http_access deny manager
http_access allow localhost
http_access allow networklan
http_access deny all
http_port 192.168.100.108:3128
coredump_dir /var/spool/squid
refresh_pattern ^ftp: 1440 20% 10080
refresh_pattern ^gopher: 1440 0% 1440
refresh_pattern -i (/cgi-bin/|\?) 0 0% 0
refresh_pattern (Release|Packages(.gz)*)$ 0 20% 2880
refresh_pattern . 0 20% 4320
cache_mem 256 MB
maximum_object_size 512 MB
```

ERREUR : l'URL demandée n'a

Non sécurisé http://facebook.fr

**ERREUR**

**L'URL demandée n'a pas pu être trouvée**

L'erreur suivante s'est produite en essayant d'accéder à l'URL : http://facebook.fr/

**Accès interdit.**

La configuration du contrôle d'accès, empêche votre requête d'être acceptée. Si vous pensez que c'est une erreur, contactez votre fournisseur d'accès.

Votre administrateur proxy est webmaster.

Générée le Sat, 04 Apr 2026 18:22:11 GMT par debian (squid/5.7)

Copier Coller Chercher

```
Release [48,0 kB]

B]
in Sources [185 kB]
in amd64 Packages [294 kB]

in amd64 python3-tornado amd64 6.2.0-
```

20:22
04/04/2026

# Blocage de certains sites stocké dans un fichier annexe

## création du fichier block_domaine.txt

```
  GNU nano 7.2                                                    /etc/squid/block_domaines.txt *
tutos-info.fr
ndlaprovidence.fr
ecoledirecte.com
```

```
acl SSL_ports port 443
acl Safe_ports port 80 # http
acl Safe_ports port 21 # ftp
acl Safe_ports port 443 # https
acl Safe_ports port 70 # gopher
acl Safe_ports port 210 # wais
acl Safe_ports port 1025-65535 # unregistered ports
acl Safe_ports port 280 # http-mgmt
acl Safe_ports port 488 # gss-http
acl Safe_ports port 591 # filemaker
acl Safe_ports port 777 # multiling http
acl CONNECT method CONNECT
acl networklan src 192.168.159.138/24

#ACL de blocage de sites
acl blockYoutube dstdomain .youtube.com
acl blockFacebookFR dstdomain .facebook.fr
acl FacebookFR_planning time MTWHF 12:00-14:00
acl blockFacebookCOM dstdomain .facebook.com
acl deny_domain url_regex -i "/etc/squid/block_domaines.txt"

# Refuser l'accès aux sites interdits
http_access deny blockYoutube
http_access deny blockFacebookFR
http_access deny blockFacebookCOM
http_access allow FacebookFR_planning
http_access deny deny_domain

http_access deny !Safe_ports
http_access deny CONNECT !SSL_ports
http_access allow localhost manager
http_access deny manager
http_access allow localhost
http_access allow networklan
http_access deny all
http_port 192.168.159.138:3128
coredump_dir /var/spool/squid
```

```
refresh_pattern ^ftp: 1440 20% 10080
refresh_pattern ^gopher: 1440 0% 1440
refresh_pattern -i (/cgi-bin/|\?) 0 0% 0
refresh_pattern (Release|Packages(.gz)*)$ 0 20% 2880
refresh_pattern . 0 20% 4320
cache_mem 256 MB
maximum_object_size 512 MB
```

Redémarrer le service squid

# Blocage de certaines extension de fichiers

## Créer le fichier block_extensions.conf

```
acl SSL_ports port 443
acl Safe_ports port 80 # http
acl Safe_ports port 21 # ftp
acl Safe_ports port 443 # https
acl Safe_ports port 70 # gopher
acl Safe_ports port 210 # wais
acl Safe_ports port 1025-65535 # unregistered ports
acl Safe_ports port 280 # http-mgmt
acl Safe_ports port 488 # gss-http
acl Safe_ports port 591 # filemaker
acl Safe_ports port 777 # multiling http
acl CONNECT method CONNECT
acl networklan src 192.168.159.138/24

#ACL de blocage de sites
acl blockYoutube dstdomain .youtube.com
acl blockFacebookFR dstdomain .facebook.fr
acl FacebookFR_planning time MTWHF 12:00-14:00
acl blockFacebookCOM dstdomain .facebook.com
acl deny_domain url_regex -i "/etc/squid/block_domaines.txt"
acl EXTENSIONS urlpath_regex -i "/etc/squid/block_extensions.conf"

# Refuser l'accès aux sites interdits
http_access deny blockYoutube
http_access deny blockFacebookFR
```

```
http_access deny blockFacebookCOM
http_access allow FacebookFR_planning
http_access deny deny_domain
http_access deny EXTENSIONS

http_access deny !Safe_ports
http_access deny CONNECT !SSL_ports
http_access allow localhost manager
http_access deny manager
http_access allow localhost
http_access allow networklan
http_access deny all
http_port 192.168.159.138:3128
coredump_dir /var/spool/squid
refresh_pattern ^ftp: 1440 20% 10080
refresh_pattern ^gopher: 1440 0% 1440
refresh_pattern -i (/cgi-bin/|\?) 0 0% 0
refresh_pattern (Release|Packages(.gz)*)$ 0 20% 2880
refresh_pattern . 0 20% 4320
cache_mem 256 MB
maximum_object_size 512 MB
```

## Restreindre l'accès à internet

```
acl SSL_ports port 443
acl Safe_ports port 80 # http
acl Safe_ports port 21 # ftp
acl Safe_ports port 443 # https
acl Safe_ports port 70 # gopher
acl Safe_ports port 210 # wais
acl Safe_ports port 1025-65535 # unregistered ports
acl Safe_ports port 280 # http-mgmt
acl Safe_ports port 488 # gss-http
acl Safe_ports port 591 # filemaker
acl Safe_ports port 777 # multiling http
acl CONNECT method CONNECT
acl networklan src 192.168.159.138/24

#ACL de blocage de sites
acl blockYoutube dstdomain .youtube.com
acl blockFacebookFR dstdomain .facebook.fr
acl FacebookFR_planning time MTWHF 12:00-14:00
acl blockFacebookCOM dstdomain .facebook.com
acl deny_domain url_regex -i "/etc/squid/block_domaines.txt"
acl EXTENSIONS urlpath_regex -i "/etc/squid/block_extensions.conf"
```

```
acl JOURS_HEURES_OUVRES time M T W H F 09:00-18:00

# Refuser l'accès aux sites interdits
http_access deny blockYoutube
http_access deny blockFacebookFR
http_access deny blockFacebookCOM
http_access allow FacebookFR_planning
http_access deny deny_domain
http_access deny EXTENSIONS
http_access allow JOURS_HEURES_OUVRES

http_access deny !Safe_ports
http_access deny CONNECT !SSL_ports
http_access allow localhost manager
http_access deny manager
http_access allow localhost
http_access allow networklan
http_access deny all
http_port 192.168.159.138:3128
coredump_dir /var/spool/squid
refresh_pattern ^ftp: 1440 20% 10080
refresh_pattern ^gopher: 1440 0% 1440
refresh_pattern -i (/cgi-bin/|\?) 0 0% 0
refresh_pattern (Release|Packages(.gz)*)$ 0 20% 2880
refresh_pattern . 0 20% 4320
cache_mem 256 MB
maximum_object_size 512 MB
```