

yasio `4E656568`
`2D878763`

docs **passing**

yasio `2F4E4E8F917F8855F8765F6B` socket `5EFC15E86EA237E8BCFA8E5478625E64766E625B627A7F7E6752B8`

- `6568888A`:
 - [English](#)
 - `78534E65`
- `8875F329`:
 - `7E8858`:
 - Visual Studio 2013+
 - GCC4.7+
 - xcode9+
 - `5A4E5F63` C++11,14,17 `787E81E8`
 - `8267`: x86, x64, ARM `4889`
 - `68EE7C7E`: Windows, macOS, Linux, FreeBSD, iOS, Android `7838`
- `6788`:
 - `51CE6D51`: `io_service`
 - `4E59`: `io_channel`
 - `4E854A8B`: `io_transport`

图 1-1-1:

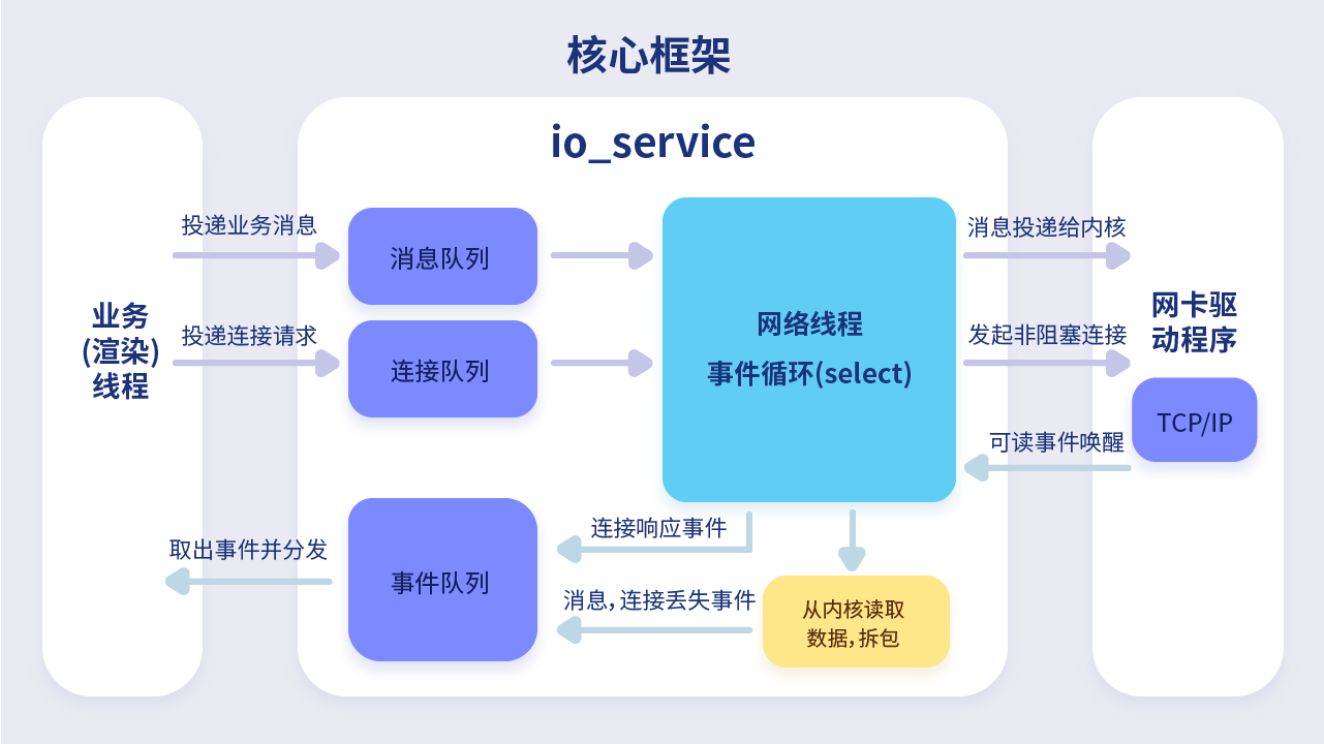


图 1-1-1

tool.chinaz.com http://

C++

```
#include "yasio/yasio.hpp"
#include "yasio/obstream.hpp"
using namespace yasio;
using namespace yasio::inet;
int main()
{
    io_service service({"tool.chinaz.com", 80});
    service.set_option(YOPT_S_DEFERRED_EVENT, 0); // dispatch network event on network thread
    service.start([&](event_ptr&& ev) {
        switch (ev->kind())
        {
        case YEK_PACKET: {
            auto packet = std::move(ev->packet());
            fwrite(packet.data(), packet.size(), 1, stdout);
            fflush(stdout);
            break;
        }
        case YEK_CONNECT_RESPONSE:
            if (ev->status() == 0)
            {
                auto transport = ev->transport();
                if (ev->cindex() == 0)
                {
                    obstream obs;
                    obs.write_bytes("GET /index.htm HTTP/1.1\r\n");

                    obs.write_bytes("Host: tool.chinaz.com\r\n");

                    obs.write_bytes("User-Agent: Mozilla/5.0 (Windows NT 10.0; "
                                   "WOW64) AppleWebKit/537.36 (KHTML, like Gecko) "
                                   "Chrome/87.0.4820.88 Safari/537.36\r\n");
                    obs.write_bytes("Accept: */*;q=0.8\r\n");
                    obs.write_bytes("Connection: Close\r\n\r\n");

                    service.write(transport, std::move(obs.buffer()));
                }
            }
            break;
        case YEK_CONNECTION_LOST:
            printf("The connection is lost.\n");
            break;
        }
    });
    // open channel 0 as tcp client
    service.open(0, YCK_TCP_CLIENT);
    getchar();
}
```

Lua

```
local ip138 = "tool.chinaz.com"
local service = yasio.io_service.new({host=ip138, port=80})
local respdata = ""
```

```
service:start(function(ev)
    local k = ev.kind()
    if (k == yasio.YEK_PACKET) then
        respdata = respdata .. ev:packet():to_string()
    elseif k == yasio.YEK_CONNECT_RESPONSE then
        if ev:status() == 0 then -- connect succeed
            local transport = ev:transport()
            local obs = yasio.obstream.new()
            obs:write_bytes("GET / HTTP/1.1\r\n")

            obs:write_bytes("Host: " .. ip138 .. "\r\n")

            obs:write_bytes("User-Agent: Mozilla/5.0 (Windows NT 10.0; WOW64) AppleWebKit/
537.36 (KHTML, like Gecko) Chrome/79.0.3945.117 Safari/537.36\r\n")
            obs:write_bytes("Accept: */*;q=0.8\r\n")
            obs:write_bytes("Connection: Close\r\n\r\n")

            service:write(transport, obs)
        end
    elseif k == yasio.YEK_CONNECTION_LOST then
        print("request finish, respdata: " .. respdata)
    end
end)

-- Open channel 0 as tcp client and start non-blocking tcp 3 times handshake
service:open(0, yasio.YCK_TCP_CLIENT)

-- Call this function at thread which focus on the network event.
function gDispatchNetworkEvent(...)
    service:dispatch(128) -- dispatch max events is 128 per frame
end

_G.yaservice = service -- Store service to global table as a singleton instance
```

6D8B & 794F
4B05 3A8B



6F88 Lua 794F7A5E9F4F62535F5E4F69 yasio - ibstream_view::consume out of range! 6C692F3A8B6B8FCC456F69846CF76DC5286F62

- 6D8B:
 - echo_server: TCP/UDP/KCP 6B646D2168
 - echo_client: TCP/UDP/KCP 6B64A9627A
 - ssltest: SSL 6B89A9627A, 6969github.com 6B98563768646262
 - tcptest: TCP 6B897A6F

- [speedtest](#): TCP,UDP,KCP
- [mcast](#):
- [794F3A8B](#):
- [ftp_server](#): yasio ftp
- [lua](#): Lua http TCP
- [xlua](#): xlua
- [DemoUE4](#): UE4

7F8B 6D8B & 794F
16D1 4BD5 3A8B

- C++11 msvc , gcc , clang
- git , cmake installed
- 88485946704E:

```
git clone https://github.com/yasio/yasio
cd yasio
git submodule update --init --recursive
cd build
# for xcode should be: cmake .. -GXcode
cmake ..
cmake --build . --config Debug
```


io_service Class

```
socket.select tcp, udp, kcp, ssl-client
```

```
EDD5
```

```
namespace yasio { namespace inet { class io_service; } }
```

```
6254  
1058
```

```
515167905165  
6C718420FD70
```

Name	Description
io_service::io_service	io_service

```
6C516985
```

Name	Description
io_service::start	
io_service::stop	
io_service::open	
io_service::close	
io_service::is_open	
io_service::dispatch	
io_service::write	
io_service::write_to	DGRAM

Name	Description
io_service::schedule	
io_service::init_globals	
io_service::cleanup_globals	
io_service::channel_at	
io_service::set_option	

object_pool

yasio.hpp

io_service::io_service

io_service

```
io_service::io_service();  
  
io_service::io_service(int channel_count);  
  
io_service::io_service(const io_hostent& channel_ep);  
  
io_service::io_service(const io_hostent* channel_eps, int channel_count);
```

channel_count

channel_ep

channel_eps

4F698F2A5757657499575789

794F
3A8B

```
#include "yasio/yasio.hpp"
int main() {
    using namespace yasio;
    using namespace yasio::inet;
    io_service s1; // s1 only support 1 channel
    io_service s2(5); // s2 support 5 channels concurrency
    io_service s3(io_hostent{"github.com", 443}); // s3 support 1 channel
    io_hostent hosts[] = {
        {"192.168.1.66", 20336},
        {"192.168.1.88", 20337},
    };
    io_service s4(hosts, YASIO_ARRAYSIZE(hosts)); // s4 support 2 channels concurrency
    return 0;
}
```

io_service::start

54527F7C67577F7A82

```
void start(io_event_cb_t cb);
```

5365
C278

cb

7F7E4E4E5E83FF6E8B4C534E57 io_service::dispatch 8C75897E7A895E82

794F
3A8B

```
#include "yasio/yasio.hpp"
int main() {
    using namespace yasio;
    using namespace yasio::inet;
    auto service = yasio_shared_service(io_hostent{host="ip138.com", port=80});
    service->start([](event_ptr&& ev) {
        auto kind = ev->kind();
        if (kind == YEK_CONNECT_RESPONSE)
        {
            if (ev->status() == 0)
                printf("[%d] connect succeed.\n", ev->cindex());
            else
                printf("[%d] connect failed!\n", ev->cindex());
        }
    });
}
```

```
    return 0;
}
```

io_service::stop

59697f7e67527f7a39

```
void stop()
```

6061
e80f

59697f7e67527f7a69528f88, 6951654f539990514f535e795f51685e995139
64fd791a616160fae1f77649857663880fa62

io_service::open

525f4f9939

```
void open(size_t cindex, int kind);
```

5365
c270

cindex

4f53295f39

kind

4f53798939

6061
e80f

5948 TCP, 664af9425168529997985832f14b6267fa7aef978e6382

cindex 7950c598594eio_service52c953e3794f5379cf89

kind 5f986f4f4e674f504e4e:
c5792f456b6a3e3c4b66

- YCK_TCP_CLIENT
- YCK_TCP_SERVER
- YCK_UDP_CLIENT
- YCK_UDP_SERVER
- YCK_KCP_CLIENT
- YCK_KCP_SERVER

- YCK_SSL_CLIENT

io_service::close

51254F89628946854A8B89

```
void close(transport_handle_t transport);  
void close(int cindex);
```

5365
C278

transport

5C895185764F8F4A8B89

cindex

5C895185764F8F89

6C61
E88F

EB8E TCP 6F 5C4A5789409E74662C5898E6389

io_service::is_open

52A04F89624F8F4A8B8954694E525F726989

```
bool is_open(transport_handle_t transport) const;  
bool is_open(int cindex) const;
```

5365
C278

transport

4F8F4F8B536789
20831A8B53C482

cindex

4F89205F89

8F5650
B4DE3C

true: 5355FF false: 2A5355

io_service::dispatch

52	6D	7F	7E	7E	7A	4E	75	76	4E	4E	30
06	3E	51	DC	BF	08	A7	1F	84	8B	F6	02

```
void dispatch(int max_count);
```

53	65
C2	70

max_count

67	6B	67	59	52	6D	4E	4E	65	30
2C	21	00	27	06	3E	8B	F6	70	02

6C	61
E8	0F

90 5E 68 65 6C 5E 5F 57 51 5E 7F 7E 4E 4E 76 4E 51 90 8F 7E 7A 8C 75 4F 59 Cocos2d-x 76 6E 67 7E 7A FF 4E 53 51 4E 6E 62 5F 64 (Unity, UE4) 76 4E 90 8F 7E 7A 39
1A 38 64 89 05 94 53 28 73 C3 51 DC 88 F6 84 1A A1 38 91 BF 08 03 28 8B 82 84 52 D3 BF 08 0C E5 CA 76 D6 38 0F 15 CE 84 38 38 91 BF 08 02

6B	65	6C	5B	4E	5B	51	57	66	65	6E	62	75	97	97	5E	67	75	30
64	B9	D5	F9	8E	89	68	30	F4	B0	38	0F	4C	62	5E	38	09	28	02

79	4F
3A	8B

```
yasio_shared_service()->dispatch(128);
```

io_service::write

54	4F	8F	4F	8B	8F	7A	53	90	65	63	30
11	20	93	1A	DD	DC	EF	D1	01	70	6E	02

```
int write(
    transport_handle_t thandle,
    std::vector<char> buffer,
    io_completion_cb_t completion_handler = nullptr
);
```

53	65
C2	70

thandle

4F	8F	4F	8B	53	67	30
20	93	1A	DD	E5	C4	02

buffer

89	53	90	76	4E	8F	52	7F	51	53	30
81	D1	01	84	8C	DB	36	13	B2	3A	02

completion_handler

53	90	5B	62	56	8C	30
D1	01	8C	10	DE	03	02

8F5650
04DE3C

645F53897662598276, < 0 : F86F637F198F89

6C61
E88F

completion_handler 4F2F63 KCP 39

7Abuffer4A796388F5756F4E464A8A63 completion_handler 89

io_service::write_to

54UDP28834A886389766289

```
int write_to(  
    transport_handle_t thandle,  
    std::vector<char> buffer,  
    const ip::endpoint& to,  
    io_completion_cb_t completion_handler = nullptr  
);
```

5365
2270

thandle

4F834A88E3C289

buffer

89538976buffer89

to

895389768F7A575789

completion_handler

618188166E8189

8F5650
04DE3C

765F538976598276, 5F < 0 F86F6F637F198F8F1A582F26834A88F273E5(TCP8F63A86678)89

6C61
E88F

63F07845F7284E DGRAM 28834A886F73 UDP, KCP 39

538988166E8189 completion_handler 4F2F63 KCP 39

buffer completion_handler

io_service::schedule

```
highp_timer_ptr schedule(  
    const std::chrono::microseconds& duration,  
    timer_cb_t cb  
);
```

duration

cb

std::shared_ptr

```
// Register a once timer, timeout is 3 seconds.  
yasio_shared_service()->schedule(std::chrono::seconds(3), []()->bool{  
    printf("time called!\n");  
    return true;  
});  
  
// Register a loop timer, interval is 5 seconds.  
auto loopTimer = yasio_shared_service()->schedule(std::chrono::seconds(5), []()->bool{  
    printf("time called!\n");  
    return false;  
});
```

io_service::init_globals

```
static void init_globals(print_fn2_t print_fn);
```

```
print_fn
```

81	5B	4E	7F	7E	65	5F	62	53	51	65	30
EA	9A	49	51	DC	E5	D7	53	70	FD	70	02

6C
E8 61
OF

6A 51 6B 6E 6F 63 69 81 75 6C 4F 6F 53 78 62 97 89 81 66 51 7F 6C 7E 65 91 5B 5A 51 52 81 5B 4A 65 67 7B 7F 6F 6C

52 97 5F 6B 67 75 6F 8B 59 62 5B 5A 51 52 UE4 54 U3D 84 65 5F 8F 51 82

79	4F
3A	8B

```
// yasio_uelua.cpp
// compile with: /EHsc
#include "yasio_uelua.h"
#include "yasio/platform/yasio_ue4.hpp"
#include "lua.hpp"
#ifdef defined(NS_SLUA)
using namespace NS_SLUA;
#endif
#include "yasio/bindings/lyasio.cpp"

DECLARE_LOG_CATEGORY_EXTERN(yasio_ue4, Log, All);
DEFINE_LOG_CATEGORY(yasio_ue4);

void yasio_uelua_init(void* L)
{
    auto Ls = (lua_State*)L;
    print_fn2_t log_cb = [] (int level, const char* msg) {
        FString text(msg);
        const TCHAR* tstr = *text;
        UE_LOG(yasio_ue4, Log, L"%s", tstr);
    };
    io_service::init_globals(log_cb);

    luaregister_yasio(Ls);
}

void yasio_uelua_cleanup()
{
    io_service::cleanup_globals();
}
```


6C61
E80F

5378578081788F6354E15845E55F63786E8369A86958(.dll,.so)52E598837869F8656E6E89954787A5FE2A8869

io_service::channel_at

8A87EF83725F8762E189E36482

```
io_channel* channel_at(size_t cindex) const;
```

5365
C270

cindex

4F937265

8F5650
04DE3C

4F93E3646788, 53725F5888FA83F4F86E845E nullptr 82

io_service::set_option

887E889882

```
void set_option(int opt, ...);
```

5365
C270

opt

8893674E, 88E777 YOPT_X_XXX.

794F
3A8B

```
#include "yasio/yasio.hpp"

int main(){
    using namespace yasio;
    using namespace yasio::inet;
    io_hostent hosts[] = {
        {"192.168.1.66", 20336},
        {"192.168.1.88", 20337},
    };
    auto service = std::make_shared<io_service>(hosts, YASIO_ARRAYSIZE(hosts));
```

```
// for application protocol with length field, you just needs set this option.
// it's similar to java netty length frame based decode.
// such as when your protocol define as following
//     packet.header: (header.len=12bytes)
//         code:int16_t
//         datalen:int32_t (not contains packet.header.len)
//         timestamp:int32_t
//         crc16:int16_t
//     packet.data
service->set_option(YOPT_C_LFBFD_PARAMS,
    0,        // channelId, the channel index
    65535,    // maxFrameLength, max packet size
    2,        // lenghtFieldOffset, the offset of length field
    4,        // lengthFieldLength, the size of length field, can be 1,2,4
    12,       // lengthAdjustment, if the value of length feild ==
packet.header.len + packet.data.len, this parameter should be 0, otherwise should be
sizeof(packet.header)
);

// for application protocol without length field, just sets length field size to -1.
// then io_service will dispatch any packet received from server immediately,
// such as http request, this is default behavior of channel.
service->set_option(YOPT_C_LFBFD_PARAMS, 1, 65535, -1, 0, 0);
return 0;
}
```

8B5396
F7C205

[io_event Class](#)

[io_channel Class](#)

[io_service Options](#)

[xxsocket Class](#)

[obstream Class](#)

[ibstream_view Class](#)

[ibstream Class](#)

io_channel Class

TCP/SSL/UDP/KCP

```
namespace yasio { namespace inet { class io_channel; } }
```

Name	Description
io_channel::get_service	io_service
io_channel::index	
io_channel::remote_port	
io_channel::bytes_transferred	
io_channel::connect_id	ID

io_service
io_service::channel_at

io_channel::get_service

io_service

```
io_service& get_service()
```

io_channel::index

87624f998f7a7ae3

```
int index() const
```

io_channel::remote_port

87624f998f7a7ae3.

```
u_short remote_port() const;
```

8f5650
04de3c

8f564f998f7a7ae3f7

- f98e2377a4f9988799a1798f7a7ae3
- f98e6757a4f99887976547ae3

io_channel::bytes_transferred

87624f998f7a7ae3f7

```
long long bytes_transferred() const;
```

8f5650
04de3c

4e8e63fa7a5f585520ff633658598265ff786c784ef88a2377a636641c7

io_channel::connect_id

87624f998f7a7ae3id

```
unsigned int connect_id() const;
```

8f5650
04de3c

58677a4f9955208f63id



[io_service Class](#)

[io_event Class](#)

io_event Class

io_service

```
namespace yasio { namespace inet { class io_event; } }
```

Name	Description
io_event::kind	
io_event::status	
io_event::packet	
io_event::timestamp	
io_event::transport	
io_event::transport_id	ID
io_event::transport_udata	

io_event::kind

```
int kind() const;
```


8F5650
D4DE3C

4E4E7C57FEF34E6F4E4E50:

- YEK_PACKET : 606F63664E
- YEK_CONNECT_RESPONSE : 8E63C654664E
- YEK_CONNECTION_LOST : 8E632559464E

io_event::status

83534E4E726989

```
int status() const;
```

8F5650
D4DE3C

- 0: 695E
- 70: 7A19, 7867E360897853637873E769

io_event::packet

83534E4E6A5E78696963

```
std::vector<char>& packet()
```

8F5650
D4DE3C

686863784F578, 7867E3608978 std::move 68GC695F4E4E4E638068686382

io_event::timestamp

83534E4E4E7F786E797E63256389

```
highp_time_t timestamp() const;
```

8F5650
D4DE3C

54787E6325E873785E797E63256389

io_event::transport

87524E4E794F854F8B23C7B9

```
transport_handle_t transport() const;
```

8F5650
D4DE3C

5F5953C7FF5F6252555F4E4E656F26834F8B53C7F2595963FF4E53734F5757596B8F39
D4DE53C7FF5F6252555F4E4E656F26834F8B53C7F2595963FF4E53734F5757596B8F39

io_event::transport_id

87524E4E794F854F8BIDB9

```
unsigned int transport_id() const;
```

8F5650
D4DE3C

324F6378F7727883F48579534EIDB9

io_event::transport_udata

887F1687524F854F8B78576562B9

```
template<typename _Uty>  
_Uty io_event::transport_udata();  
  
template<typename _Uty>  
void io_event::transport_udata(_Uty uservalue);
```

6C61
E80F

78579789E1F17B74 userdata 785358, 8882:

- 65528E63FA7A62524E4E655858userdata
- 65528E6372594E4E656574userdata

8B5396
F7C205

[io_service Class](#)

ostream Class

634f4f8b525f175252f0b9

- 3.35.0 basic_ostream C++
- ostream int16~int64 float/double, ,
- fast_ostream

8b6c
ed05

```
namespace yasio {  
using ostream = basic_ostream<endian::network_convert_tag>;  
using fast_ostream = basic_ostream<endian::host_convert_tag>;  
}
```









6254
1058

515167905165
6c718420fd70

Name	Description
ostream::ostream	ostream

5151656c
6c718905



Name	Description
ostream::write	
ostream::write_ix	(7bit Encoded Int/Int64)
ostream::write_v	(7bit Encoded Int)
ostream::write_byte	

Name	Description
obstream::write_bytes	
obstream::empty	
obstream::data	
obstream::length	
obstream::buffer	
obstream::clear	
obstream::shrink_to_fit	
obstream::save	




: obstream.hpp

obstream::obstream

 obstream 

```
obstream(size_t capacity = 128);  
  
obstream(const obstream& rhs);  
  
obstream(obstream&& rhs);
```

obstream::write



```
template<typename _Nty>  
void obstream::write(_Nty value);
```

5365
C270

value

8951517959
8159636439

6C61
E88F

_Nty 5849795757456948671~8598263637957626979795739

ostream::write_ix

6632/644F6968594E7Bit Encoded Int656F887F6451516989

```
template<typename _Intty>
void ostream::write_ix(_Intty value);
```

5365
C270

value

895151795989
815963643982

6C61
E88F

_Intty 795753896959487957

- int32_t
- int64_t

64F0788879767869655F51585E8Fdotnet594E6165

- [BinaryWriter.Write7BitEncodedInt](#)
- [BinaryWriter.Write7BitEncodedInt64](#)

ostream::write_v

51514E8F5268626C6C63529F5E5788(7Bit Encoded Int).

```
void write_v(cxx17::string_view sv);
```

5365
C270

sv

89515176596238
81996364786282

6C61
E88F

69F17851497Bit Encoded7678636F51516378627F26, 518972 write_bytes 515159826363.

ostream::write_byte

515114A598238
89512A578282

```
void write_byte(uint8_t value);
```

5365
C270

value

895151765938
819963643C82

6C61
E88F

69F1785289784F4E ostream::write

ostream::write_bytes

51515982637C38
89515982787C82

```
void write_bytes(cxx17::string_view sv);  
  
void write_bytes(const void* data, int length);  
  
void write_bytes(std::streamoff offset, const void* data, int length);
```

5365
C270

sv

5151string_view5389785982787C.

data

8951515982787C4789636467.

length

895151598265757479955.
816965578278746477A6.

offset

895151598265747979685979.
816965578278746477A6.

6C61
E88F

offset + length 70505F985C4E
645C5F786F6E obstream::length

obstream::empty

5268406F524E7A82
24A8496F263A7A82

```
bool empty() const;
```

8F5650
04DE3C

true 7A; false 927A82

6C61
E88F

695168784F4E length == 082
697878494F4E

obstream::data

83536563639439
87D8786E878882

```
const char* data() const;
```

```
char* data();
```

8F5650
04DE3C

598260656388575739
598260656388575739

obstream::length

8353609F5F82
87D8409FA682

```
size_t length() const;
```

8F5650
04DE3C

8F56604F532476685982F539
64664126632864685782F539

ostream::buffer

8F56604F532476685982F539
64664126632864685782F539

```
const std::vector<char>& buffer() const;  
  
std::vector<char>& buffer();
```

8F5650
04DE3C

69642875623255236F22457F78 std::move 629069

794F
3A8B

```
// ostream_buffer.cpp  
// compile with: /EHsc  
#include "yasio/ostream.hpp"  
  
int main( )  
{  
    using namespace yasio;  
    using namespace cxx17;  
  
    ostream obs;  
    obs.write_v("hello world!");  
  
    const auto& const_buffer = obs.buffer();  
  
    // after this line, the obs will be empty  
    auto move_buffer = std::move(obs.buffer());  
  
    return 0;  
}
```

ostream::clear

6F7460FF4F4F587539
6566416C4F4F587539

```
void clear();
```

6C61
E80F

6B5165654A2165buffer5158FF594E0A653759755F5253582758677583

ostream::shrink_to_fit

2A524065E875623A7A55655882

```
void shrink_to_fit();
```

ostream::save

5C6045764E0F52598278624F5852654E82

```
void save(const char* filename) const;
```

794F
3A8B

```
// ostream_save.cpp
// compile with: /EHsc
#include "yasio/ostream.hpp"
#include "yasio/istream.hpp"

int main( )
{
    using namespace yasio;
    using namespace cxx17;

    ostream obs;
    obs.write_v("hello world!");
    obs.save("ostream_save.bin");

    istream ibs;
    if(ibs.load("ostream_save.bin")) {
        // output should be: hello world!
        try {
            std::count << ibs.read_v() << "\n";
        }
        catch(const std::exception& ex) {
            std::count << "read_v fail: " <<
                << ex.message() << "\n";
        }
    }

    return 0;
}
```



[ibstream_view Class](#)

[ibstream Class](#)

ibstream_view Class

634f4f88f52725f57525f8832

6567

27238f5271627682b6c5369597362468b9f34762fa std::out_of_range 625832

886C
EDD5

```
namespace yasio {  
  // 206ff7f2877a86c4f81528f6259825f6c8925a8257c42883  
  using ibstream_view = basic_ibstream_view<endian::network_convert_tag>;  
  
  // 206ff7f2877a86c4f81528f6259825f6c8925a8257c42883  
  using fast_ibstream_view = basic_ibstream_view<endian::host_convert_tag>;  
}
```

6254
1058

62716728

Name	Description
ibstream_view::ibstream_view	672812a ibstream_view 688c

5151656C
6C7189b5

Name	Description
ibstream_view::reset	917f5f238ff27539362 2b6885c68f17167862
ibstream_view::read	2d7821776c88637832
ibstream_view::read_ix	216321776c8863 (7bit Encoded Int/Int64) 237832
ibstream_view::read_v	88625e72557 (7bit Encoded Int/Int64) 294e86327832

Name	Description
ibstream_view::read_byte	<code>1145982</code>
ibstream_view::read_bytes	<code>8853635892584881526563 F8D6879A7FA68C8B367862</code>
ibstream_view::empty	<code>2824415824517A</code>
ibstream_view::data	<code>83634178626788</code>
ibstream_view::length	<code>836341278F</code>
ibstream_view::advance	<code>545278534078F8638869</code>
ibstream_view::seek	<code>78A84184F8626569</code>

`6C61
E80F`

`ibstream_view 1924C++17892479 std::string_view, 8153775478585384235F71538F7A268D4FA7734E4E GC89`

`896C
8142`

`54874E: ibstream.hpp`

ibstream_view::ibstream_view

`6428462A ibstream_view 588C38`

```
ibstream_view();  
  
ibstream_view(const void* data, size_t size);  
  
ibstream_view(const ostream* obs);
```

`5365
C278`

data

`85788F575348885678628850575788`

size

5F C0 5F 17 53 40 8F 52 63 62 59 6C 80

obs

F0 6F 17 53 70 61 80

istream_view::reset

21 7F istream_view 15 62 80 50 80

```
void istream_view::reset(const void* data, size_t size);
```

53 65
C2 70

data

5F C0 5F 17 53 40 8F 52 63 62 80 67 57 80

size

5F 53 5F 52 53 40 8F 52 63 59 6C 80
85 C0 8F 17 16 8C 80 66 70 6E 27 6F 82

istream_view::read

4E 60 40 80 53 63 50 80
CE 41 20 80 00 70 5C 80

```
template<typename _Nty>  
_Nty istream_view::read();
```

8F 50 50
04 0E 3C

8F 50 80 52 70 50
04 0E 80 30 64 30

6C 61
E8 0F

_Nty 50 80 70 80 52 4E 60 40 67 1~8 50 82 63 63 70 52 62 60 70 70 57 80

istream_view::read_ix

80 53 7Bit Encoded Int 53 70 16 70 70 53 70 50 80

```
template<typename _Intty>  
_Intty istream_view::read_ix();
```


8F5650
04DE3C

32/644F63785089

6C61
E80F

_Intty 795F985F4E4E7C57

- int32_t
- int64_t

7C7D787C8B4E Microsoft dotnet 894E7D78

- [BinaryReader.Read7BitEncodedInt\(\)](#)
- [BinaryReader.Read7BitEncodedInt64\(\)](#)

ibstream_view::read_v

8B5353974E8F52636282

```
cxx17::string_view read_v();
```

8F5650
04DE3C

8F56885352794E8F5263638956FF65 GC39

6C61
E80F

7C7D787A4B8B53 7bit Encoded Int827576797897A658FF8B8978 read_bytes 8B534E8F525982786282

ibstream_view::read_byte

8B5312A578282

```
uint8_t read_byte();
```

8F5650
04DE3C

uint8_t5082

6C61
E80F

675163784F4E ibstream_view::read

ibstream_view::read_bytes

FB62676A9F56598263626C63 GC82

```
cxx17::string_view read_bytes();
```

8F5650
D4DE3C

4F6B52636274 cxx17::string_view 7B67636F62

ibstream_view::empty

52636069544E7A82
24AD412F263A7A82

```
bool empty() const;
```

8F5650
D4DE3C

true 7A; false 604E8159535414F598262

6C61
E80F

696363784F4E length == 082

ibstream_view::data

8F56606363639482
646E41786E678882

```
const char* data() const;
```

8F5650
D4DE3C

8F6E6354604E28462A598276678882

istream_view::length

8752609275E39

```
size_t length() const;
```

8F5659
D4DE3C

5F52609275E39
53404177A682

istream_view::advance

545279526D8B536F6839
1140FBAB41FB66386782

```
void advance(ptrdiff_t offset);
```

5365
C278

offset

89545279527659799139
811140FBAB844FFBCE82

6C61
E86F

82*offset*4F8D65FF525364E379528B536F6839
261F70419CB1E3FBAB8B66386782

istream_view::seek

79528B536F6839
FBABFB66386782

```
ptrdiff_t seek(ptrdiff_t offset, int whence);
```

5365
C278

offset

84*whence*76517959799139
8173844FFBCE82

whence

544E78644EC68F63674E50FF SEEK_SET, SEEK_CUR, SEEK_END 82
2849496C8E

8F5650
04DE3C

8F5E78A85A78F84E6D885982597989

ibstream Class

634F4E8B525962528F54536E5753528882

8B6C
EDD5

```
namespace yasio {  
using ibstream = basic_ibstream<endian::network_convert_tag>;  
// F8F87F787A6CFF5F82FF8C3C6C7F8F8F  
using fast_ibstream = basic_ibstream<endian::host_convert_tag>;  
}
```

6254
1058

515167885165
6C718428FD78

Name	Description
ibstream::ibstream	849818E ibstream F88C

5151656C
6C7189D5

Name	Description
ibstream::load	FE68FE628F6D

7E625C6B7E67
E77F4221D384

ibstream_view

ibstream

ibstream::ibstream

6788464E ibstream F88C89

```
istream(std::vector<char> blob);  
  
istream(const ostream* obs);
```

`blob`

`obs`

`ostream`

`load`

`load(const char* filename) const;`

`load`

`load`

```
bool load(const char* filename) const;
```

`load`

`true` `false`

`save`

`ostream::save`


`save`

`ostream Class`

`io_service Class`

xxsocket Class

bsd socket API yasio



```
xxsocket accept_n xxx_n socket
```

namespace

```
namespace yasio { namespace inet { class xxsocket; } }
```

xxsocket

Name	Description
xxsocket::xxsocket	xxsocket

xxsocket

Name	Description
xxsocket::xpconnect	TCP
xxsocket::xpconnect_n	TCP
xxsocket::pconnect	TCP
xxsocket::pconnect_n	TCP
xxsocket::pserve	tcp
xxsocket::swap	socket
xxsocket::open	socket

Name	Description
xxsocket::reopen	 socket
xxsocket::is_open	 socket
xxsocket::native_handle	 socket
xxsocket::release_handle	 socket
xxsocket::set_nonblocking	 socket
xxsocket::test_nonblocking	 socket
xxsocket::bind	 socket
xxsocket::bind_any	 socket
xxsocket::listen	 TCP
xxsocket::accept	 TCP
xxsocket::accept_n	 TCP
xxsocket::connect	 socket
xxsocket::connect_n	 socket
xxsocket::send	 socket
xxsocket::send_n	 socket
xxsocket::recv	 socket
xxsocket::recv_n	 socket
xxsocket::sendto	 DGRAM
xxsocket::recvfrom	 DGRAM

Name	Description
xxsocket::handle_write_ready	 xxsocket
xxsocket::handle_read_ready	 xxsocket
xxsocket::local_endpoint	 xxsocket
xxsocket::peer_endpoint	 xxsocket
xxsocket::set_keepalive	 tcp keepalive
xxsocket::reuse_address	 xxsocket
xxsocket::exclusive_address	 xxsocket
xxsocket::select	 xxsocket
xxsocket::shutdown	 xxsocket
xxsocket::close	 xxsocket
xxsocket::tcp_rtt	 tcp rtt.
xxsocket::get_last_errno	 xxsocket
xxsocket::set_last_errno	 xxsocket
xxsocket::strerror	 xxsocket
xxsocket::gai_strerror	 getaddrinfo
xxsocket::resolve	 xxsocket
xxsocket::resolve_v4	 ipv4
xxsocket::resolve_v6	 ipv6
xxsocket::resolve_v4to6	 ipv4V4MAPPED

Name	Description
<code>xxsocket::resolve_tov6</code>	<code>ipv4</code> <code>ipv6</code> <code>V4MAPPED</code>
<code>xxsocket::getipsv</code>	<code>ip</code>
<code>xxsocket::traverse_local_address</code>	

xxsocket::xxsocket

`xxsocket`

```
xxsocket::xxsocket();  
xxsocket::xxsocket(socket_native_type handle);  
xxsocket::xxsocket(xxsocket&& right);  
xxsocket::xxsocket(int af, int type, int protocol);
```

`handle`

`handle`

`socket` `xxsocket`

`right`

`move`

`af`

`ip`

`protocol`

`TCP/UDP` `0`

xxsocket::xpconnect

`TCP`

```
int xxsocket::xpconnect(const char* hostname, u_short port, u_short local_port = 0);
```

`hostname`

`hostname`

`IP` `16` `5760`

port

818f636752587a7af238

local_port

7c5a9a4f7af23f7fc6b8a58 0 887a8f67529139

6c61
e80f

4f8152686b2c67626178ip538f68727c8

8f5658
b4be3c

0: 6252ff < 0 5129ff9a8f xxsocket::get_last_errno 875393ef7939

xxsocket::xpconnect_n

8f8c7a675258fa7aTCP8f6389

```
int xxsocket::xpconnect_n(const char* hostname, u_short port, const std::chrono::microseconds&
wtimeout, u_short local_port = 0);
```

5365
c270

hostname

818f636752587a7af23f7fc6b8a58 IP87a 16 5760 8

port

818f636752587a7af238

local_port

7c5a9a4f7af23f7fc6b8a58 0 887a8f67529139

wtimeout

fa7a8f6389f8629539

8f5658
b4be3c

0: 6252ff < 0 5129ff9a8f xxsocket::get_last_errno 875393ef7939

6c61
e80f

4f8152686b2c67626178ip538f68727c8

xxsocket::pconnect

548f7a675258ffa7aTCP8fa339

```
int xxsocket::pconnect(const char* hostname, u_short port, u_short local_port = 0);
int xxsocket::pconnect(const endpoint& ep, u_short local_port = 0);
```

5365
c270

hostname

818fa3675258ffa7a60ffef4e69 IP5670 16 5f64 82

ep

818fa3675258ffa7a64a39

port

818fa3675258ffa7a2339

local_port

6752994f7aef3f6c088a50 0 88798967529139

8f5650
646e3c

0: 6252ff < 0 51296f998f xxsocket::get_last_errno 875393ef7939

6c61
e80f

4f4f6860676762626179ip538b6882

xxsocket::pconnect_n

548f7a675258ffa7aTCP8fa339

```
int pconnect_n(const char* hostname, u_short port, const std::chrono::microseconds& wtimeout,
u_short local_port = 0);
int pconnect_n(const char* hostname, u_short port, u_short local_port = 0);
int pconnect_n(const endpoint& ep, const std::chrono::microseconds& wtimeout, u_short
local_port = 0);
int pconnect_n(const endpoint& ep, u_short local_port = 0);
```

5365
c270

hostname

818fa3675258ffa7a60ffef4e69 IP5670 16 5f64 82

ep

818f63675258795757b9

port

818f63675258797af3b9

local_port

6750904f7af3f76c6b8b50 0 88798f675291b9

wtimeout

fa7a8f6389f8f505b9

8f5650
b4de3c

0: 1052ff < 0 51296c1a87 xxsocket::get_last_errno 875393ef79b9

xxsocket::pserve

5f546757TCP6752795430
602f2c30 0da1d12c02

```
int pserve(const char* addr, u_short port);  
int pserve(const endpoint& ep);
```

5365
c270

addr

676a636a7f61 IP6a7 89

ep

6767575739
2c5a5040b2

port

TCP79547af3b9

8f5650
b4de3c

0: 1052ff < 0 51296c1a87 xxsocket::get_last_errno 875393ef79b9

794f
3a8b

```
// xxsocket-serve.cpp  
#include <signal.h>  
#include <vector>  
#include "yasio/xxsocket.hpp"
```

```
using namespace yasio;
using namespace yasio::inet;

xxsocket g_server;
static bool g_stopped = false;
void process_exit(int sig)
{
    if (sig == SIGINT)
    {
        g_stopped = true;
        g_server.close();
    }
    printf("exit");
}
int main()
{
    signal(SIGINT, process_exit);

    if (g_server.pserve("0.0.0.0", 1219) != 0)
        return -1;
    const char reply_msg[] = "hi, I'm server\n";
    do
    {
        xxsocket cs = g_server.accept();
        if (cs.is_open())
        {
            cs.send(reply_msg, sizeof(reply_msg) - 1);
            std::this_thread::sleep_for(std::chrono::milliseconds(100));
        }
    } while (!g_stopped);

    return 0;
}
```

xxsocket::swap

 socket

```
xxsocket& swap(xxsocket& who);
```



who





xxsocket 

xxsocket::open

xxsocket

```
bool open(int af = AF_INET, int type = SOCK_STREAM, int protocol = 0);
```

af

AF_INET (ipv4) AF_INET6 (ipv6)

type

SOCK_STREAM (TCP), SOCK_DGRAM (UDP)

protocol

TCP/UDP 0

true: false xxsocket::get_last_errno

xxsocket::reopen

xxsocket

```
bool reopen(int af = AF_INET, int type = SOCK_STREAM, int protocol = 0);
```

af

AF_INET (ipv4) AF_INET6 (ipv6)

type

SOCK_STREAM (TCP), SOCK_DGRAM (UDP)

protocol

TCP/UDP 0

true: false xxsocket::get_last_errno

6C61
E80F

8267socket50635F6F6851654F5151F56F6B2168636F82

xxsocket::is_open

52A8socket2F24F2536682

```
bool is_open() const;
```

8F5650
D4DE3C

true: 2953666F false: 5A636682

xxsocket::native_handle

8368socket654F6F6F7882

```
socket_native_type native_handle() const;
```

8F5650
D4DE3C

socket6748636F786F yasio::inet::invalid_socket 887A2848socket82

xxsocket::release_handle

21636555socket6F6F78A7564382

```
socket_native_type release_handle() const;
```

8F5650
D4DE3C

21635274socket6748636F78

xxsocket::set_nonblocking

8876socket7482788585A6F82

```
int set_nonblocking(bool nonblocking) const;
```


5365
C270

nonblocking

true: 9798586A5F6F false: 9858215F62

8F5650
04DE3C

0: 6262FF < 0 5929FFA987 xxsocket::get_last_errno 875393287932

xxsocket::test_nonblocking

6840socket6F644E9798586A5F62

```
int test_nonblocking() const;
```

8F5650
04DE3C

1: 9798586A5F6F 0: 9858215F62

6C61
E80F

6840winsock26F644E9798586A5F62 SOCK_STREAM 7057socket1A645E -1 32

xxsocket::bind

7F58socket676767575739

```
int bind(const char* addr, unsigned short port) const;  
int bind(const endpoint& ep) const;
```

5365
C270

addr

676763587F53ip675739

port

817158737F5339

ep

897158737F53575739

8F5650
04DE3C

0: 1052FF < 0 5129FF9A07 xxsocket::get_last_errno 875393EF7039

xxsocket::bind_any

7F5Asocket276A4B61506089

```
int bind_any(bool ipv6) const;
```

5365
C270

ipv6

6F547F5B67674E61IPv65767
2F26616A2C3A4B0F

8F5650
04DE3C

0: 1052FF < 0 5129FF9A07 xxsocket::get_last_errno 875393EF7039

xxsocket::listen

6F2B705263EA TCP69577A63E346F96589

```
int listen(int backlog = SOMAXCONN) const;
```

5365
C270

backlog

6F5970546580
8027612C7080

8F5650
04DE3C

0: 1052FF < 0 5129FF9A07 xxsocket::get_last_errno 875393EF7039

xxsocket::accept

6353464F5B627A8F6380
A307602A5237E80F6380

```
xxsocket accept() const;
```

8F5650
04DE3C

5458627A984F78 xxsocket FB8C39

xxsocket::accept_n

878858636F6A57664F58677A8E6389

```
int accept_n(socket_native_type& new_sock) const;
```

5365
C278

new_sock

83FAE2686C6458627A984F786554socketE3C455Z8

8F5650
04DE3C

0: 6252FF < 0 5928FF98CF xxsocket::get_last_errno 8763938F7889

6C61
E88F

82676867788468 0 6Fnew_sock 4A28887E4E2798586A6F82

8978687A7848586CF8762A38373 xxsocket::set_nonblocking 66socket887E4A2798586A6F82

xxsocket::connect

FA7A8E6389

```
int connect(const char* addr, u_short port);  
int connect(const endpoint& ep);
```

5365
C278

addr

8F7A4867ip575789

port

8F7A48677A5389

ep

8F7A4867575789

8F	56	50
D4	DE	3C

```
0: 6252ff < 0 598dff908f xxsocket::get_last_errno 835395ef7839
```

6C	61
E8	0F

TCP: 5380 TCP 4E6B6362
0177 0921E14BUDP: 5E7A4517E7E5B
FA CB 43 C4 D1 9A

xxsocket::connect_n

5E	7A	8F	63	30
FA	CB	DE	A5	02

```
int connect_n(const char* addr, u_short port, const std::chrono::microseconds& wtimeout);
int connect_n(const endpoint& ep, const std::chrono::microseconds& wtimeout);
int connect_n(const endpoint& ep);
```

53	65
C2	70

addr

8F7A4E67ip575730
DC0B3B3A304002

port

8F	7A	4E	67	7A	53	30
DC	0B	3B	3A	EF	E3	02

ep

8F	7A	4E	67	57	57	30
DC	0B	3B	3A	30	40	02

wtimeout

5E	7A	8F	63	76	8D	65	65	95	30
FA	CB	DE	A5	84	85	F6	F6	F4	02

8F	56	50
D4	DE	3C

```
0: 62 57 ff < 0 59 8d ff 90 8f xxsocket::get_last_errno 83 53 95 8b 78 30
   10 0f 0c 31 25 0c 1a c7 87 d6 19 ef 01 02
```

6C	61
E8	0F

TCP: 5380 TCP 4E6B6362
0177 0921E14BUDP: 5E7A4517E7E5B
FA CB 43 C4 D1 9A

xxsocket::connect_n

xxsocket::connect_n

```
int disconnect() const;
```

xxsocket::connect_n

```
0: 0 < 0 xxsocket::get_last_errno
```

xxsocket::connect_n

SOCK_DGRAM (UDP) socket

xxsocket::send

xxsocket::send

```
int send(const void* buf, int len, int flags = 0);
```

xxsocket::send

buf

xxsocket::send

len

xxsocket::send

flags

xxsocket::send

xxsocket::send

```
==len: 0 < len xxsocket::get_last_errno
```

xxsocket::send_n

xxsocket::send_n

```
int send_n(const void* buf, int len, const std::chrono::microseconds& wtimeout, int flags = 0);
```

5365
C270

buf

89518863627680595982575739

len

895188636276955E39

wtimeout

618188F6F6F482

flags

618178625542678839

8F5650
04DE3C

```
==len: 6252FF < len 598DFF9A8F xxsocket::get_last_errno 835395887839
```

xxsocket::recv

FE516863298F7A4E6751898F67769656239

```
int recv(void* buf, int len, int flags = 0) const;
```

5365
C270

buf

A352786275B25A39

len

A352786275B25A725E39

flags

A35278625542678839

8F5650
04DE3C

```
==len: 6252FF < len 598DFF9A8F xxsocket::get_last_errno 835395887839
```

6C61
E88F

68F17869547A538F59FF53514Esocket678E695469 8288586A5E 39

xxsocket::recv_n

5480F2F2F2A1566A4E8A9862FA636A7F56786289

```
int recv_n(void* buf, int len, const std::chrono::microseconds& wtimeout, int flags = 0)
const;
```

5365
C278

buf

6368686275515A82

len

6368686275515A7F5682

wtimeout

636880F2F2F282

flags

636363635F5C688882

8F5858
D4DE3C

```
==len: 6252FF < len 598D6C7A8F xxsocket::get_last_errno 835395887882
```

xxsocket::sendto

54807A4E675188 DGRAM 68UDP686362

```
int sendto(const void* buf, int len, const endpoint& to, int flags = 0) const;
```

5365
C278

buf

656188686275515A82

len

656188686275515A7F5682

to

6181786857565682

flags

618178625554688882

8F5650
04DE3C

```
==len: 6252FF < len 5989FF99FF xxsocket::get_last_errno 835395887839
```

xxsocket::recvfrom

4E815888248C7A4E675189276374986282

```
int recvfrom(void* buf, int len, endpoint& peer, int flags = 0) const;
```

5365
C278

buf

A358788215B25A7F2682

len

A358788215B25A7F2682

peer

A35878826468FF85FA237889

flags

A35878825E5C688882

8F5650
04DE3C

```
==len: 6252FF < len 5989FF99FF xxsocket::get_last_errno 835395887839
```

6C61
E88F

68716869547A538458FF52514Esocket6788585468 828858255F 82

xxsocket::handle_write_ready

785Fsocket535182

```
int handle_write_ready(const std::chrono::microseconds& wtimeout) const;
```

5365
C278

wtimeout

785F8868687A82

8F5650
04DE3C

0: 80F3FF 1: F652FF < 0: 5189FF9A8F xxsocket::get_last_errno 876393887839

6C61
E80F

9A585F516861887F6251696F76C95146FF69F67684A7A53846889

xxsocket::handle_read_ready

7865socket278889

```
int handle_read_ready(const std::chrono::microseconds& wtimeout) const;
```

5365
C270

wtimeout

7865886565F389

8F5650
04DE3C

0: 80F3FF 1: F652FF < 0: 5189FF9A8F xxsocket::get_last_errno 876393887839

xxsocket::local_endpoint

87634537499A4F766757505089

```
endpoint local_endpoint() const;
```

8F5650
04DE3C

8F586757575789

6C61
E80F

59676A6789788F xxsocket::connect 6288TCP8E63328E31626768626F9945846879575768 0.0.0.0

xxsocket::peer_endpoint

87634537499A4F76677A505089

```
endpoint peer_endpoint() const;
```

8F5658
04DE3C

8F566257575739
04DE2C30304082

6C61
E88F

5962666969728F xxsocket::connect 1689 TCP8E63369E31626268626E99458F587957572F 0.0.0.0

xxsocket::set_keepalive

8B7FTCP5E52518B79C5F9C27682

```
int set_keepalive(int flag = 1, int idle = 7200, int interval = 75, int probes = 10);
```

5365
C278

flag

1 : 55546555524F8B79C5F9FF 0 : 71E582

idle

5351725C6967464F6D60454E54FF54525E5C538B79C5F9A24B7967598D6868F46C534DFF79FF39

interval

5351626552C5F9B6E54F86FCB1595189C5F9A24B62F8F4F4846C534DFF68B26982

probes

5351626552C5F9B6E54F86FCB1595189C5F9A24B62F8F4F4846C534DFF68B26982

8F5658
04DE3C

0 : 188F6C < 0 5129FF9A8F xxsocket::get_last_errno 8768938B7982

794F
3A8B

```
// xxsocket-keepalive.cpp
#include "yasio/xxsocket.hpp"
using namespace yasio;
using namespace inet;

int main(){
    xxsocket client;
    if(0 == client.pconnect("192.168.1.19", 80)) {
```

```
        client.set_keepalive(1, 5, 10, 2);
    }
    return 0;
}
```

xxsocket::reuse_address

xxsocket::reuse_address

```
void reuse_address(bool reuse);
```

xxsocket::reuse_address

reuse

xxsocket::reuse_address

xxsocket::reuse_address

xxsocket::reuse_address

xxsocket::exclusive_address

xxsocket::exclusive_address

```
void exclusive_address(bool exclusive);
```

xxsocket::exclusive_address

exclusive

xxsocket::exclusive_address

xxsocket::exclusive_address

xxsocket::exclusive_address

xxsocket::set_optval

xxsocket::set_optval

```
template <typename _Ty> int set_optval(int level, int optname, const _Ty& optval);
```

5365
C270

level

socket899979A72B39

optname

8999797C5739
8979788882

optval

89995889

8F5658
04DE3C

0: 1252FF < 0 5129FF1A8F xxsocket::get_last_errno 8753958F7839

6C61
E80F

64F07854bsd socket setsockopt 528878546FE32F4F786A6750886CF4694F4F7539
528878546FE32F4F786A6750886CF4694F4F7539

xxsocket::get_optval

887Esocket899989

```
template <typename _Ty> _Ty get_optval(int level, int optname) const
```

5365
C270

level

socket899979A72B39

optname

8999797C5739
8979788882

8F5658
04DE3C

845889995889

6C61
E80F

64F07854bsd socket getsockopt 528878546FE32F4F786A6750886CF4694F4F7539
528878546FE32F4F786A6750886CF4694F4F7539

xxsocket::select

7952socket846848484839

```
int select(fd_set* readfds, fd_set* writefds, fd_set* exceptfds, const
std::chrono::microseconds& wtimeout)
```

5365
C270

readfds

F2F84848F2F878657430

writefds

F2514848F2F878657430

exceptfds

55584848F2F878657430

wtimeout

7851484889F8484830

8F5650
D4DE3C

0:80F2FF > 0:6252FF < 0:5989FF908F xxsocket::get_last_errno 870819887930

xxsocket::shutdown

73E8TCP48851A8830

```
int shutdown(int how = SD_BOTH) const;
```

5365
C270

how

73E81A887988FFEF204E486A674E50

- SD_SEND : 51891A88
- SD_RECEIVE : 63631A88
- SD_BOTH : 88E873E8

8F5650
04DE3C

0: f252ff < 0: 5129ff992f xxsocket::get_last_errno 876293227932

xxsocket::close

7322socket6f2a62767f446662

```
void close(int shut_how = SD_BOTH);
```

5365
c270

shut_how

73221A9378576f6f2f454b4545674e52

- SD_SEND : 53891A99
- SD_RECEIVE : 63539999
- SD_BOTH : 21282325
- SD_NONE : 58287325

8F5650
04DE3C

0: f252ff < 0: 5129ff992f xxsocket::get_last_errno 876293227932

6C61
E80F

5262 shut_how != SD_NONE 6f62f0781A488328 shutdown 6f518c786522 close 62

xxsocket::tcp_rtt

8752TCP8f6379RTT39

```
uint32_t tcp_rtt() const;
```

8F5650
04DE3C

8458TCP79RTTf2f2ff6c534b: 5E79 39

xxsocket::get_last_errno

xxsocket::get_last_errno

```
static int get_last_errno();
```

xxsocket::get_last_errno

```
0: errno > 0 ? xxsocket::strerror(errno) : 0
```

xxsocket::get_last_errno

xxsocket::get_last_errno

xxsocket::set_last_errno

xxsocket::set_last_errno

```
static void set_last_errno(int error);
```

xxsocket::set_last_errno

error

xxsocket::set_last_errno

xxsocket::set_last_errno

xxsocket::set_last_errno

xxsocket::not_send_error

xxsocket::not_send_error

```
static bool not_send_error(int error);
```

xxsocket::not_send_error

error

xxsocket::not_send_error

8F5650
04DE3C

true : socket69586C false : socket7260F27E6179938BFC655373E6socket7E6299AF62

6C61
E80F

4E536389644F8F6E50 < 0 F8FC837869FD78B2

xxsocket::not_recv_error

72AD2F245F6352F2socketFA68E86577E664F3E662

```
static bool not_recv_error(int error);
```

5365
C278

error

78E678B2

8F5650
04DE3C

true : socket69586C false : socket7260F27E6179938BFC655373E6socket7E6299AF62

6C61
E80F

4E536363644F8F6E50 < 0 F8FC837869FD78B2

xxsocket::strerror

5C958B788F634E5B7B4E30
8619EE616C623A5A57263262

```
static const char* strerror(int error);
```

5365
C278

error

78E678B2

8F5650
04DE3C

898BFF697659784E30
19E6F16457283262

xxsocket::gai_strerror

`getaddrinfo`

```
static const char* gai_strerror(int error);
```

`error`

error

`error`

`error`

`error`

xxsocket::resolve

`resolve`

```
int resolve(std::vector<endpoint>& endpoints, const char* hostname, unsigned short port = 0,
            int socktype = SOCK_STREAM);
```

`endpoints`

endpoints

`endpoints`

hostname

`hostname`

port

`port`

socktype

`socktype`

`socktype`

`0: 0 > 0 0 xxsocket::strerror 0`

xxsocket::resolve_v4

IPv4

```
int resolve_v4(std::vector<endpoint>& endpoints, const char* hostname, unsigned short port = 0, int socktype = SOCK_STREAM);
```

endpoints

hostname

port

socktype

socket

0: 00000000 > 0 0000 xxsocket::strerror 00000000000000000000000000000000

xxsocket::resolve_v6

IPv6

```
int resolve_v6(std::vector<endpoint>& endpoints, const char* hostname, unsigned short port = 0, int socktype = SOCK_STREAM);
```

endpoints

hostname

port

socktype

socket7957397b8b62

8f5650d4de3c

0: 636366ff > 0 9a2f xxsocket::strerror 8f634a8876f3884f6939

xxsocket::resolve_v4to6

4f89675754535476c5e3606f67652b24IPv457575f8f634aIPv6 V4MAPPED685f393c6f62

```
int resolve_v4to6(std::vector<endpoint>& endpoints, const char* hostname, unsigned short port = 0, int socktype = SOCK_STREAM);
```

5365c270

endpoints

8f5153653983faC27062

hostname

5754396f6062

port

7af339ef

socktype

socket7957397b8b62

8f5650d4de3c

0: 636366ff > 0 9a2f xxsocket::strerror 8f634a8876f3884f6939

xxsocket::resolve_tov6

89676760632b64606757576fc5e3606f67652b24IPv457574f8f634aIPv6 V4MAPPED685f393c6f62

```
int resolve_tov6(std::vector<endpoint>& endpoints, const char* hostname, unsigned short port = 0, int socktype = SOCK_STREAM);
```

53	65
C2	70

endpoints

8F	51	53	65	30
93	FA	C2	70	02

hostname

57	54	30
DF	0D	02

port

7A	53	30
EF	E3	02

socktype

socket^{7C}_{7B}⁵⁷_{8B}³⁰₀₂

8F	56	50
D4	DE	3C

```
0: 65 95 80 FF > 0 90 8F xxsocket::strerror 8F 63 4E 8B 7E 95 8B 4F 60 30
E0 19 EF 0C 1A C7 6C 62 3A E6 C6 19 EF EF E1 6F 02
```

xxsocket::getipsv

83 53 67 67 65 63 76 IP 53 88 68 68 5F 4F 30
B7 D6 2C 3A 2F 01 84 4F AE 08 07 D7 4D 02

```
static int getipsv();
```

8F	56	50
D4	DE	3C

- `ipsv_ipv4`: `676767676767`|`Pv4``548889`
- `ipsv_ipv6`: `676767676767`|`Pv6``548889`
- `ipsv_dual_stack`: `676767676767`|`Pv4``54`|`Pv6``5468488889`

6C	61
E8	0F

5F 8F 56 50 65 63 53 68 53 8B 66 FF 75 62 5E 5F 59 7E 4F 51 4F 75 IPv4 90 4F FF
53 D4 DE 3C 2F 01 CC 08 4F AE 2F 0C 28 37 94 53 CB C8 18 48 7F 28 1A E1 0C

4F 59 66 80 62 67 88 59 57 54 65 5F 54 87 7A 7F 7E 65 FF 5C 4F 4F 51 90 62 wifi FF
88 82 7A FD 4B 3A BE 07 28 0C F6 00 2F 02 9D 51 DC F6 0C 06 1A 18 48 09 E9 wifi 0C

📶wifi📶IPv4: <https://github.com/halx99/yasio/issues/130>

794F
3A8B

```
// xxsocket-ipsv.cpp
#include <vector>
#include "yasio/xxsocket.hpp"
using namespace yasio;
using namespace yasio::inet;
```

```
int main(){
    const char* host = "github.com";
    std::vector<ip::endpoint> eps;
    int flags = xxsocket::get_ipsv();
    if(flags & ipsv_ipv4) {
        xxsocket::resolve_v4(eps, host, 80);
    }
    else if(flags & ipsv_ipv6) {
        xxsocket::resolve_tov6(eps, host, 80);
    }
    else {
        std::cerr << "Local network not available!\n";
    }
    return 0;
}
```

xxsocket::traverse_local_address

674E6767575769
9A3E676A564069

```
static void traverse_local_address(std::function<bool(const ip::endpoint&)> handler);
```

5365
C270

handler

674E5757568C39
9A3E30400E0362

794F
3A8B

```
// xxsocket-traverse.cpp
#include <vector>
#include "yasio/xxsocket.hpp"
using namespace yasio;
using namespace yasio::inet;
int main(){
    int flags = 0;
    xxsocket::traverse_local_address([&](const ip::endpoint& ep) -> bool {
        switch (ep.af())
        {
            case AF_INET:
                flags |= ipsv_ipv4;
                break;
            case AF_INET6:
                flags |= ipsv_ipv6;
                break;
        }
        return (flags == ipsv_dual_stack);
    });
    YASIO_LOG("Supported ip stack flags=%d", flags);
}
```

```
    return flags;  
}
```

8B	53	96
F7	C2	05

[io_service Class](#)

io_service options

io_service

Name	Description
<i>YOPT_S_DEFER_EVENT_CB</i>	Set defer event callback params: callback:defer_event_cb_t remarks: a. User can do custom packet resolve at network thread, such as decompress and crc check. b. Return true, io_service will continue enqueue to event queue. c. Return false, io_service will drop the event.
<i>YOPT_S_DEFERRED_EVENT</i>	Set whether deferred dispatch event, default is: 1 params: deferred_event:int(1)
<i>YOPT_S_RESOLV_FN</i>	Set custom resolve function, native C++ ONLY params: func:resolv_fn_t*
<i>YOPT_S_PRINT_FN</i>	Set custom print function native C++ ONLY parmas: func:print_fn_t remarks: you must ensure thread safe of it
<i>YOPT_S_PRINT_FN2</i>	Set custom print function with log level parmas: func:print_fn2_t you must ensure thread safe of it
<i>YOPT_S_EVENT_CB</i>	Set event callback params: func:event_cb_t*
<i>YOPT_S_TCP_KEEPALIVE</i>	Set tcp keepalive in seconds, probes is tries. params: idle:int(7200), interal:int(75), probes:int(10)
<i>YOPT_S_NO_NEW_THREAD</i>	Don't start a new thread to run event loop. params: value:int(0)
<i>YOPT_S_SSL_CACERT</i>	Sets ssl verification cert, if empty, don't verify. params: path:const char*

Name	Description
<i>YOPT_S_CONNECT_TIMEOUT</i>	Set connect timeout in seconds. params: connect_timeout:int(10)
<i>YOPT_S_DNS_CACHE_TIMEOUT</i>	Set dns cache timeout in seconds. params: dns_cache_timeout : int(600),
<i>YOPT_S_DNS_QUERIES_TIMEOUT</i>	Set dns queries timeout in seconds, default is: 5000. params: dns_queries_timeout : int(5000) remark: a. this option must be set before 'io_service::start' b. only works when have c-ares c. since v3.33.0 it's milliseconds, previous is seconds. d. the timeout algorithm of c-ares is complicated, usually, by default, dns queries will failed with timeout after more than 75 seconds. e. for more detail, please see: https://c-ares.haxx.se/ares_init_options.html
<i>YOPT_S_DNS_QUERIES_TRIES</i>	Set dns queries tries when timeout reached, default is: 5. params: dns_queries_tries : int(5) remarks: a. this option must be set before 'io_service::start' b. relative option: <i>YOPT_S_DNS_QUERIES_TIMEOUT</i>
<i>YOPT_S_DNS_DIRTY</i>	Set dns server dirty. params: reserved : int(1) remarks: a. this option only works with c-ares enabled b. you should set this option after your mobile network changed
<i>YOPT_C_LFBFD_FN</i>	Sets channel length field based frame decode function. params: index:int, func:decode_len_fn_t* remark: native C++ ONLY
<i>YOPT_C_LFBFD_PARAMS</i>	Sets channel length field based frame decode params. params: index:int, max_frame_length:int(10MBytes), length_field_offset:int(-1), length_field_length:int(4), length_adjustment:int(0),

Name	Description
<i>YOPT_C_LFBFD_IBTS</i>	Sets channel length field based frame decode initial bytes to strip. params: index:int, initial_bytes_to_strip:int(0)
<i>YOPT_C_REMOTE_HOST</i>	Sets channel remote host. params: index:int, ip:const char*
<i>YOPT_C_REMOTE_PORT</i>	Sets channel remote port. params: index:int, port:int
<i>YOPT_C_REMOTE_ENDPOINT</i>	Sets channel remote endpoint. params: index:int, ip:const char*, port:int
<i>YOPT_C_LOCAL_HOST</i>	Sets local host for client channel only. params: index:int, ip:const char*
<i>YOPT_C_LOCAL_PORT</i>	Sets local port for client channel only. params: index:int, port:int
<i>YOPT_C_LOCAL_ENDPOINT</i>	Sets local endpoint for client channel only. params: index:int, ip:const char*, port:int
<i>YOPT_C_MOD_FLAGS</i>	Mods channel flags. params: index:int, flagsToAdd:int, flagsToRemove:int
<i>YOPT_C_ENABLE_MCAST</i>	Enable channel multicast mode. params: index:int, multi_addr:const char*, loopback:int
<i>YOPT_C_DISABLE_MCAST</i>	Disable channel multicast mode. params: index:int
<i>YOPT_C_KCP_CONV</i>	The kcp conv id, must equal in two endpoint from the same connection. params: index:int, conv:int
<i>YOPT_T_CONNECT</i>	Change 4-tuple association for io_transport_udp. params: transport:transport_handle_t remark: only works for udp client transport
<i>YOPT_T_DISCONNECT</i>	Dissolve 4-tuple association for io_transport_udp. params: transport:transport_handle_t remark: only works for udp client transport

Name	Description
<code>YOPT_B_SOCKOPT</code>	Sets io_base sockopt. params: io_base*,level:int,optname:int,optval:int,optlen:int

8B5396
F7C205

[io_service Class](#)

API

54547A95
7D0D7AF4

```
namespace yasio {}
```

5151656C
6C71B9D5

Name	Description
yasio::host_to_network	4B6A59825F8C717E59825F
yasio::network_to_host	717E59825F8C717E59825F
yasio::xhighp_clock	876A6362A7F6F433
yasio::highp_clock	876A6362A7F6F433
yasio::clock	876A6362A7F6F433
yasio::set_thread_name	8B7E8C23887F7A5A
yasio::basic_strerror	686F72592B45

yasio::host_to_network

4B6A59825F8C717E59825F82

59654E
3487F6

yasio/detail/endian_portable.hpp

```
template <typename _Ty>  
inline _Ty host_to_network(_Ty value);  
inline int host_to_network(int value, int size);
```

5365
c270

value

818f637d6950ffvalue7667_Ty 2345294f011~859827d507c6700

size

818f637d69506769598265ff5380691~4598200

8f5650
646e3c

7f7e59825f695000

794f
3a8b

```
#include <stdio.h>
#include <inttypes.h>
#include "yasio/detail/endian_portable.hpp"
int main(){
    uint16_t v1 = 0x1122;
    uint32_t v2 = 0x11223344;
    uint64_t v3 = 0x1122334455667788;
    // output will be: net.v1=2211, net.v2=44332211, net.v3=8877665544332211
    printf("net.v1=%04" PRIx16 " ", net.v2=%08" PRIx32 " ", net.v3=%016" PRIx64 "\n",
        yasio::host_to_network(v1),
        yasio::host_to_network(v2),
        yasio::host_to_network(v3));
    return 0;
}
```

yasio::network_to_host

7f7e59825f69666a59826f00

59694f
3487f6

yasio/detail/endian_portable.hpp

```
template <typename _Ty>
inline _Ty network_to_host(_Ty value);
inline int network_to_host(int value, int size);
```

5365
c270

value

818f637d6950ffvalue7667_Ty 2345294f011~859827d507c6700

size

818f6376655067655b8265ff5380691~45b8239

8f5658
646e3c

4f5758825f785839

794f
3a8b

```
#include <stdio.h>
#include <inttypes.h>
#include "yasio/detail/endian_portable.hpp"
int main(){
    uint16_t v1 = 0x2211;
    uint32_t v2 = 0x44332211;
    uint64_t v3 = 0x8877665533442211;
    // output will be: net.v1=1122, net.v2=11223344, net.v3=1122334455667788
    printf("host.v1=%04" PRIx16 " ", host.v2=%08" PRIx32 " ", host.v3=%016" PRIx64 " \n",
        yasio::network_to_host(v1),
        yasio::network_to_host(v2),
        yasio::network_to_host(v3));
    return 0;
}
```

yasio::xhighp_clock

87686362797f936382

59654e
3487f6

yasio/detail/utils.hpp

```
template <typename _Ty = steady_clock_t>
inline highp_time_t xhighp_clock();
```

6a675365
217f6278

_Ty

- yasio::steady_clock_t: 8f685527767f9363637169686363
- yasio::system_clock_t: 8f68787fUTCf8f463

8F5650
040E3C

7E797F63F36389

yasio::highp_clock

8762AE7379F2F36389

59654E
3487F6

yasio/detail/utils.hpp

```
template <typename _Ty = steady_clock_t>  
inline highp_time_t highp_clock();
```

6A675365
217FC270

_Ty

- yasio::steady_clock_t: 8F5650527C7E63F3638979F2F363
- yasio::system_clock_t: 846E7B7EUTC F2F363

8F5650
040E3C

7E797F63F36389

yasio::clock

8762AE7379F2F36389

59654E
3487F6

yasio/detail/utils.hpp

```
template <typename _Ty = steady_clock_t>  
inline highp_time_t clock();
```

6A675365

_Ty

- yasio::steady_clock_t: 846E53527C7E63F3638979F2F363

- `yasio::system_clock_t`: 8A5B7C7EUTC F2F453

8F5659
04DE3C

EB797E65256238
62A7F6F43382

yasio::set_thread_name

8B7B8573897E7A6439
6662A7F6F43382

59654E
3487F6

`yasio/detail/thread_name.hpp`

```
inline void set_thread_name(const char* name);
```

5365
C278

name

87898B7E7E7A5479
86818E6E6F6B6DFA

6C61
E80F

5165754E8B65597E7A7A5E975E677538
64FD78217F8ECAAD1A6F6B6B8F5E38692862

yasio::basic_strfmt

51656A67FF685F535B7B4E6289585B7B4E38
FD78217F8E6C6C6F16572B3216898D5B7B3262

59654E
3487F6

`yasio/detail/strfmt.hpp`

```
template <class _Elem, class _Traits = std::char_traits<_Elem>,  
          class _Alloc = std::allocator<_Elem>>  
inline std::basic_string<_Elem, _Traits, _Alloc> basic_strfmt(size_t n, const _Elem*  
format, ...);
```

5365
2270

n

5758buffer5959
1058

format

686F597843FF54695155 printf 7854

8F5650
04DE3C

8F68685F535278 std::string 7C5759784E39
046E3C6F106E64

6C61
E80F

6B994F73FCE778634F75597E584859785254
0E997F736CE778634F75597E584859785254

- yasio::strfmt: 686F52597855
- yasio::wcsfmt: 686F5358597845

794F
3A8B

```
#include "yasio/detail/strfmt.hpp"
int main() {
    std::string str1 = yasio::strfmt(64, "My age is %d", 19);
    std::wstring str2 = yasio::wcsfmt(64, L"My age is %d", 19);
    return 0;
}
```



yasio yasio yasio/detail/config.hpp

Name	Description
YASIO_HAVE_KCP	kcpkcp
YASIO_HEADER_ONLY	yasio
YASIO_SSL_BACKEND	SSLSSL OpenSSL/MbedTLS 3.36.0 (YASIO_HAVE_SSL) 1 (OpenSSL) 2 (mbedtls)
YASIO_ENABLE_UDS	unix domain socket unix win10 RS5+
YASIO_HAVE_CARES	c-ares c-ares yasioDNS 10 c-ares
YASIO_VERBOSE_LOG	
YASIO_NT_COMPAT_GAI	Windows XP getaddrinfo API
YASIO_USE_SPSC_QUEUE	SPSC io_service::write
YASIO_USE_SHARED_PACKET	std::shared_ptr
YASIO_HAVE_HALF_FLOAT	half.hpp
YASIO_DISABLE_OBJECT_POOL	
YASIO_DISABLE_CONCURRENT_SINGLETON	

yasio 7C535974
98050406

yasio 76706853597446468458TCP 6F694EUDP 6C826763897A697E63618067526F4E6F45786476656F597439734F6582674E79695F:

- 1A2Fio_service0909 YOPT_C_LFBFD_PARAMS 8B7F4F99536539
- 1A2Fio_service0909 YOPT_C_LFBFD_FN 8B7F815845639F5E8361F078 decode_len_fn_t 09

6C61E80F

8158456876537F46705878F6F554E598269468863int38F6FC455846897F78678845A806FC24732FF08963ARM87775982F980E288 SIGBUS 6258E28882F245C289817FE961637F467078828 io_channel::__builtin_decode_len 09

YOPT_C_LFBFD_PARAMS

8B7F4F99C262C36289

C265C278

max_frame_length

6759539F7F466F888756893A5F586389

length_field_offset

637F46596978F84E686F6368628859824FF889

length_field_length

637F465969596F6F62631~489829293(uint8_t,uint16_t,uint24_t,int32_t)89

length_adjustment

637F4663745C8899585978426C8F5243A8F04FA88A18868595468684FF5F59725E58685C8328886F54F86F1269304FA 0 6C520124FA 886F597F46 89

6C61E80F

886F637FA65768C57878728510C57825E7F7838886777517F89785395585873:

```
int io_channel::__builtin_decode_len(void* d, int n)
{
    int loffset = uparams_.length_field_offset;
    int lsize   = uparams_.length_field_length;
    if (loffset >= 0)
    {
        int len = 0;
        if (n >= (loffset + lsize))
```

```
{
    ::memcpy(&len, (uint8_t*)d + loffset, lsize);
    len = yasio::network_to_host(len, lsize);
    len += uparams_.length_adjustment;
    if (len > uparams_.max_frame_length)
        len = -1;
}
return len;
}
return n;
}
```

decode_len_fn_t

41 93 93 73 68 68 53 9f 56 fd 78 6f 57 88 89

```
typedef std::function<int(void* d, int n)> decode_len_fn_t;
```

53 65
c2 70

d

65 93 53 63 62 88 58 82 57 57 89

n

6f 93 53 63 62 9f a6 89

8f 56 50
84 b6 3c

84 68 88 69 53 78 62 6e 99 9f a6 89

• > 0 : 93 78 63 9f 56 62 57 89

• == 0 : a3 62 78 62 46 89 4f 93 78 88 69 53 68 99 9f 56 6f yasio 55 42 4a 7f 7e a3 63 63 62 6f 48 63 63 52 63 63 62 6f 4f 6b 21 83 73 62 57 78 89

• < 0 : 93 78 63 9f 56 62 56 6c 4f 99 63 55 52 48 85 4f 88 63 66 89

6c 61
e8 0f

93 78 88 69 53 9f a6 fd 78 c5 98 29 7e 7a 58 51 76 fd 4f 59 f9 4e Lua 19 46 2f 63 88 7e 2a 5a 49 93 78 88 69 53 9f a6 fd 78 89

yasio Interop

Unity C# yasio C: https://github.com/yasio/yasio/blob/master/yasio/bindings/yasio_ni.cpp

OpenNSM2

Unity yasio-3.37.1 NetworkServiceManager unity: <https://github.com/yasio/OpenNSM2>

91	70	95	98	89	7B
CD	B9	EE	98	E3	54

[illegible]

1. `asio,libevent,libev,libuv,ioeventpoll,ioepoll,iocp,kqueue,epoll,select`
`TCP`
2. `asio`
`TCP`
3. `asio`
`TCP,UDP,KCP,Transport`
4. `asio`
`select`

```

c-ares[66][67][68][69][70][71][72][73][74][75][76][77][78][79][80][81][82][83][84][85][86][87][88][89][90][91][92][93][94][95][96][97][98][99]
DNS[66][67][68][69][70][71][72][73][74][75][76][77][78][79][80][81][82][83][84][85][86][87][88][89][90][91][92][93][94][95][96][97][98][99]
select[66][67][68][69][70][71][72][73][74][75][76][77][78][79][80][81][82][83][84][85][86][87][88][89][90][91][92][93][94][95][96][97][98][99]
c-ares[66][67][68][69][70][71][72][73][74][75][76][77][78][79][80][81][82][83][84][85][86][87][88][89][90][91][92][93][94][95][96][97][98][99]
10[66][67][68][69][70][71][72][73][74][75][76][77][78][79][80][81][82][83][84][85][86][87][88][89][90][91][92][93][94][95][96][97][98][99]

```

6563FF4F97894F8DOpenSSL6280MbedTLS30
2F010C4600819D56160502

 https://github.com/yasio/ftp_server/blob/master/ftp_server.cpp#L98

3.30

52624654746658488fIOS52526764969668519ff41e863SIGPIPE7463f8f2APP23886f697464664f45e963TCP8f3268666f938f6932f1988f168: Broken pipe
 8889: <https://github.com/yasio/yasio/issues/170>

ios **ec=65, detail:No route to host**

- **ios**:
 - **APP** **ios14.1+** **Local Network Permission**
 - **10161** **SNMP via TLS**
- **APP** **49152~65535**
- **https://www.speedguide.net/port.php**

macOS **UDP** **40** **Message too long**

- **macOS** **UDP** **9126**
- **socket** **UDP**:
 - **xxsocket**: **sock_udp.set_optval(SOL_SOCKET, SO_SNDBUF, (int)65535);**
 - **io_service**: **https://github.com/yasio/yasio/blob/master/tests/speed/main.cpp#L223**

io_service **schedule**

io_service

std::thread

https://github.com/yasio/yasio/issues/244

xxsocket **_nodelay**

_nonblock **internal**

YOPT_TCP_KEEPALIVE

https://github.com/yasio/yasio/issues/117

Lua

• c++11:

- `kaguya` `c++` `lua_newuserdata`, `placement new`
`xcode clang release`
- `bing.com` `LUA_USER_ALIGNMENT_T=max_align_t`
- `max_align_t` `xcode clang` `long double` `16`
- <http://lua-users.org/lists/lua-l/2019-07/msg00197.html>

• c++14:

- `sol2` `sol2` `kaguya` `sol2` `lua_newuserdata`
`clang release`

• c++17:

- `sol2` `xcode` `ios11` `C++17` `new` `Aligned allocation/deallocation` `-faligned-allocation`
- `ios10` `std::shared_mutex` `yasio` `Apple` `pthread`
- `Lua` `double` `max_align_t` `C11` https://en.cppreference.com/w/c/types/max_align_t `Lua` `ANSI C89` `LUA_USER_ALIGNMENT_T`
- `C++11` `std::max_align_t` https://en.cppreference.com/w/cpp/types/max_align_t

`max_align_t` `__stddef_max_align_t.h`

Can't load xxx.bundle on macOS?

The file `xxx.bundle` needs change attr by command `sudo xattr -r -d com.apple.quarantine xxx.bundle`

xxsocket resolve socketype

- `winsock`
- `0` `IP`

`F41A38C1EE98`

`F7C265 987E5E52F3`