

System Verification and Validation Report for Chess Connect

Team #4,
Alexander Van Kralingen
Arshdeep Aujla
Jonathan Cels
Joshua Chapman
Rupinder Nagra

March 8, 2023

1 Revision History

Date	Version	Notes
2023-03-04	Arshdeep Aujla	Added Template for Nonfunctional Requirements
2023-03-05	Arshdeep Aujla	Added Table for functional requirements, traceability matrix
2023-03-07	Jonathan Cels	Added functional requirement test reports
2023-03-08	Jonathan Cels	Added nonfunctional requirement test reports

2 Symbols, Abbreviations and Acronyms

symbol	description
T	Test
TBD	To Be Determined
LCD	Liquid Crystal Display
LED	Light Emitting Diode
Engine Move	Good chess move, calculated by a chess engine
Legal Move	Chess move that is allowed according to the rules
Illegal Move	Chess move that is not allowed according to the rules
ADC	Analog to Digital Converter

Refer to SRS Section 1 for an extensive list of used symbols, abbreviations, and acronyms.

Contents

1	Revision History	i
2	Symbols, Abbreviations and Acronyms	ii
3	Functional Requirements Evaluation	1
3.1	Game Active State	1
3.2	Game Inactive State	2
3.3	Normal Mode	3
3.4	Engine Mode	4
3.5	Beginner Mode	6
4	Nonfunctional Requirements Evaluation	8
4.1	Look and Feel	8
4.2	Usability and Humanity	8
4.3	Performance	9
4.4	Health and Safety	11
4.5	Precision and Accuracy	12
4.6	Capacity	12
4.7	Security	12
5	Unit Testing	13
6	Changes Due to Testing	13
7	Automated Testing	13
8	Trace to Requirements	13
9	Trace to Modules	14
10	Code Coverage Metrics	14
A	Reflection Appendix	14

List of Tables

1	Active State Functional Requirements Results	1
2	Inactive State Functional Requirements Results	2
3	Normal Mode Functional Requirements Results	3
4	Engine Mode Functional Requirements Results	5
5	Beginner Mode Functional Requirements Results	7

6	Performance Non-Functional Requirements Results	9
7	Experimental Results of Performance Testing	10
8	Health and Safety Non-Functional Requirements Results	11
9	Experimental Results of Health and Safety Testing	11
10	Capacity Non-Functional Requirements Results	12
11	Security Non-Functional Requirements Results	12
12	Requirements Traceability Matrix	14

List of Figures

1	Experimental Results of Performance Testing	10
---	---	----

3 Functional Requirements Evaluation

Refer to the VnV Plan for descriptions of the tests derived to evaluate the functional requirements.

3.1 Game Active State

Test	Input	Expected	Actual	Notes	Result
GA-1	Draw/resign button pressed while game active.	System variable 'gameInProgress' set to false.	System variable configured correctly.		Pass
GA-2	Start game button pressed while game active.	System variable 'gameInProgress' remains true.	System variable configured correctly.		Pass
GA-3	User mode button pressed while game active.	System variable 'currMode' changed to represent the selected user mode.	User mode unchanged.	Design changed, user mode not switchable while a game is active.	Rework
GA-4	Start game button pressed while game inactive.	System variable 'gameInProgress' set to true, 'currFEN' variable is set to the starting FEN.	System variables configured correctly.		Pass
GA-5	Move made that results in stalemate or checkmate according to the rules of chess while game inactive.	System variable 'gameInProgress' set to false.	System variable configured correctly.		Pass

Table 1: Active State Functional Requirements Results

3.2 Game Inactive State

Test	Input	Expected	Actual	Notes	Result
GI-1	Start game button pressed while game inactive.	System variable 'gameInProgress' set to true.	System variable configured correctly.		Pass
GI-2	User mode button pressed while game inactive.	User mode unchanged.	System variable configured correctly.	Design changed, user mode is now switchable (only) while a game is inactive.	Rework
GI-3	Draw/resign button pressed while game inactive.	System variable 'gameInProgress' remains false.	System variable configured correctly.		Pass
GI-4	Piece moved while game inactive.	System variable 'currFEN' is unchanged.	System variable configured correctly.		Pass
GI-5	Draw/resign button pressed, or move made that results in stalemate or checkmate according to the rules of chess while game active.	Game termination and winner are displayed on LCD screen.	Display updates correctly.		Pass

Table 2: Inactive State Functional Requirements Results

3.3 Normal Mode

Test	Input	Expected	Actual	Notes	Result
NB-1	Piece moved while in normal mode.	Game state is updated to reflect piece movement.	Game state updated correctly.		Pass
NB-2	Resign button pressed while in normal mode.	System variable 'gameInProgress' set to false.	System variable configured correctly.		Pass
NB-3	Draw button pressed while in normal mode.	System variable 'gameInProgress' set to false.	System variable configured correctly.		Pass
ND-1	Game state updated while in normal mode.	Updated game state is transmitted to the web application via Bluetooth.	Game state transmitted correctly.		Pass
NA-1	Web application receives updated game state while in normal mode.	Update to game state is reflected on web application display.	Display updates correctly.		Pass
NA-2	Game termination occurs while in normal mode.	Game termination and winner are displayed on web application display.	Display updates correctly.		Pass

Table 3: Normal Mode Functional Requirements Results

3.4 Engine Mode

Test	Input	Expected	Actual	Notes	Result
EB-1	Piece moved while in engine mode.	Game state is updated to reflect piece movement.	Game state updated correctly.		Pass
EB-2	Resign button pressed while in engine mode.	System variable 'gameInProgress' set to false.	System variable configured correctly.		Pass
EB-3	Draw button pressed while in engine mode.	System variable 'gameInProgress' set to false.	System variable configured correctly.		Pass
EB-4	Engine moves transmitted from the web application to microcontroller.	Engine moves are displayed on the LCD screen.	Display updated correctly.		Pass
ED-1	Game state updated while in engine mode.	Updated game state is transmitted to the web application via Bluetooth.	Game state transmitted correctly.		Pass
ED-2	Engine moves are calculated by the web application.	Calculated engine moves are transmitted from the web application to the microcontroller via Bluetooth	Moves transmitted correctly.	Only one engine move currently calculated, more planned in future revisions.	Partial Pass

Test	Input	Expected	Actual	Notes	Result
EA-1	Web application receives updated game state while in engine mode.	Update to game state is reflected on web application display.	Display updates correctly.		Pass
EA-2	Engine moves are calculated by the web application.	Calculated engine moves are displayed on web application display.	Engine moves are not displayed.	Not implemented, planned in future revisions.	TBD
EA-3	Game termination occurs while in engine mode.	Game termination and winner are displayed on web application display.	Display updates correctly.		Pass

Table 4: Engine Mode Functional Requirements Results

3.5 Beginner Mode

Test	Input	Expected	Actual	Notes	Result
BB-1	Piece moved while in beginner mode.	Game state is updated to reflect piece movement.	Game state updated correctly.		Pass
BB-2	Piece picked up and held while in beginner mode.	LEDs on board indicate legal moves.	Correct LEDs light up.		Pass
BB-3	Piece moved such that an illegal move is made while in beginner mode.	LEDs on board indicate illegal move.	Correct LEDs light up.	Not implemented, planned in future revisions.	TBD
BB-4	Resign button is pressed while in beginner mode.	System variable 'gameInProgress' set to false.	System variable configured correctly.		Pass
BB-5	Draw button is pressed while in beginner mode.	System variable 'gameInProgress' set to false.	System variable configured correctly.		Pass
BD-1	Game state is updated while in beginner mode.	Updated game state is transmitted to the web application via Bluetooth.	Game state transmitted correctly.		Pass

Test	Input	Expected	Actual	Notes	Result
BA-1	User selcetions chess instructions in web application.	Web application displays detailed rules for how to play chess.	N/A	Not implemented, planned in future revisions.	TBD
BA-2	Web application receives updated game state while in beginner mode.	Update to game state is reflected on web application display.	Display updates correctly.		Pass

Table 5: Beginner Mode Functional Requirements Results

4 Nonfunctional Requirements Evaluation

Many of the nonfunctional requirements outlined in the VnV plan are left for revision 1, as much of the external testing relies on the product being more completed and accessible to a wider audience. Some external user testing was done, specifically for NFT-4 and NFT-5, and is detailed in the Performance section.

4.1 Look and Feel

Look and feel testing will be performed for revision 1, as though it is functional, this part of the product is not ready for external user testing.

4.2 Usability and Humanity

Usability testing will be performed for revision 1, as though it is functional, this part of the product is not ready for external user testing.

4.3 Performance

Test	Input	Expected	Actual	Notes	Result
NFT-4	Experiment performed as detailed below.	Average LED response time over all trials is less than 0.5 seconds.	Average response time was 0.488 seconds.	This value is close to the 0.5 second limit, and may be subject to human error. Further testing will be done with more trials for revision 1 to ensure this requirement is met.	Pass
NFT-5	Experiment performed as detailed below.	Maximum single response time of any trial is less than 1 second.	Maximum response time was 0.72 seconds.		Pass
NFT-6	N/A	N/A	N/A	Not tested, as the system is currently subject to a 2-second delay before refreshing. Will be tested for revision 1.	TBD
NFT-7	N/A	N/A	N/A	Not tested, as the system is currently subject to a 2-second delay before refreshing. Will be tested for revision 1.	TBD

Table 6: Performance Non-Functional Requirements Results

The following table holds data for NFT-4 and NFT-5. Three external users, all familiar with the rules of chess, were each asked to perform the following experiment in beginner mode 5 times:

Pick up an arbitrary piece and suspend it in the air. Wait until the board visually indicates the possible moves for the suspended piece. The time between the user picking up the piece and the board’s LED indicators turning on was measured and recorded.

	User 1	User 2	User 3
Trial 1	0.49s	0.48s	0.36s
Trial 2	0.65s	0.69s	0.27s
Trial 3	0.53s	0.33s	0.52s
Trial 4	0.72s	0.34s	0.49s
Trial 5	0.42s	0.51s	0.52s
Total Average	0.488s		

Table 7: Experimental Results of Performance Testing

The following scatter plot shows the experimental results visually. The average, shown in green, falls just below the required 0.5 second threshold, and all points are well below the maximum acceptable response time of 1 second.

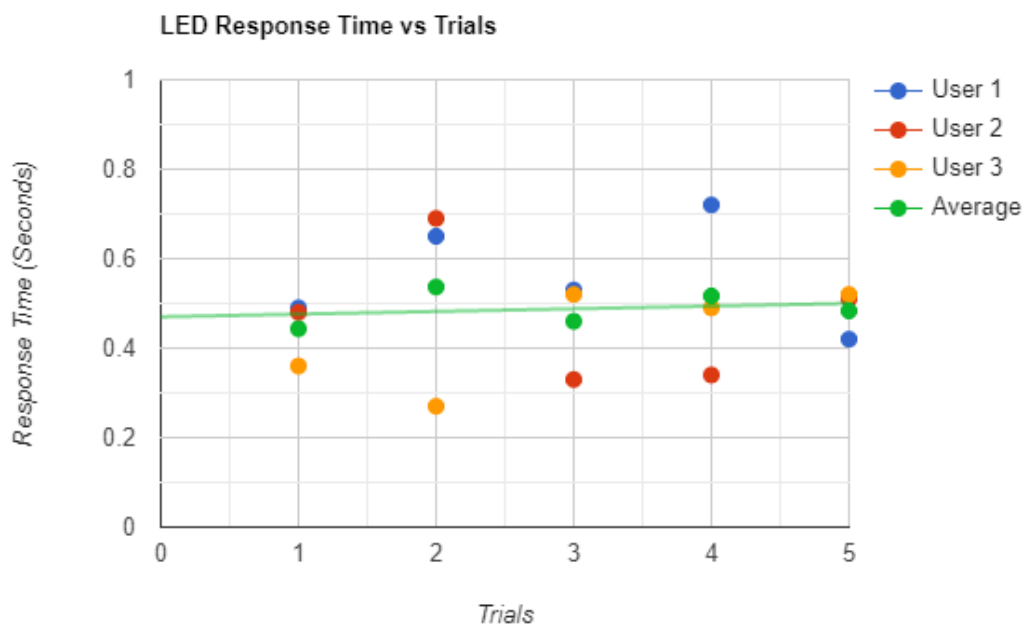


Figure 1: Experimental Results of Performance Testing

4.4 Health and Safety

Test	Input	Expected	Actual	Notes	Result
NFT-8	10 sample wires were chosen while the product was running. Their current and voltage were measured, and power was calculated using those measurements.	All power measurements below safe limits.	All power measurements below safe limits.	Measurements far below any safety thresholds.	Pass

Table 8: Health and Safety Non-Functional Requirements Results

The following table holds data for NFT-8.

Wire #	Wire Description	Gauge	Current (Amps)	Voltage (Volts)	Calculated Power (Watts)	Maximum power (Watts)
1	Hall sensor 1 with black piece	20	0.04	1.6	0.064	7.5
2	Hall sensor 32 with no piece	20	0.03	1	0.03	7.5
3	Hall sensor 64 with white piece	20	0.02	0.6	0.012	7.5
4	Arduino power line	10	0.5	5	2.5	75
5	ADC 1	20	0.01	5	0.05	7.5
6	ADC 4	20	0.02	5	0.1	7.5
7	ADC clock	20	0.05	5	0.25	7.5
8	Wall power supply (L)	8	0.75	110	47.631	120
9	Wall power supply (G)	8	0.01	0	0	120
10	Bluetooth RX	20	0.02	5	0.1	7.5

Table 9: Experimental Results of Health and Safety Testing

4.5 Precision and Accuracy

Precision and accuracy testing will be performed for revision 1, as though it is functional, this part of the product is not ready for external user testing.

4.6 Capacity

Test	Input	Expected	Actual	Notes	Result
NFT-10	A relatively complex chess FEN position was transmitted via Bluetooth to the web application while in engine mode.	The measured memory usage of the web application is less than 1GB.	The maximum measured memory value was 1187.4 MB, as measured by Windows task manager.	Memory usage will increase in future revisions, as more engine moves will be calculated at a higher depth.	Pass

Table 10: Capacity Non-Functional Requirements Results

4.7 Security

Test	Input	Expected	Actual	Notes	Result
NFT-11	Bluetooth connection to web application severed.	Web application alert that the connection has been lost.	N/A	Not implemented, planned in future revisions.	TBD
NFT-12	Power connection to system is severed, and then restored after a short time frame.	The game state data is stored in local memory and is unchanged after power is restored.	Game state data is properly stored.		Pass

Table 11: Security Non-Functional Requirements Results

5 Unit Testing

6 Changes Due to Testing

7 Automated Testing

8 Trace to Requirements

Test	Requirement
GA-1	GA1
GA-2	GA2
GA-3	GA3
GA-4	GA6
GA-5	GA7
GI-1	GI1
GI-2	GI2
GI-3	GI3
GI-4	GI4
GI-5	GI5, GI6
NB-1	NB1
NB-2	NB2
NB-3	NB3
ND-1	ND1
NA-1	NA1, NA2
NA-2	NA3
EB-1	EB1
EB-2	EB2
EB-3	EB3
EB-4	EB4
ED-1	ED1
ED-2	ED2
EA-1	EA1, EA2
EA-2	EA3, EA4, EA5
EA-3	EA6

BB-1	BB1
BB-2	BB2
BB-3	BB3
BB-4	BB4
BB-5	BB5
BD-1	BD1
BA-1	BA1
BA-2	BA2
NFT1	LF3
NFT2	UH5
NFT3	UH6
NFT4	PR1
NFT5	PR2
NFT6	PR3
NFT7	PR4
NFT8	PR6
NFT9	PR7
NFT10	PR10
NFT11	SR4
NFT12	SR3

Table 12: Requirements Traceability Matrix

9 Trace to Modules

10 Code Coverage Metrics

A Reflection Appendix

References

Author Author. System requirements specification. <https://github.com/...>, 2019.

CSA. *Canadian Electrical Code*. CSA Group, 2021.

FEN. Fen (forsyth-edwards notation) - chess terms. <https://www.chess.com/terms/fen-chess>. Accessed: 2023-01-18.

- Interl Chess Federation FIDE. Fide laws of chess. <https://www.fide.com/FIDE/handbook/LawsOfChess.pdf>, 2018.
- Canadian Centre for Occupational Health and Safety. Hazard and risk: Osh answers. https://www.ccohs.ca/oshanswers/hsprograms/hazard_risk.html, 2022. Accessed: 2022-10-05.
- Carlo Ghezzi, Mehdi Jazayeri, and Dino Mandrioli. *Fundamentals of Software Engineering*. Prentice Hall, Upper Saddle River, NJ, USA, 2nd edition, 2003.
- Daniel M. Hoffman and Paul A. Strooper. *Software Design, Automated Testing, and Maintenance: A Practical Approach*. International Thomson Computer Press, New York, NY, USA, 1995. URL <http://citeseer.ist.psu.edu/428727.html>.
- List of Chess Variants. List of chess variants, Sep 2022. URL https://en.wikipedia.org/wiki/List_of_chess_variants.
- David L. Parnas. On the criteria to be used in decomposing systems into modules. *Comm. ACM*, 15(2):1053–1058, December 1972.
- David L. Parnas. Designing software for ease of extension and contraction. In *ICSE '78: Proceedings of the 3rd international conference on Software engineering*, pages 264–277, Piscataway, NJ, USA, 1978. IEEE Press. ISBN none.
- David L. Parnas and P.C. Clements. A rational design process: How and why to fake it. *IEEE Transactions on Software Engineering*, 12(2):251–257, February 1986.
- D.L. Parnas, P.C. Clement, and D. M. Weiss. The modular structure of complex systems. In *International Conference on Software Engineering*, pages 408–419, 1984.
- James Robertson and Suzanne Robertson. *Volere Requirements Specification Template*. Atlantic Systems Guild Limited, 16 edition, 2012.
- W. Spencer Smith. Systematic development of requirements documentation for general purpose scientific computing software. In *Proceedings of the 14th IEEE International Requirements Engineering Conference, RE 2006*, pages 209–218, Minneapolis / St. Paul, Minnesota, 2006. URL <http://www.ifi.unizh.ch/req/events/RE06/>.
- W. Spencer Smith and Lei Lai. A new requirements template for scientific computing. In J. Ralyté, P. Ågerfalk, and N. Kraiem, editors, *Proceedings of the First International Workshop on Situational Requirements Engineering Processes – Methods, Techniques and Tools to Support Situation-Specific Requirements Engineering Processes, SREP'05*, pages 107–121, Paris, France, 2005. In conjunction with 13th IEEE International Requirements Engineering Conference.
- W. Spencer Smith, Lei Lai, and Ridha Khedri. Requirements analysis for engineering computation: A systematic approach for improving software reliability. *Reliable Computing, Special Issue on Reliable Engineering Computation*, 13(1):83–107, February 2007.

- W. Spencer Smith, John McCutchan, and Jacques Carette. Commonality analysis of families of physical models for use in scientific computing. In *Proceedings of the First International Workshop on Software Engineering for Computational Science and Engineering (SECSE 2008)*, Leipzig, Germany, May 2008. In conjunction with the 30th International Conference on Software Engineering (ICSE). URL <http://www.cse.msstate.edu/~SECSE08/schedule.htm>. 8 pp.
- W. Spencer Smith, John McCutchan, and Jacques Carette. Commonality analysis for a family of material models. Technical Report CAS-17-01-SS, McMaster University, Department of Computing and Software, 2017.
- Bill Wall. History of chess sets and symbols. <https://www.chesscentral.com/pages/chess-sets-pieces-boards/a-history-of-chess-pieces-and-chess-sets.html>, 2003. Accessed: 2022-10-04.
- WCAG. Web content accessibility guidelines 2 overview. <https://www.w3.org/WAI/standards-guidelines/wcag/#intro>, 2018. Accessed: 2022-10-05.