



1. symbols a_k , one every T seconds

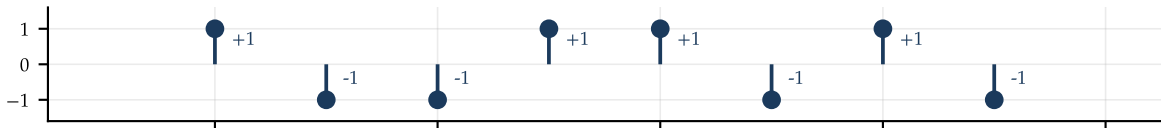

2. each symbol launches a scaled copy of the pulse $a_k p(t - kT)$

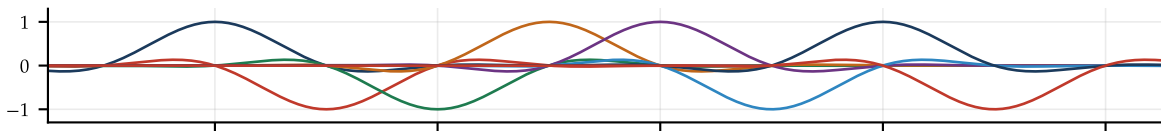

3. the transmitted signal $s(t) = \sum_k a_k p(t - kT)$; samples at kT return the symbols

