

---

# Sleep as Android

The ultimate alarm clock app




# Agenda

Sleep as Android

Structure

Code snippets

- Wekker-app
- Sleep-tracker
- IOT-functionaliteit
- SMART-wake up
- Ideale bedtijd
- Advies

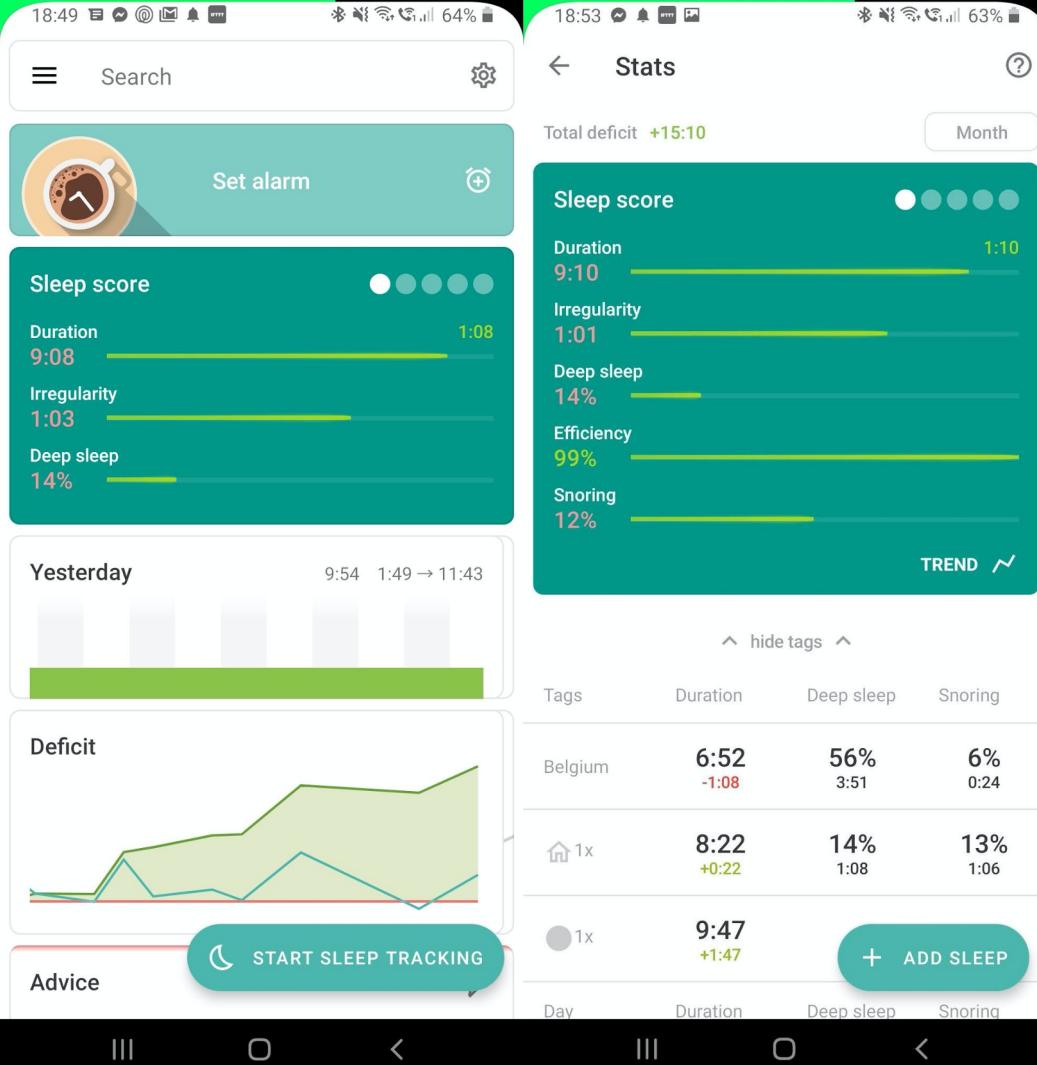

## Structure - Database - Content



#	column_name	data_type	character_set	collation	is_nullable
1	id	bigint unsigned	NULL	NULL	NO
2	name	varchar(255)	utf8mb4	utf8mb4_unicode_ci	NO
3	page	varchar(255)	utf8mb4	utf8mb4_unicode_ci	NO
4	content_section	text	utf8mb4	utf8mb4_unicode_ci	NO
5	content_section_nl	text	utf8mb4	utf8mb4_unicode_ci	NO
6	created_at	timestamp	NULL	NULL	YES
7	updated_at	timestamp	NULL	NULL	YES

## Structure - Database - Donations



#	column_name	data_type	character_set	collation	is_nullable
1	id	bigint unsigned	NULL	NULL	NO
2	payment_id	varchar(255)	utf8mb4	utf8mb4_unicode_ci	NO
3	first_name	varchar(255)	utf8mb4	utf8mb4_unicode_ci	NO
4	last_name	varchar(255)	utf8mb4	utf8mb4_unicode_ci	NO
5	email	varchar(255)	utf8mb4	utf8mb4_unicode_ci	NO
6	sum	double(8,2)	NULL	NULL	NO
7	message	varchar(255)	utf8mb4	utf8mb4_unicode_ci	NO
8	public	varchar(255)	utf8mb4	utf8mb4_unicode_ci	NO
9	completed	tinyint(1)	NULL	NULL	NO
10	created_at	timestamp	NULL	NULL	YES
11	updated_at	timestamp	NULL	NULL	YES

# Code snippets - Language



```
public function getAbout(Request $r)
{
    $about = Content::where('page', 'about')->get();

    $data = [];

    // Loading data into associative array to be able to use different sections by name
    foreach ($about as $ab) {
        if ($r->session()->get('key: lingo') == 'nl') {
            $data[$ab->name] = $ab->content_section_nl;
        } else {
            $data[$ab->name] = $ab->content_section;
        }
    }

    return view('pages.about', compact('varname: 'data'));
}
```

```
@extends('layouts.app')

@section('content')
    <div class="banner about-banner"></div>
    <div class="wrapper about-target">
        <h1>{{$data['title']}}</h1>
        <p class="about-section">{{$data['intro']}}</p>
        <p class="about-section">{{$data['section_one']}}</p>
    </div>

@endsection
```

```
<link rel="stylesheet" href="{{URL::asset('css/app.css')}}">

```

</head>

```
<body>

```

@include('partials.header')

@yield('content')

@include('partials.footer')

```
<script src="{{asset('js/app.js')}}" defer></script>

```

</body>



```
@import 'components/variables'  
@import 'components/header'  
@import 'components/footer'  
@import 'components/auth'  
@import 'pages/donate'  
@import 'pages/admin/index'  
@import 'pages/blog'  
@import 'pages/about'  
@import 'pages/contact'  
  
*  
  margin: 0  
  padding: 0  
  font-family: 'Roboto', sans-serif  
  line-height: 150%
```



---

# Demonstratie

