


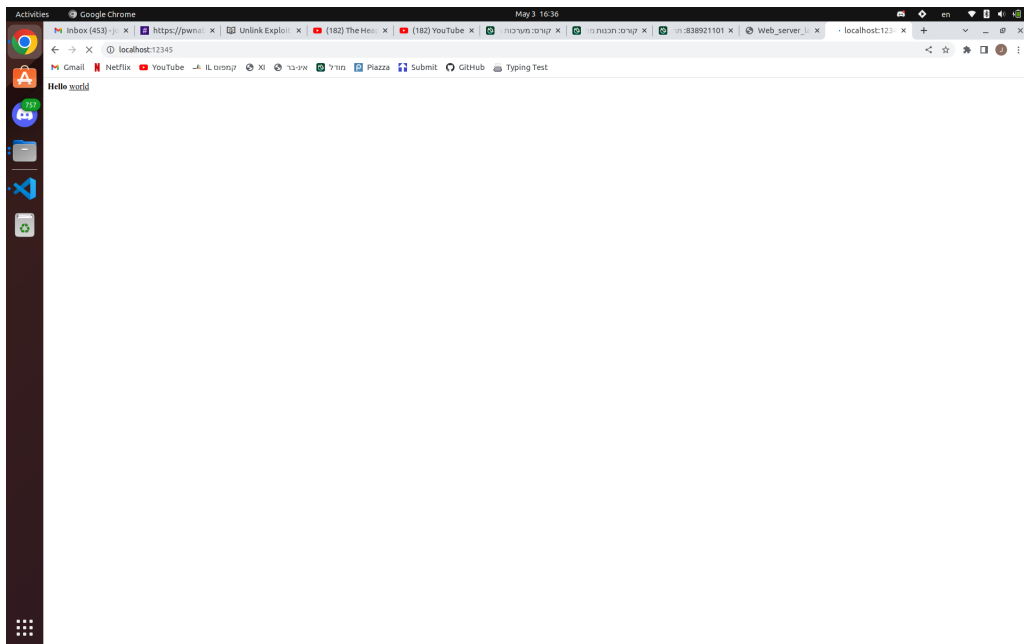
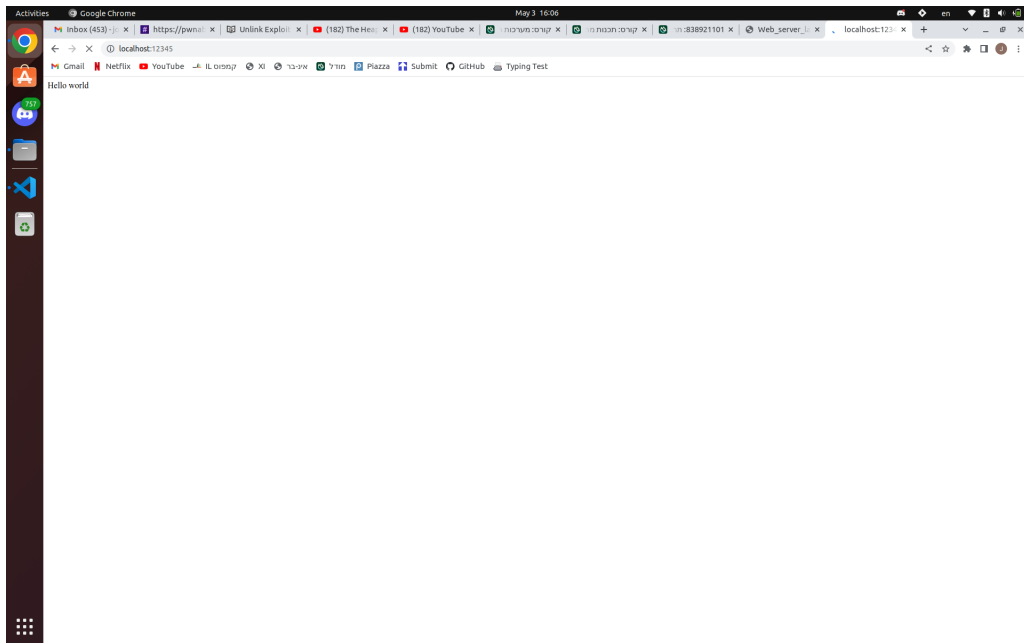


תכנות מתקדם 2 - תרגילון 4

יונתן קלסי

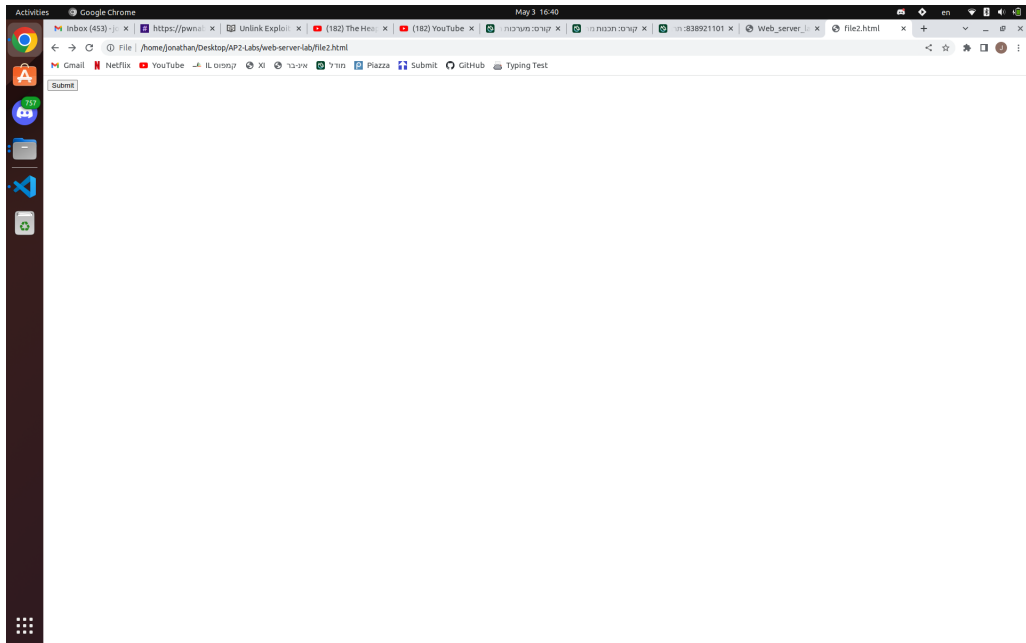

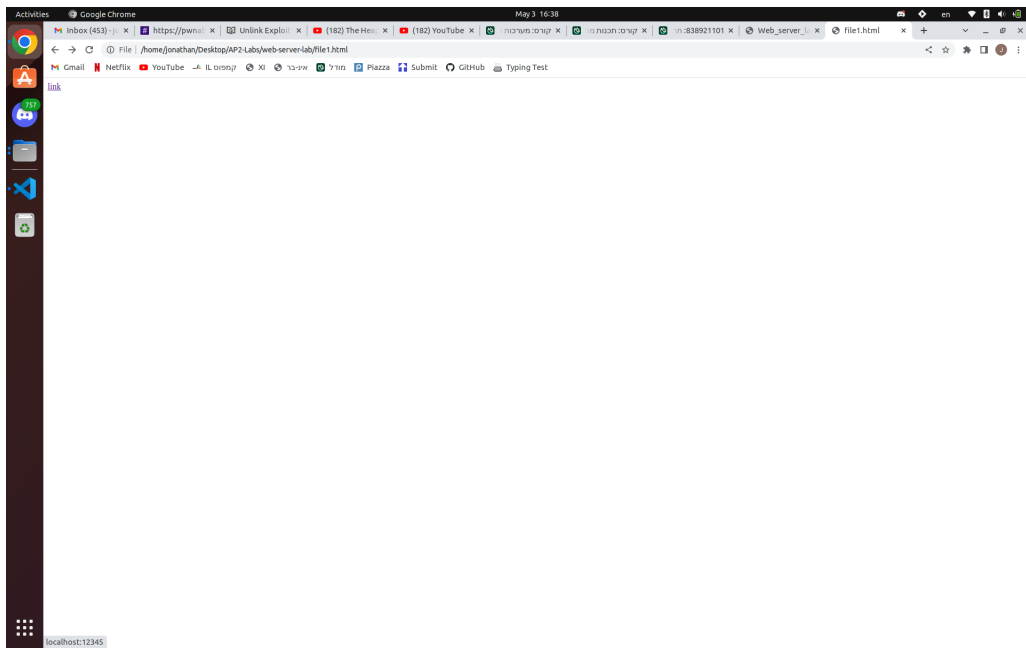

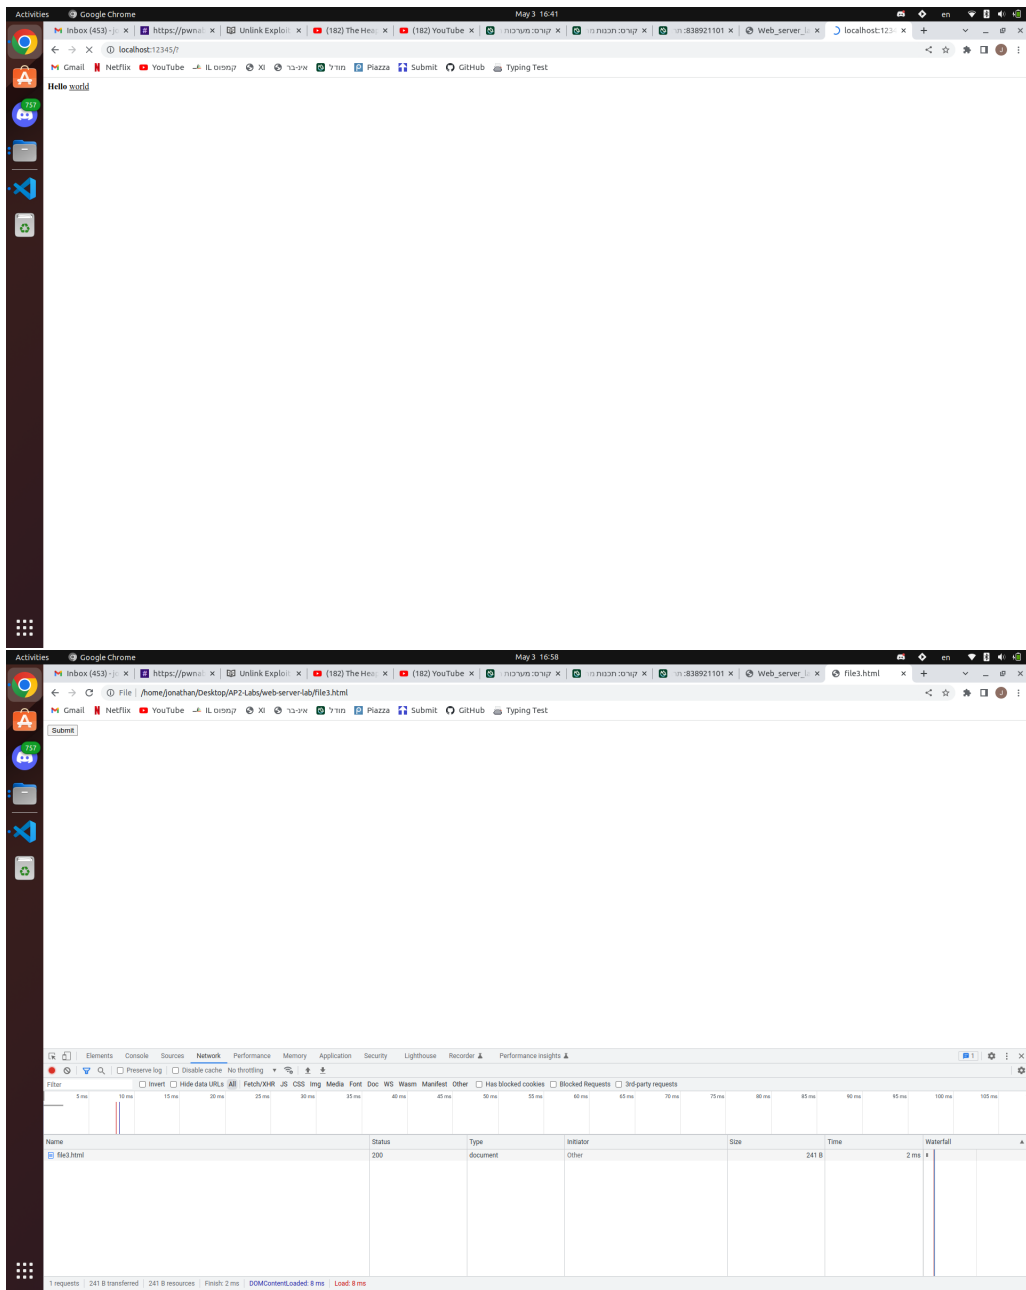

The top screenshot shows a Google Chrome browser window with the URL `https://pwn01.x`. The Network tab is open, showing a list of requests. The bottom screenshot shows the same browser window with the URL `https://pwn01.x`. The Network tab is open, and the 'file5.html' request is selected. The right-hand pane shows the details of the request, including the Request URL, Request Method, Status Code, Remote Address, and Response Headers.

Name	Status	Type	Initiator	Size	Time	Waterfall
file4.html	200	document	Other	284 B	3 ms	
localhost	200	fetch	file.html[1]	97 B	62 ms	

2 requests | 381 B transferred | 309 B resources | Finish: 525 ms | DOMContentLoaded: 9 ms | Load: 9 ms

The server sent: Hello world

Name	Headers	Preview	Response	Initiator	Timing
file5.html					
localhost					

2 requests | 617 B transferred | 545 B resources | Finish: 609 ms

Request URL: `http://localhost:12345/`
 Request Method: `GET`
 Status Code: `200 OK`
 Remote Address: `127.0.0.1:12345`
 Referer Policy: `strict-origin-when-cross-origin`

Response Headers

Access-Control-Allow-Origin: *

Content-Type: `text/html`

Request Headers

Accept: */*