

PRAKTIKUM SISTEM BASIS DATA

Nama	Jonathan Frederick Kosasih	No. Modul	5
NPM	2306225981	Tipe	TUTAM

1. Screenshot eksekusi query:

```
express_jonathankosasih=# CREATE TABLE IF NOT EXISTS items(  
express_jonathankosasih(#   id UUID PRIMARY KEY DEFAULT uuid_generate_v4(),  
express_jonathankosasih(#   name VARCHAR(255) NOT NULL,  
express_jonathankosasih(#   price INT NOT NULL,  
express_jonathankosasih(#   store_id UUID NOT NULL,  
express_jonathankosasih(#   image_url VARCHAR(255),  
express_jonathankosasih(#   stock INT DEFAULT 0,  
express_jonathankosasih(#   created_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP,  
express_jonathankosasih(#   FOREIGN KEY (store_id) REFERENCES stores(id) ON DELETE CASCADE  
express_jonathankosasih(# );  
CREATE TABLE  
express_jonathankosasih=# |
```

2. Screenshot eksekusi npm install:

```
> v TERMINAL powershell + v [ ] [ ] ...  
PS C:\Users\jonat\OneDrive\Documents\university\smt4\sbd\prak\modul5_sbd> npm i  
  
up to date, audited 85 packages in 2s  
  
15 packages are looking for funding  
  run `npm fund` for details  
  
found 0 vulnerabilities  
PS C:\Users\jonat\OneDrive\Documents\university\smt4\sbd\prak\modul5_sbd> |
```

3. Soal berisi contoh source code untuk item.route.js
4. Screenshot setup Cloudinary:

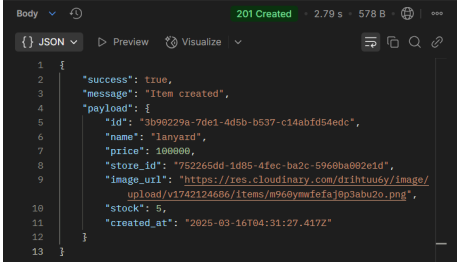

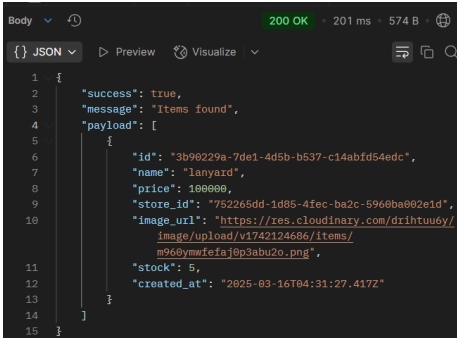
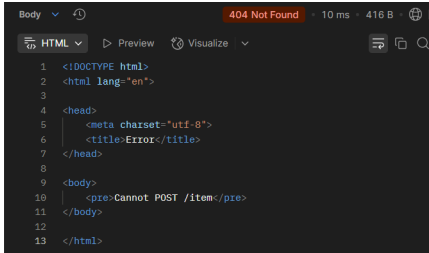
```
> v TERMINAL  
PS C:\Users\jonat\OneDrive\Documents\university\smt4\sbd\prak\modul5_sbd> npm i cloudinary  
npm warn deprecated q@1.5.1: You or someone you depend on is using Q, the JavaScript Promise library that gave JavaScript developer  
s strong feelings about promises. They can almost certainly migrate to the native JavaScript promise now. Thank you literally every  
one for joining me in this bet against the odds. Be excellent to each other.  
npm warn deprecated  
npm warn deprecated (For a CapTP with native promises, see @endo/eventual-send and @endo/captp)  
  
added 3 packages, and audited 88 packages in 5s  
  
15 packages are looking for funding  
  run `npm fund` for details  
  
found 0 vulnerabilities  
PS C:\Users\jonat\OneDrive\Documents\university\smt4\sbd\prak\modul5_sbd> |
```

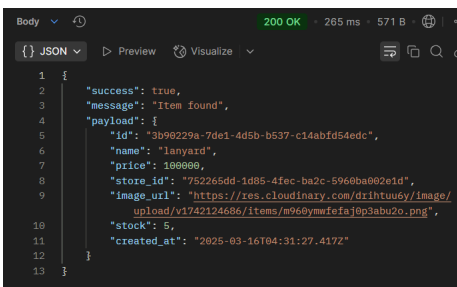
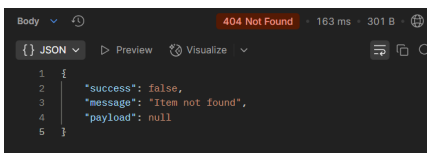
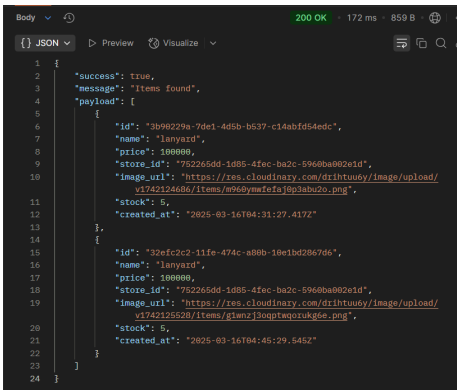
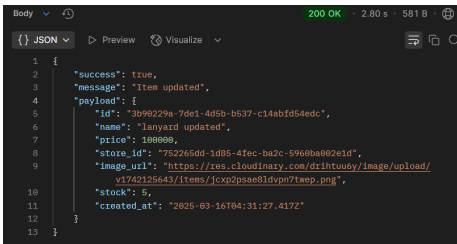

Screenshot penambahan ke .env:

```
.env
1  PORT = 5444
2  PG_CONNECTION_STRING = postgresql://
   prak-sbd_owner:npg_9N0iXRVtsjPo@ep-black-mountain-a13a8oso-pooler.ap-southeast-1.aws.
   neon.tech/prak-sbd?sslmode=require
3
4  DB_HOST = ep-black-mountain-a13a8oso-pooler.ap-southeast-1.aws.neon.tech
5  DB_DATABASE = prak-sbd
6  DB_USER = prak-sbd_owner
7  DB_PASSWORD = npg_9N0iXRVtsjPo
8  DB_PORT = 5432
9  ENDPOINT_ID = ep-black-mountain-a13a8oso
10
11  CLOUDINARY_CLOUD_NAME = drihtuu6y
12  CLOUDINARY_API_KEY = 747427571532741
13  CLOUDINARY_API_SECRET = FvBbGvOKwZ3ccKaSeQpUersZY4M
```

5. Pada tutam ini, saya menambahkan beberapa file baru, di antaranya cloudinary.util.js, item.controller.js, item.repository.js, dan item.route.js. Source code tidak akan saya copy ke sini, tetapi akan dikumpulkan melalui .zip file.

6. Screenshot:

Method	Endpoint	Success	Failed
POST	/item/create		
GET	/item		

GET	/item/byId/:id		
GET	/item/byStoreId/:store_id		
PUT	/item		
DELETE	/item/:id	