

REACT.JS

A JavaScript library for building user interfaces

THE INTERNET

World Wide Web

The WorldWideWeb (W3) is a wide-area [hypermedia](#) information retrieval initiative aiming to give universal access to a large universe of documents.

Everything there is online about W3 is linked directly or indirectly to this document, including an [executive summary](#) of the project, [Mailing lists](#) , [Policy](#) , November's [W3 news](#) , [Frequently Asked Questions](#) .

[What's out there?](#)

Pointers to the world's online information, [subjects](#) , [W3 servers](#), etc.

[Help](#)

on the browser you are using

[Software Products](#)

A list of W3 project components and their current state. (e.g. [Line Mode](#) ,[X11 Viola](#) ,[NeXTStep](#) ,[Servers](#) ,[Tools](#) ,[Mail robot](#) ,[Library](#))

[Technical](#)

Details of protocols, formats, program internals etc

[Bibliography](#)

Paper documentation on W3 and references.

[People](#)

A list of some people involved in the project.

[History](#)

A summary of the history of the project.

[How can I help ?](#)


If you would like to support the web..

[Getting code](#)

Getting the code by [anonymous FTP](#) , etc.



Welcome to my
Homepage!

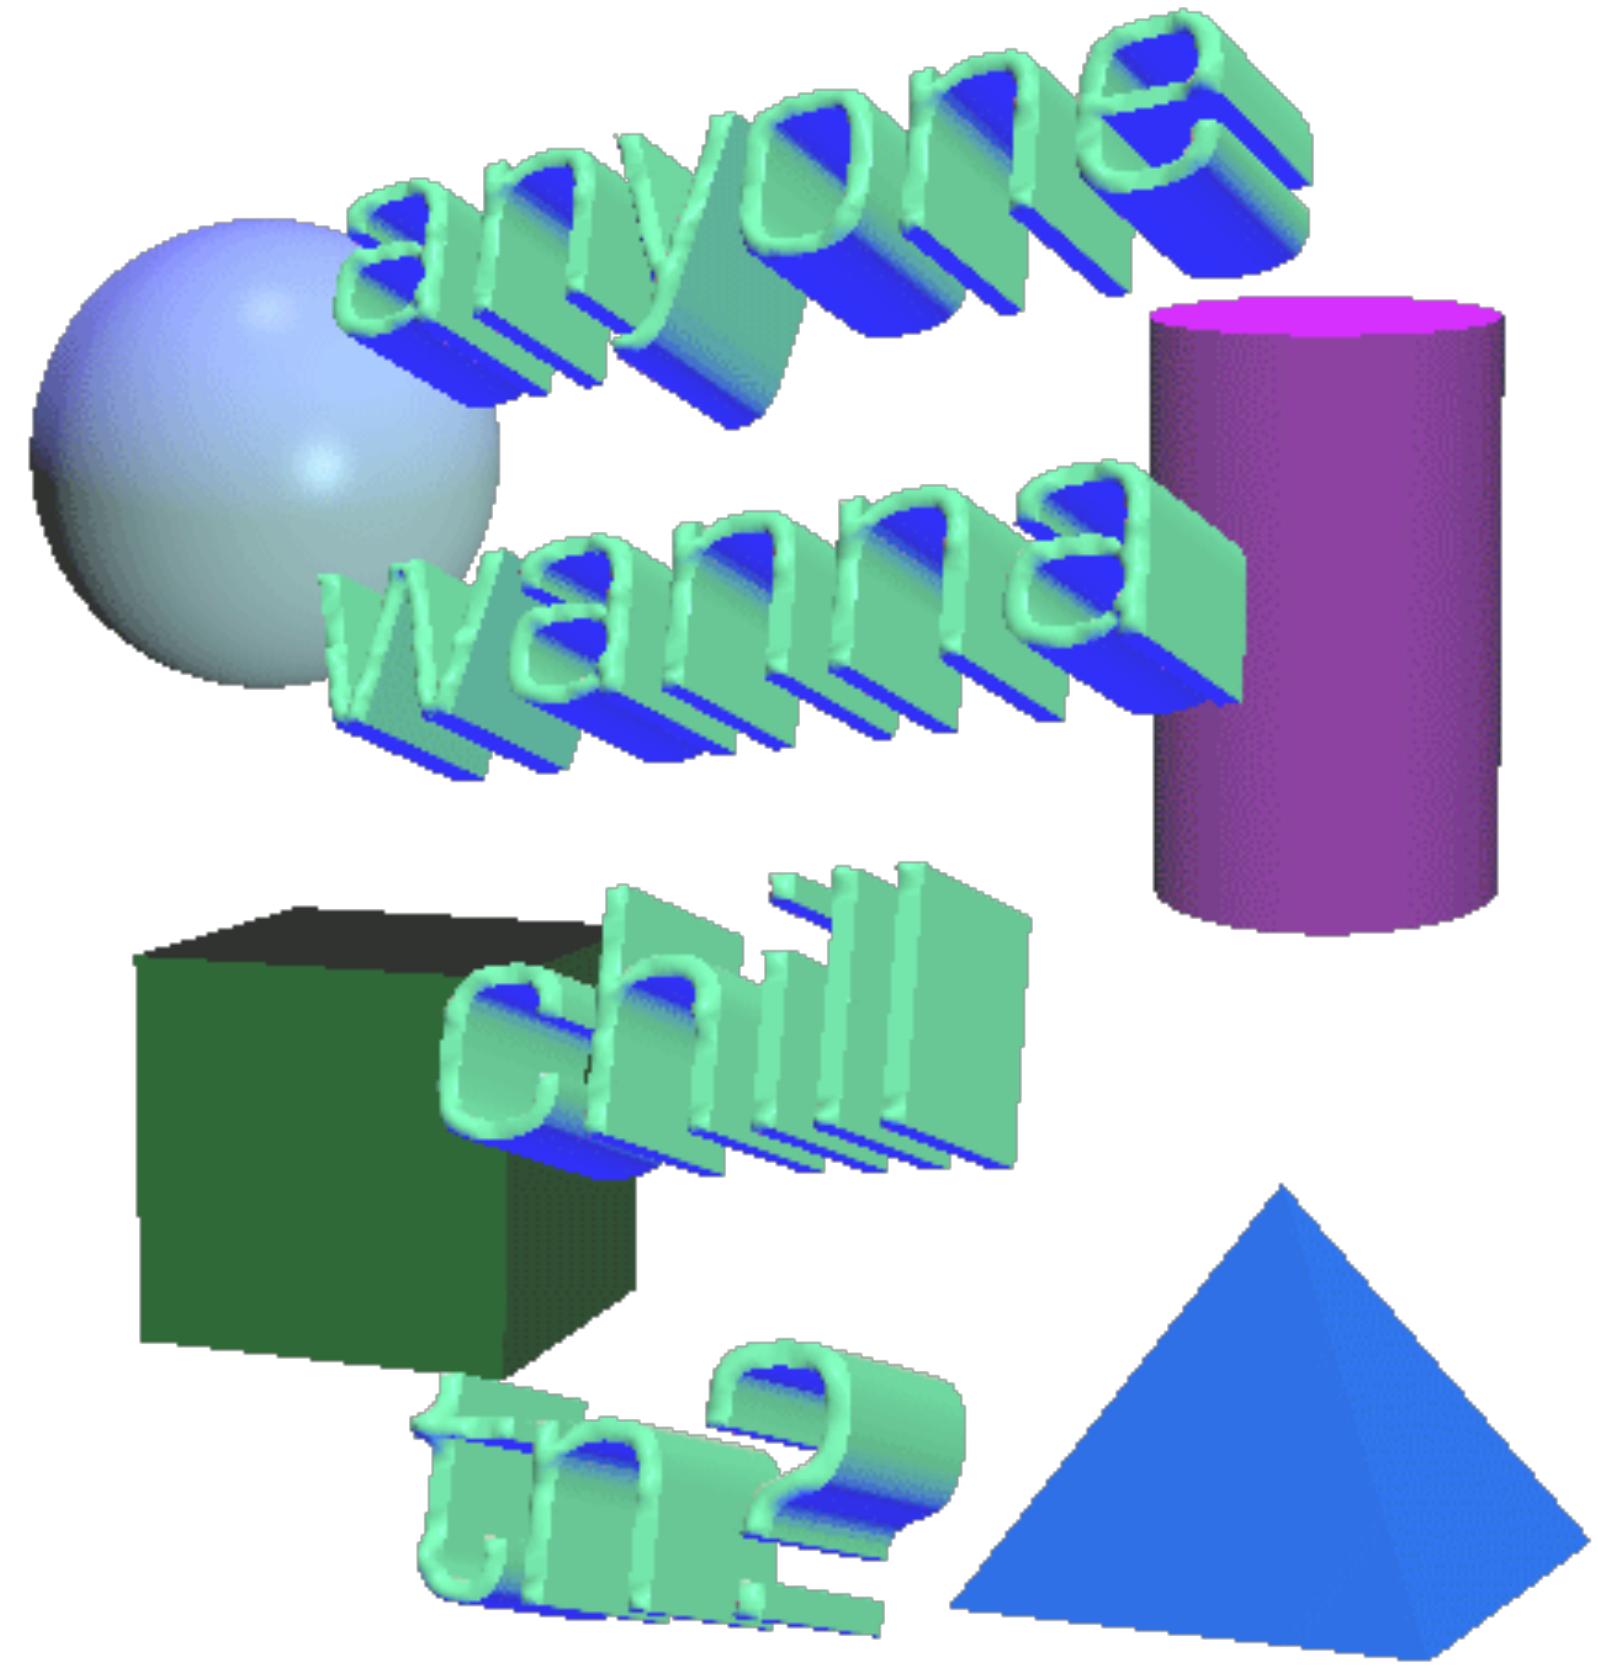

THE INTERNET IS A SERIES OF DOCUMENTS

- **Static HTML with inline styling (gradually CSS)**
- **Some images**
- **Interactivity mostly meant linking to other pages**
- **“Brochureware”**

BUZZWORD



WEB 2.0





THE INTERNET IS A SERIES OF APPLICATIONS


- True interactive applications like Gmail and Google Maps arrive.
- Applications do not refresh; facilitate tons of user events, hardware.
- The browser becomes a maturing application platform.
- “Software”


DRIVEN BY JAVASCRIPT


The little language that could

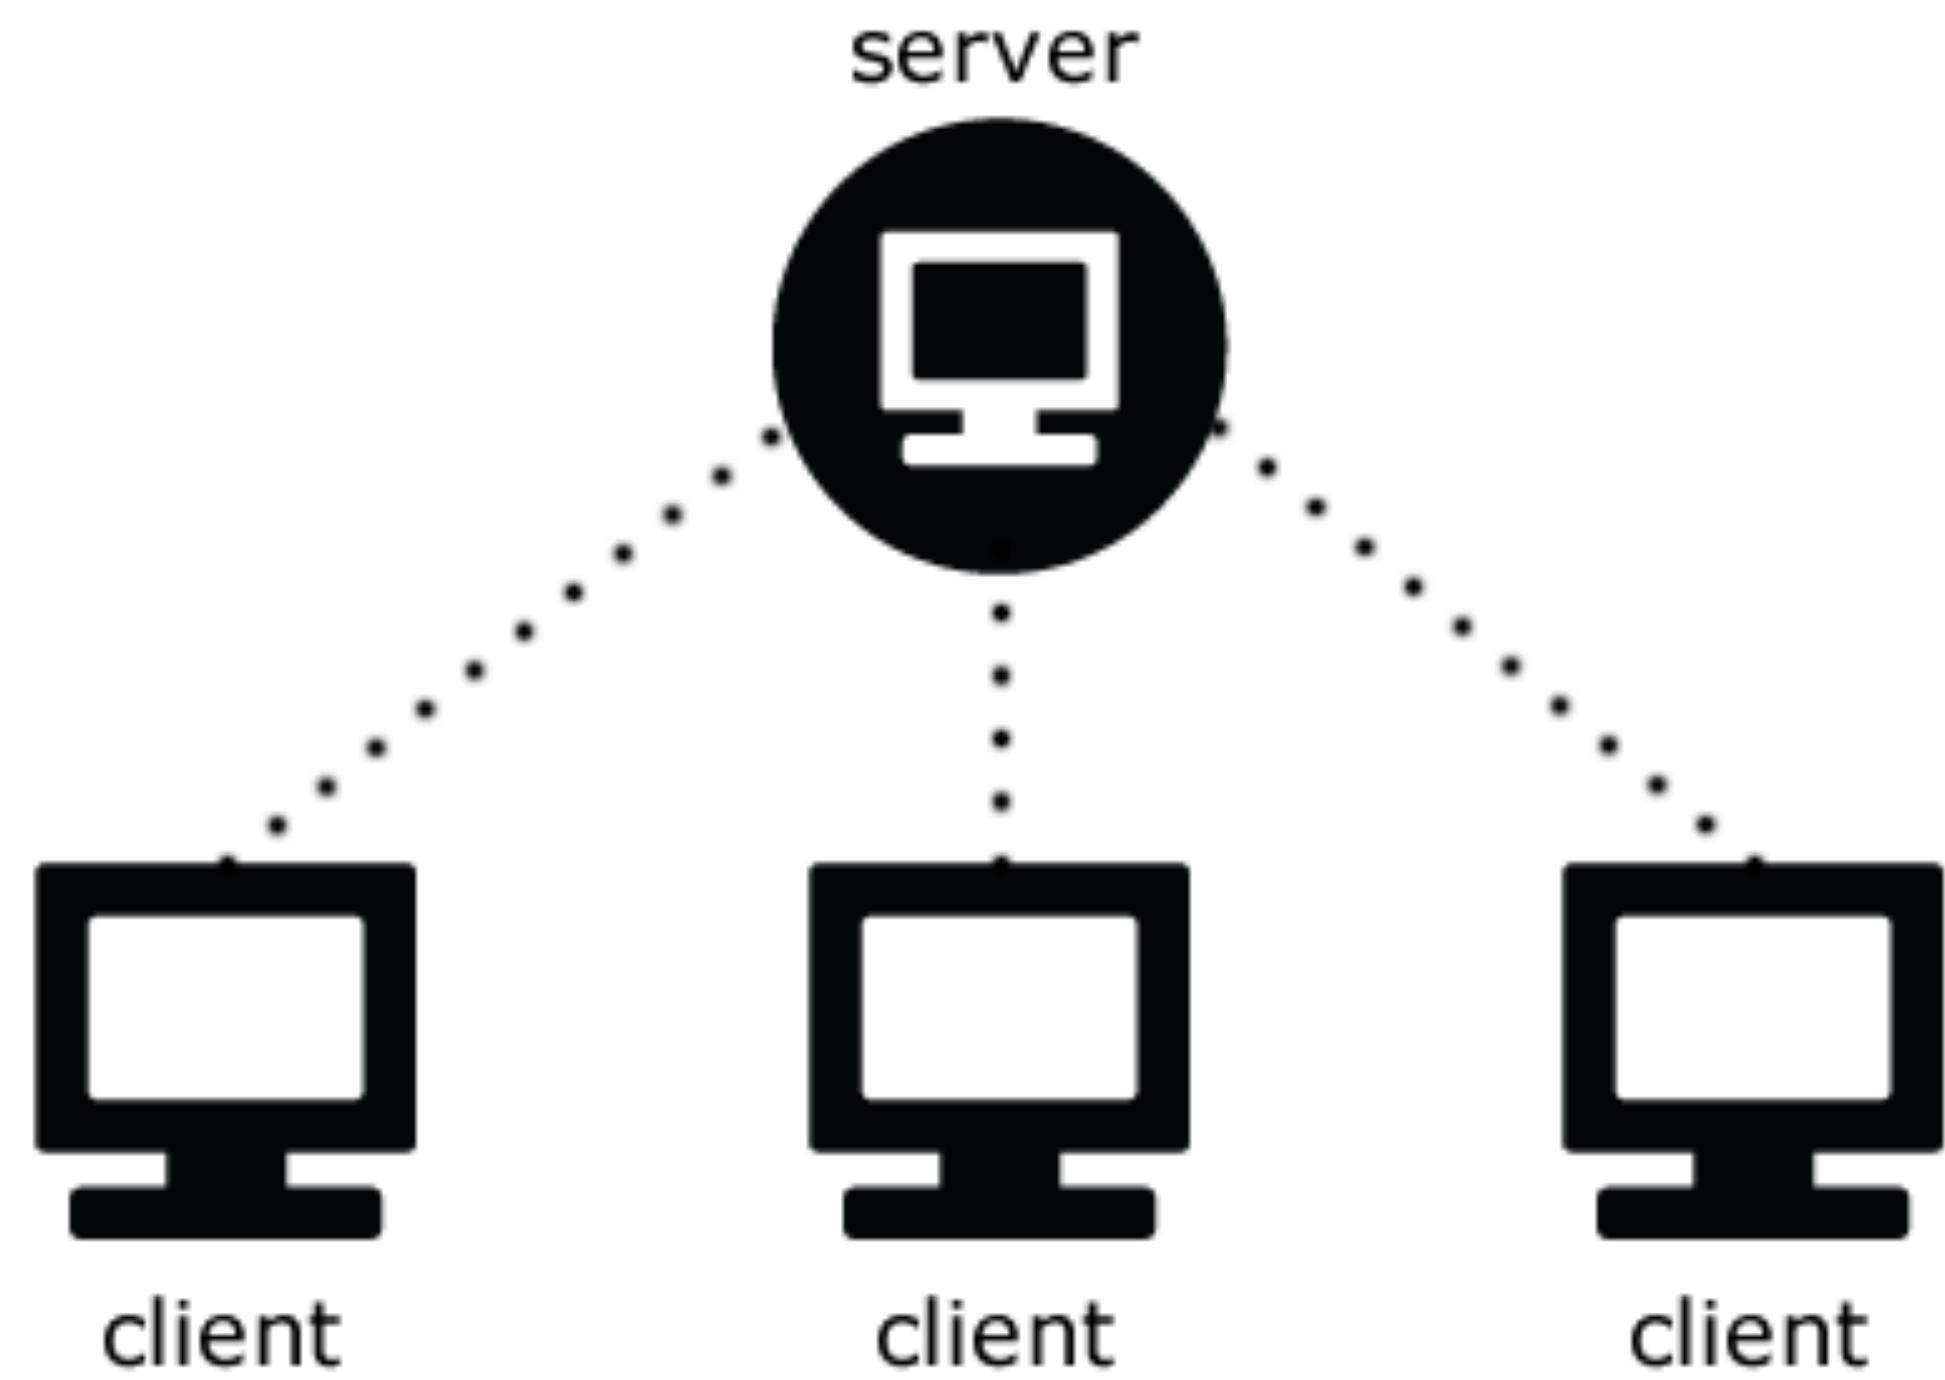


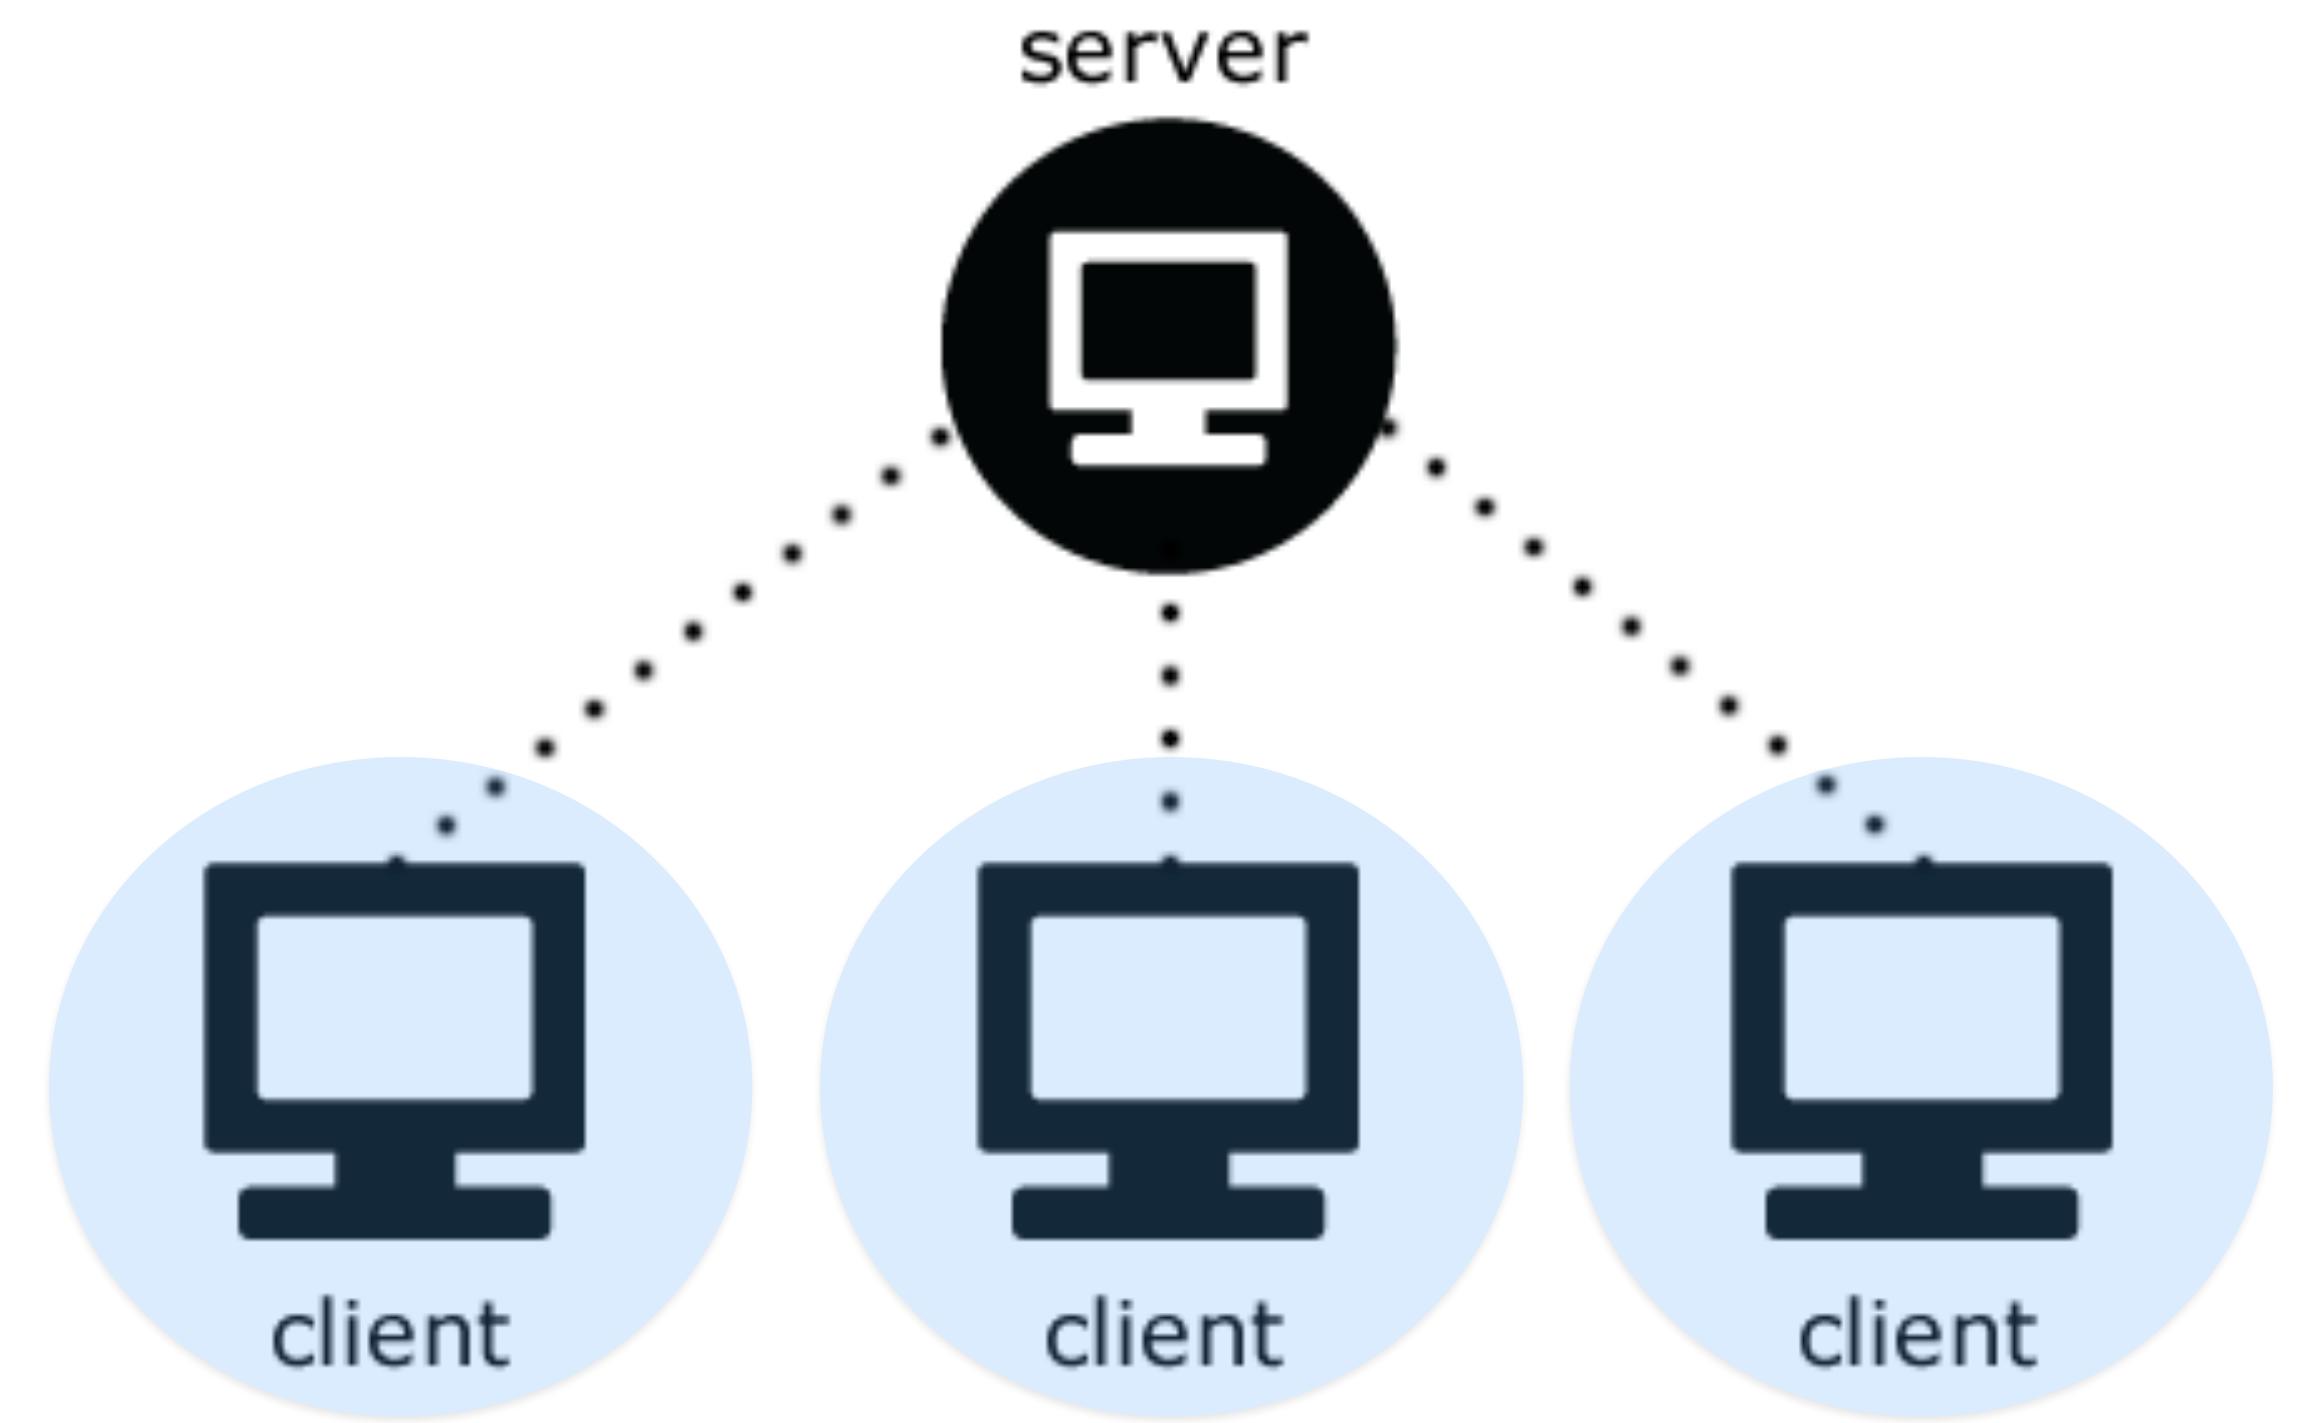

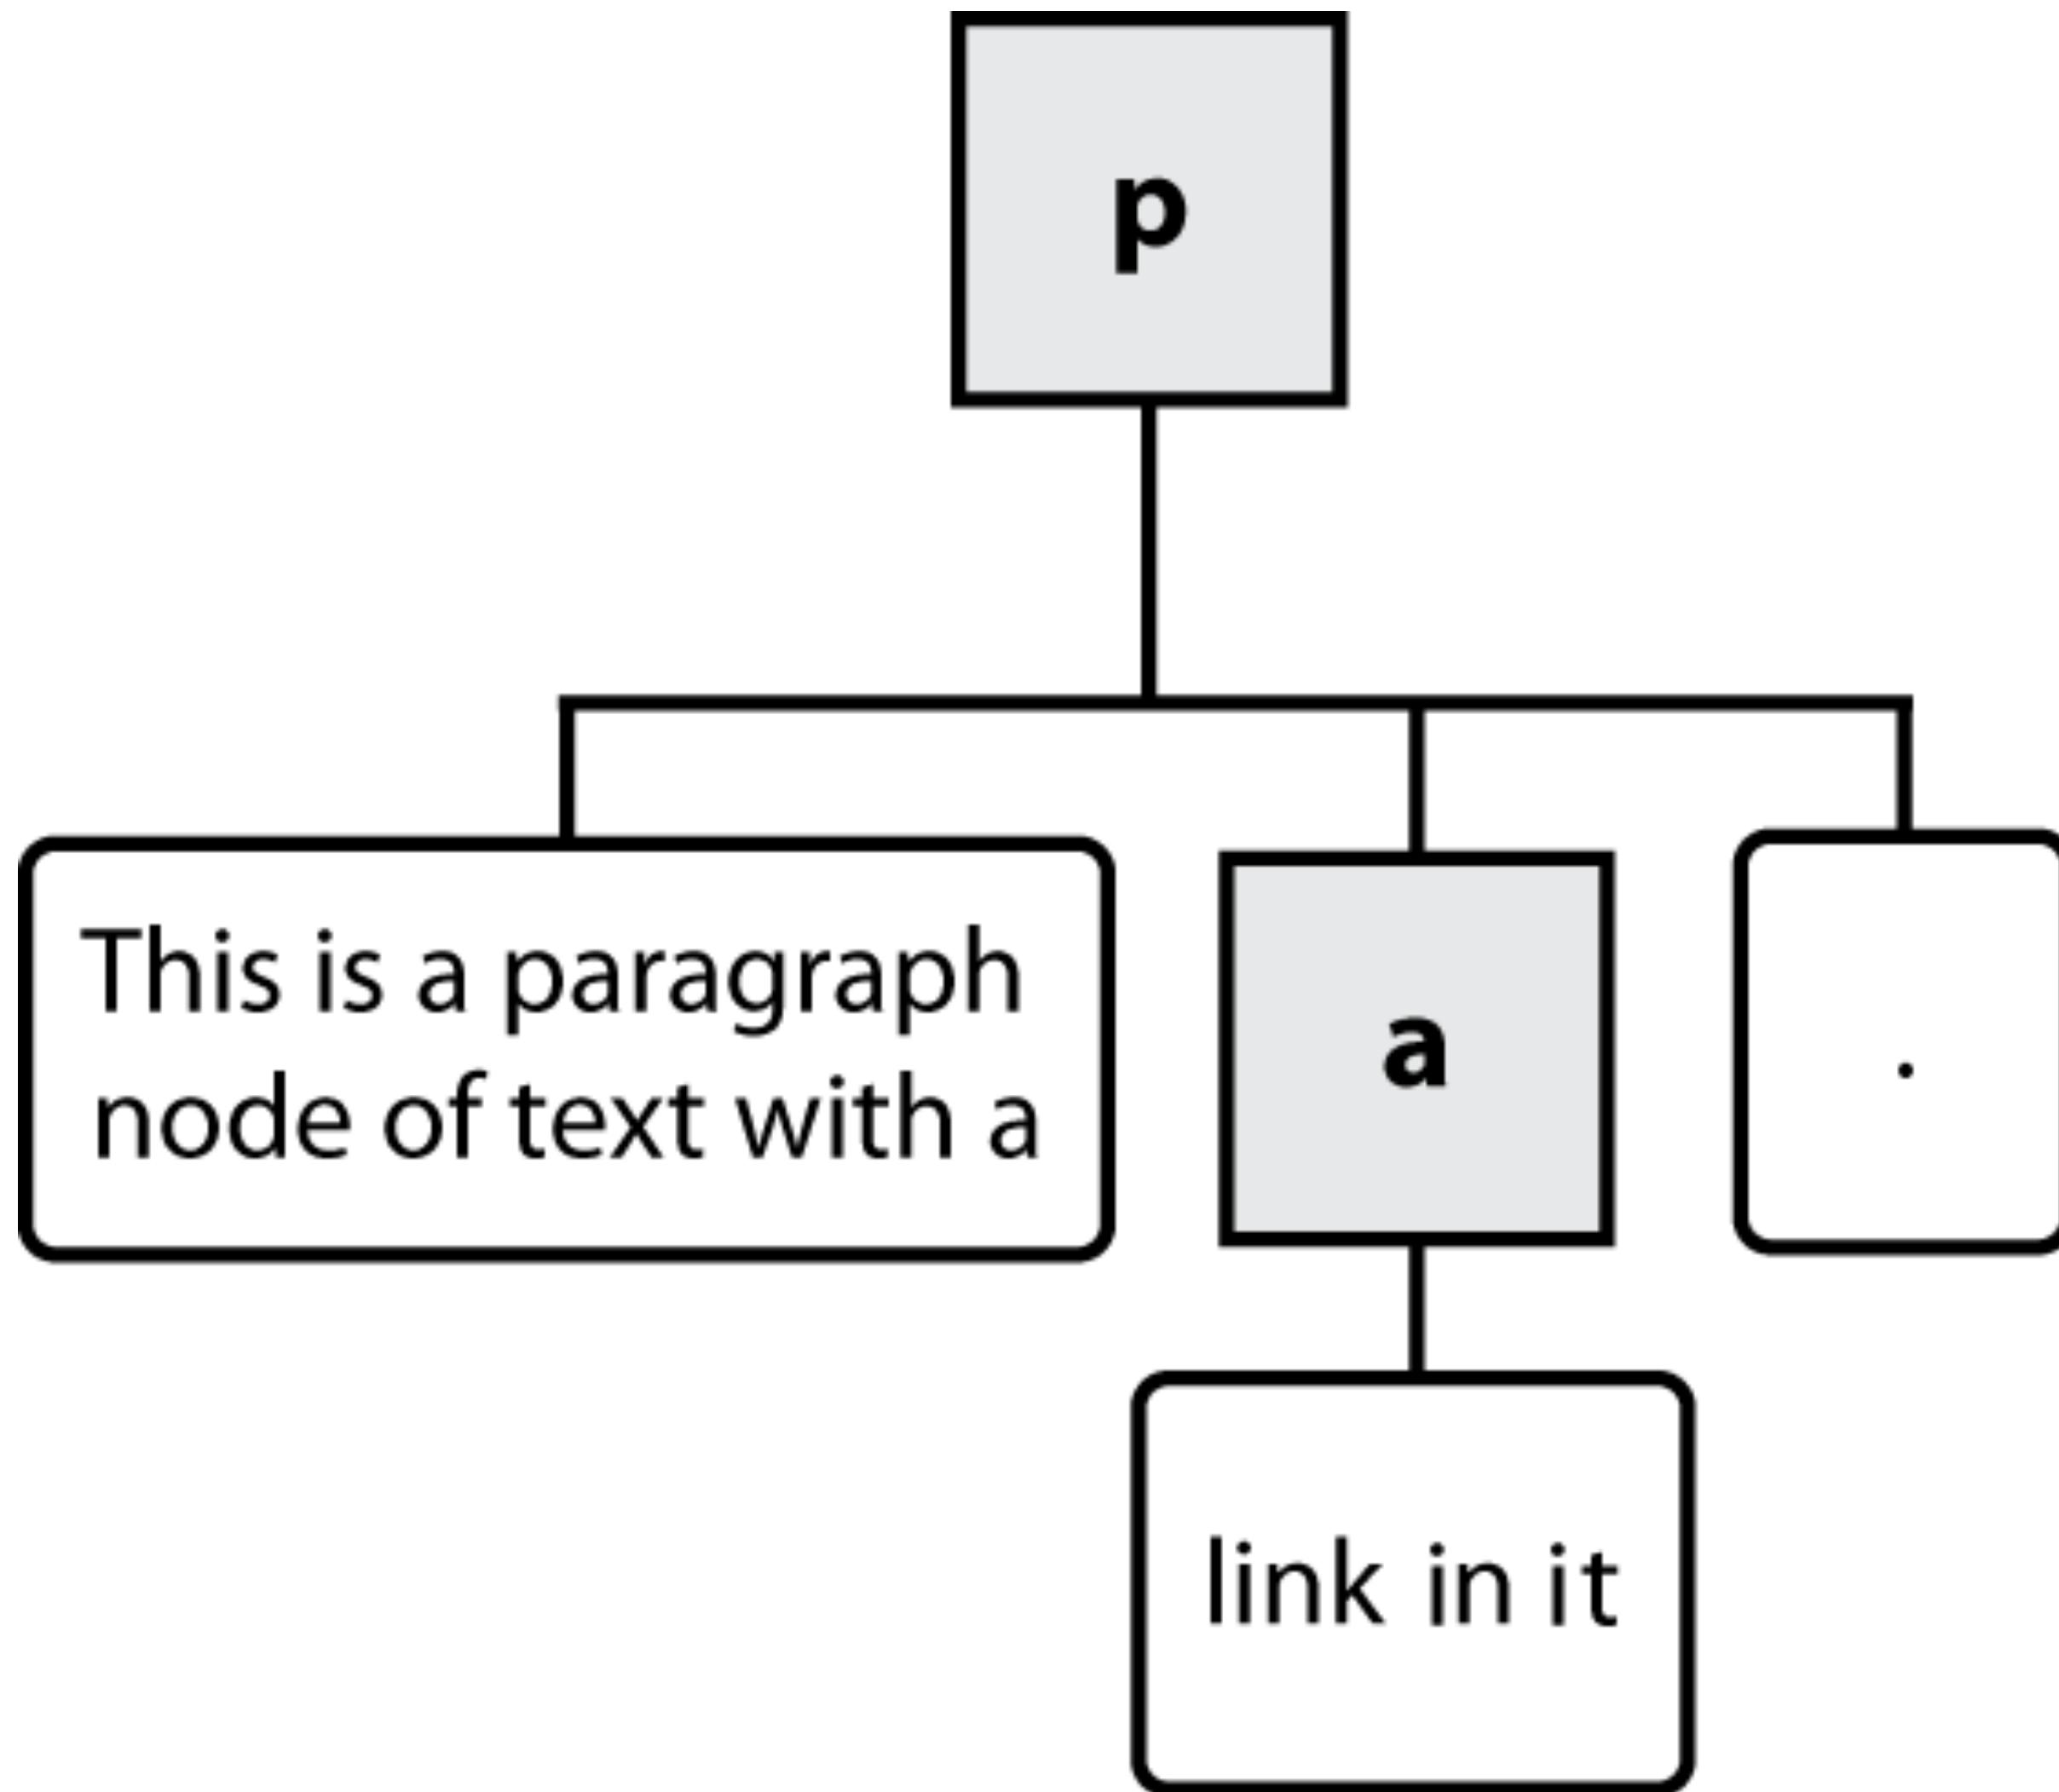

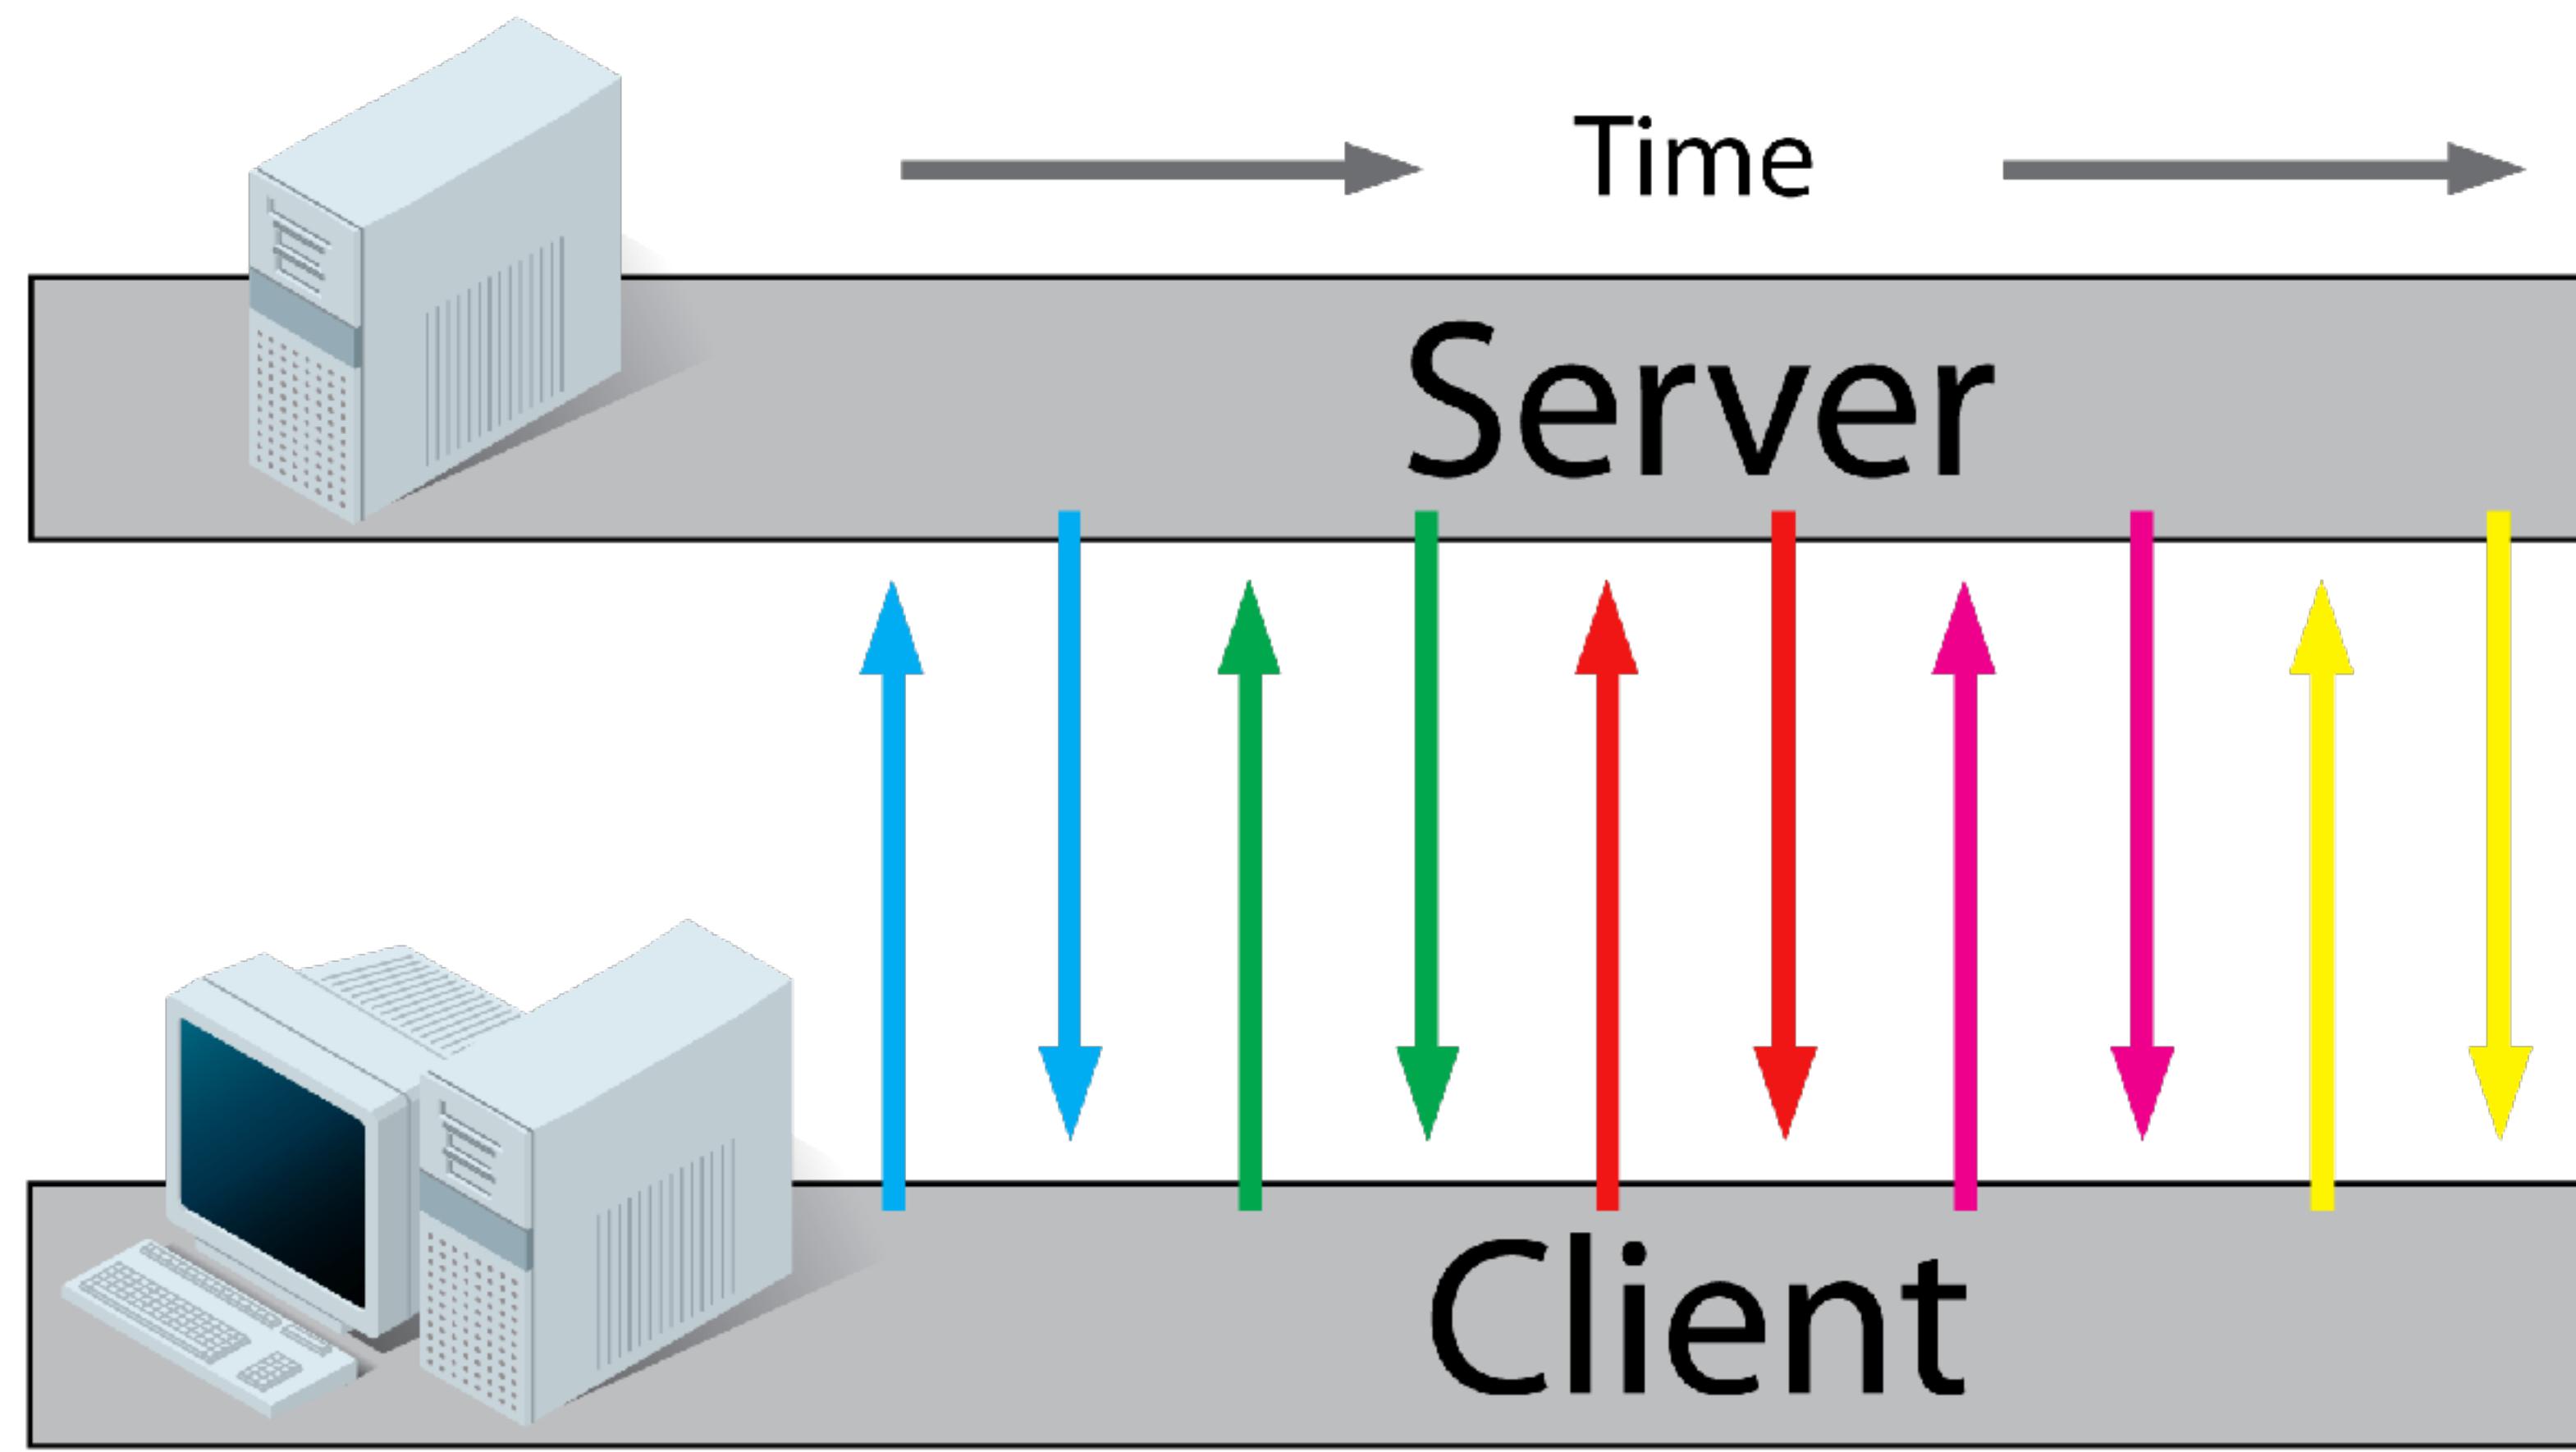

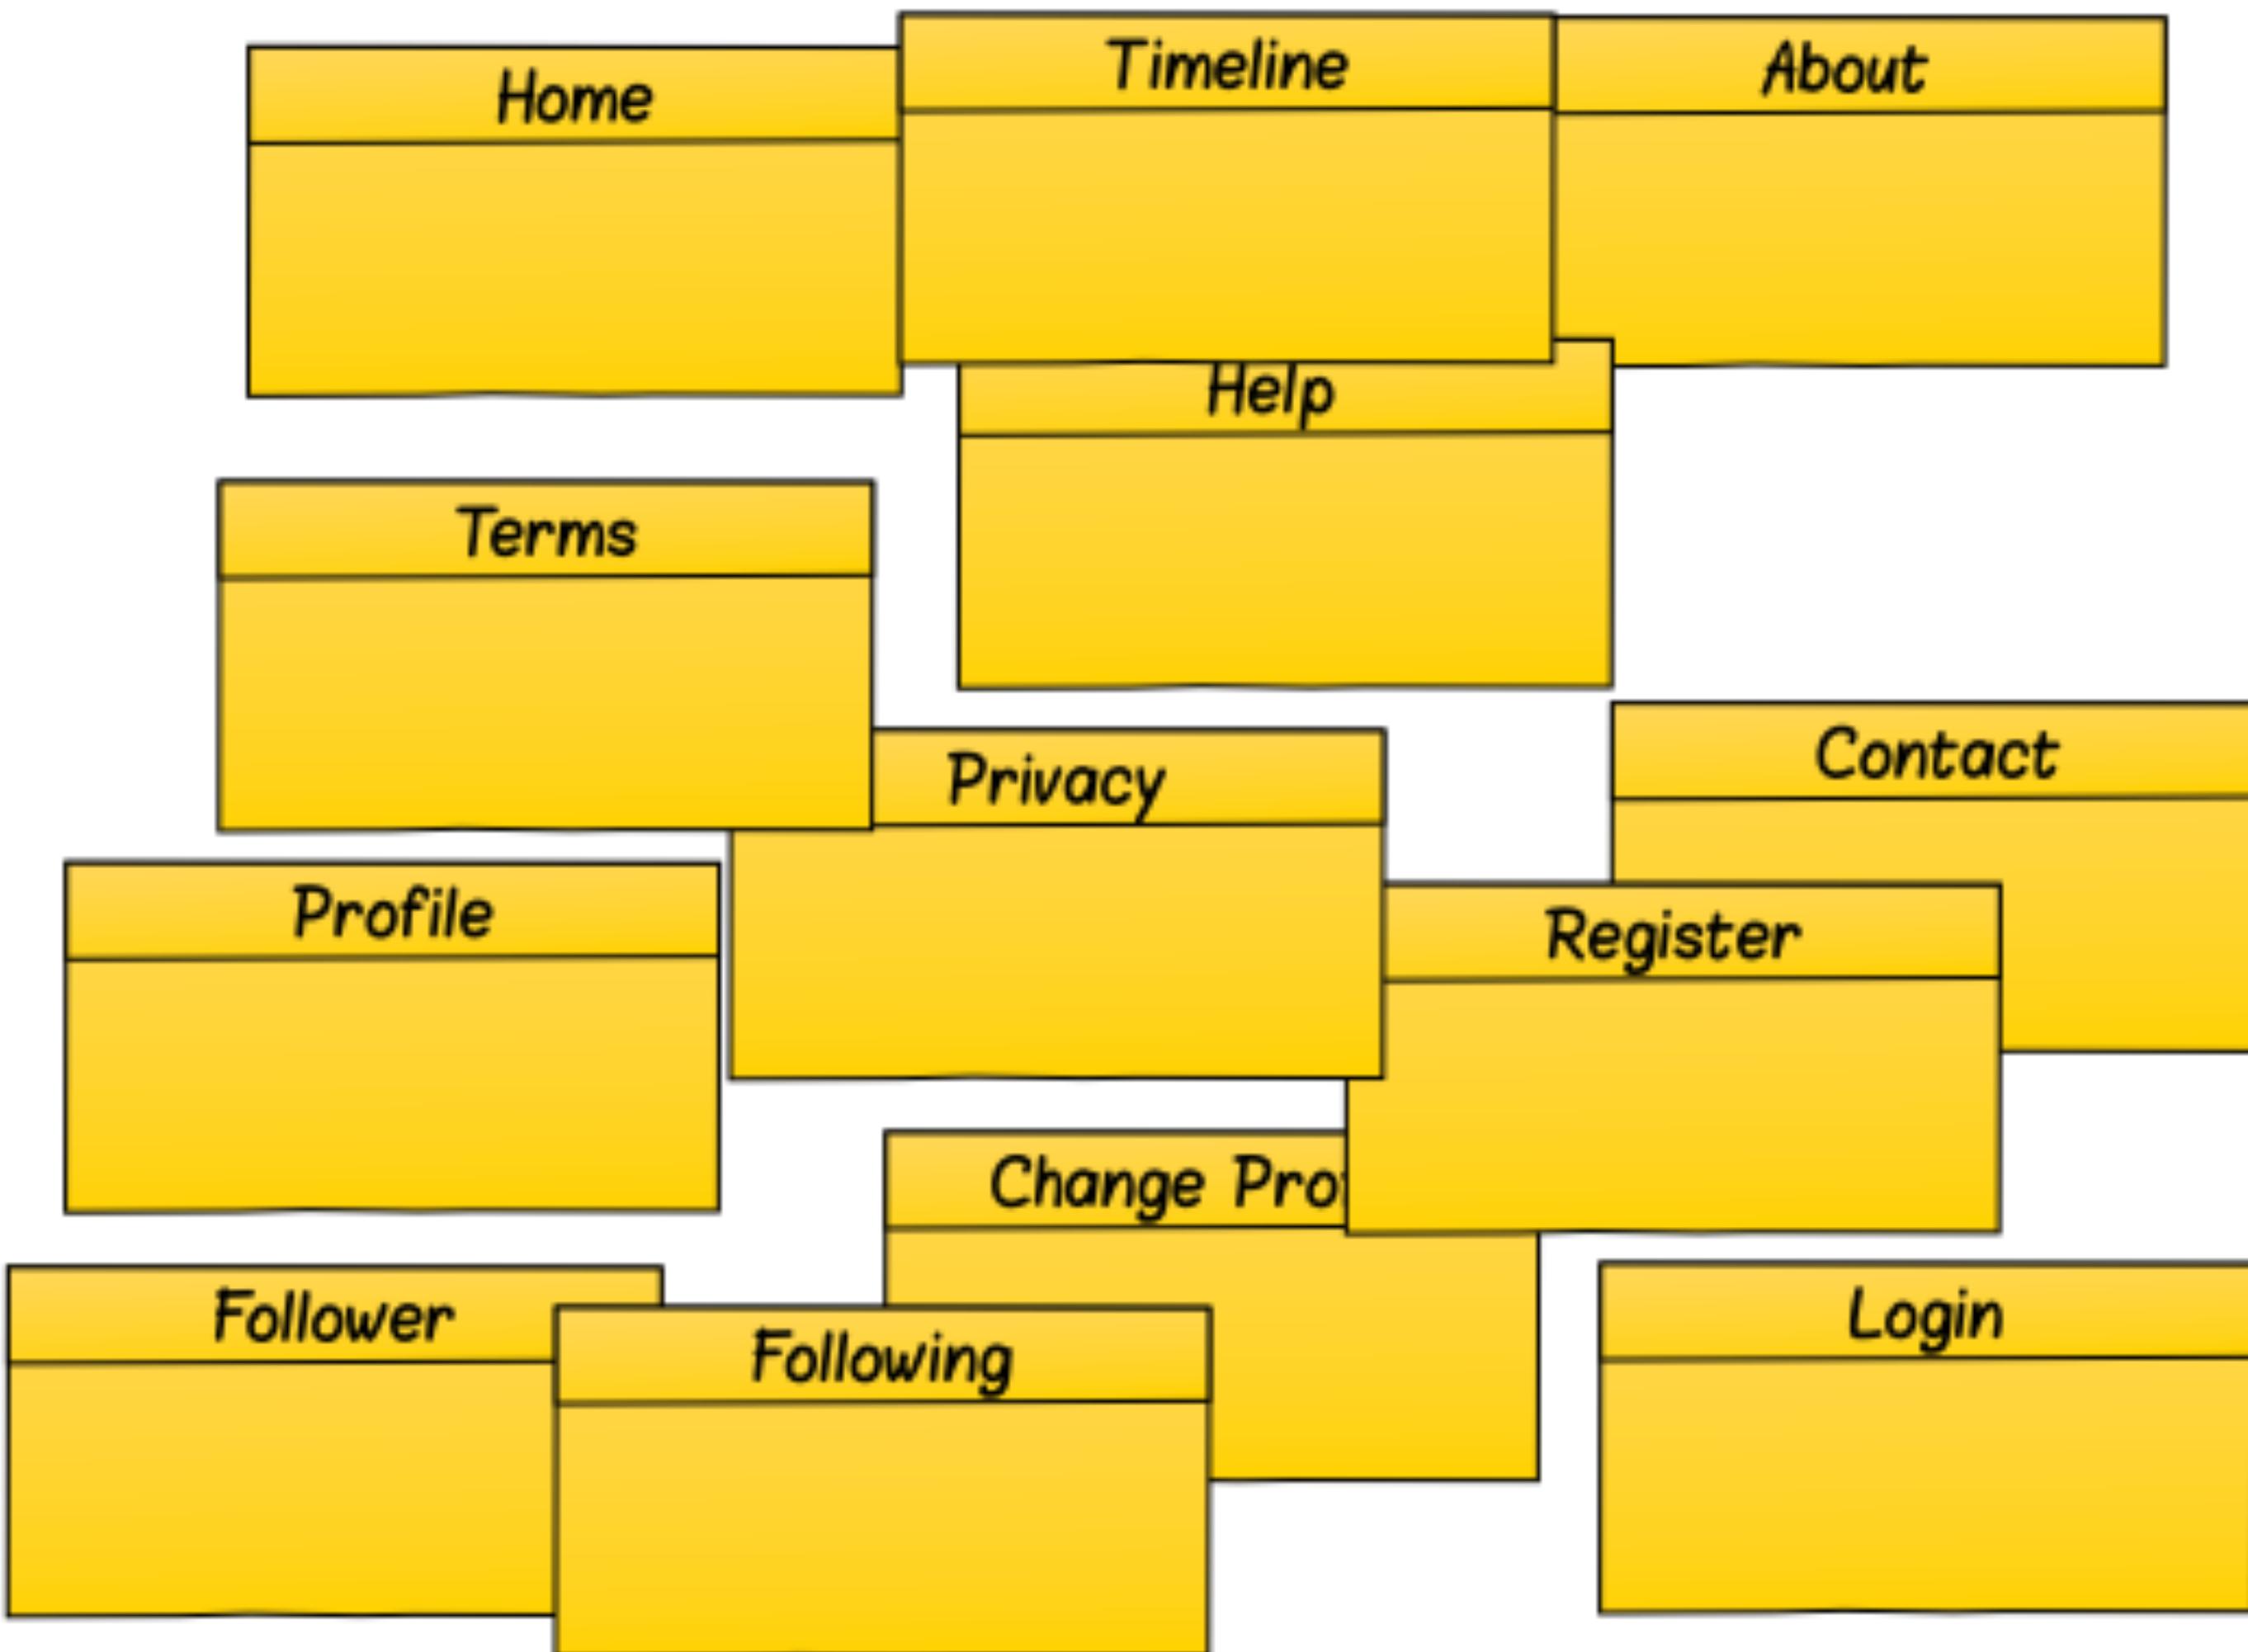

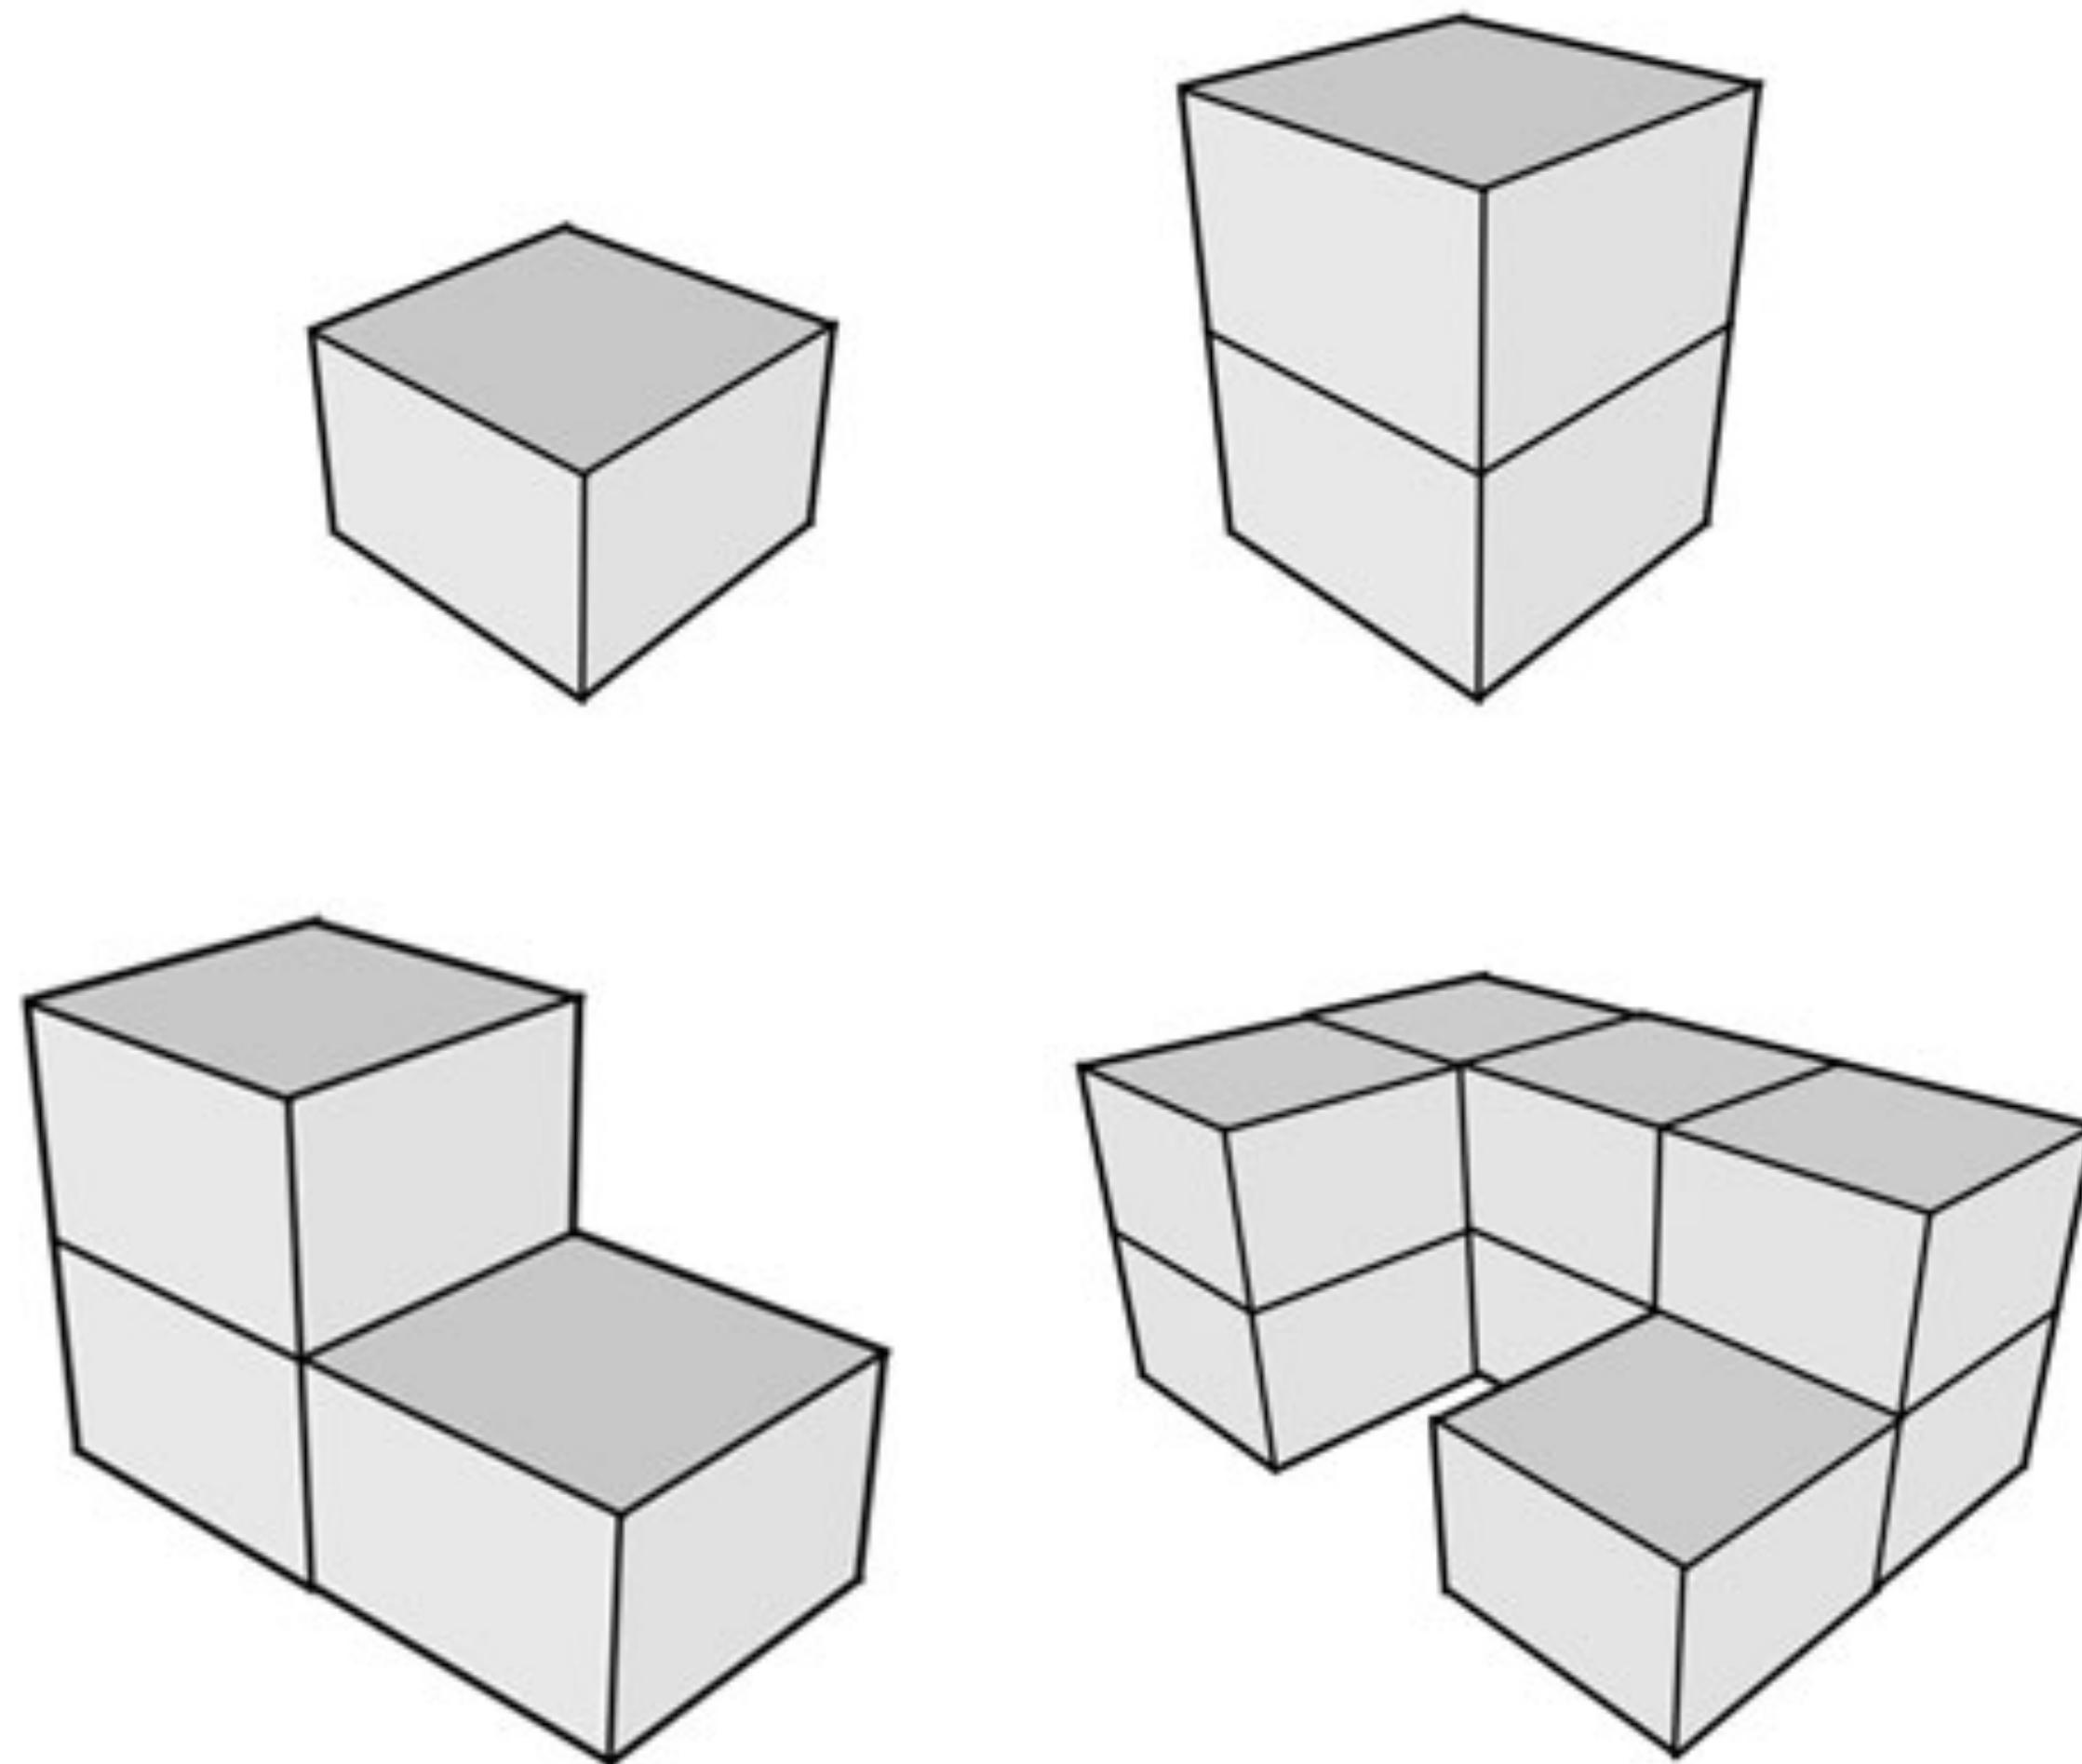


SERIOUS SOFTWARE IS SERIOUS

- Must be easily understood.
- Must be easily maintained.
- Must scale.
- Must work.



*“Let’s put the day’s
hotels on the DOM node”*

Cowboy Coder, 2010

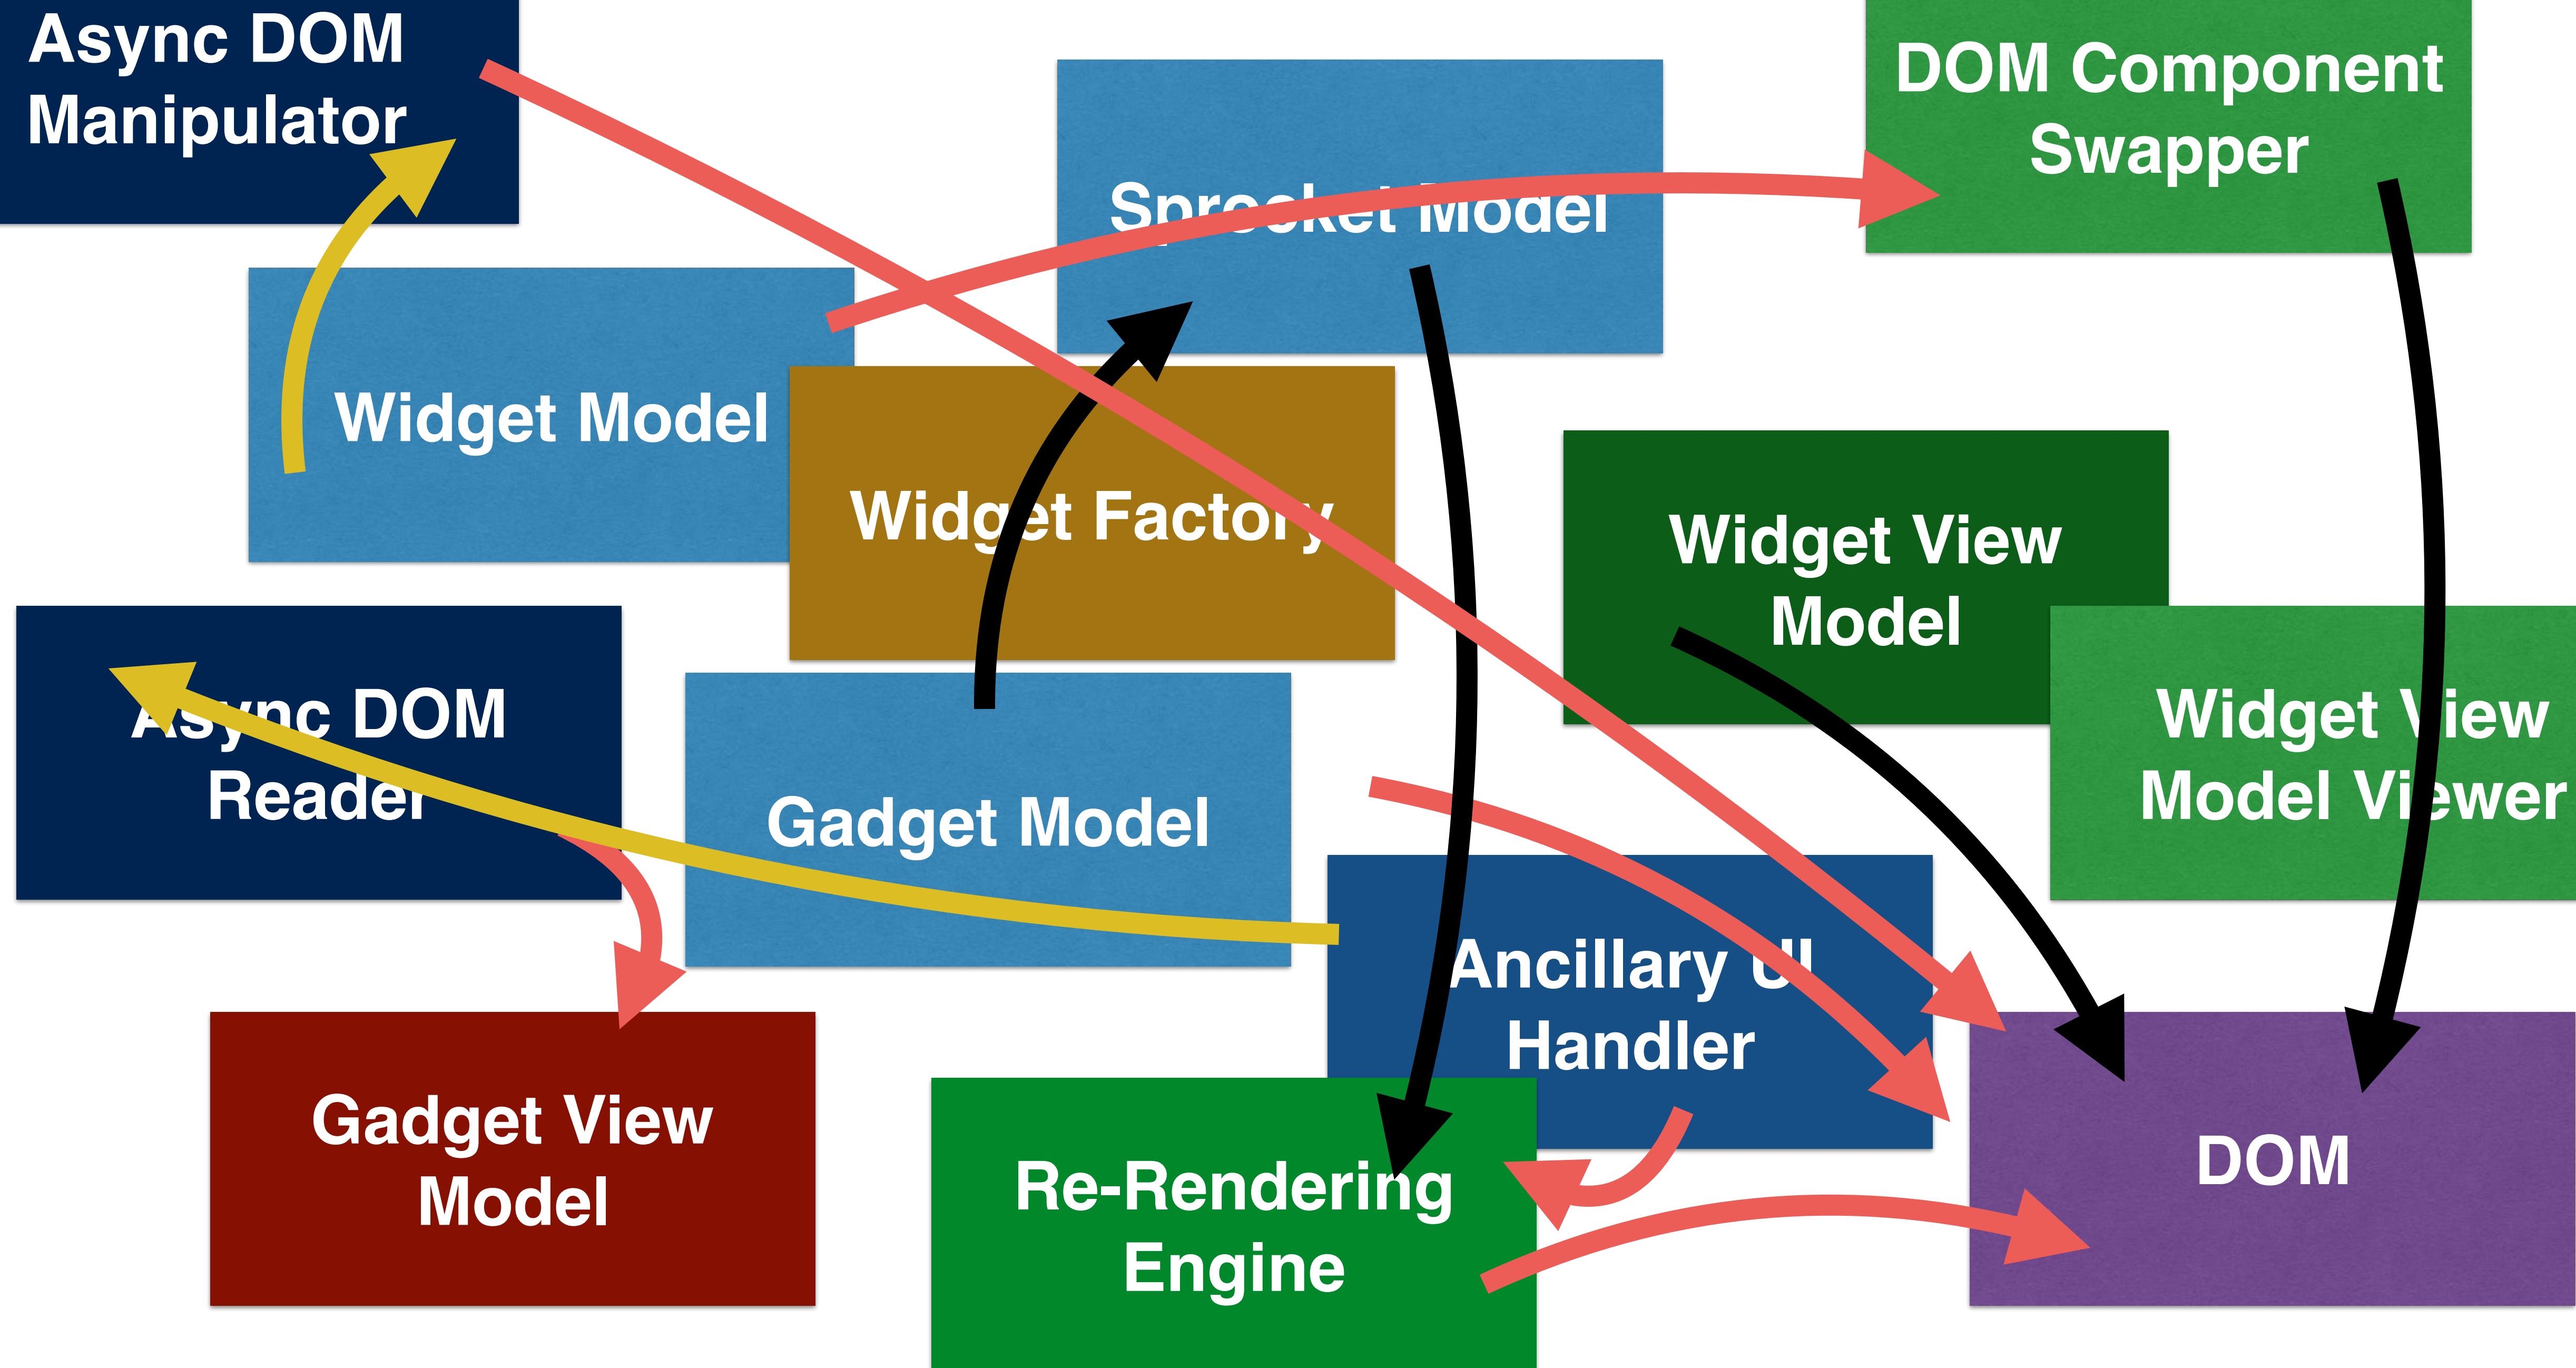

**"WAT THE (*@#^\$ EVEN IS
ASYNC_SUB_RENDERER_COMPONENT
_FACTORY_SYNC_CHECK???"**

—DEVE LOPER JR.

"UM... I'M NOT SURE ANYMORE"

—COWBOY CODY

PORABILITY & REUSABILITY


- **Code written within a specific framework often has to conform to that framework and/or use domain-specific languages that aren't portable outside that framework**
- **Difficult to move and re-use existing code when technologies change**
- **Here in internet-town, technologies change a lot, and quickly!**

PERFORMANCE

- Technically speaking, the DOM never imagined that web apps would get this big
- Consequently, mutating the DOM is an expensive operation - each interaction requires things like re-draws, stylesheet recalculation, etc
- User interfaces for web apps need to change the DOM, sometimes a lot

STATE

- **Most web frameworks up until recently have been built on the MVC pattern**
- **The introduction of shared mutable state makes the state of your application difficult to predict**
- **Existing patterns of data-binding in the DOM can make reacting to a change difficult to predict**

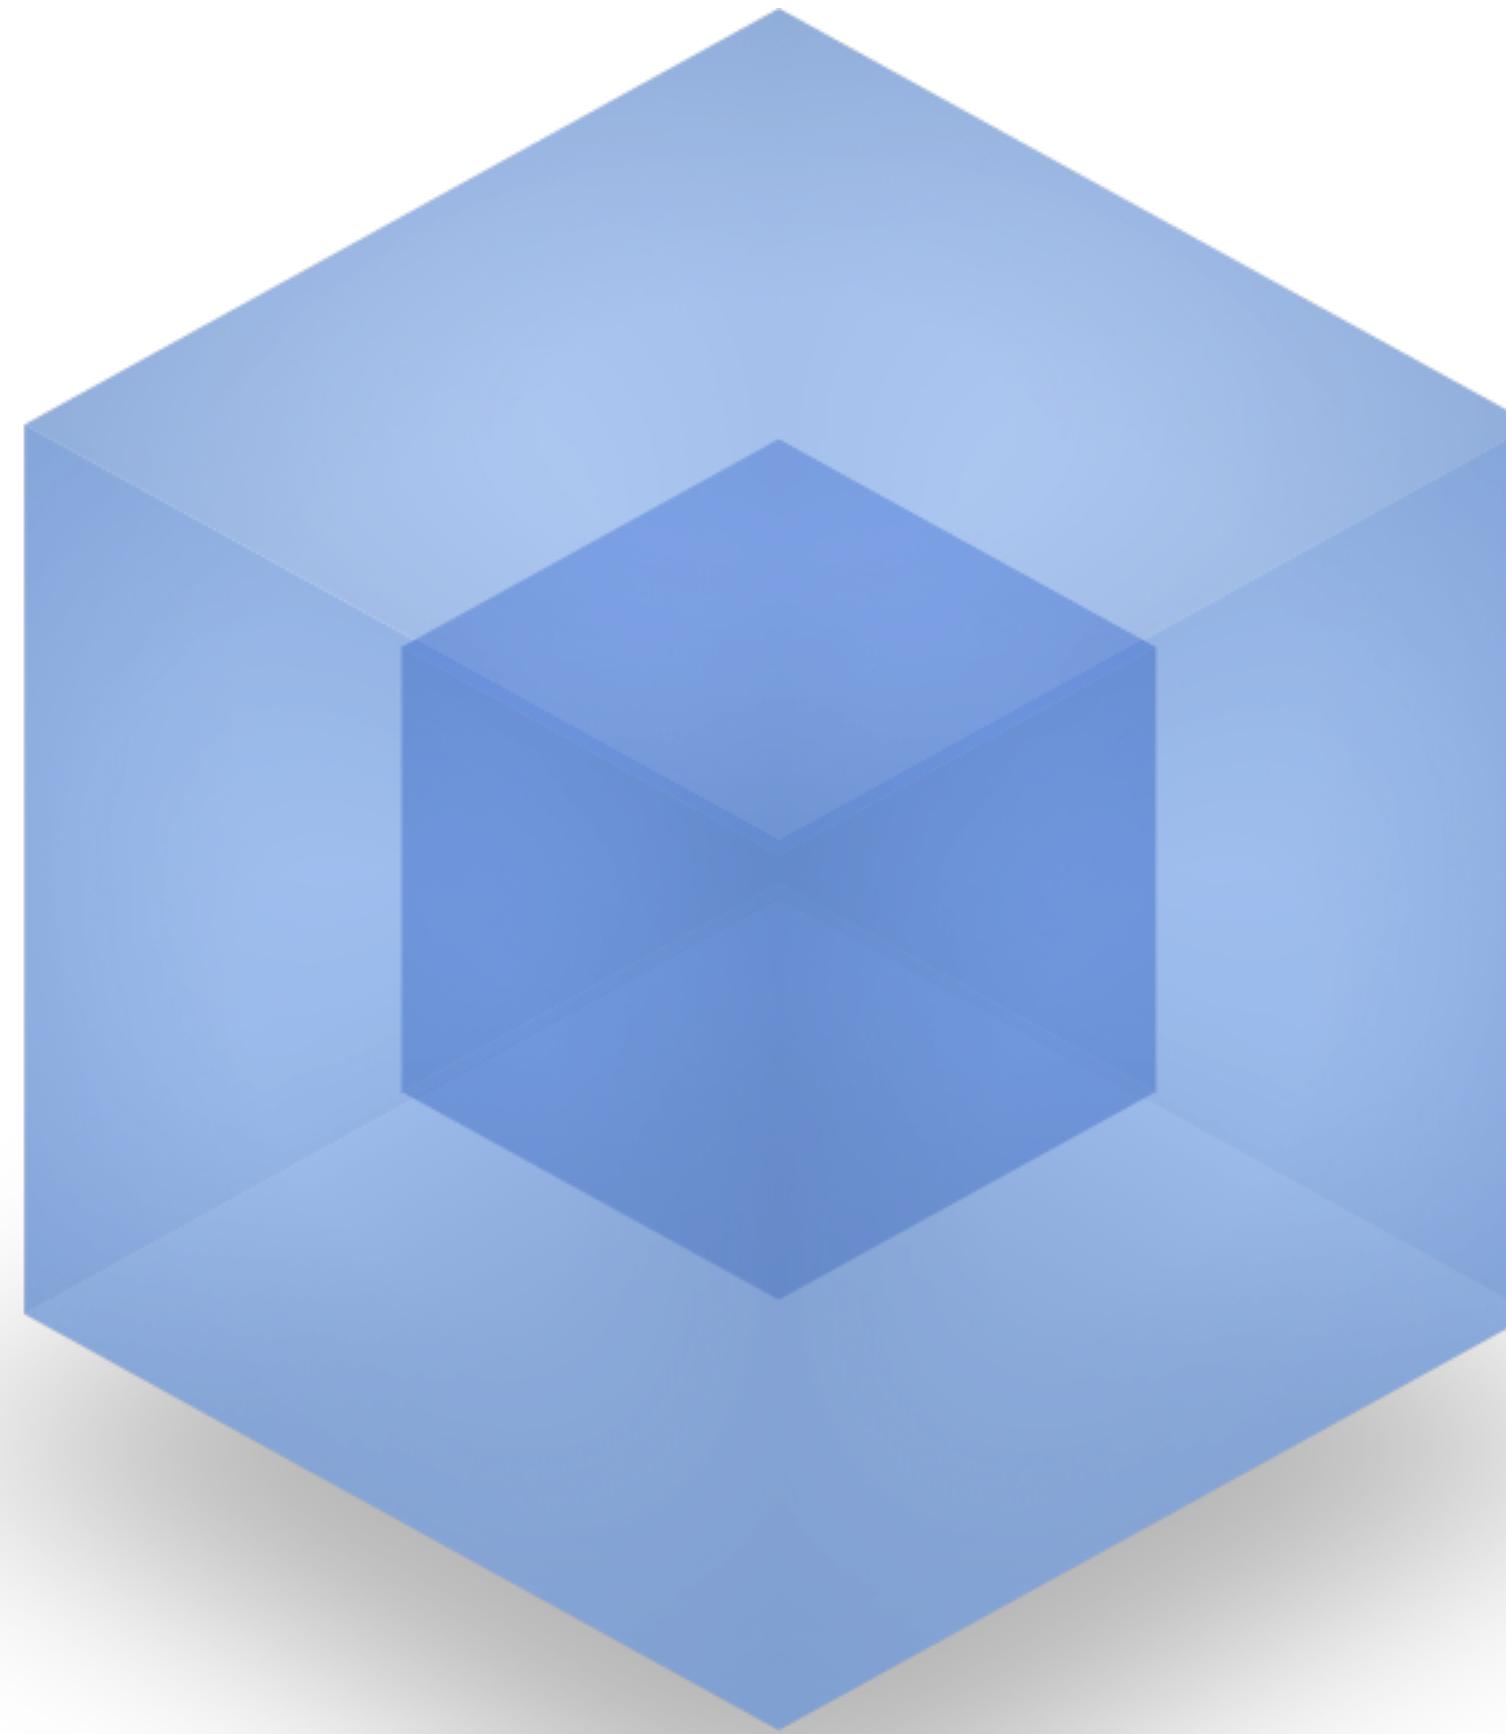


webpack

MODULE BUNDLER

WEBPACK

- Allows us to use `require` / `module.exports` AND/OR `import` / `export` for our frontend code
- Will bundle files together into one big js file
- ...So our code can be modular and we only have one thing to include as a `<script src=""></script>`

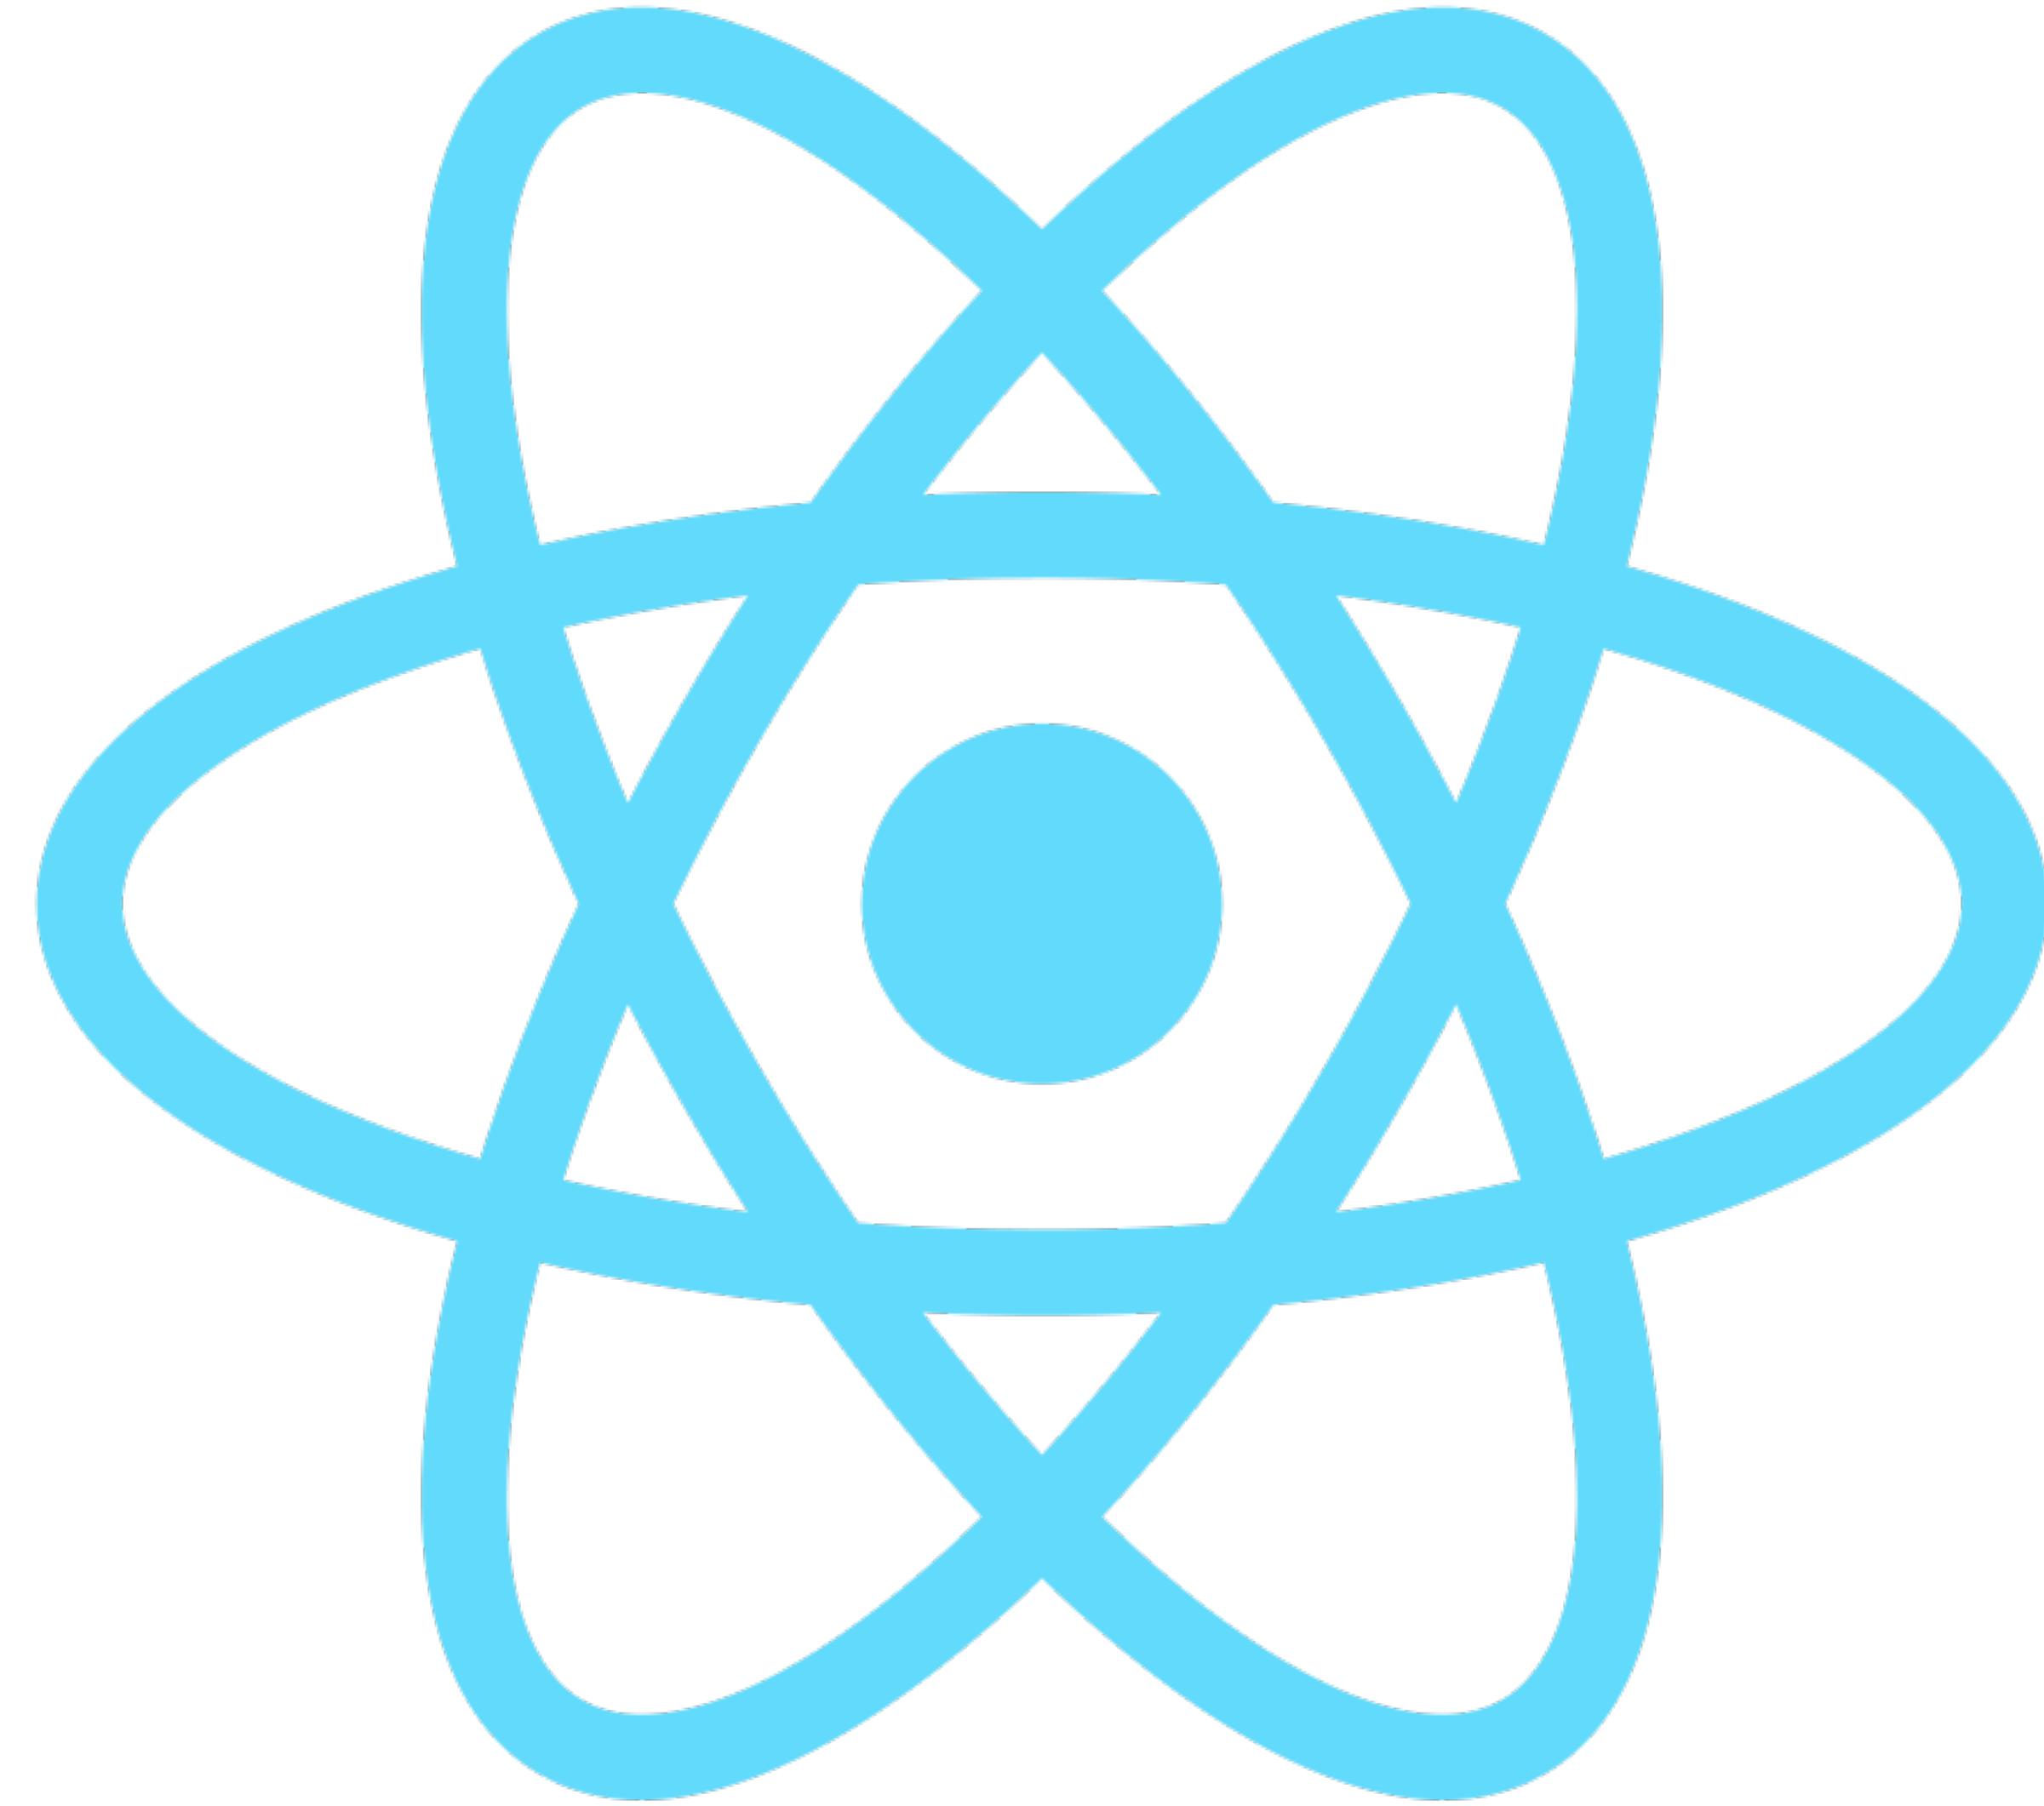

REACT

- Allows us to define functions that “return HTML”
- No data-binding: instead, data flows in one direction
- Minimize DOM manipulation by rendering to a Virtual DOM before rendering to the Real DOM
- We’ll be using JSX syntax (but that’s not mandatory with React)