



Pathlock Native Cyber Security and GRC Suite Dynamic Access Controls Installation Guide for Optional Scenarios

Version: 2026 Q1



Pathlock

info@pathlock.com | One Tabor Center, 1200 17th St. Suite 880, Denver, CO 80202
www.pathlock.com

Copyright Notice

©2026 *Pathlock Inc.* All Rights Reserved.

The software and any support from *Pathlock Inc.* are provided “as-is” and without warranty, express or implied. *Pathlock Inc.* specifically disclaims all warranties, express or implied, of any kind including, but not limited to, implied warranties of merchantability and fitness for a particular purpose. Additional disclaimers, limitations and other terms and conditions applicable to the software, any support from and your relationship with *Pathlock Inc.* are included in your License Agreement with *Pathlock Inc.*

Table of Contents

1	Overview	4
1.1	Purpose	4
2	Single Point of Interceptions (SPIs)	5
2.1	SAP BW (Enhancement / Modification)	5
2.2	SAP WebDynpro (Enhancement / Modification)	6
2.2.1	SAP WDA: Modify View	6
2.2.2	SAP WDA: Before Action	8

1 Overview

SAP ECC/S4HANA establishes security through role-based access controls, which proactively prevent unauthorized access and mitigate risk violations.

Pathlock DAC provides an additional layer of security for SAP users within the ECC/S4HANA application. This add-on layer facilitates a granular approach to securing ECC/S4HANA environments.

1.1 Purpose

This document outlines the **Single Points of Interception (SPIs)** to implement as part of optional scenarios for Pathlock DAC.

2 Single Point of Interceptions (SPIs)

2.1 SAP BW (Enhancement / Modification)

SAP BW:

Transaction code	SE24
Class	CL_RSBOLAP_QV_RESULT_SET_CONS
Method	GET_RESULT_SET_DATA

Create an implicit enhancement at the end of the method within the specified class. Copy and paste the following snippet code.

Snippet:

```

CONSTANTS :lc_param_usrmasking TYPE spfpflpar-parname VALUE 'dynp/usrmasking',
           lc_all               TYPE spfpflpar-pvalue VALUE 'ALL'.

DATA: lv_param_value TYPE c LENGTH 3,
      lr_root        TYPE REF TO cx_root,
      lr_bw_handler  TYPE REF TO /appss4h/cl_bw_handler.

TRY.
  *-- Read Profile Param# 'dynp/usrmasking' value
  CALL 'C_SAPGPARAM' ID 'NAME' FIELD lc_param_usrmasking "#EC CI_CCALL
                        ID 'VALUE' FIELD lv_param_value.
  IF sy-subrc EQ 0 AND lv_param_value EQ lc_all.
    CALL METHOD ('/APPSS4H/CL_BW_HANDLER')=>('GET_INSTANCE')
      RECEIVING
        rr_instance = lr_bw_handler.

    IF lr_bw_handler IS BOUND.

      CALL METHOD lr_bw_handler->('HANDLE_BW')
        EXPORTING
          ir_query_view = n_r_query_view
          e_sx_body      = e_sx_body
          e_r_data       = e_r_data
          e_r_text       = e_r_text
          e_sx_rows      = e_sx_rows
          e_sx_columns   = e_sx_columns.


    ENDIF.
  ENDIF.

  CATCH cx_root INTO lr_root.

ENDTRY.

```

Screenshot:

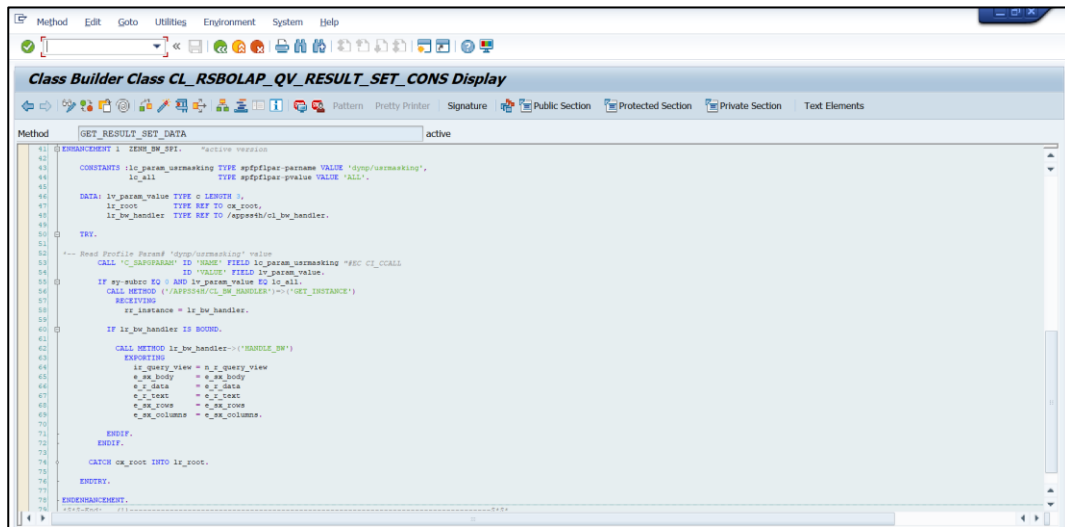

2.2 SAP WebDynpro (Enhancement / Modification)

2.2.1 SAP WDA: Modify View

Transaction code	SE18
BAdI Definition	WD_BADI_DOMODIFYVIEW

Create an implementation for the above mentioned BAdI. Copy and paste the following snippet code.

Snippet:

```

CONSTANTS : lc_rz11_param TYPE spfpflpar-parname VALUE 'dynp/usrmasking',
            lc_all         TYPE spfpflpar-pvalue  VALUE 'ALL'.

DATA: lv_rz11_value TYPE c LENGTH 3,
      lr_root       TYPE REF TO cx_root,
      lo_view       TYPE REF TO cl_wdr_view.

TRY .

  *-- Read RZ11 Param value



  CALL 'C_SAPGPARAM' ID 'NAME' FIELD lc_rz11_param "#EC CI_CCALL
                                ID 'VALUE' FIELD lv_rz11_value.
  IF sy-subrc EQ 0 AND lv_rz11_value = lc_all.
    lo_view ?= view.
    CALL METHOD ('/APPSDM/CL_WDA_HANDLER')=>('HANDLE_WDA')
      EXPORTING
        iv_handler      = 'M'
        ir_view_modify  = lo_view
        ir_context       = wd_context.
  ENDIF.

  CATCH cx_root.

ENDTRY.

```

Screenshots:

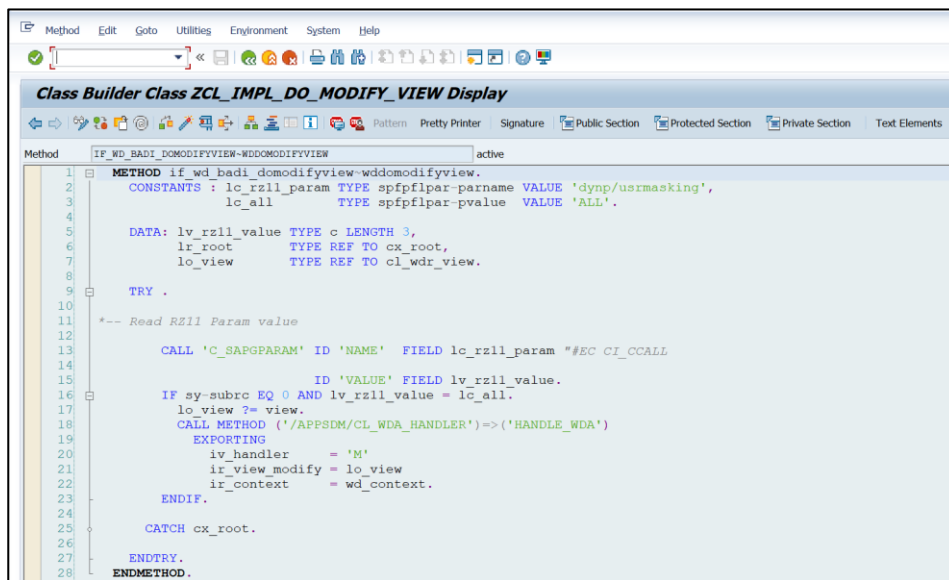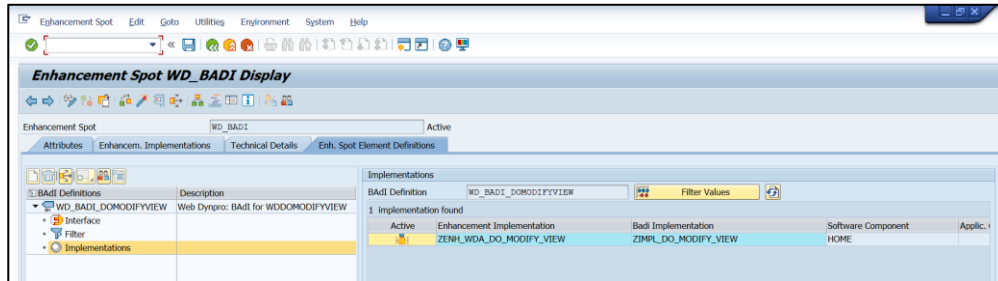

2.2.2 SAP WDA: Before Action

Transaction code	SE24
Class	CL_WDR_VIEW
Method	BEFORE_ACTION

Create an SPI at the beginning of the method within the specified class. Copy and paste the following snippet code.

Snippet:

```

CONSTANTS : lc_rz11_param TYPE spfpflpar-parname VALUE 'dynp/usrmasking',
            lc_all        TYPE spfpflpar-pvalue  VALUE 'ALL'.

DATA: lv_rz11_value TYPE c LENGTH 3,
      lr_root       TYPE REF TO cx_root,
      lo_view       TYPE REF TO cl_wdr_view.

TRY .

  *-- Read RZ11 Param value


  CALL 'C_SAPGPARAM' ID 'NAME'  FIELD lc_rz11_param "#EC CI_CCALL
                  ID 'VALUE' FIELD lv_rz11_value.
  IF sy-subrc EQ 0 AND lv_rz11_value = lc_all.
    lo_view ?= view.
    CALL METHOD ('/APPSDM/CL_WDA_HANDLER')=>('HANDLE_WDA')
      EXPORTING
        iv_handler      = 'A'
        ir_view_modify  = lo_view
        ir_context      = wd_context.
  ENDIF.

  CATCH cx_root.

ENDTRY.

```


Screenshots:

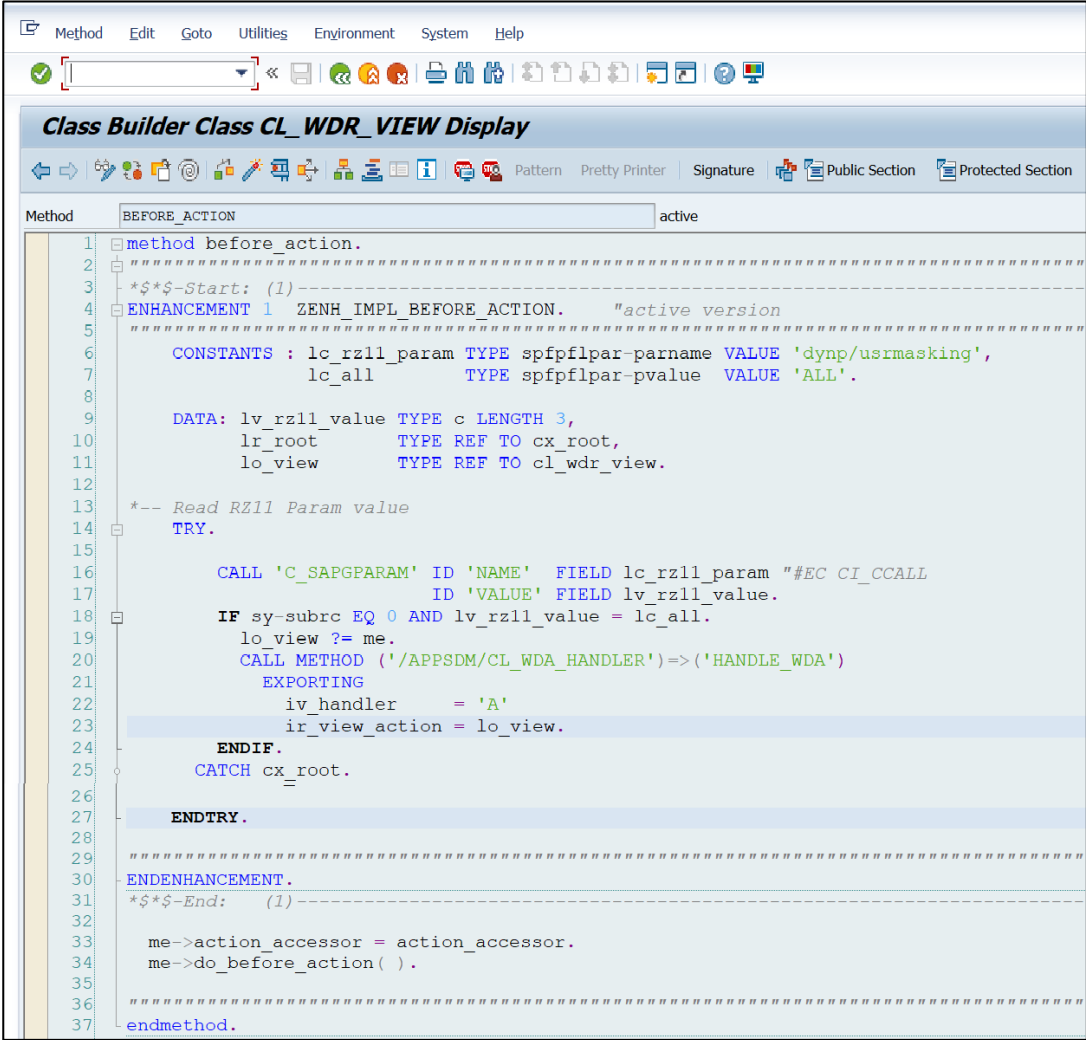

The screenshot shows the Class Builder interface for the **Class CL_WDR_VIEW Display**. The method **BEFORE_ACTION** is selected and is marked as **active**. The code is as follows:

```

1  method before_action.
2  =====
3  *$*-Start: (1)-----
4  ENHANCEMENT 1 ZENH_IMPL_BEFORE_ACTION.    "active version
5  =====
6      CONSTANTS : lc_rz11_param TYPE spfpflpar-parname VALUE 'dynp/usrmasking',
7                  lc_all       TYPE spfpflpar-pvalue  VALUE 'ALL'.
8
9      DATA: lv_rz11_value TYPE c LENGTH 3,
10             lr_root      TYPE REF TO cx_root,
11             lo_view      TYPE REF TO cl_wdr_view.
12
13  *-- Read RZ11 Param value
14  TRY.
15
16      CALL 'C_SAPGPARAM' ID 'NAME'  FIELD lc_rz11_param "#EC CI_CCALL
17                          ID 'VALUE' FIELD lv_rz11_value.
18
19      IF sy-subrc EQ 0 AND lv_rz11_value = lc_all.
20          lo_view ?= me.
21          CALL METHOD ('/APPSDM/CL_WDA_HANDLER')=>('HANDLE_WDA')
22              EXPORTING
23                  iv_handler      = 'A'
24                  ir_view_action = lo_view.
25      ENDIF.
26      CATCH cx_root.
27
28  ENTRY.
29  =====
30  ENDENHANCEMENT.
31  *$*-End: (1)-----
32
33      me->action_accessor = action_accessor.
34      me->do_before_action( ).
35
36  =====
37  endmethod.

```