

Version 0

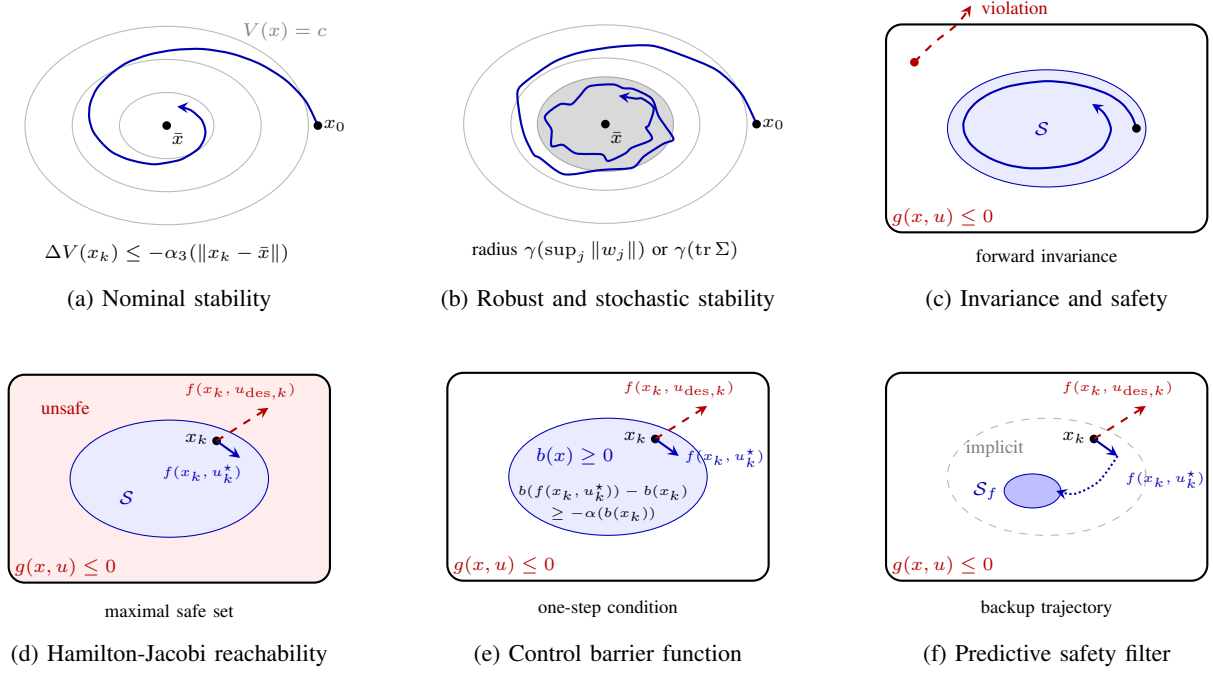


Fig. 1: Illustration of the stability and safety notions of this section. (a) Nominal stability: a Lyapunov function V decreases along closed-loop trajectories (level sets in gray) and the state converges to the equilibrium $\bar{x}$. (b) Robust and stochastic stability: under disturbances w , the state converges to a neighbourhood of $\bar{x}$ (shaded), whose size depends on the disturbance bound or the noise covariance. (c) Safety: constraint satisfaction at one time instant does not imply safety (red dashed); safety is guaranteed by an invariant set S contained in the constraints. (d)–(f) Safety filters: the desired input $u_{\text{des},k}$ would leave the safe set and is modified to u_k^* . HJ reachability computes the maximal safe set S offline and its complement (red) contains the states from which a constraint violation cannot be avoided. A CBF certifies invariance of $\{b(x) \geq 0\}$ by the one-step condition on $b(x_{k+1})$. A PSF does not compute the safe set (dashed) but certifies safety by a backup trajectory (dotted) into a smaller terminal set S_f .

Version 1

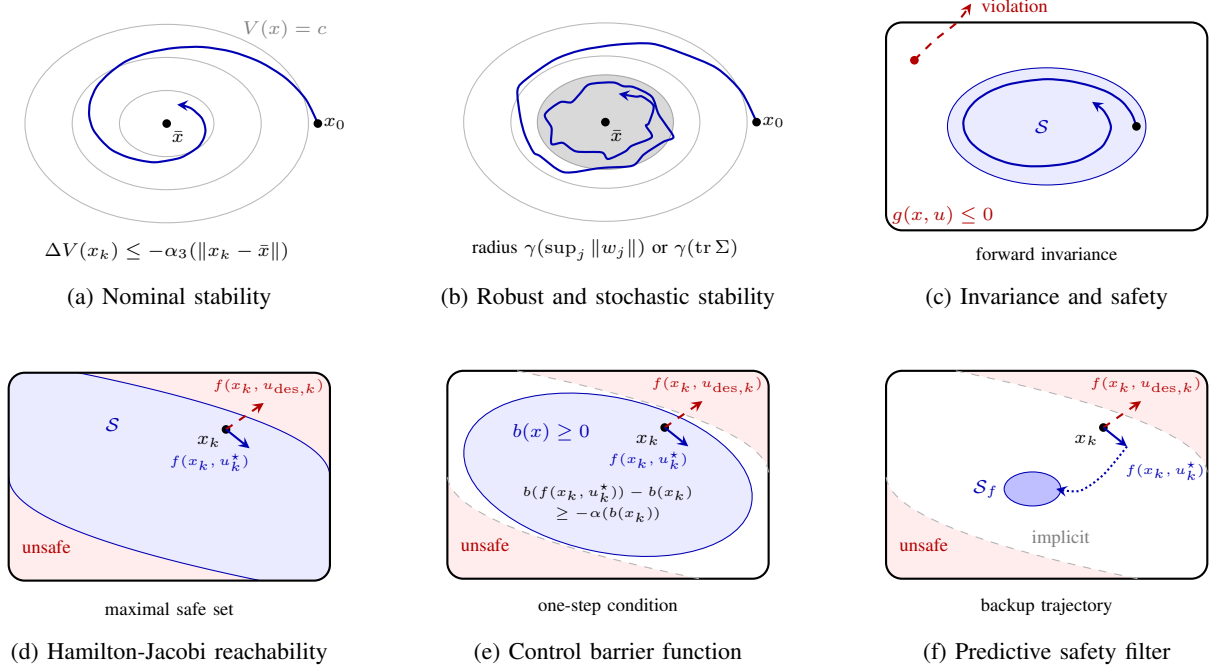


Fig. 2: Illustration of the stability and safety notions of this section. (a) Nominal stability: a Lyapunov function V decreases along closed-loop trajectories (level sets in gray) and the state converges to the equilibrium $\bar{x}$. (b) Robust and stochastic stability: under disturbances w , the state converges to a neighbourhood of $\bar{x}$ (shaded), whose size depends on the disturbance bound or the noise covariance. (c) Safety: constraint satisfaction at one time instant does not imply safety (red dashed); safety is guaranteed by an invariant set S contained in the constraints. (d)–(f) Safety filters: the desired input $u_{\text{des},k}$ would leave the safe set and is modified to u_k^* . HJ reachability computes the maximal safe set S offline and its complement (red) contains the states from which a constraint violation cannot be avoided. A CBF certifies invariance of $\{b(x) \geq 0\}$ by the one-step condition on $b(x_{k+1})$. A PSF does not compute the safe set (dashed) but certifies safety by a backup trajectory (dotted) into a smaller terminal set S_f .

Version 2

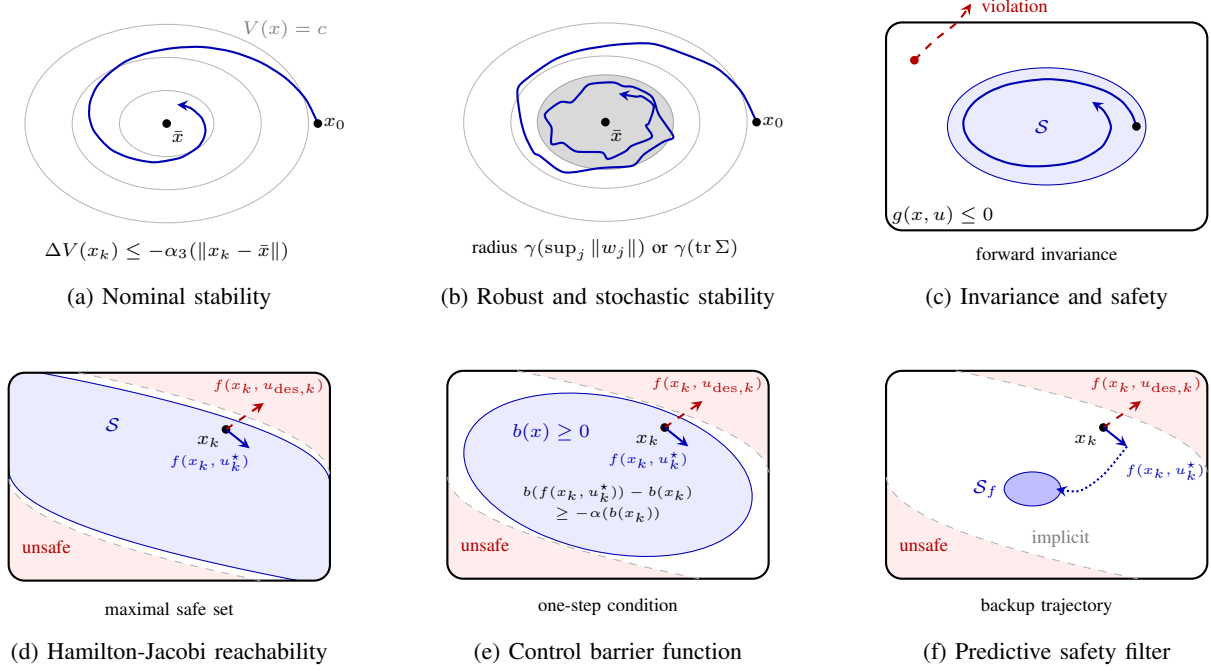


Fig. 3: Illustration of the stability and safety notions of this section. (a) Nominal stability: a Lyapunov function V decreases along closed-loop trajectories (level sets in gray) and the state converges to the equilibrium $\bar{x}$. (b) Robust and stochastic stability: under disturbances w , the state converges to a neighbourhood of $\bar{x}$ (shaded), whose size depends on the disturbance bound or the noise covariance. (c) Safety: constraint satisfaction at one time instant does not imply safety (red dashed); safety is guaranteed by an invariant set S contained in the constraints. (d)–(f) Safety filters: the desired input $u_{\text{des},k}$ would leave the safe set and is modified to u_k^* ; the unsafe states are shaded red (edge dashed). HJ reachability computes the maximal safe set S offline, the largest invariant set within the constraints. A CBF certifies invariance of $\{b(x) \geq 0\}$ by the one-step condition on $b(x_{k+1})$. A PSF does not compute the safe set but certifies safety by a backup trajectory (dotted) into a smaller terminal set S_f .