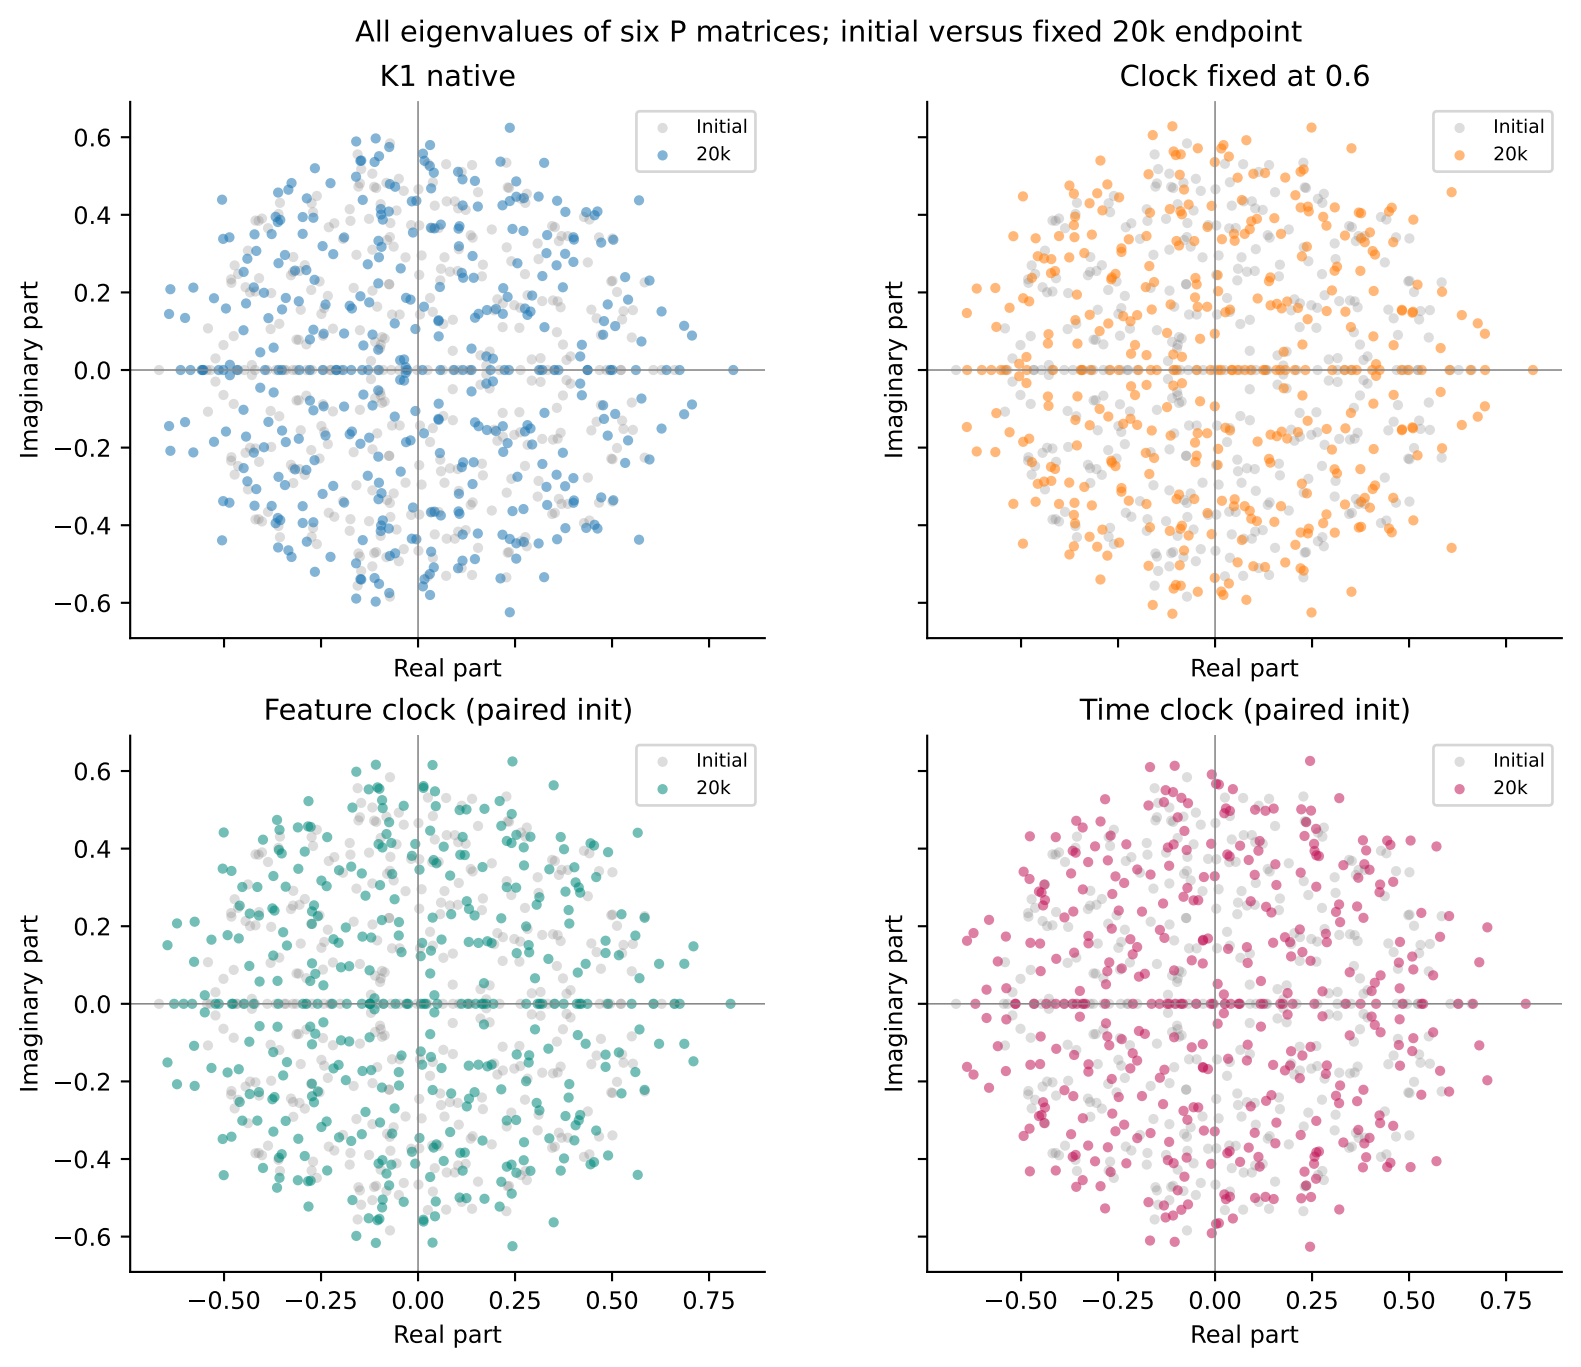

All eigenvalues of six P matrices; initial versus fixed 20k endpoint
K1 native
Clock fixed at 0.6
Feature clock (paired init)
Time clock (paired init)
Initial
20k
Imaginary part
Real part
0.6
0.4
0.2
0.0
−0.2
−0.4
−0.6
−0.50
−0.25
0.00
0.25
0.50
0.75