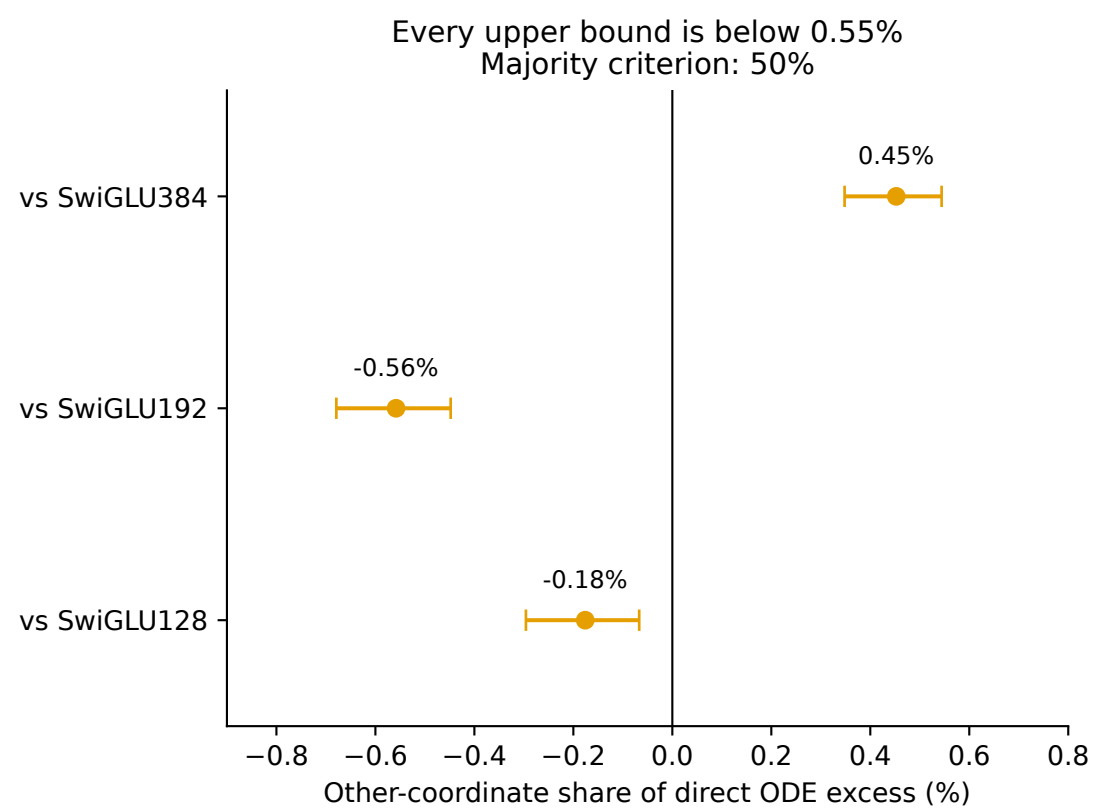

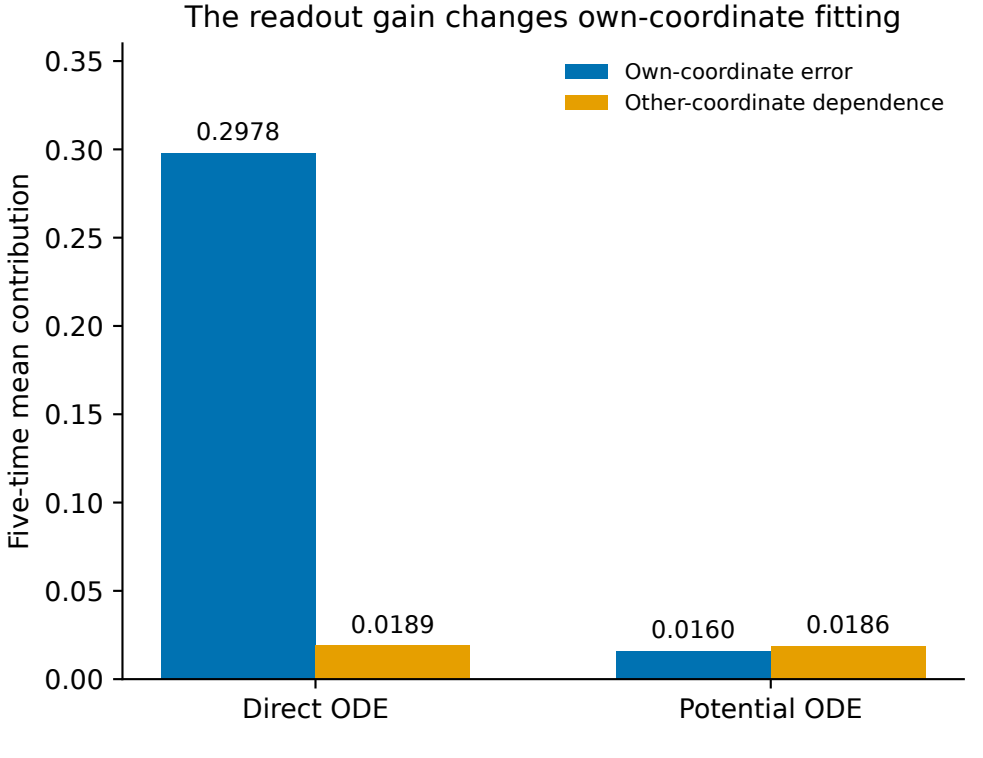

4096 independent redraw pairs, reused across all models and five times. Intervals describe probe sampling, not training-run variation.