


João Paulo Lorena - 2DSM

Criação e Inserção Inicial

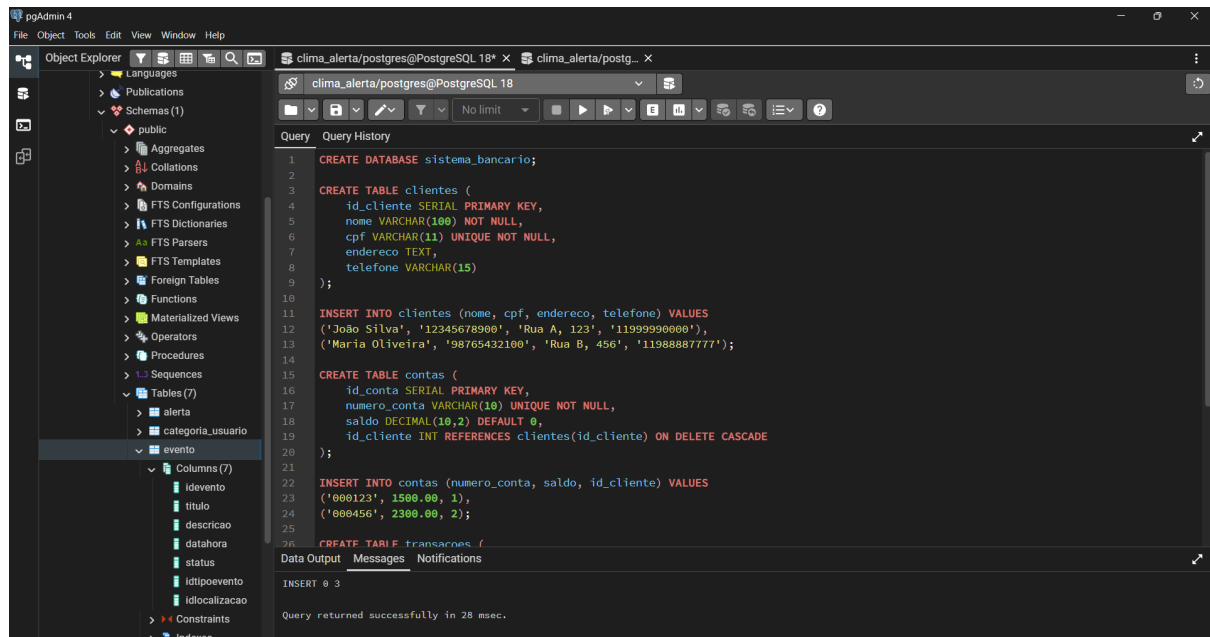


```
1 CREATE DATABASE sistema_bancario;
2
3 CREATE TABLE clientes (
4     id_cliente SERIAL PRIMARY KEY,
5     nome VARCHAR(100) NOT NULL,
6     cpf VARCHAR(11) UNIQUE NOT NULL,
7     endereco TEXT,
8     telefone VARCHAR(15)
9 );
10
11 INSERT INTO clientes (nome, cpf, endereco, telefone) VALUES
12 ('João Silva', '12345678900', 'Rua A, 123', '11999990000'),
13 ('Maria Oliveira', '98765432100', 'Rua B, 456', '11988887777');
14
15 CREATE TABLE contas (
16     id_conta SERIAL PRIMARY KEY,
17     numero_conta VARCHAR(10) UNIQUE NOT NULL,
18     saldo DECIMAL(10,2) DEFAULT 0,
19     id_cliente INT REFERENCES clientes(id_cliente) ON DELETE CASCADE
20 );
21
22 INSERT INTO contas (numero_conta, saldo, id_cliente) VALUES
23 ('000123', 1500.00, 1),
24 ('000456', 2300.00, 2);
25
26 CREATE TABLE transacoes (
27     id_transacao SERIAL PRIMARY KEY,
28     id_conta INT REFERENCES contas(id_conta) ON DELETE CASCADE,
29     tipo VARCHAR(15) CHECK (tipo IN ('Depósito', 'Saque', 'Transferência')),
30     valor DECIMAL(10,2) NOT NULL CHECK (valor > 0),
31     data_transacao TIMESTAMP DEFAULT CURRENT_TIMESTAMP,
32     destino_transferencia INT REFERENCES contas(id_conta)
33 );
34
35 INSERT INTO transacoes (id_conta, tipo, valor, destino_transferencia) VALUES
36 (1, 'Depósito', 500.00, NULL),
37 (2, 'Saque', 200.00, NULL),
38 (1, 'Transferência', 300.00, 2);
39
```

Data Output Messages Notifications

INSERT 0 3

Query returned successfully in 28 msec.

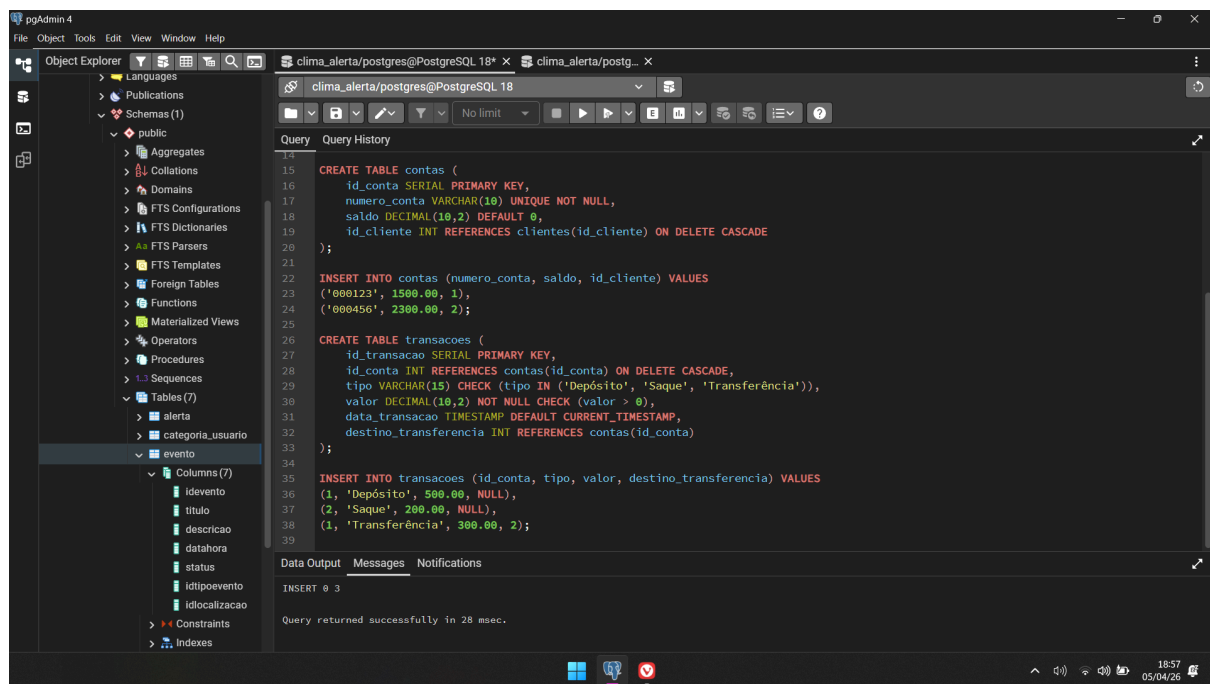

```
14 CREATE TABLE transacoes (
15     id_transacao SERIAL PRIMARY KEY,
16     id_conta INT REFERENCES contas(id_conta) ON DELETE CASCADE,
17     tipo VARCHAR(15) CHECK (tipo IN ('Depósito', 'Saque', 'Transferência')),
18     valor DECIMAL(10,2) NOT NULL CHECK (valor > 0),
19     data_transacao TIMESTAMP DEFAULT CURRENT_TIMESTAMP,
20     destino_transferencia INT REFERENCES contas(id_conta)
21 );
22
23 INSERT INTO transacoes (id_conta, tipo, valor, destino_transferencia) VALUES
24 (1, 'Depósito', 500.00, NULL),
25 (2, 'Saque', 200.00, NULL),
26 (1, 'Transferência', 300.00, 2);
27
28
```

Data Output Messages Notifications

INSERT 0 3

Query returned successfully in 28 msec.

Consulta e inserts

The screenshot displays the pgAdmin 4 interface with the following components:

- Object Explorer:** Shows the database structure under 'clima_alerta/postgres@PostgreSQL 18'. The 'eventos' table is selected, showing columns: idevento, titulo, descricao, datahora, status, idtipoevento, and idlocalizacao.
- Query Editor:** Contains the following SQL script:

```
1 SELECT * FROM clientes;
2
3 SELECT c.nome, ct.numero_conta, ct.saldo
4 FROM clientes c
5 INNER JOIN contas ct ON c.id_cliente = ct.id_cliente;
6
7 INSERT INTO clientes (nome, cpf, endereco, telefone)
8 VALUES ('João Paulo', '11122233344', 'Jacareí, SP', '12999999999');
9
10 INSERT INTO contas (numero_conta, saldo, id_cliente)
11 VALUES ('000789', 500.00, 3);
12
13 INSERT INTO transacoes (id_conta, tipo, valor, destino_transferencia)
14 VALUES (1, 'Transferência', 100.00, 3);
15
16 SELECT numero_conta, saldo FROM contas;
17
```
- Data Output:** Shows the results of the last query (SELECT numero_conta, saldo FROM contas):

numero_conta	saldo
000123	1500.00
000456	2300.00
000789	500.00