


Transformations

Rigid body transformation

- Object transformed by transforming boundary points

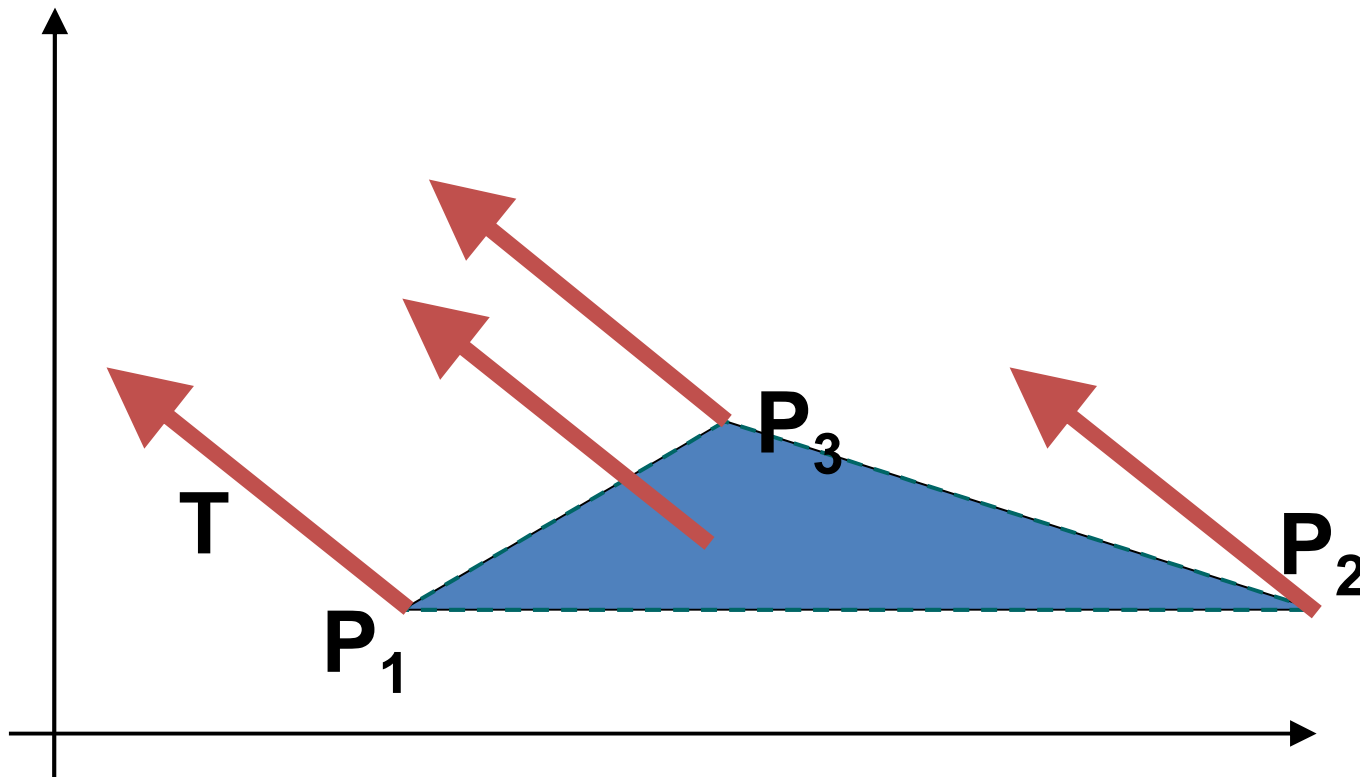


Translation

- Translating a point from position P to position P' with translation vector T

$$P = \begin{pmatrix} x \\ y \end{pmatrix} \quad P' = \begin{pmatrix} x' \\ y' \end{pmatrix} \quad T = \begin{pmatrix} t_x \\ t_y \end{pmatrix}$$

$$x' = x + t_x \quad y' = y + t_y$$

$$P' = P + T$$

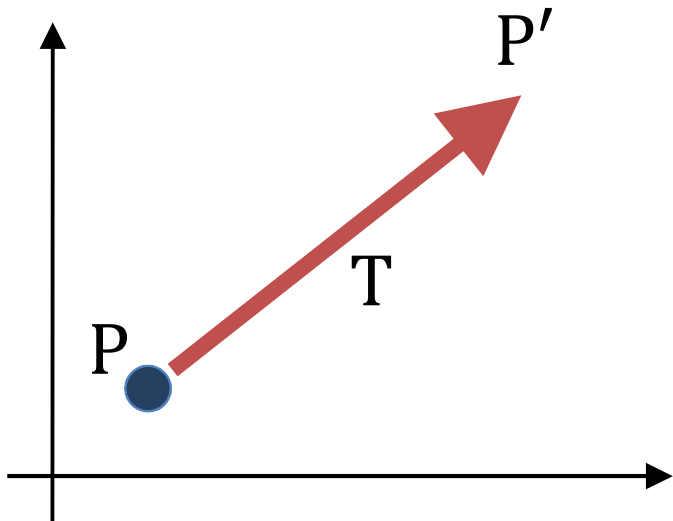

Translation 3D

- For convenience we usually describe objects in relation to their own coordinate system
- We can *translate* or move points to a new position by adding offsets to their coordinates:


$$\begin{pmatrix} x \\ y \\ z \end{pmatrix} = \begin{pmatrix} x' \\ y' \\ z' \end{pmatrix} + \begin{pmatrix} t_x \\ t_y \\ t_z \end{pmatrix}$$

- Note that this translates all points uniformly

Scaling





$$x' = x \cdot s_x, \quad y' = y \cdot s_y$$

example: a line scaled using $s_x=s_y=0.33$ is reduced in size and moved closer to the coordinate origin

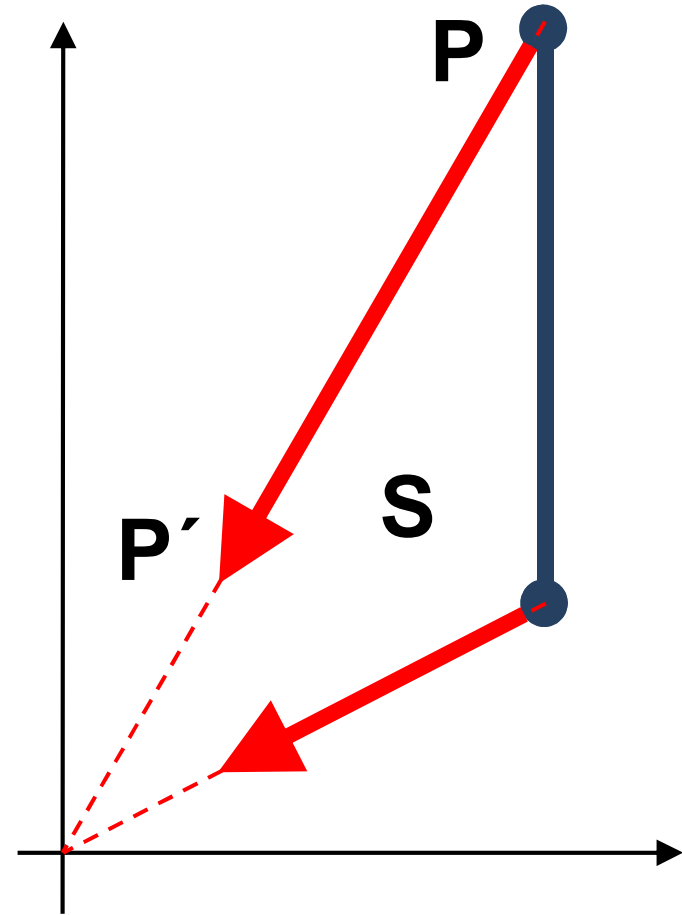


Scaling

- Uniform scaling: $S_x = S_y$

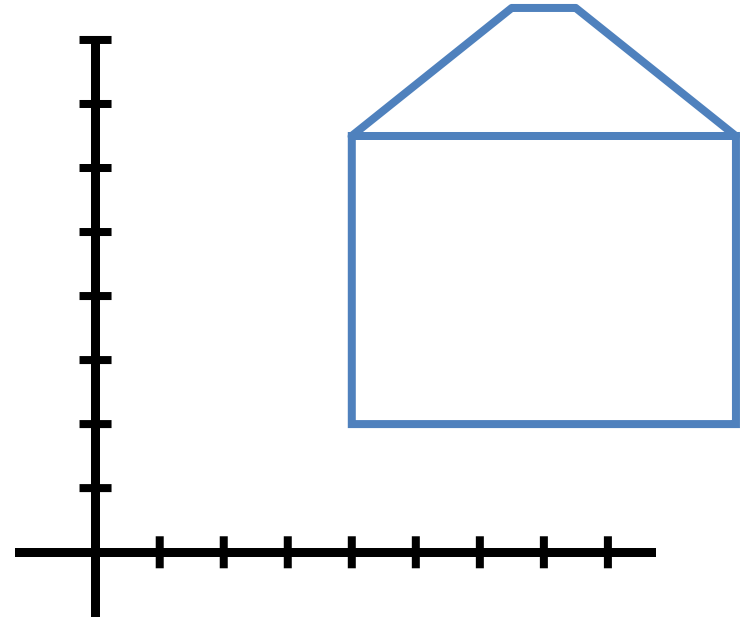
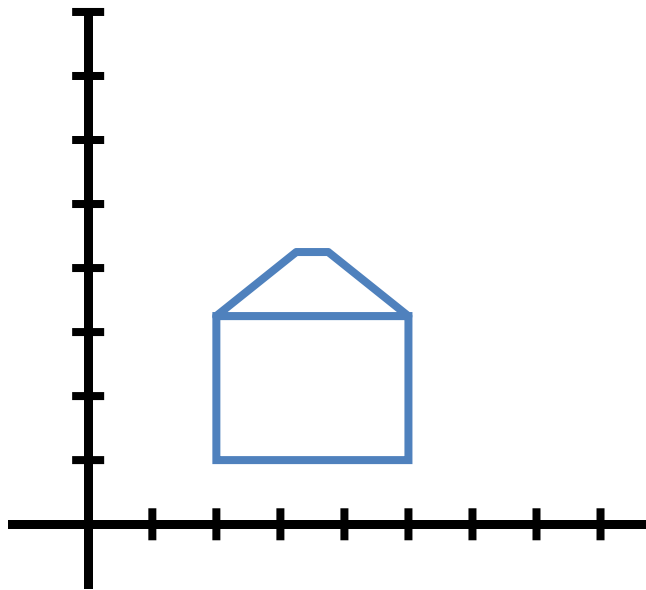
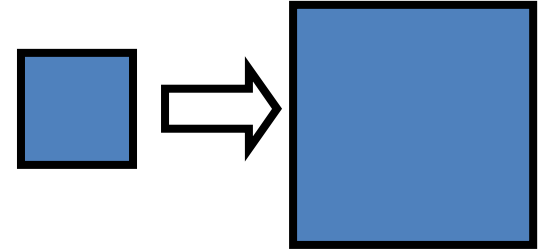


Scaling


- Uniform scaling: $S_x = S_y$

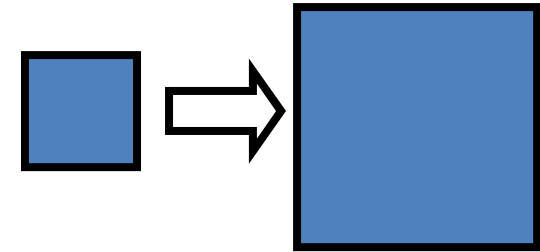

- Differential scaling: $S_x \neq S_y$

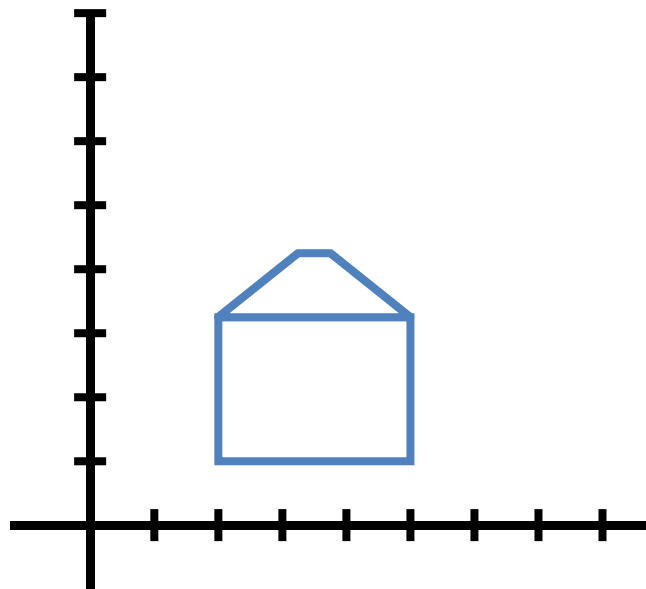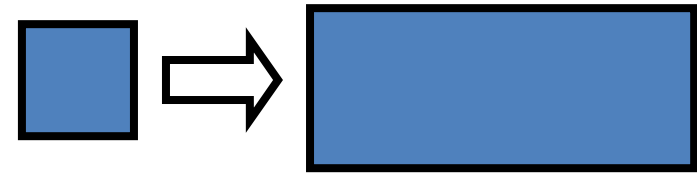


$X \times 2,$
 $Y \times 0.5$

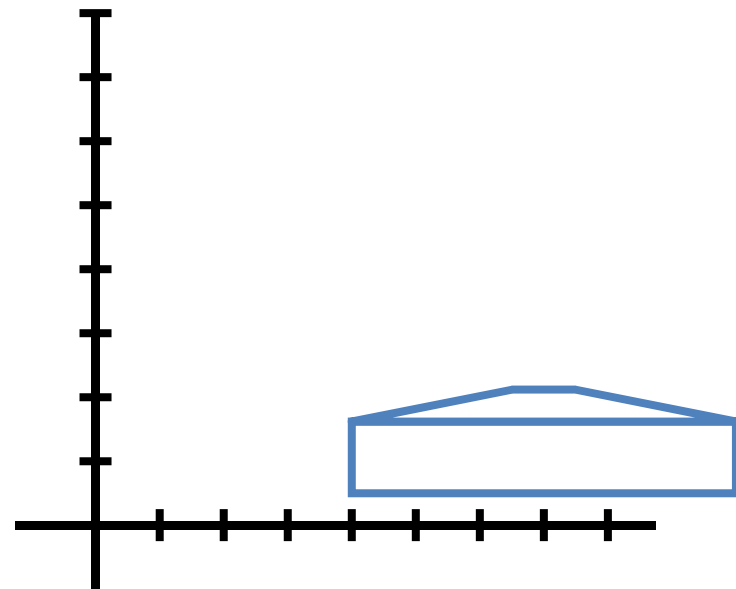


Scaling


- uniform scaling: $S_x = S_y$

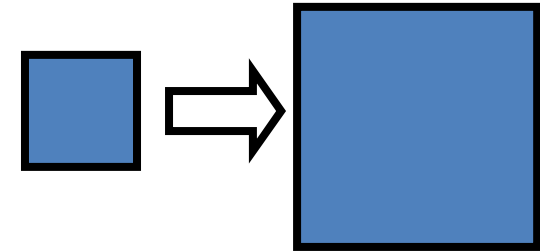

- differential scaling: $S_x \neq S_y$

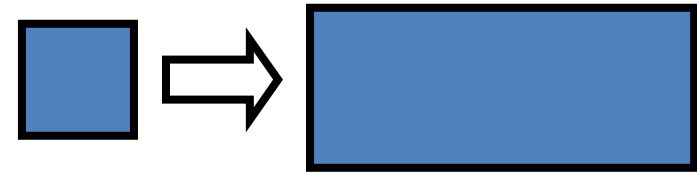


- fixed point:

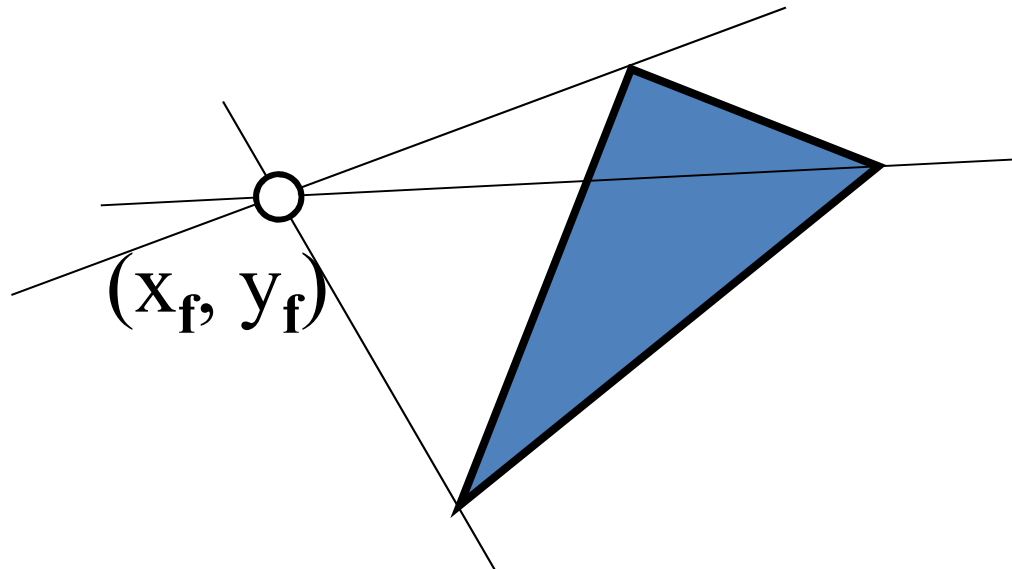

Rotation

- Rotation of an object by an angle θ around the origin

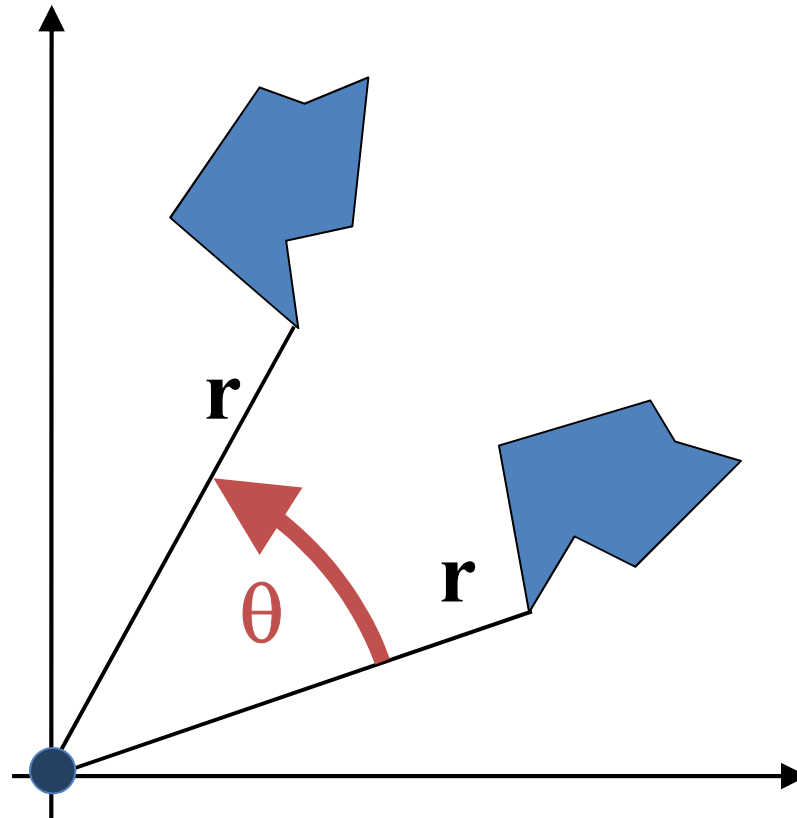


Rotation

- Positive angle \Rightarrow ccw rotation

$$x = r \cdot \cos \phi \quad y = r \cdot \sin \phi$$

$$\begin{aligned} x' &= r \cdot \cos(\phi + \theta) \\ &= \underline{r \cdot \cos \phi} \cdot \cos \theta - \underline{r \cdot \sin \phi} \cdot \sin \theta \\ &= \underline{x} \cdot \cos \theta - \underline{y} \cdot \sin \theta \end{aligned}$$

$$\begin{aligned} y' &= r \cdot \sin(\phi + \theta) \\ &= \underline{r \cdot \cos \phi} \cdot \sin \theta + \underline{r \cdot \sin \phi} \cdot \cos \theta \end{aligned}$$


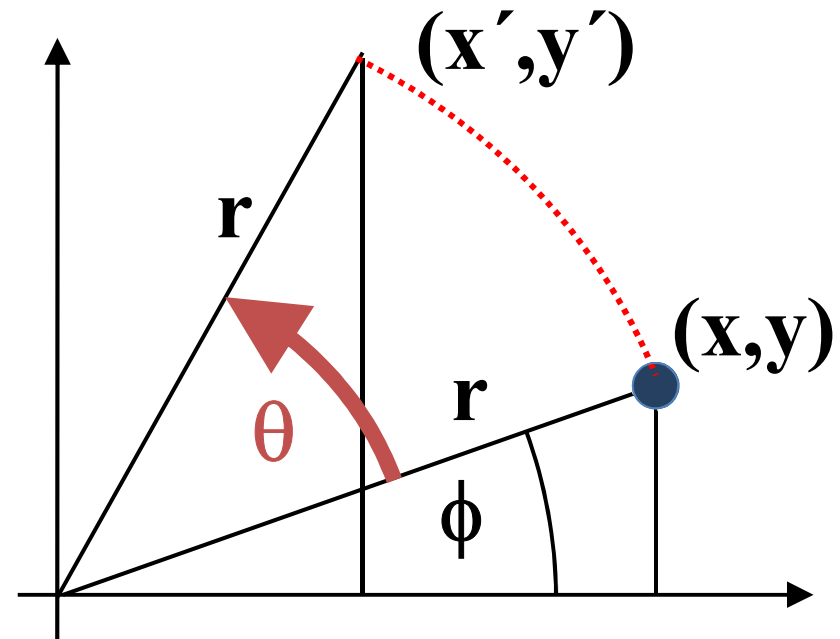


$$\begin{aligned} x' &= x \cdot \cos \theta - y \cdot \sin \theta \\ y' &= x \cdot \sin \theta + y \cdot \cos \theta \end{aligned}$$

Transformation Matrices


Why Matrices?

- All transformations representable by a matrix multiplication
 - Uniform way of representing transformations
 - Matrix multiplications are **associative**
 - $(M_1 \cdot M_2) \cdot M_3 = M_1 \cdot (M_2 \cdot M_3)$
 - Composite Transformations can be premultiplied
 - Not **commutative** $M_1 \cdot M_2 \neq M_2 \cdot M_1$ which is also true for transformations

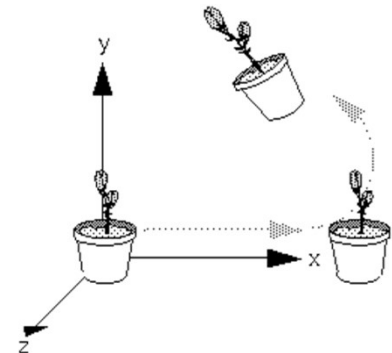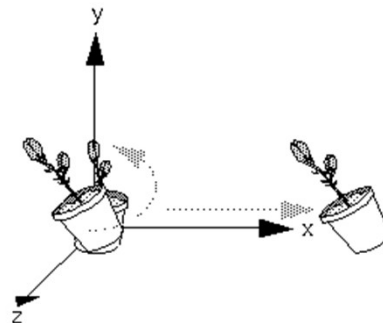


Transformation Order

- Order matters

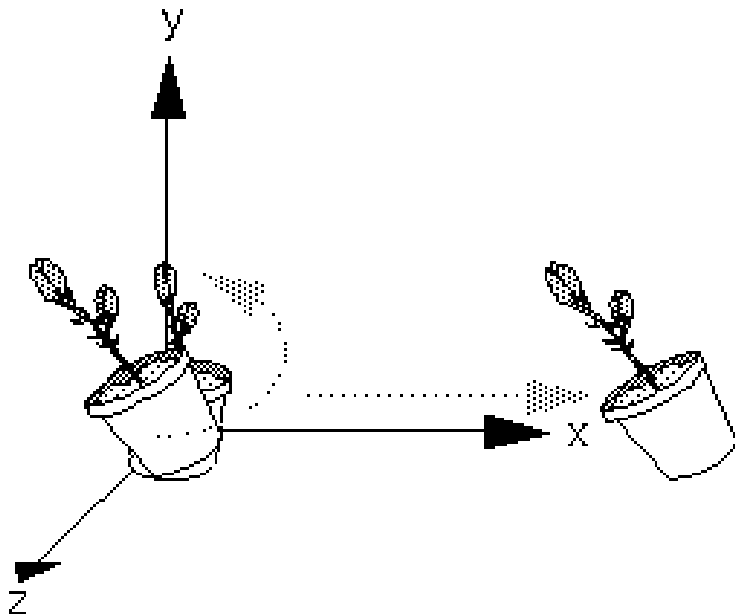

$\text{Trans} * \text{Rot} * v$

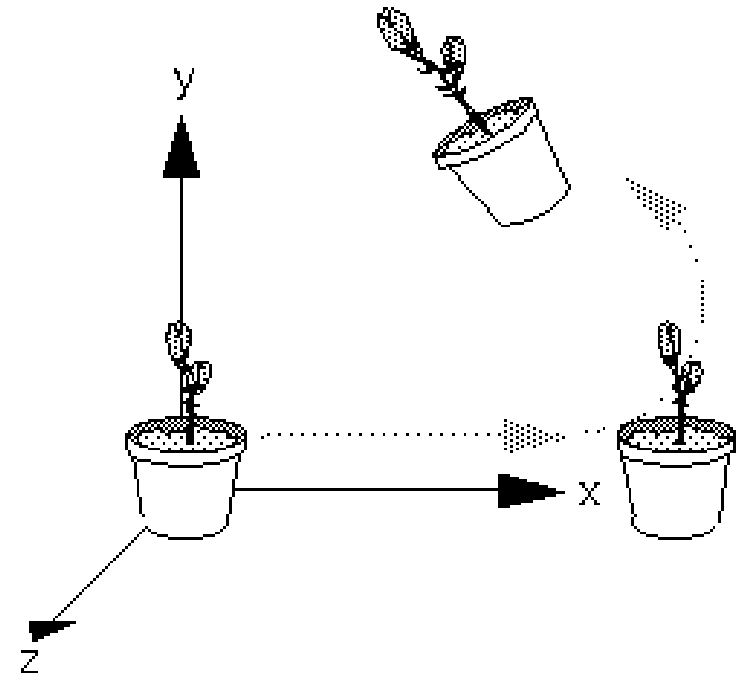

$\text{Rot} * \text{Trans} * v$

Scaling 3D

- Scaling operation

$$\begin{pmatrix} x' \\ y' \\ z' \end{pmatrix} = \begin{pmatrix} s_x x \\ s_y y \\ s_z z \end{pmatrix}$$

- Matrix form

$$\begin{pmatrix} x' \\ y' \\ z' \end{pmatrix} = \underbrace{\begin{pmatrix} s_x & 0 & 0 \\ 0 & s_y & 0 \\ 0 & 0 & s_z \end{pmatrix}}_{\text{scaling matrix}} \begin{pmatrix} x \\ y \\ z \end{pmatrix}$$

2-D Rotation

- Rotation operation

$$x' = x \cdot \cos \theta - y \cdot \sin \theta$$

$$y' = x \cdot \sin \theta + y \cdot \cos \theta$$

- Matrix form

$$\begin{pmatrix} x' \\ y' \end{pmatrix} = \begin{pmatrix} \cos \theta & -\sin \theta \\ \sin \theta & \cos \theta \end{pmatrix} \begin{pmatrix} x \\ y \end{pmatrix}$$

- 3-D is more complicated
 - Need to specify an
 - Simple cases: rotation about X, Y, Z axes

3-D Rotation

- *What does the 3-D rotation matrix look like for a rotation about the Z-axis?*
 - Build it coordinate-by-coordinate

$$\begin{bmatrix} x' \\ y' \\ z' \end{bmatrix} = \begin{bmatrix} \cos(\theta) & -\sin(\theta) & 0 \\ \sin(\theta) & \cos(\theta) & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \end{bmatrix}$$

3-D Rotation

- *What does the 3-D rotation matrix look like for a rotation about the Y-axis?*
 - Build it coordinate-by-coordinate

$$\begin{bmatrix} x' \\ y' \\ z' \end{bmatrix} = \begin{bmatrix} \cos(\theta) & 0 & \sin(\theta) \\ 0 & 1 & 0 \\ -\sin(\theta) & 0 & \cos(\theta) \end{bmatrix} \begin{bmatrix} x \\ y \\ z \end{bmatrix}$$

3-D Rotation

- *What does the 3-D rotation matrix look like for a rotation about the X-axis?*
 - Build it coordinate-by-coordinate

$$\begin{bmatrix} x' \\ y' \\ z' \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos(\theta) & -\sin(\theta) \\ 0 & \sin(\theta) & \cos(\theta) \end{bmatrix} \begin{bmatrix} x \\ y \\ z \end{bmatrix}$$

Rotation Matrices

- Remember basis!
- What does a z-rotation by 0° , 90° do to the basis?
(draw transformation of basis vectors)

$$\begin{bmatrix} x' \\ y' \\ z' \end{bmatrix} = \begin{bmatrix} \cos(\theta) & -\sin(\theta) & 0 \\ \sin(\theta) & \cos(\theta) & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \end{bmatrix}$$

Rotation Matrices

- Rotation matrix is **orthogonal**
 - Columns/rows linearly independent
 - Columns/rows sum to 1
- The inverse of an orthogonal matrix is just its transpose:

$$\begin{bmatrix} a & b & c \\ d & e & f \\ h & i & j \end{bmatrix}^{-1} = \begin{bmatrix} a & b & c \\ d & e & f \\ h & i & j \end{bmatrix}^T = \begin{bmatrix} a & d & h \\ b & e & i \\ c & f & j \end{bmatrix}$$

Translation Matrices?

- But how to represent translation as a matrix?
- Answer: with **homogeneous coordinates**

Homogeneous Coordinates

Homogeneous Coordinates

- *Homogeneous coordinates*: represent coordinates in 3 dimensions with a 4-vector
- Points: Directions:

$$(x, y, z) = \begin{bmatrix} x / w \\ y / w \\ z / w \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

$$(x, y, z) = \begin{bmatrix} x \\ y \\ z \\ 0 \end{bmatrix}$$

Homogeneous Coordinates

- *How can we represent translation as a 4x4 matrix?*
- A: Using the rightmost column:

$$\mathbf{T} = \begin{bmatrix} 1 & 0 & 0 & T_x \\ 0 & 1 & 0 & T_y \\ 0 & 0 & 1 & T_z \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

Homogeneous Coordinates

- Homogeneous coordinates seem unintuitive, but they make graphics operations much easier
- Our transformation matrices are now 4x4:

$$\mathbf{R}_x = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos(\theta) & -\sin(\theta) & 0 \\ 0 & \sin(\theta) & \cos(\theta) & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

Homogeneous Coordinates

- Homogeneous coordinates seem unintuitive, but they make graphics operations much easier
- Our transformation matrices are now 4x4:

$$\mathbf{R}_y = \begin{bmatrix} \cos(\theta) & 0 & \sin(\theta) & 0 \\ 0 & 1 & 0 & 0 \\ -\sin(\theta) & 0 & \cos(\theta) & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

Homogeneous Coordinates

- Homogeneous coordinates seem unintuitive, but they make graphics operations much easier
- Our transformation matrices are now 4x4:

$$\mathbf{R}_z = \begin{bmatrix} \cos(\theta) & -\sin(\theta) & 0 & 0 \\ \sin(\theta) & \cos(\theta) & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

Homogeneous Coordinates

- Homogeneous coordinates seem unintuitive, but they make graphics operations much easier
- Our transformation matrices are now 4x4:

$$\mathbf{S} = \begin{bmatrix} S_x & 0 & 0 & 0 \\ 0 & S_y & 0 & 0 \\ 0 & 0 & S_z & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

Inverse Matrices

- translation

$$T^{-1}(t_x, t_y) = T(-t_x, -t_y)$$

- rotation

$$R^{-1}(\theta) = R(-\theta)$$

- scaling

$$S^{-1}(s_x, s_y) = S(1/s_x, 1/s_y)$$

Composite Transformations (1)

n transformations are applied after each other on a point P, these transformations are represented by matrices M_1, M_2, \dots, M_n .

$$P' = M_1 \times P$$

$$P'' = M_2 \times P'$$


...

$$P^{(n)} = M_n \times P^{(n-1)}$$

shorter: $P^{(n)} = (M_n \times \dots (M_2 \times (M_1 \times P)) \dots)$

Transformations are not commutative!

- Reversing the order in which a sequence of transformations is performed may affect the transformed position of an object.
- In (a), an object is first translated, then rotated. In (b), the object is rotated first, then translated.

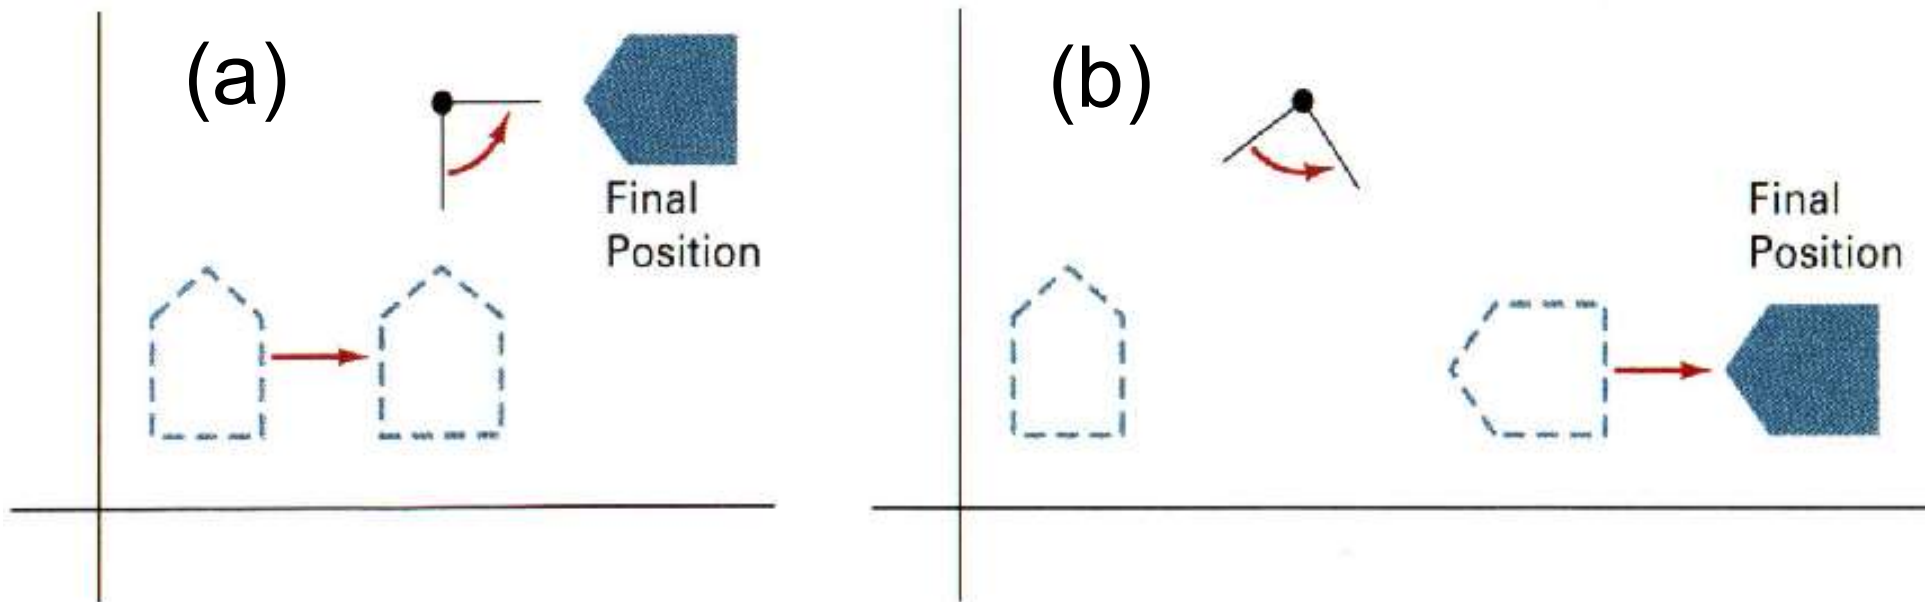

Translation Matrices

- Now that we can represent translation as a matrix, we can composite it with other transformations
- Ex: rotate 90° about **X**, then 10 units down **Z**:

$$\begin{bmatrix} x' \\ y' \\ z' \\ w' \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 10 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos(90^\circ) & -\sin(90^\circ) & 0 \\ 0 & \sin(90^\circ) & \cos(90^\circ) & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Translation Matrices

- Now that we can represent translation as a matrix, we can composite it with other transformations
- Ex: rotate 90° about **X**, then 10 units down **Z**:

$$\begin{bmatrix} x' \\ y' \\ z' \\ w' \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 10 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & -1 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Translation Matrices

- Now that we can represent translation as a matrix, we can composite it with other transformations
- Ex: rotate 90° about **X**, then 10 units down **Z**:

$$\begin{bmatrix} x' \\ y' \\ z' \\ w' \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & -1 & 0 \\ 0 & 1 & 0 & 10 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$$

Translation Matrices

- Now that we can represent translation as a matrix, we can composite it with other transformations
- Ex: rotate 90° about **X**, then 10 units down **Z**:

$$\begin{bmatrix} x' \\ y' \\ z' \\ w' \end{bmatrix} = \begin{bmatrix} x \\ -z \\ y + 10 \\ w \end{bmatrix}$$