



Escuela de Ingeniería en Computación  
Investigación de Operaciones

Rutas Óptimas  
Algoritmo de Floyd

Grupo 40  
Profesor: Francisco Torres Rojas

Carmen Hidalgo Paz  
Carné: 2020030538

Melissa Carvajal Charpentier  
Carné: 2022197088

Josué Soto González  
Carné: 2023207915

12 de Septiembre del 2025

## 1 Floyd's Algorithm


This program consists of Floyd's algorithm to obtain the shortest path between any pair of nodes in a graph with weighted distances. Floyd's algorithm compares the distance between any two given nodes and by passing through another city in between, if the result is less than the original then it chooses the shortest one. After contemplating all nodes in the graph, the graph is guaranteed to have all the shortest distances between any two nodes in the graph. These changes are recorded in another matrix called P that helps determine the shortest path between any two nodes.

## 2 Robert W. Floyd (1936–2001)



Robert Willoughby Floyd was a computer scientist that lived from 1936 to 2001. He made great advances in computer science and developed an algorithm to find the shortest paths between any two nodes for a directed graph. He was awarded a Turing Award in 1978.

### 3 Initial Graph

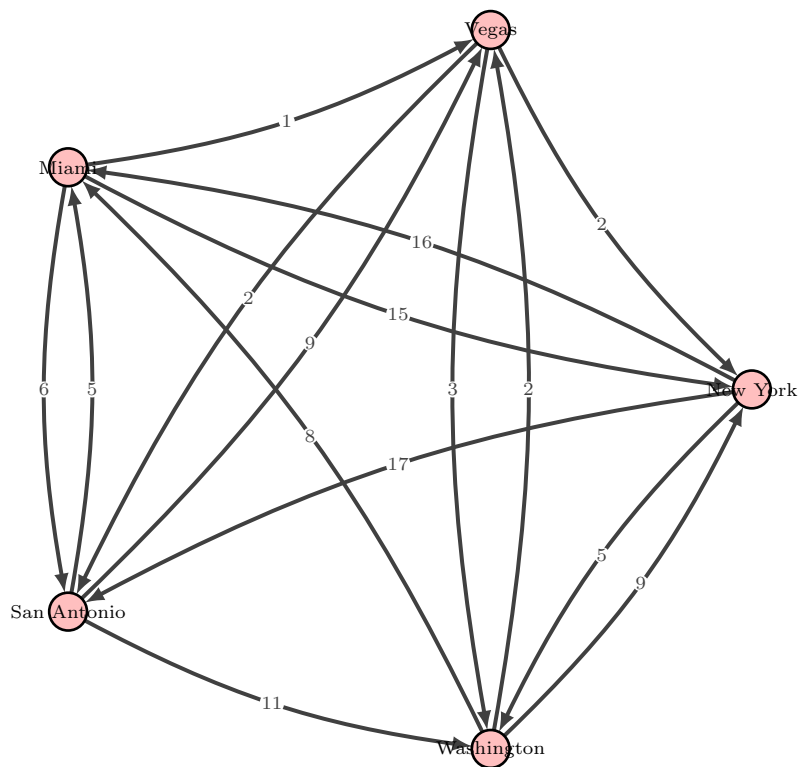

### 4 Table $D_0$

D	New York	Vegas	Miami	San Antonio	Washington
New York	0	$\infty$	16	17	5
Vegas	2	0	$\infty$	2	3
Miami	15	1	0	6	$\infty$
San Antonio	$\infty$	9	5	0	11
Washington	9	2	8	$\infty$	0

### 5 Table $P_0$

P	New York	Vegas	Miami	San Antonio	Washington
New York	0	0	0	0	0
Vegas	0	0	0	0	0
Miami	0	0	0	0	0
San Antonio	0	0	0	0	0
Washington	0	0	0	0	0

## 6 Table $D_1$

D	New York	Vegas	Miami	San Antonio	Washington
New York	0	$\infty$	16	17	5
Vegas	2	0	18	2	3
Miami	15	1	0	6	20
San Antonio	$\infty$	9	5	0	11
Washington	9	2	8	26	0

## 7 Table $P_1$

P	New York	Vegas	Miami	San Antonio	Washington
New York	0	0	0	0	0
Vegas	0	0	1	0	0
Miami	0	0	0	0	1
San Antonio	0	0	0	0	0
Washington	0	0	0	1	0

## 8 Table $D_2$

D	New York	Vegas	Miami	San Antonio	Washington
New York	0	$\infty$	16	17	5
Vegas	2	0	18	2	3
Miami	3	1	0	3	4
San Antonio	11	9	5	0	11
Washington	4	2	8	4	0

## 9 Table $P_2$

P	New York	Vegas	Miami	San Antonio	Washington
New York	0	0	0	0	0
Vegas	0	0	1	0	0
Miami	2	0	0	2	2
San Antonio	2	0	0	0	0
Washington	2	0	0	2	0

### 10 Table $D_3$

D	New York	Vegas	Miami	San Antonio	Washington
New York	0	17	16	17	5
Vegas	2	0	18	2	3
Miami	3	1	0	3	4
San Antonio	8	6	5	0	9
Washington	4	2	8	4	0

### 11 Table $P_3$

P	New York	Vegas	Miami	San Antonio	Washington
New York	0	3	0	0	0
Vegas	0	0	1	0	0
Miami	2	0	0	2	2
San Antonio	3	3	0	0	3
Washington	2	0	0	2	0

### 12 Table $D_4$

D	New York	Vegas	Miami	San Antonio	Washington
New York	0	17	16	17	5
Vegas	2	0	7	2	3
Miami	3	1	0	3	4
San Antonio	8	6	5	0	9
Washington	4	2	8	4	0

### 13 Table $P_4$

P	New York	Vegas	Miami	San Antonio	Washington
New York	0	3	0	0	0
Vegas	0	0	4	0	0
Miami	2	0	0	2	2
San Antonio	3	3	0	0	3
Washington	2	0	0	2	0


#### 14 Table $D_5$

D	New York	Vegas	Miami	San Antonio	Washington
New York	0	7	13	9	5
Vegas	2	0	7	2	3
Miami	3	1	0	3	4
San Antonio	8	6	5	0	9
Washington	4	2	8	4	0

#### 15 Table $P_5$


P	New York	Vegas	Miami	San Antonio	Washington
New York	0	5	5	5	0
Vegas	0	0	4	0	0
Miami	2	0	0	2	2
San Antonio	3	3	0	0	3
Washington	2	0	0	2	0

#### Current city: New York

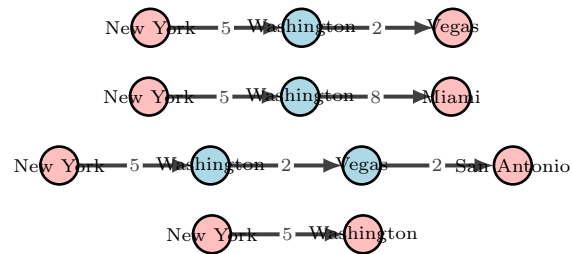


#### Current city: Vegas






Current city: Miami

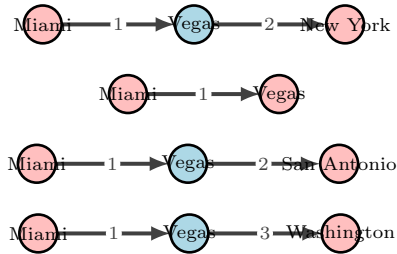

Current city: San Antonio

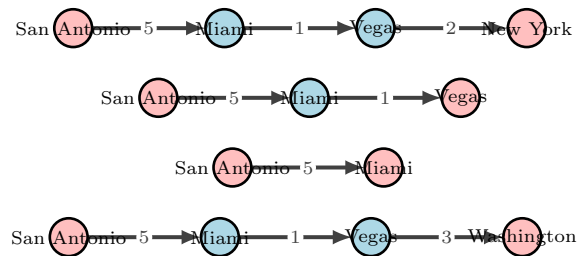

Current city: Washington

