Each customer can have multiple
consessions.

Customer

PK	customer_id	SERIAL
	first_name	VARCHAR(50)
	last_name	VARCHAR(50)
	address	VARCHAR(50)
	billing_info	VARCHAR(50)

Consessions

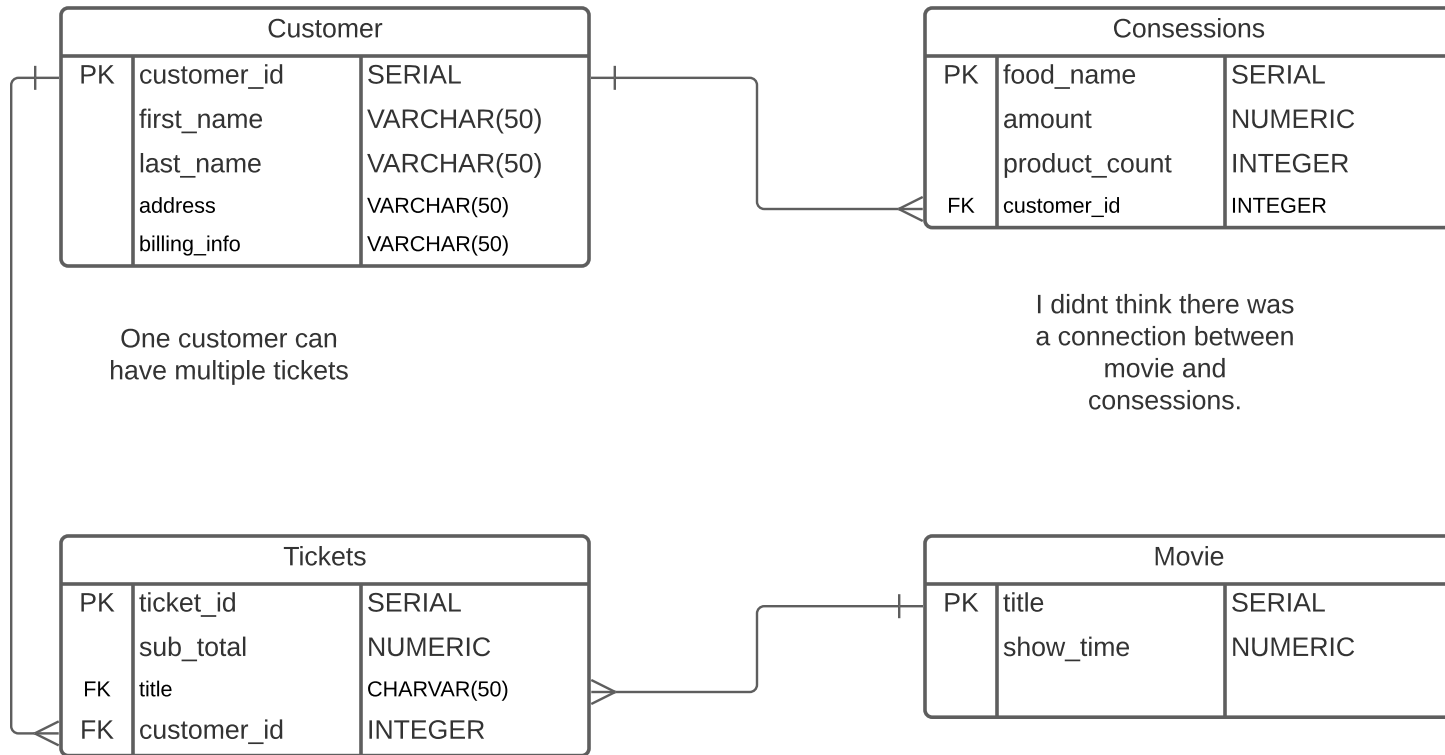| PK	food_name	SERIAL
	amount	NUMERIC
	product_count	INTEGER
FK	customer_id	INTEGER

One customer can
have multiple tickets

I didnt think there was
a connection between
movie and
consessions.

Tickets

PK	ticket_id	SERIAL
	sub_total	NUMERIC
FK	title	CHARVAR(50)
FK	customer_id	INTEGER

Movie

PK	title	SERIAL
	show_time	NUMERIC

Each movie can have
multiple tickets.