


Optimization in Relating to Problem-Solving

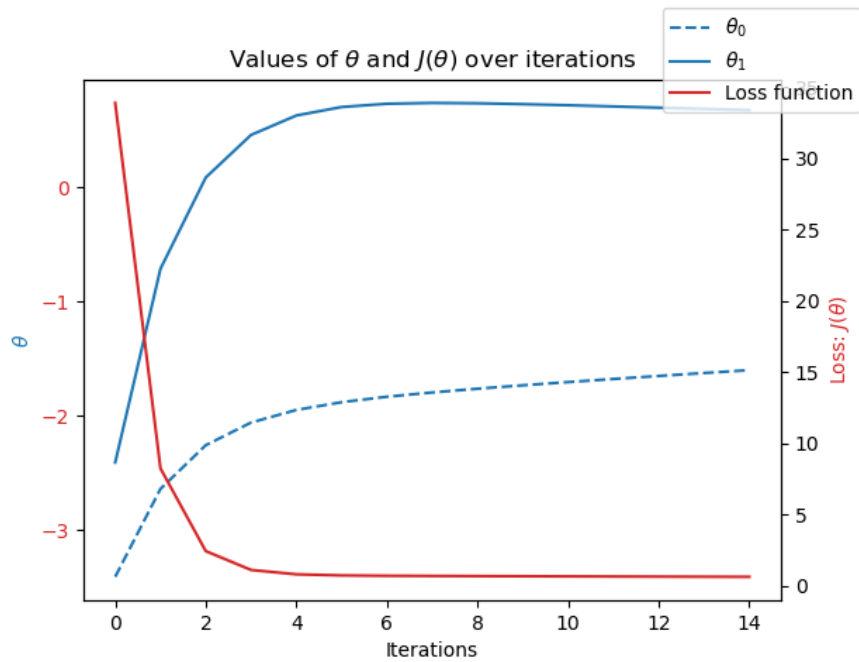

Station: Madrid

Year: 1973


Iterations = 15

Theta0 = -5


Theta 1 = -6

Steps = 0.1

Loss function for different thetas

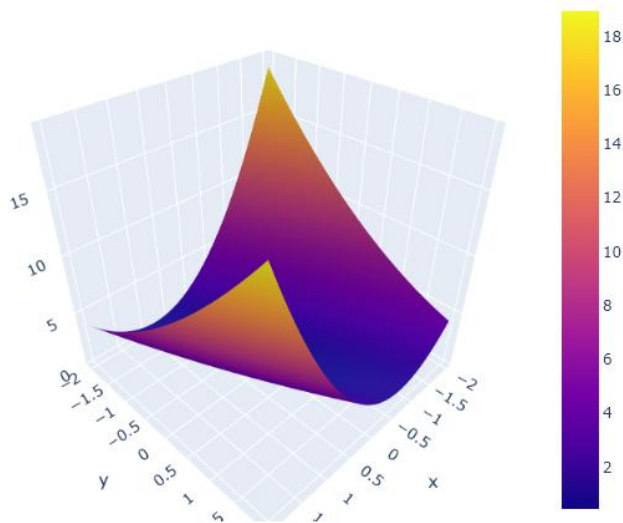

Machine Learning
Achievement 1
Exercise 3

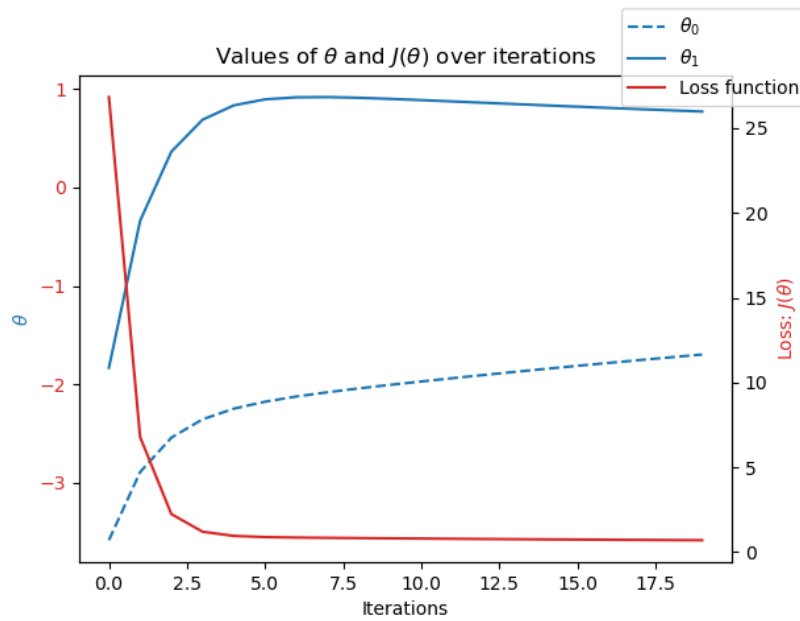

Station: Gdansk

Year: 1997


Iterations = 20

Theta0 = -5

Theta 1 = -5

Steps = 0.1


Loss function for different thetas

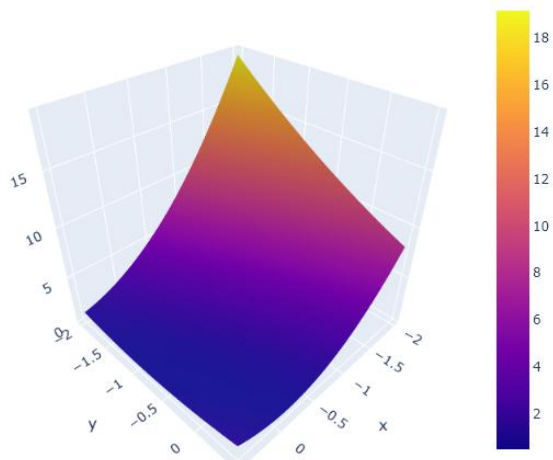

Machine Learning


Achievement 1

Exercise 3

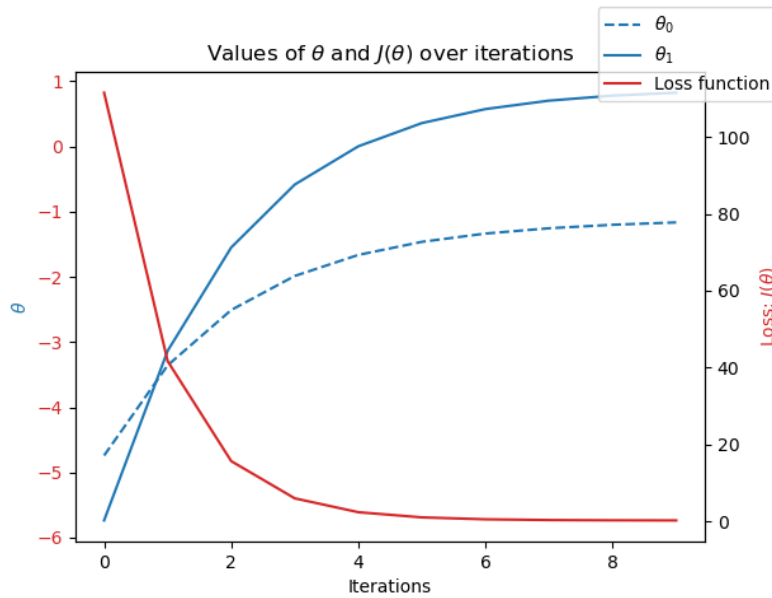

Station: Oslo
 Year: 2022
 Iterations = 10
 Theta0 = -7
 Theta 1 = -10
 Steps = 0.1

Loss function for different thetas

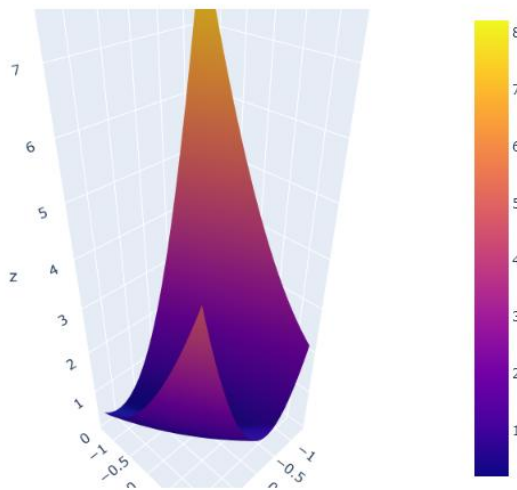

My observations between these three weather stations and their distribution varies. Studying Madrid and Gdansk there is a large difference between theta0 and theta1 with both loss functions far from crossing both theta's. However, Oslo in year 2022 shows a much closer representation of theta0 and theta1. The Loss function also crosses both thetas almost perfectly.