Query test results and filter for failing resources

Query test results and filter for failing resources with the Vanta API

Query filtered tests and failing entities

This guide will walkthrough how to query test details and failing test entities using the Vanta API.

In order to query test results and subsequent failing entities, we'll first need to obtain the test's ID. We can get this TestId by querying a list of tests and filtering by parameters like status and category. The other option is to obtain the testId from viewing the test in Vanta. Each test's ID will be located in the URL while viewing a test:

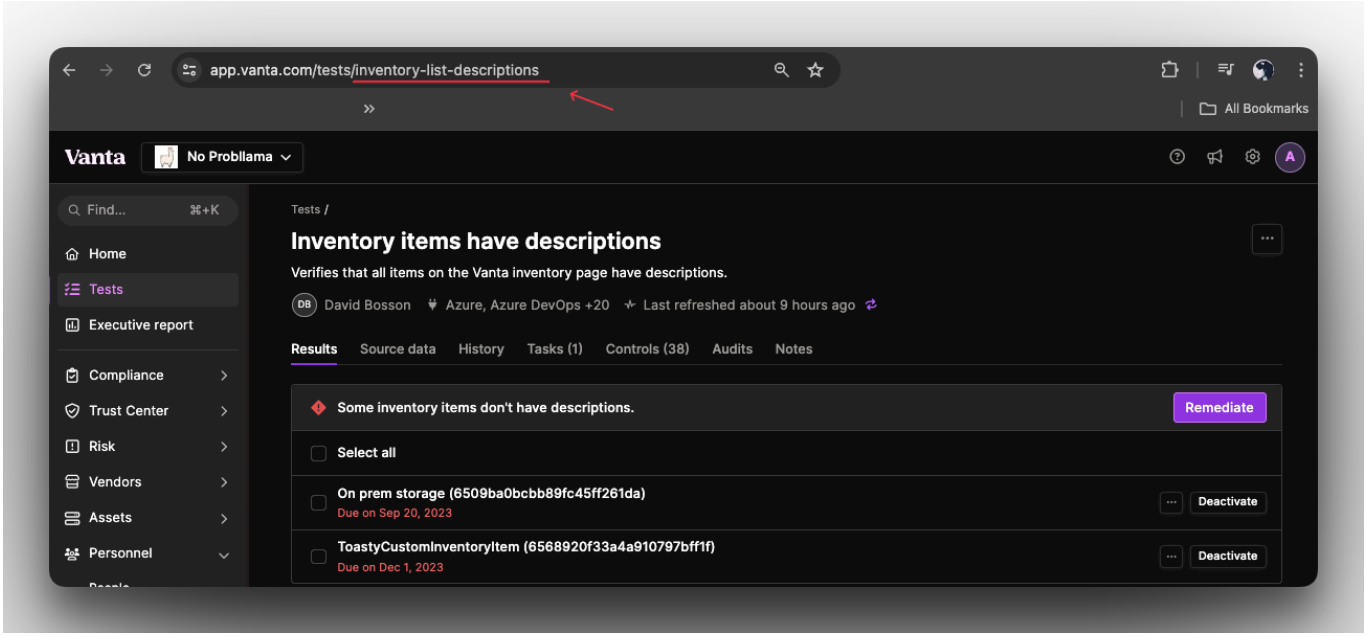

Steps:

- **GET** a list of tests, filtered by status and category.
- **GET** a list of test entities by TestId, and filter by entity status.

List Tests Endpoint - Filter by status and category

The List Tests endpoint allows us to query a list of our tests, and filter by several helpful query parameters. We'll use this endpoint to find a test we want to query failing entities on by filtering by test status and category.

Endpoint:

```
/tests
```

Query Parameters:

- **pageSize** (`<number>`): An integer value that specifies the number of resources to return per page. This parameter controls the size of each page in paginated responses.
- **pageCursor** (`<string>`): A string value used to navigate through pages of results. This parameter holds the cursor for the current page, allowing the API to fetch the next set of results.
- **statusFilter** (`ENUM<string>`): Filter tests by test status. Possible values: `OK` (Test passed), `DEACTIVATED` (Test is deactivated), `NEEDS_ATTENTION` (Test failed), `IN_PROGRESS` (Test is in progress), `INVALID` (Test is invalid), `NOT_APPLICABLE` (Test is not applicable).
- **frameworkFilter** (`<string>`): Filter tests by framework. This parameter is used to filter the tests based on a specific framework.
- **integrationFilter** (`<string>`): Filter tests by integration. This parameter is used to filter the tests based on a specific integration.
- **controlFilter** (`<string>`): Filter tests by control id. This parameter is used to filter the tests based on a specific control id.
- **ownerFilter** (`<string>`): Filter tests by owner id. This parameter is used to filter the tests based on a specific owner id.
- **categoryFilter** (`ENUM<string>`): Filter tests by category. Possible values: `['ACCOUNTS_ACCESS', 'ACCOUNT_SECURITY', 'ACCOUNT_SETUP', 'COMPUTERS', 'CUSTOM', 'DATA_STORAGE', 'EMPLOYEES', 'INFRASTRUCTURE', 'IT', 'LOGGING', 'MONITORING_ALERTS', 'PEOPLE', 'POLICIES', 'RISK_ANALYSIS', 'SOFTWARE_DEVELOPMENT', 'VENDORS', 'VULNERABILITY_MANAGEMENT']` .
- **isInRollout** (`<boolean>`): Filter tests by rollout status. A test in rollout is an upcoming test that does not have its history tracked yet.

In this request, we'll use the following parameters:

```
?pageSize=10
&statusFilter=NEEDS_ATTENTION
&categoryFilter=INFRASTRUCTURE
```

List Tests - Code Example

cURL Javascript - Fetch NodeJS - Axios Python - Requests

```
curl --location 'https://api.vanta.com/v1/tests?
pageSize=10&pageCursor=%3Cstring%3E&statusFilter=NEEDS_ATTENTION&categoryFilter=INFRASTRUCTURE'
\
--header 'Accept: application/json' \
--header 'Authorization: Bearer vat_YOUR_TOKEN'
```

List Tests - Example Response

Example Response


```
{
    "results": {
        "pageInfo": {
            "endCursor": "aXAtYWNjZXNzLXJ1bGVzLWNsb3VkZmxhcmU=",
            "hasNextPage": false,
            "hasPreviousPage": false,
            "startCursor": "aW52ZW50b3J5LWxpc3QtZGVzY3JpcHRpb25z"
        },
        "data": [
            {
                "id": "inventory-list-descriptions",
                "name": "Inventory items have descriptions",
                "lastTestRunDate": "2024-07-26T13:58:44.518Z",
                "latestFlipDate": "2023-07-31T00:17:38.481Z",
                "description": "Verifies that all items on the Vanta inventory page have
descriptions.\n",
                "failureDescription": "Some inventory items don't have descriptions.",
                "remediationDescription": "1. Go to the [Inventory list](/inventory).\n2.
Ensure that each item in the list has a description.\n\nRecommended: For your cloud
resources, we offer a bulk tag option to help manage these resources. Click [here]
(/inventory?bulk-tags=open) for further instructions on how to use tags to populate
inventory metadata.\n\n#### Remediation for Terraform\nAdd the \"VantaDescription\" tag to
your resources and set the value to a description of the resource. This information will
reflect on the [inventory page](https://app.vanta.com/inventory).\n\n```hcl\nresource
\"aws_s3_bucket\" \"data\" {\n  bucket = \"data-bucket\"\n\n  tags = {\n
VantaDescription = \"This bucket stores access logs\"\n  }\n}\n```\n\n*Note that the tag
key may be different from \"VantaDescription\" if you are utilizing [custom tags]
(https://app.vanta.com/inventory?bulk-tags=open#compute).",
                "version": {
                    "major": 5,
                    "minor": 1,
                    "_id": "66a311700b9be0c02e6206c6"
                },
                "category": "Infrastructure",
                "integrations": [
                    "aws",
                    "azure",
                    "azuredevops",
                    "gcp",
                    "addigy",
                    "bitbucket",
                    "cloudflare",
                    "datto",
                    "digitalocean",
                    "digitaloceanspaces",
                    "elastic",
                    "github",
                    "gitlab",
```

List Tests - Response Schema

Below is a bullet list explaining each property in the List Tests response body:

`results` : Contains the main result data.

- `pageInfo` : Information about pagination.
  - `endCursor` : The cursor for the end of the current page.
  - `hasNextPage` : Boolean indicating if there are more pages.
  - `hasPreviousPage` : Boolean indicating if there are previous pages.
  - `startCursor` : The cursor for the start of the current page.

`data` : An array of test objects.

- Test Object:
  - `id` : A unique identifier for the test.
  - `name` : The name of the test.
  - `lastTestRunDate` : The date and time when the test was last run.
  - `latestFlipDate` : The date and time when the test status last changed.
  - `description` : A brief description of the test.
  - `failureDescription` : A description of the test failure.
  - `remediationDescription` : Instructions on how to remediate the test failure.
  - `version` : Version information of the test.
    - `major` : Major version number.
    - `minor` : Minor version number.
    - `_id` : The unique identifier for the version.
  - `category` : The category of the test.
  - `integrations` : An array of integration identifiers associated with the test.
    - `integrationId` : The identifier for each integration.
  - `status` : The current status of the test (e.g., "NEEDS_ATTENTION").
  - `deactivatedStatusInfo` : Information about the deactivated status of the test.
    - `isDeactivated` : Boolean indicating if the test is deactivated.
    - `deactivatedReason` : The reason for deactivation (null if not deactivated).


```
                "heroku",
                "jamf",
                "jumpcloud",
                "kandji",
                "manage_engine",
                "microsoft_endpoint_manager",
                "mongodb",
                "netlify",
                "ninjaone",
                "rippling_mdm",
                "simplemdm",
                "snowflake",
                "supabase",
                "vercel",
                "workspace_one"
            ],
            "status": "NEEDS_ATTENTION",
            "deactivatedStatusInfo": {
                "isDeactivated": false,
                "deactivatedReason": null,
                "lastUpdatedDate": null
            },
            "remediationStatusInfo": {
                "status": "OVERDUE",
                "soonestRemediateByDate": "2023-09-20T15:11:59.765Z",
                "itemCount": 2
            },
            "owner": {
                "id": "62fb92241328a26f5d3fa536",
                "emailAddress": "david.bosson@vanta.com",
                "displayName": "David Bosson"
            }
        },
        {
            "id": "inventory-list-owners",
            "name": "Inventory items have active owners",
            "lastTestRunDate": "2024-07-26T23:20:42.307Z",
            "latestFlipDate": "2023-07-31T00:03:33.198Z",
            "description": "Verifies that all items on the Vanta inventory page have been assigned owners, and that these owners are still active employees.\n",
            "failureDescription": "Some inventory items don't have owners, or their owners are not active employees.",
            "remediationDescription": "### For Cloud Resources\n\nGo to the [inventory list](/inventory) and ensure that each item in the list has an owner.\n\nRecommended: We offer a collection to help manage these resources. Click [here](/inventory?bulk-tags=open) for further instructions on how to use tags to assign inventory owners.\n\n### For computers managed by the Vanta Agent\n\nEnsure that each device has an active owner. You should change device owners from the inventory page.\n\n- Click [here](/inventory?owner=NO_OWNER_ID#employee-computers-agent) to check for computers managed by the Vanta Agent without an owner.\n- Devices assigned to former employees need to be reassigned. Click [here](/inventory?owner=FORMER_EMPLOYEE_OWNERS_ID#employee-computers-agent) to check for computers managed by the Vanta Agent assigned to former employees.\n\n### For computers managed by an integrated MDM\n\nEnsure that each device has an active owner. You should change the assigned owner in the MDM platform.\n\n- Click [here](/inventory?owner=NO_OWNER_ID#employee-computers-mdm) to check for computers managed by an MDM (other
```

- `lastUpdatedDate` : The last date the deactivated status was updated.
- `remediationStatusInfo` : Information about the remediation status of the test.
- `status` : The remediation status (e.g., "OVERDUE").
- `soonestRemediateByDate` : The nearest date by which remediation is due.
- `itemCount` : The number of items that need remediation.
- `owner` : Information about the owner of the test.
- `id` : The unique identifier for the owner.
- `emailAddress` : The email address of the owner.
- `displayName` : The display name of the owner.

Get Test Entities Endpoint - Filter for failing Entities

With the Vanta Test's ID, we can query a tests entities. Filtering with the entityStatus parameter will return a list of test entities of that status on the test.

Endpoint:

`/tests/:testId/entities`

Query Parameters:

- **entityStatus** (`ENUM<string>`): The status of the entities to return. Defaults to `FAILING` . Possible values: `FAILING` , `DEACTIVATED` .
- **pageSize** (`10`): An integer value that specifies the number of resources to return per page. This parameter controls the size of each page in paginated responses.
- **pageCursor** (`<string>`): A string value used to navigate through pages of results. This parameter holds the cursor for the current page, allowing the API to fetch the next set of results.

Path Variables:

- **testId** (`<string>` - Required): The unique identifier for the test. This variable is necessary to specify which test the request is targeting.

Get Test Entities - Code Example

cURL Javascript - Fetch Node.JS - Axios Python - Requests

```
curl --location 'https://api.vanta.com/v1/tests/inventory-list-descriptions/entities?entityStatus=FAILING&pageSize=10&pageCursor=%3Cstring%3E' \
```

```
--header 'Accept: application/json' \
--header 'Authorization: Bearer vat_YOUR_TOKEN'
```

Get Test Entities - Example Response

Example Response


```
                },
                "owner": {
                    "id": "64992d9c01bf8bd6638dfe40",
                    "emailAddress": "sample+email@example.com",
                    "displayName": "Alex González"
                }

{
    "results": {
        "pageInfo": {
            "endCursor": "NjQwNWY5ZDc3MjRjZDJiMGYxMzg5MGY0",
            "hasNextPage": false,
            "hasPreviousPage": false,
            "startCursor": "NjMyYjkyZjY5NDM0ODE0YzE1NDllNjY4"
        },
        "data": [
            {
                "id": "String-632b92f69434814c1549e668",
                "entityStatus": "FAILING",
                "displayName": "632b92f69434814c1549e668",
                "responseType": "Identifier",
                "deactivatedReason": null,
                "lastUpdatedDate": "2023-06-06T17:18:18.290Z",
                "createdDate": "2022-10-24T20:55:24.408Z"
            },
            {
                "id": "String-63c58dc8d936e30c598b374e",
                "entityStatus": "FAILING",
                "displayName": "63c58dc8d936e30c598b374e",
                "responseType": "Identifier",
                "deactivatedReason": null,
                "lastUpdatedDate": "2023-06-06T17:18:18.290Z",
                "createdDate": "2023-01-16T17:47:58.948Z"
            },
            {
                "id": "String-63e68cdf5a6cd6d4e2797224",
                "entityStatus": "FAILING",
                "displayName": "63e68cdf5a6cd6d4e2797224",
                "responseType": "Identifier",
                "deactivatedReason": null,
                "lastUpdatedDate": "2023-06-06T17:18:18.290Z",
                "createdDate": "2023-02-10T18:28:52.985Z"
            },
            {
                "id": "String-6405f9d5b821bf4249c01efc",
                "entityStatus": "FAILING",
                "displayName": "6405f9d5b821bf4249c01efc",
                "responseType": "Identifier",
                "deactivatedReason": null,
                "lastUpdatedDate": "2023-06-06T17:18:18.290Z",
                "createdDate": "2023-03-06T14:34:04.808Z"
            },
```

```
    {
        "id": "String-6405f9d7724cd2b0f13890f4",
        "entityStatus": "FAILING",
        "displayName": "6405f9d7724cd2b0f13890f4",
        "responseType": "Identifier",
        "deactivatedReason": null,
        "lastUpdatedDate": "2023-06-06T17:18:18.290Z",
        "createdDate": "2023-03-06T14:34:04.808Z"
    }
]
}
```


Get Test Entities - Response Schema

Below is a bullet list explaining each property in the List Entities response body:

`results` : Contains the main result data.

- `pageInfo` : Information about pagination.
  - `endCursor` : The cursor for the end of the current page.
  - `hasNextPage` : Boolean indicating if there are more pages.
  - `hasPreviousPage` : Boolean indicating if there are previous pages.
  - `startCursor` : The cursor for the start of the current page.

`data` : An array of entity objects.

- Entity Object:
  - `id` : A unique identifier for the entity.
  - `entityStatus` : The status of the entity, e.g., "FAILING".
  - `displayName` : The display name of the entity.
  - `responseType` : The type of the entity, e.g., "Identifier".
  - `deactivatedReason` : The reason for deactivation, if applicable (null if not deactivated).
  - `lastUpdatedDate` : The date and time when the entity was last updated.
  - `createdDate` : The date and time when the entity was created.

Updated about 1 year ago

← Manage tests

Manage documents →

Did this page help you? Yes No