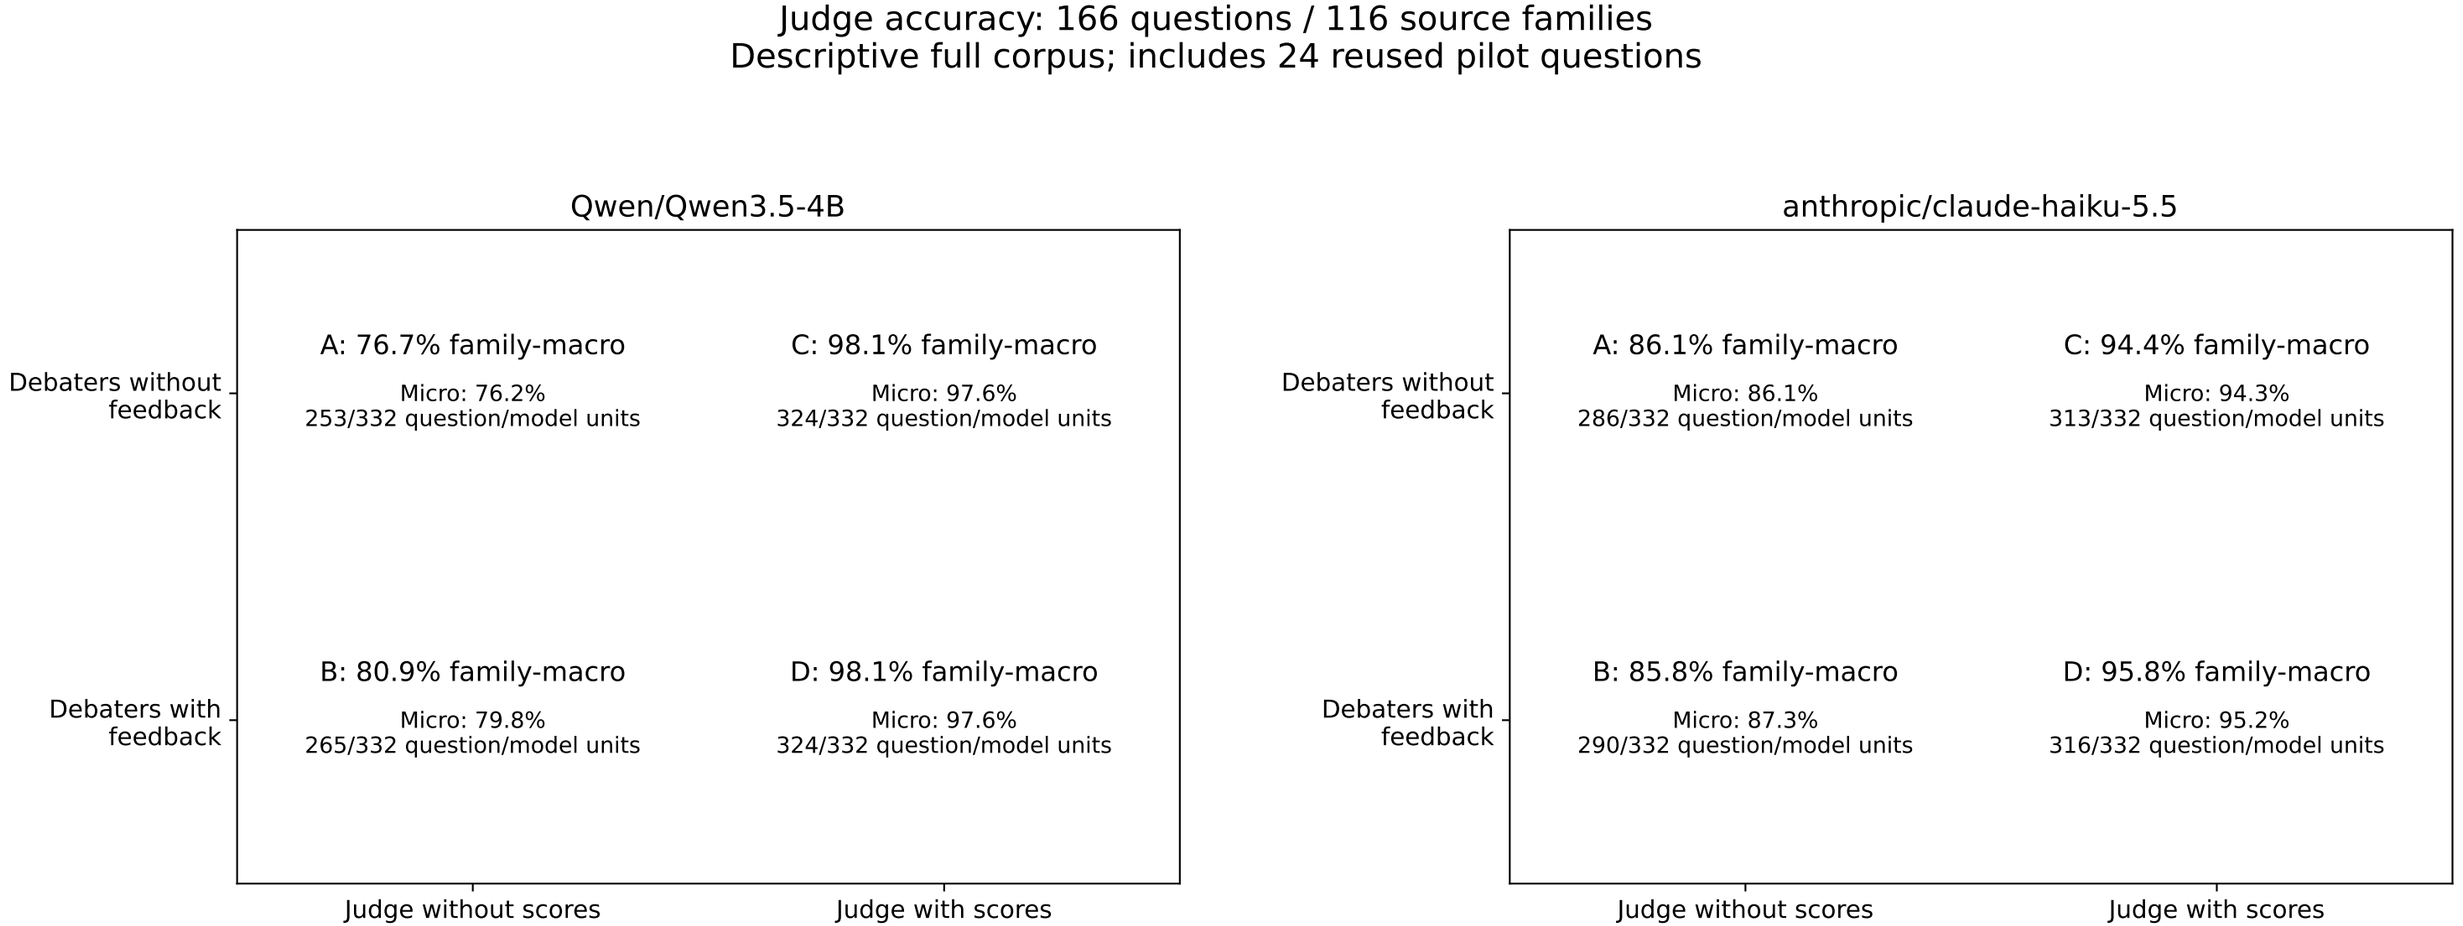

Families receive equal weight; micro percentages weight question/model units equally.
A/C share a no-feedback transcript; B/D share a feedback transcript. Neither judge sees the story or private preparation.

Full corpus — descriptive paired comparisons

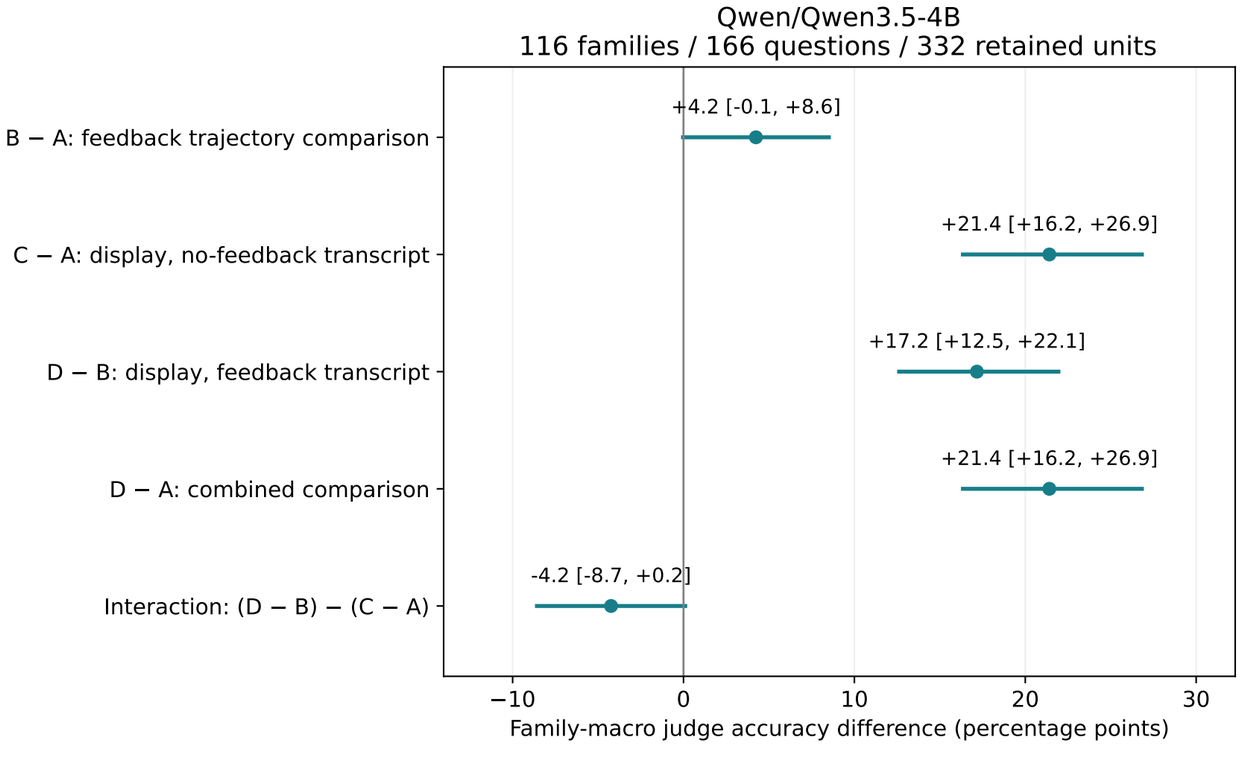

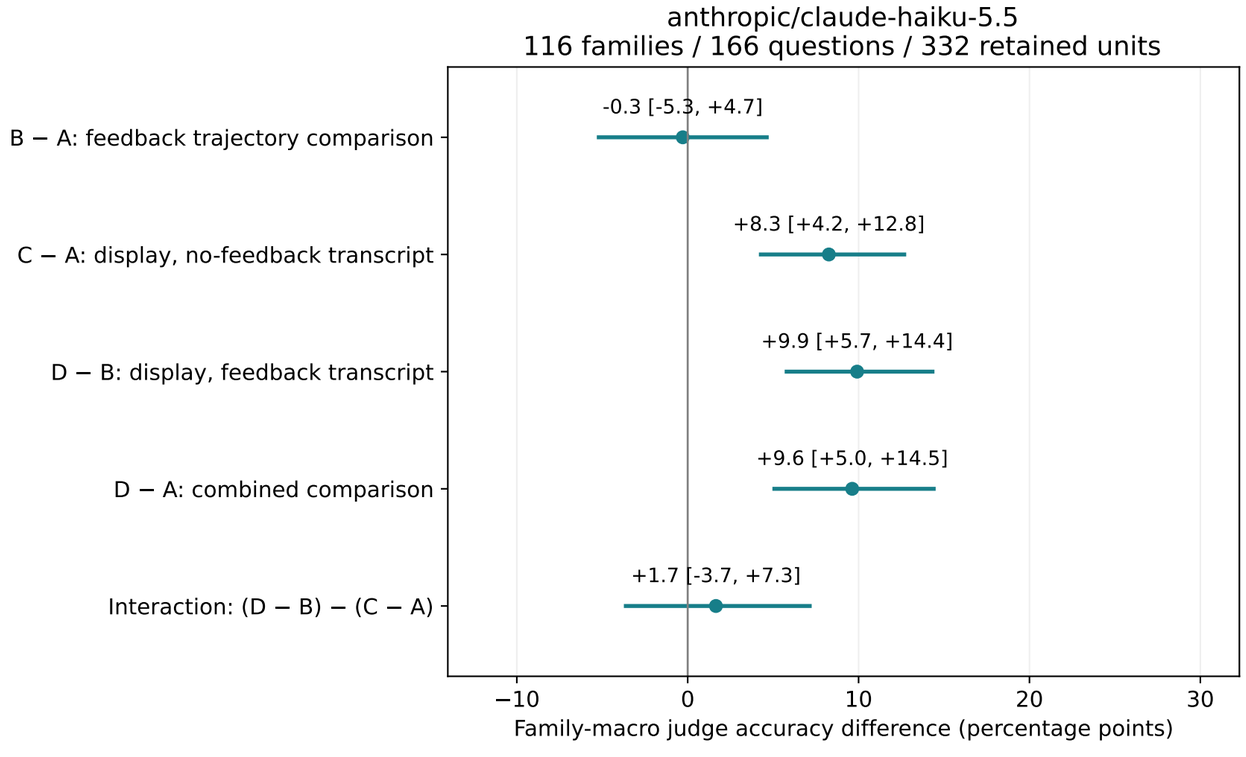

Equal-weight source-family means; retained question/model/cell observations stay clustered within family.
Unadjusted 95% percentile family-bootstrap intervals; exploratory, no multiplicity adjustment.
Intervals describe family variation, not repeated-generation uncertainty. B−A/D−A also change trajectories;
C−A/D−B compare score display with no display, without a matched neutral-display control.

Untouched before expansion — 28 families / 35 questions

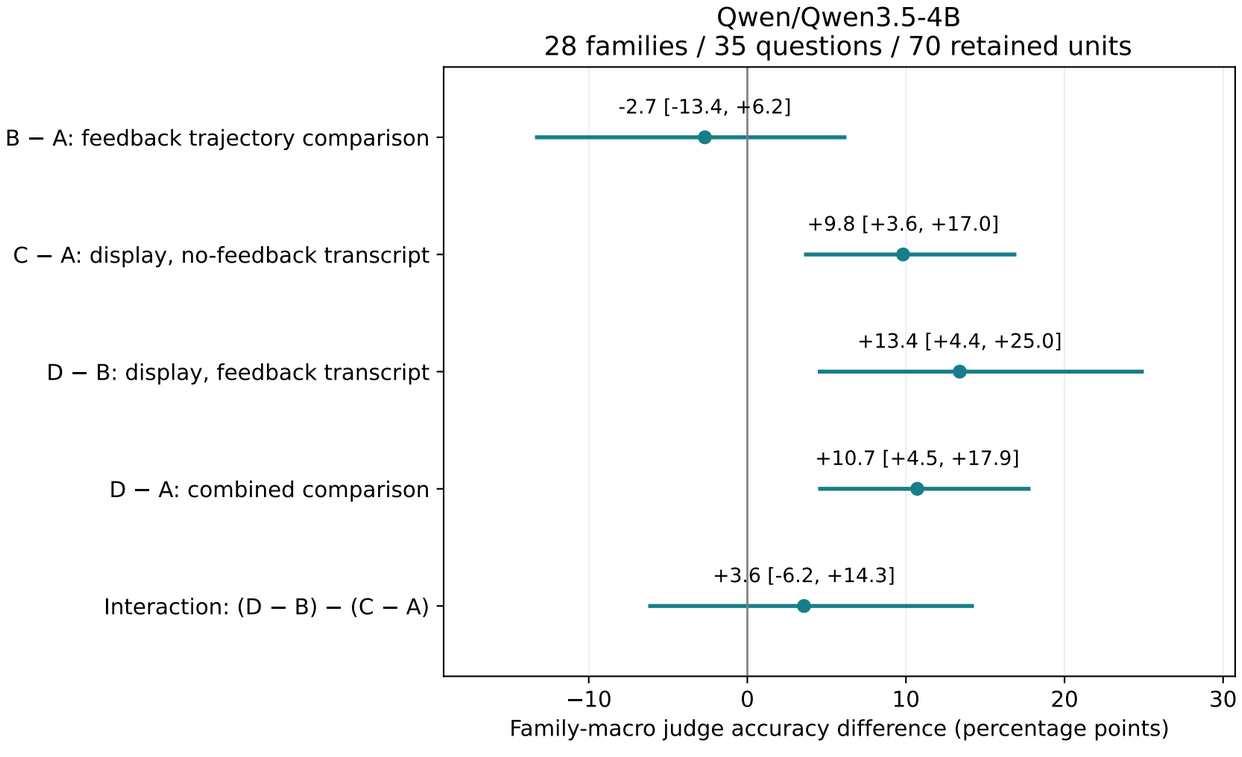

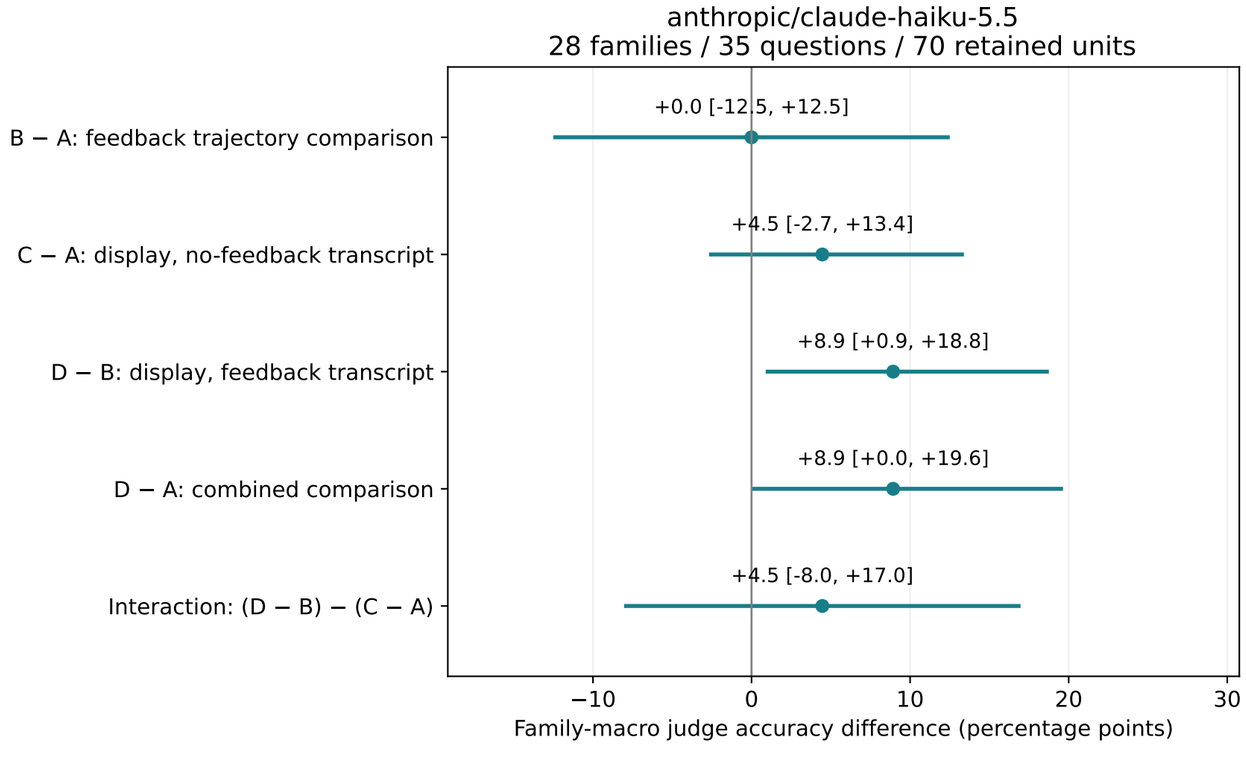

Equal-weight source-family means; retained question/model/cell observations stay clustered within family.
Unadjusted 95% percentile family-bootstrap intervals; exploratory, no multiplicity adjustment.
Intervals describe family variation, not repeated-generation uncertainty. B−A/D−A also change trajectories;
C−A/D−B compare score display with no display, without a matched neutral-display control.

Sensitivity: source-reviewer-supported questions

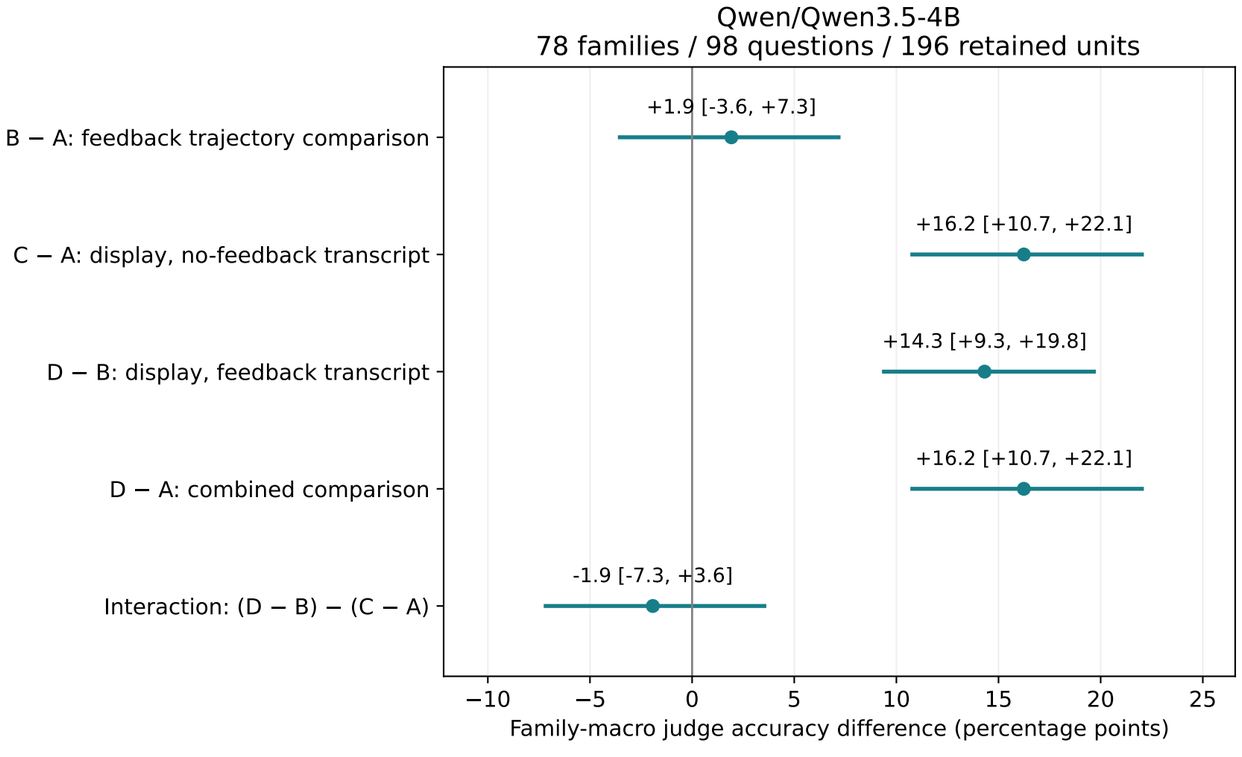

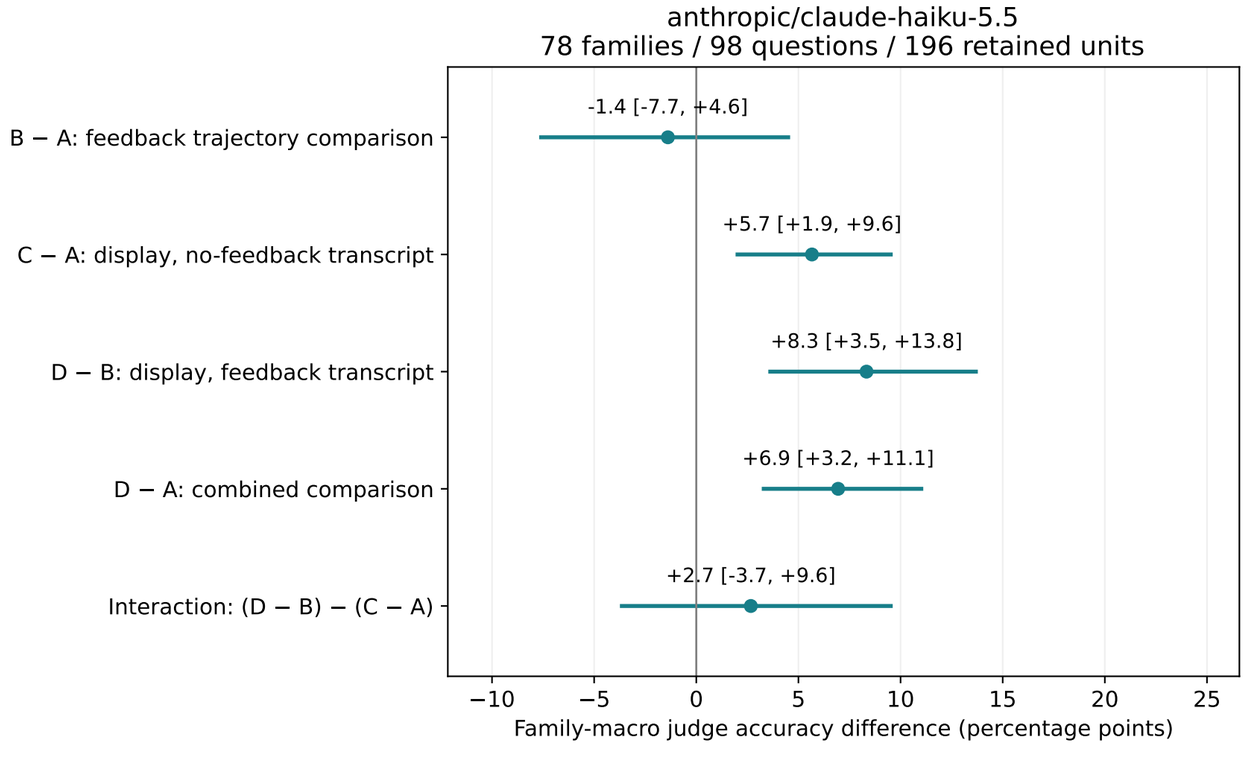

Equal-weight source-family means; retained question/model/cell observations stay clustered within family.
Unadjusted 95% percentile family-bootstrap intervals; exploratory, no multiplicity adjustment.
Intervals describe family variation, not repeated-generation uncertainty. B−A/D−A also change trajectories;
C−A/D−B compare score display with no display, without a matched neutral-display control.

Joint sensitivity: source support AND model-specific eligibility

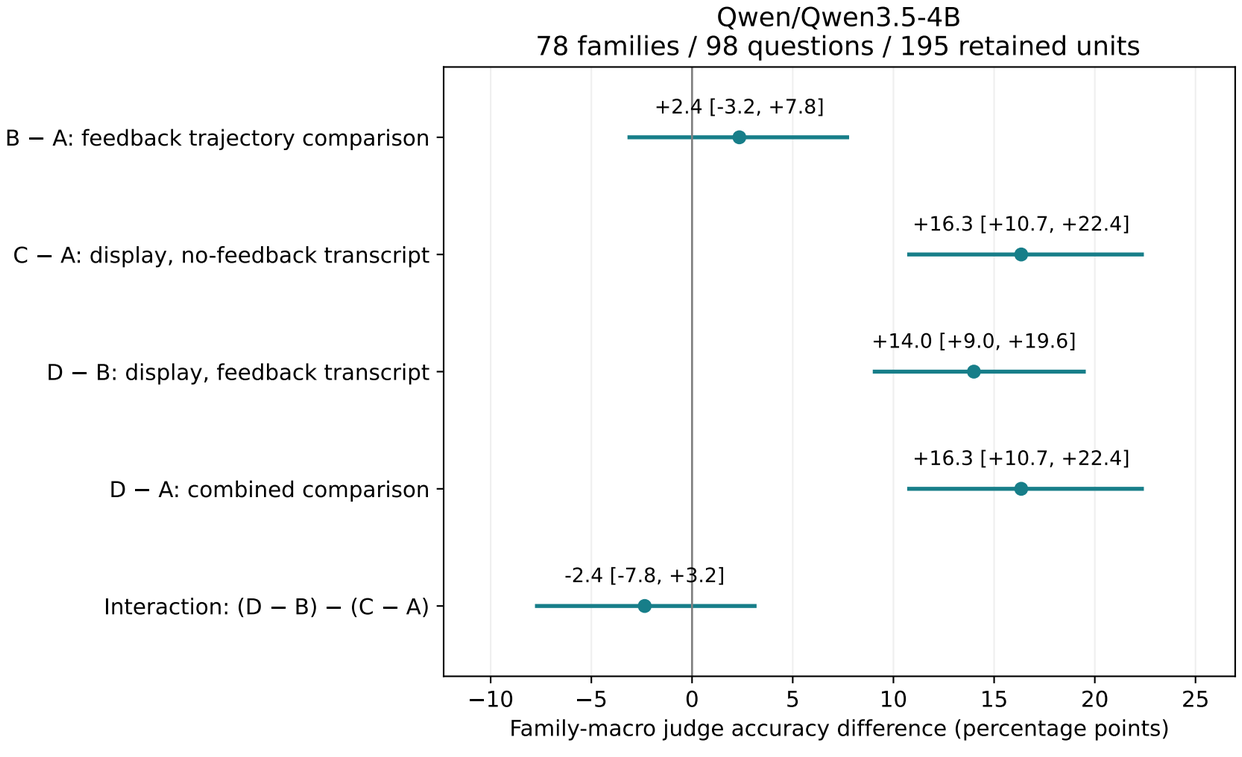

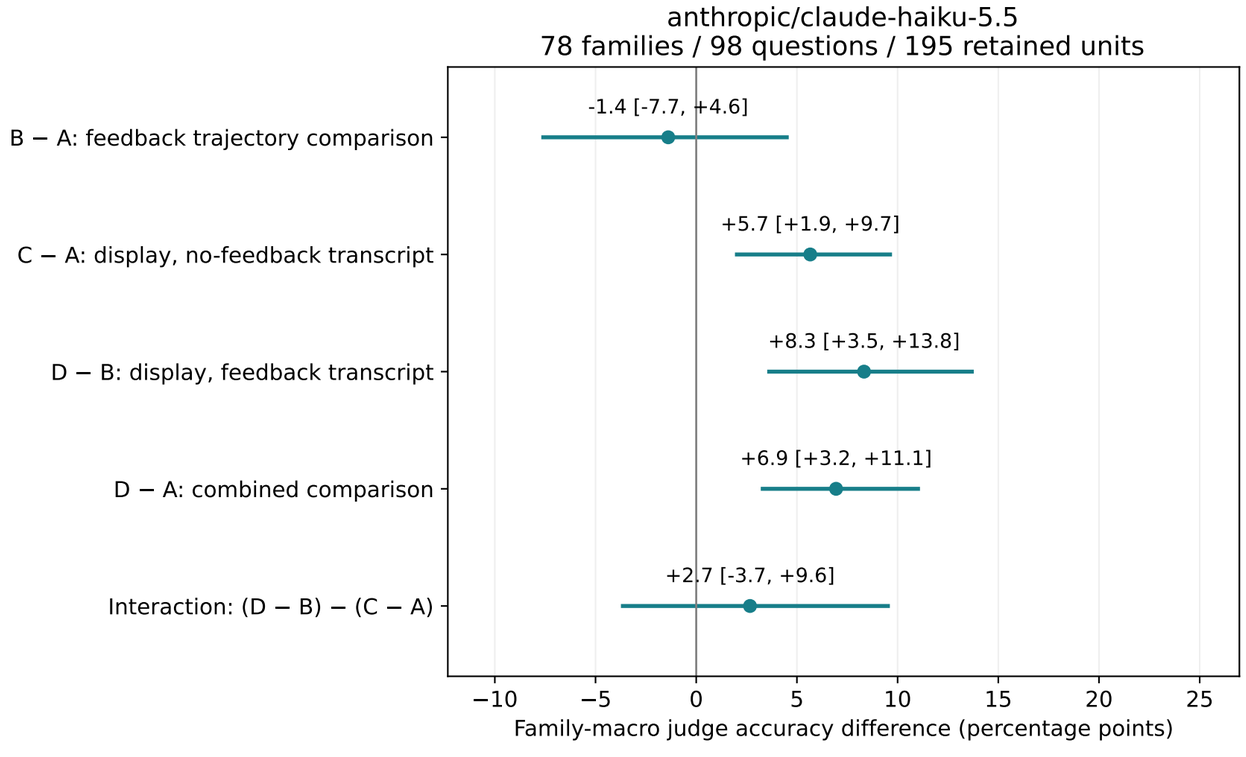

Equal-weight source-family means; retained question/model/cell observations stay clustered within family.
Unadjusted 95% percentile family-bootstrap intervals; exploratory, no multiplicity adjustment.
Intervals describe family variation, not repeated-generation uncertainty. B−A/D−A also change trajectories;
C−A/D−B compare score display with no display, without a matched neutral-display control.