



Escuela Politécnica de Guadalajara
Educación media superior
Universidad de Guadalajara

Instalación de entorno web:



Alumno: Jorge Antonio Macias Castro

Código: 222808966

Profesora: Zuri Vega

Módulo: Software de aplicación

Grado: 8vo

Grupo: B Vespertino

Carrera: TPSI


Fecha: 5/05/2026

Instalación de entorno web


1- Link de GitHub

- <https://github.com/JorgeMC285/Proyectos-Python-de-JAMC/tree/main/2-%20Instalaci%C3%B3n%20de%20entorno%20web>

2- Instalación de Node.js

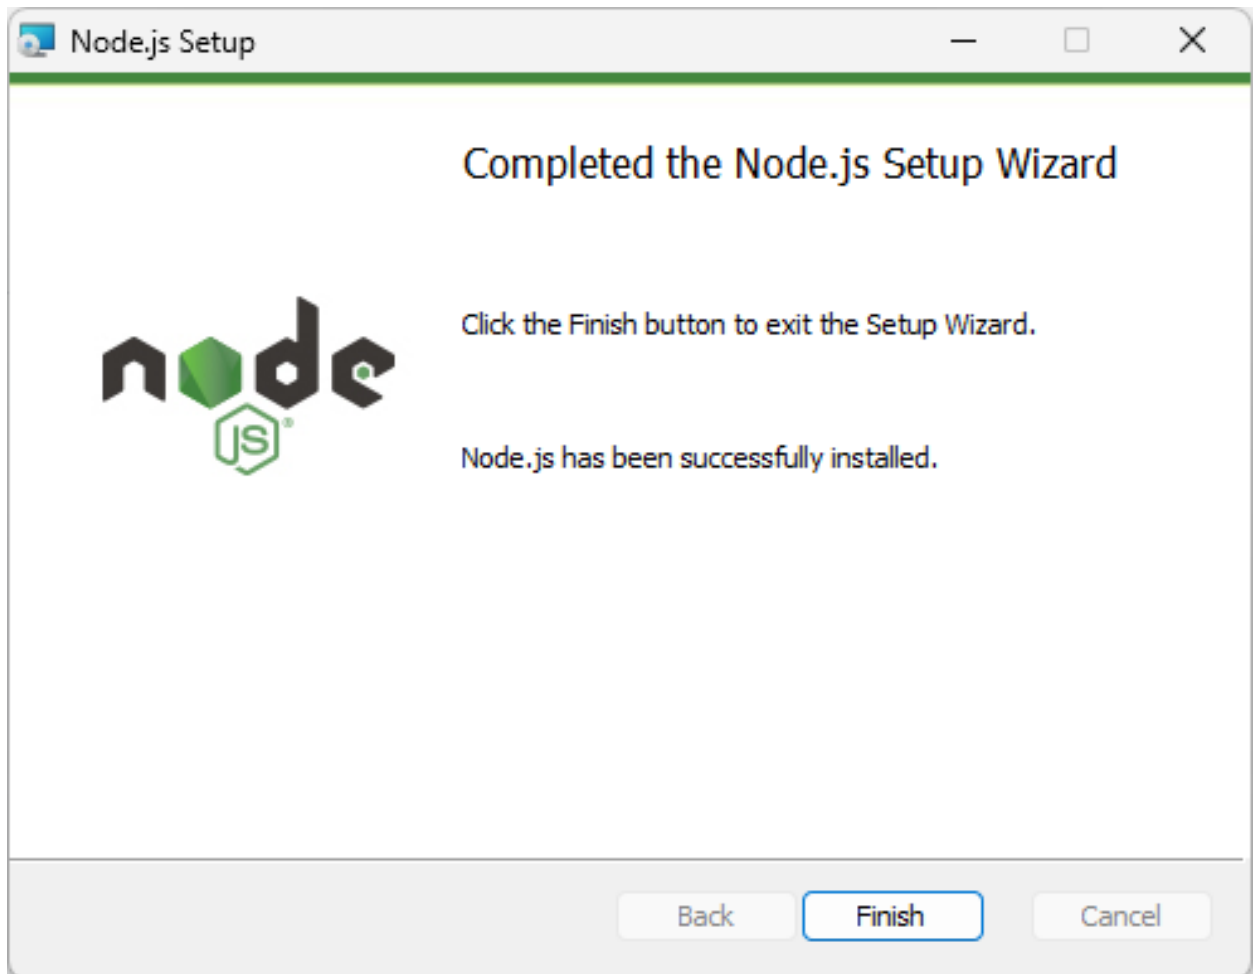

3- Instalación de Angular CLI

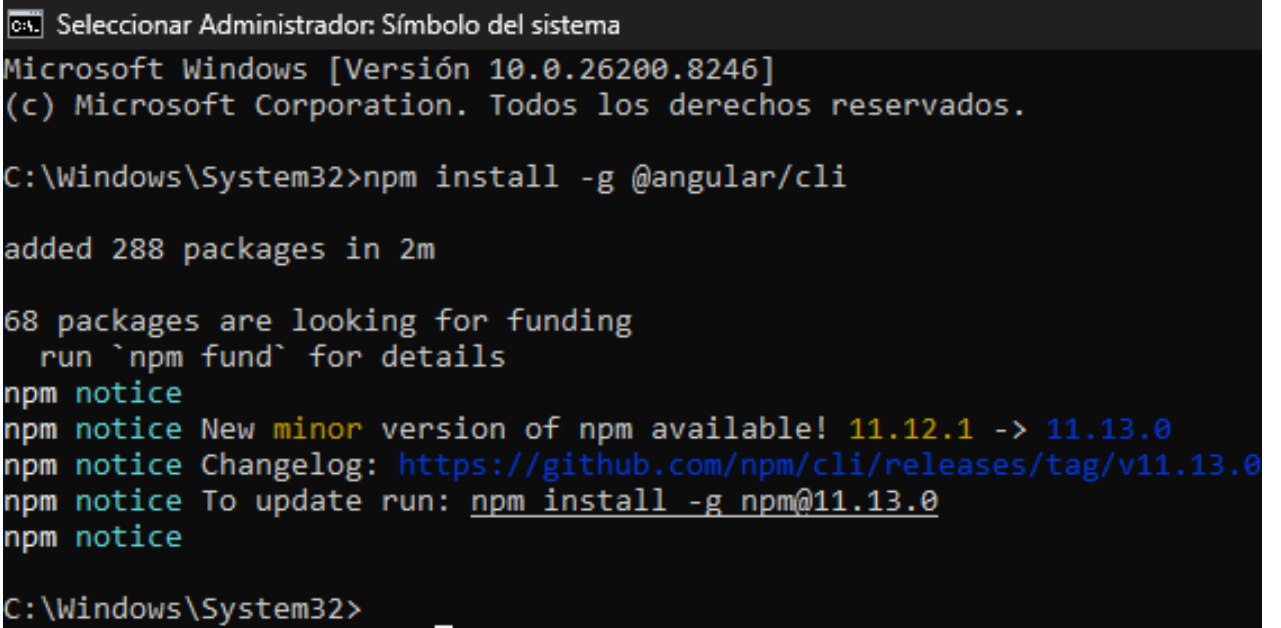

A screenshot of a Windows command prompt window. The title bar reads "Seleccionar Administrador: Símbolo del sistema". The window shows the output of the command `npm install -g @angular/cli` executed in the `C:\Windows\System32` directory. The output indicates that 288 packages were added in 2 minutes, 68 packages are looking for funding, and a new minor version of npm (11.13.0) is available for update.


```
C:\Windows\System32>npm install -g @angular/cli

added 288 packages in 2m

68 packages are looking for funding
  run `npm fund` for details
npm notice
npm notice New minor version of npm available! 11.12.1 -> 11.13.0
npm notice Changelog: https://github.com/npm/cli/releases/tag/v11.13.0
npm notice To update run: npm install -g npm@11.13.0
npm notice

C:\Windows\System32>
```

4- Instalación de PostgreSQL

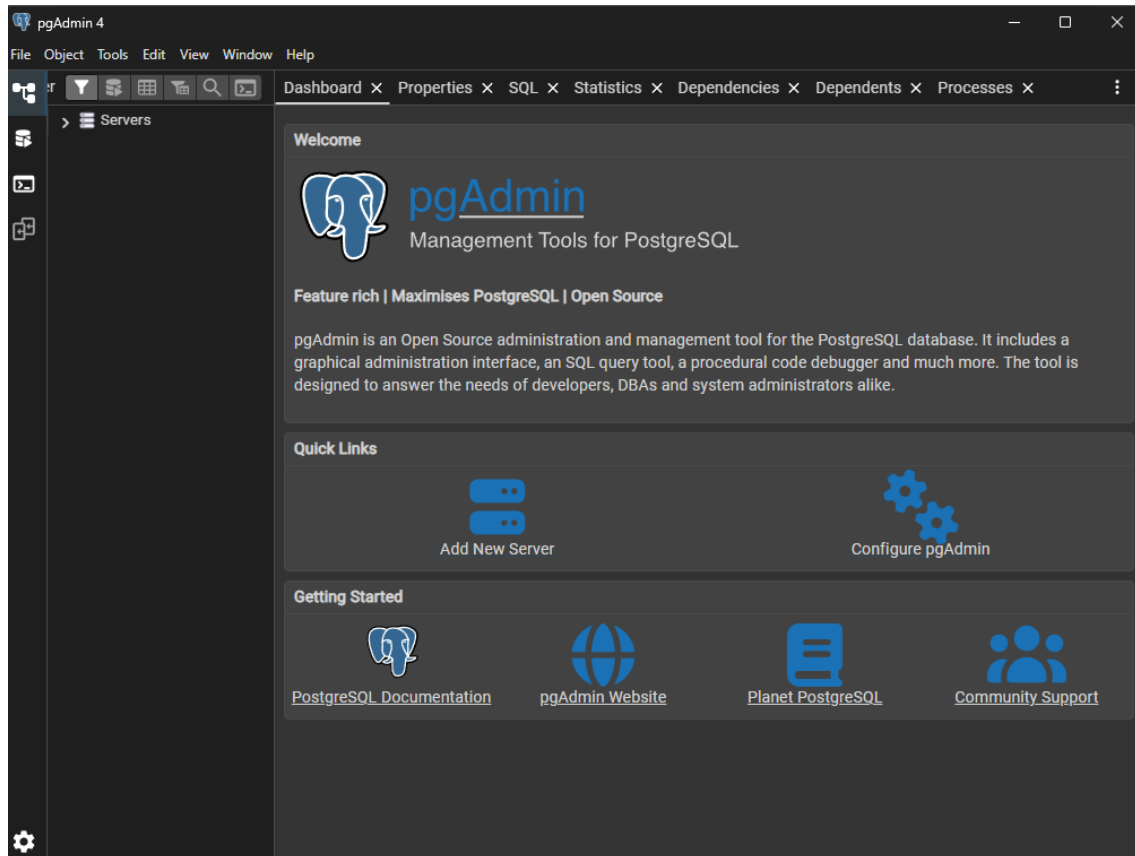

5- Creación de app

```
C:\Windows\System32>ng new mi-app

Would you like to share pseudonymous usage data about this project with the Angular Team
at Google under Google's Privacy Policy at https://policies.google.com/privacy. For more
details and how to change this setting, see https://angular.dev/cli/analytics.

  Yes

Thank you for sharing pseudonymous usage data. Should you change your mind, the following
command will disable this feature entirely:

  ng analytics disable --global

Global setting: enabled
Local setting: No local workspace configuration file.
Effective status: enabled
? Which stylesheet system would you like to use?
> CSS [ https://developer.mozilla.org/docs/Web/CSS ]
  Tailwind CSS [ https://tailwindcss.com ]
  Sass (SCSS) [ https://sass-lang.com/documentation/syntax#scss ]
  Sass (Indented) [ https://sass-lang.com/documentation/syntax#the-indented-syntax ]
  Less [ http://lesscss.org ]

↑↓ navigate • ⌘ select

C:\Windows\System32>ng new mi-app
? Which stylesheet system would you like to use? CSS [ https://developer.mozilla.org/docs/Web/CSS
? Do you want to enable Server-Side Rendering (SSR) and Static Site Generation (SSG/Prerendering)? No
? Which AI tools do you want to configure with Angular best practices? https://angular.dev/ai/develop-with-ai None
CREATE mi-app/.prettierrc (173 bytes)
CREATE mi-app/angular.json (1976 bytes)
CREATE mi-app/package.json (782 bytes)
CREATE mi-app/README.md (1517 bytes)
CREATE mi-app/tsconfig.json (990 bytes)
CREATE mi-app/.editorconfig (331 bytes)
CREATE mi-app/.gitignore (666 bytes)
CREATE mi-app/tsconfig.app.json (444 bytes)
CREATE mi-app/tsconfig.spec.json (456 bytes)
CREATE mi-app/.vscode/extensions.json (134 bytes)
CREATE mi-app/.vscode/launch.json (490 bytes)
CREATE mi-app/.vscode/mcp.json (188 bytes)
CREATE mi-app/.vscode/tasks.json (1020 bytes)
CREATE mi-app/src/main.ts (228 bytes)
CREATE mi-app/src/index.html (304 bytes)
CREATE mi-app/src/styles.css (81 bytes)
CREATE mi-app/src/app/app.spec.ts (696 bytes)
CREATE mi-app/src/app/app.ts (300 bytes)
CREATE mi-app/src/app/app.css (0 bytes)
CREATE mi-app/src/app/app.html (20488 bytes)
CREATE mi-app/src/app/app.config.ts (324 bytes)
CREATE mi-app/src/app/app.routes.ts (80 bytes)
CREATE mi-app/public/favicon.ico (15086 bytes)
? Packages installed successfully.
warning: in the working copy of 'package-lock.json', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'package.json', LF will be replaced by CRLF the next time Git touches it
  Successfully initialized git.

C:\Windows\System32>
```

Jorge Antonio Macias Castro
05/05/2026

```
C:\Windows\System32>cd mi-app
C:\Windows\System32\mi-app>ng serve

Would you like to share pseudonymous usage data about this project with the Angular Team
at Google under Google's Privacy Policy at https://policies.google.com/privacy. For more
details and how to change this setting, see https://angular.dev/cli/analytics.

  Yes

Thank you for sharing pseudonymous usage data. Should you change your mind, the following
command will disable this feature entirely:

  ng analytics disable

Global setting: enabled
Local setting: enabled
Effective status: enabled
Initial chunk files | Names          | Raw size
main.js             | main           | 48.46 kB |
styles.css          | styles         | 95 bytes |
                    | Initial total  | 48.55 kB

Application bundle generation complete. [4.901 seconds] - 2026-05-05T22:45:54.149Z

Watch mode enabled. Watching for file changes...
NOTE: Raw file sizes do not reflect development server per-request transformations.
  → Local:   http://localhost:4200/
  → press h + enter to show help
```

```
<!DOCTYPE html>
<html lang="es">
  <head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet" href="app.css">
    <title>Mi app</title>
  </head>
  <body>
    <h1>Bienvenidos a mi app </h1>

    <p>Esta es mi primera aplicación en Angular</p>

    <button (click)="saludar()">Haz clic aquí</button>
  </body>
</html>
```

```
h1 {  
  color: blue;  
  text-align: center;  
}  
  
button {  
  background-color: green;  
  color: white;  
  padding: 10px;  
}
```

```
import { Component, signal } from '@angular/core';  
import { RouterOutlet } from '@angular/router';  
  
@Component({  
  selector: 'app-root',  
  imports: [RouterOutlet],  
  templateUrl: './app.html',  
  styleUrls: ['./app.css']  
})  
export class App {  
  protected readonly title = signal('mi-app');  
  
  saludar() {  
    alert('Hola bienvenido');  
  }  
}
```

Bienvenidos a mi app

Esta es mi primera aplicación en Angular

[Haz clic aquí](#)

