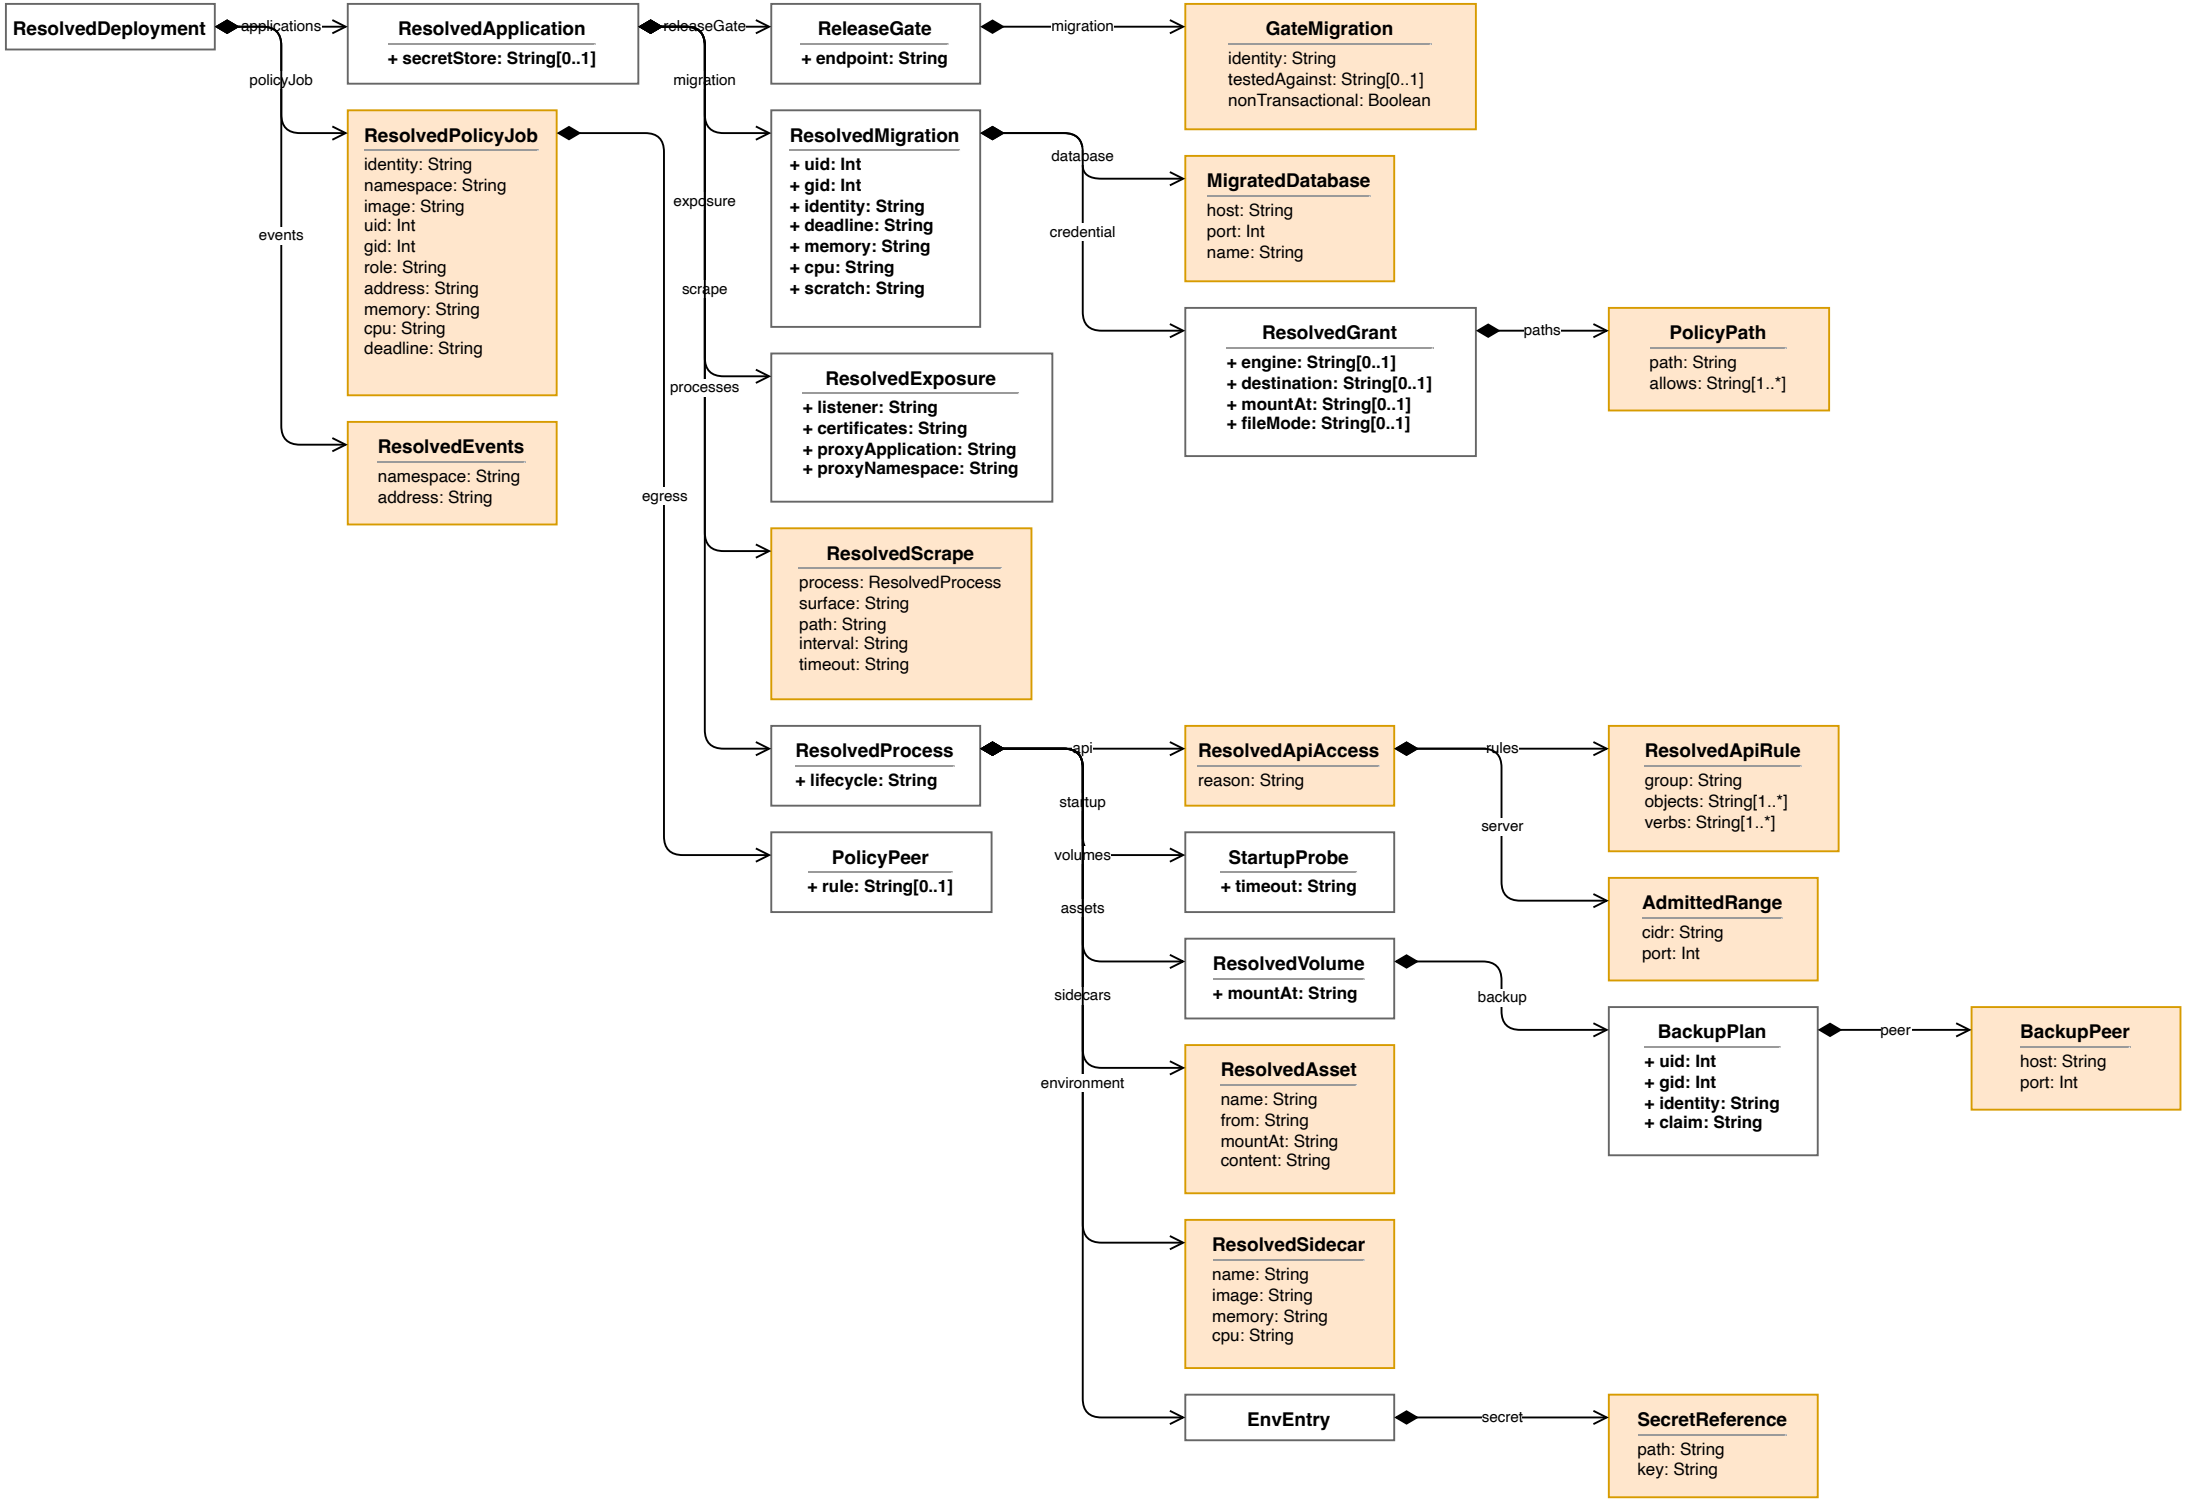
ResolvedDeployment
applications
ResolvedApplication
+ secretStore: String[0..1]
releaseGate
ReleaseGate
+ endpoint: String
migration
GateMigration
identity: String
testedAgainst: String[0..1]
nonTransactional: Boolean
policyJob
ResolvedPolicyJob
identity: String
namespace: String
image: String
uid: Int
gid: Int
role: String
address: String
memory: String
cpu: String
deadline: String
migration
ResolvedMigration
+ uid: Int
+ gid: Int
+ identity: String
+ deadline: String
+ memory: String
+ cpu: String
+ scratch: String
database
MigratedDatabase
host: String
port: Int
name: String
credential
ResolvedGrant
+ engine: String[0..1]
+ destination: String[0..1]
+ mountAt: String[0..1]
+ fileMode: String[0..1]
paths
PolicyPath
path: String
allows: String[1..*]
events
ResolvedEvents
namespace: String
address: String
exposure
scrape
processes
ResolvedExposure
+ listener: String
+ certificates: String
+ proxyApplication: String
+ proxyNamespace: String
egress
ResolvedScrape
process: ResolvedProcess
surface: String
path: String
interval: String
timeout: String
ResolvedProcess
+ lifecycle: String
api
ResolvedApiAccess
reason: String
rules
ResolvedApiRule
group: String
objects: String[1..*]
verbs: String[1..*]
server
AdmittedRange
cidr: String
port: Int
startup
volumes
StartupProbe
+ timeout: String
PolicyPeer
+ rule: String[0..1]
assets
ResolvedVolume
+ mountAt: String
backup
BackupPlan
+ uid: Int
+ gid: Int
+ identity: String
+ claim: String
peer
BackupPeer
host: String
port: Int
sidecars
environment
ResolvedAsset
name: String
from: String
mountAt: String
content: String
ResolvedSidecar
name: String
image: String
memory: String
cpu: String
EnvEntry
secret
SecretReference
path: String
key: String