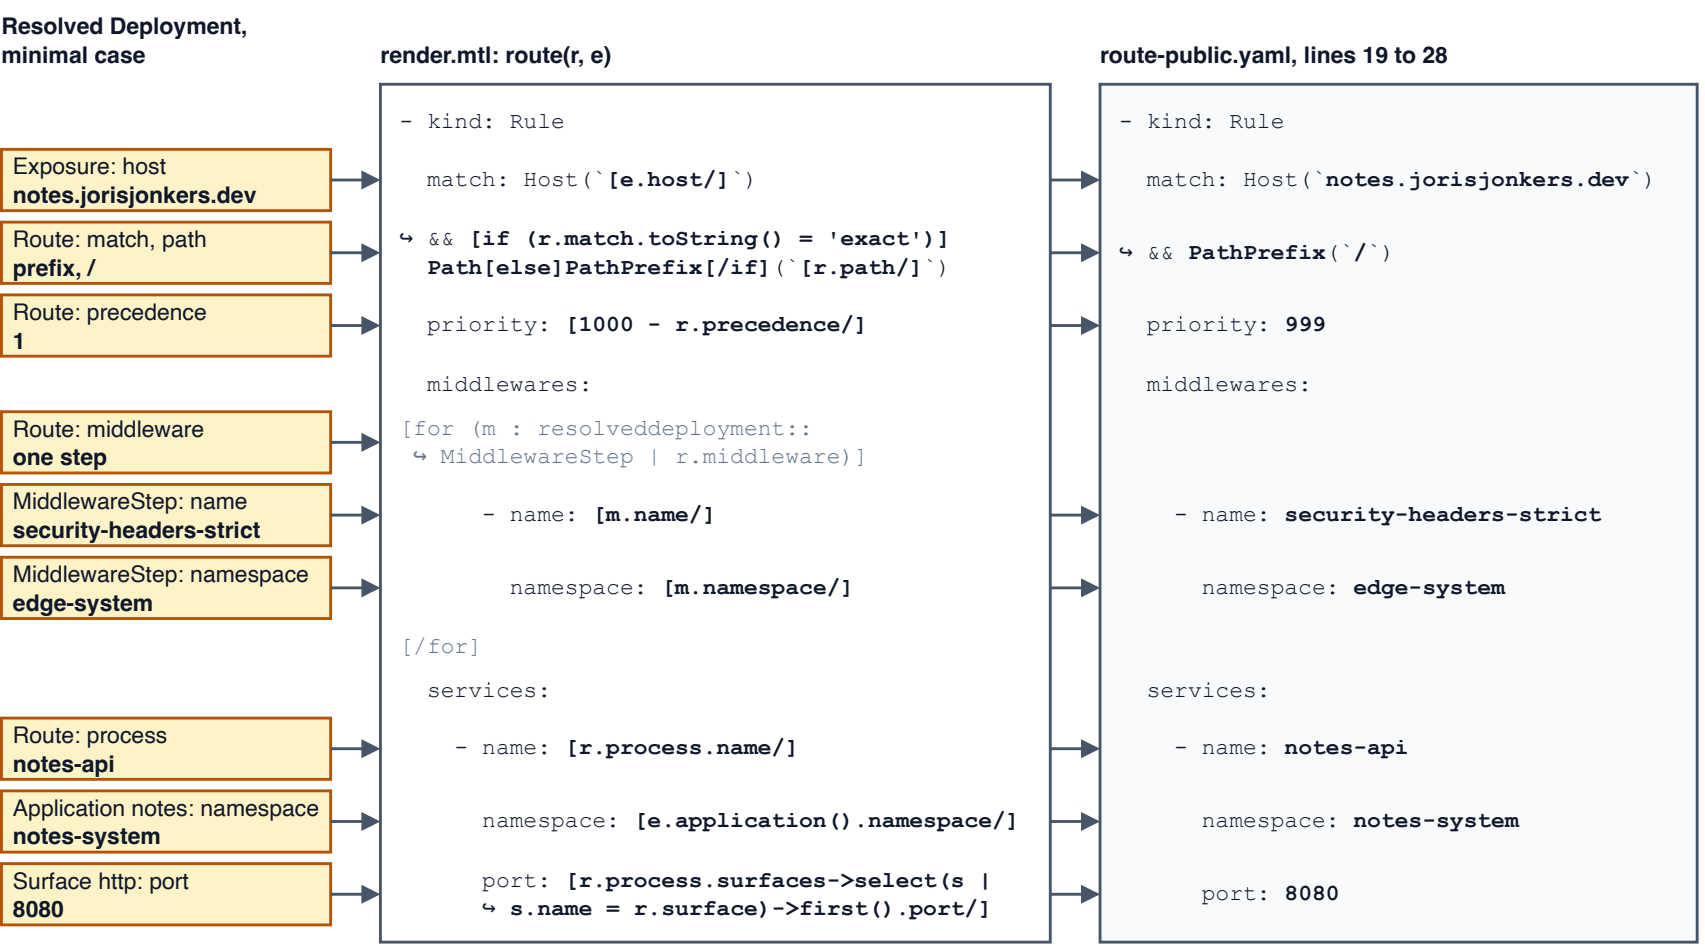

Resolved Deployment, minimal case
render.mtl: route(r, e)
route-public.yaml, lines 19 to 28
Exposure: host notes.jorisjonkers.dev
Route: match, path prefix, /
Route: precedence 1
Route: middleware one step
MiddlewareStep: name security-headers-strict
MiddlewareStep: namespace edge-system
Route: process notes-api
Application notes: namespace notes-system
Surface http: port 8080
- kind: Rule
match: Host(`[e.host/]`)
↪ && [if (r.match.toString() = 'exact')] Path[else]PathPrefix[/if](`[r.path/]`)
priority: [1000 - r.precedence/]
middlewares:
[for (m : resolveddeployment:: ↪ MiddlewareStep | r.middleware)]
- name: [m.name/]
namespace: [m.namespace/]
[/for]
services:
- name: [r.process.name/]
namespace: [e.application().namespace/]
port: [r.process.surfaces->select(s | ↪ s.name = r.surface)->first().port/]
- kind: Rule
match: Host(`notes.jorisjonkers.dev`)
↪ && PathPrefix(`/`)
priority: 999
middlewares:
- name: security-headers-strict
namespace: edge-system
services:
- name: notes-api
namespace: notes-system
port: 8080