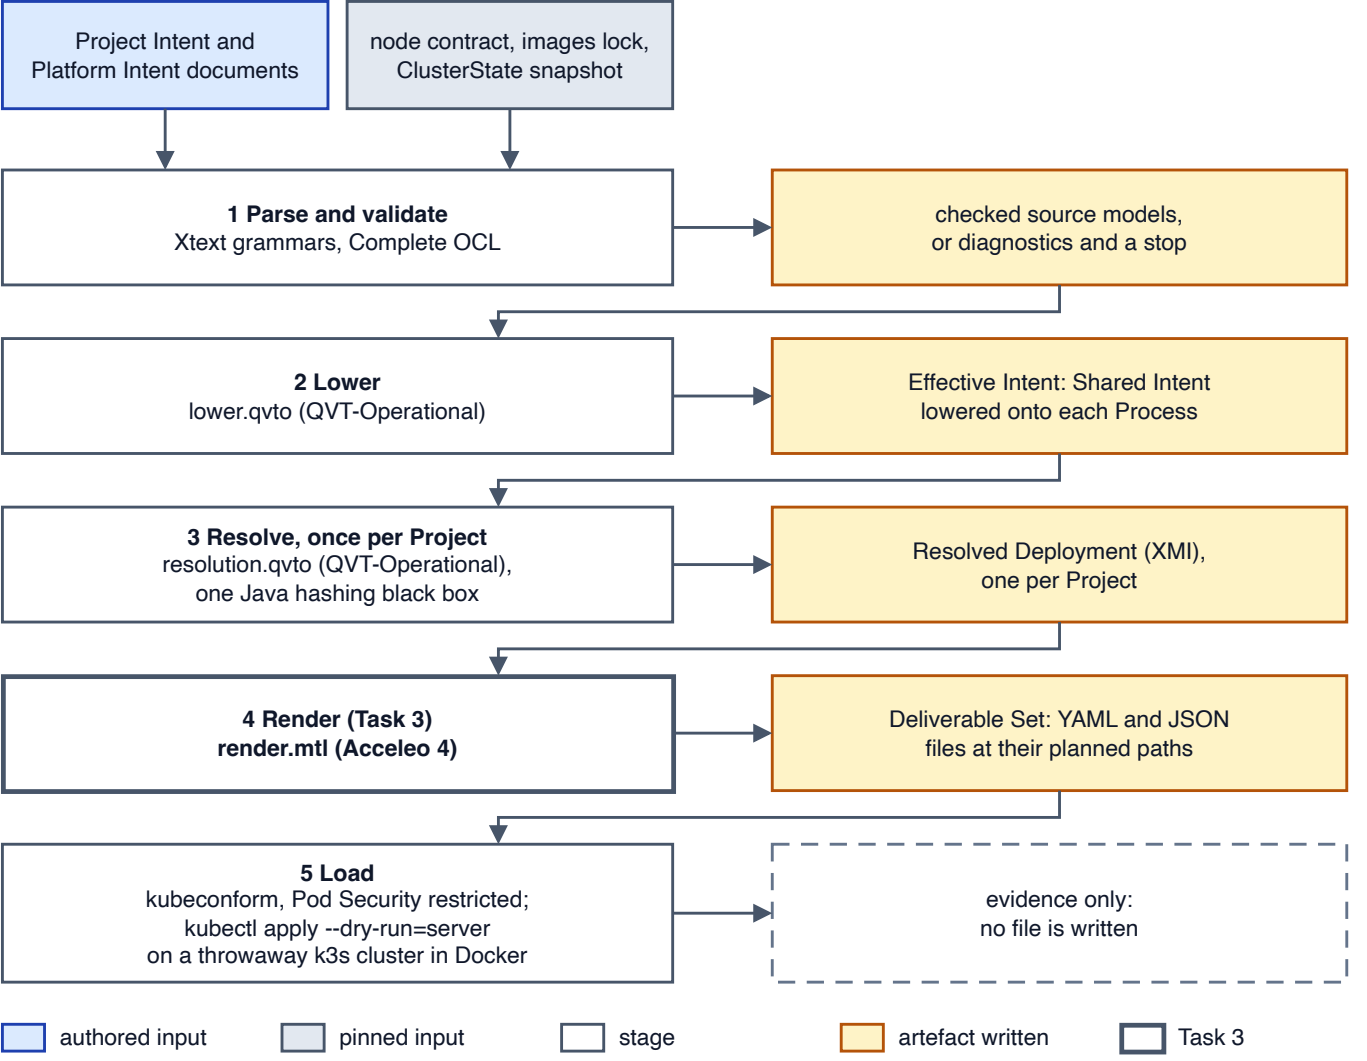
Project Intent and Platform Intent documents
node contract, images lock, ClusterState snapshot
1 Parse and validate
Xtext grammars, Complete OCL
checked source models, or diagnostics and a stop
2 Lower
lower.qvto (QVT-Operational)
Effective Intent: Shared Intent lowered onto each Process
3 Resolve, once per Project
resolution.qvto (QVT-Operational), one Java hashing black box
Resolved Deployment (XMI), one per Project
4 Render (Task 3)
render.mtl (Acceleo 4)
Deliverable Set: YAML and JSON files at their planned paths
5 Load
kubeconform, Pod Security restricted; kubectl apply --dry-run=server on a throwaway k3s cluster in Docker
evidence only: no file is written
authored input
pinned input
stage
artefact written
Task 3