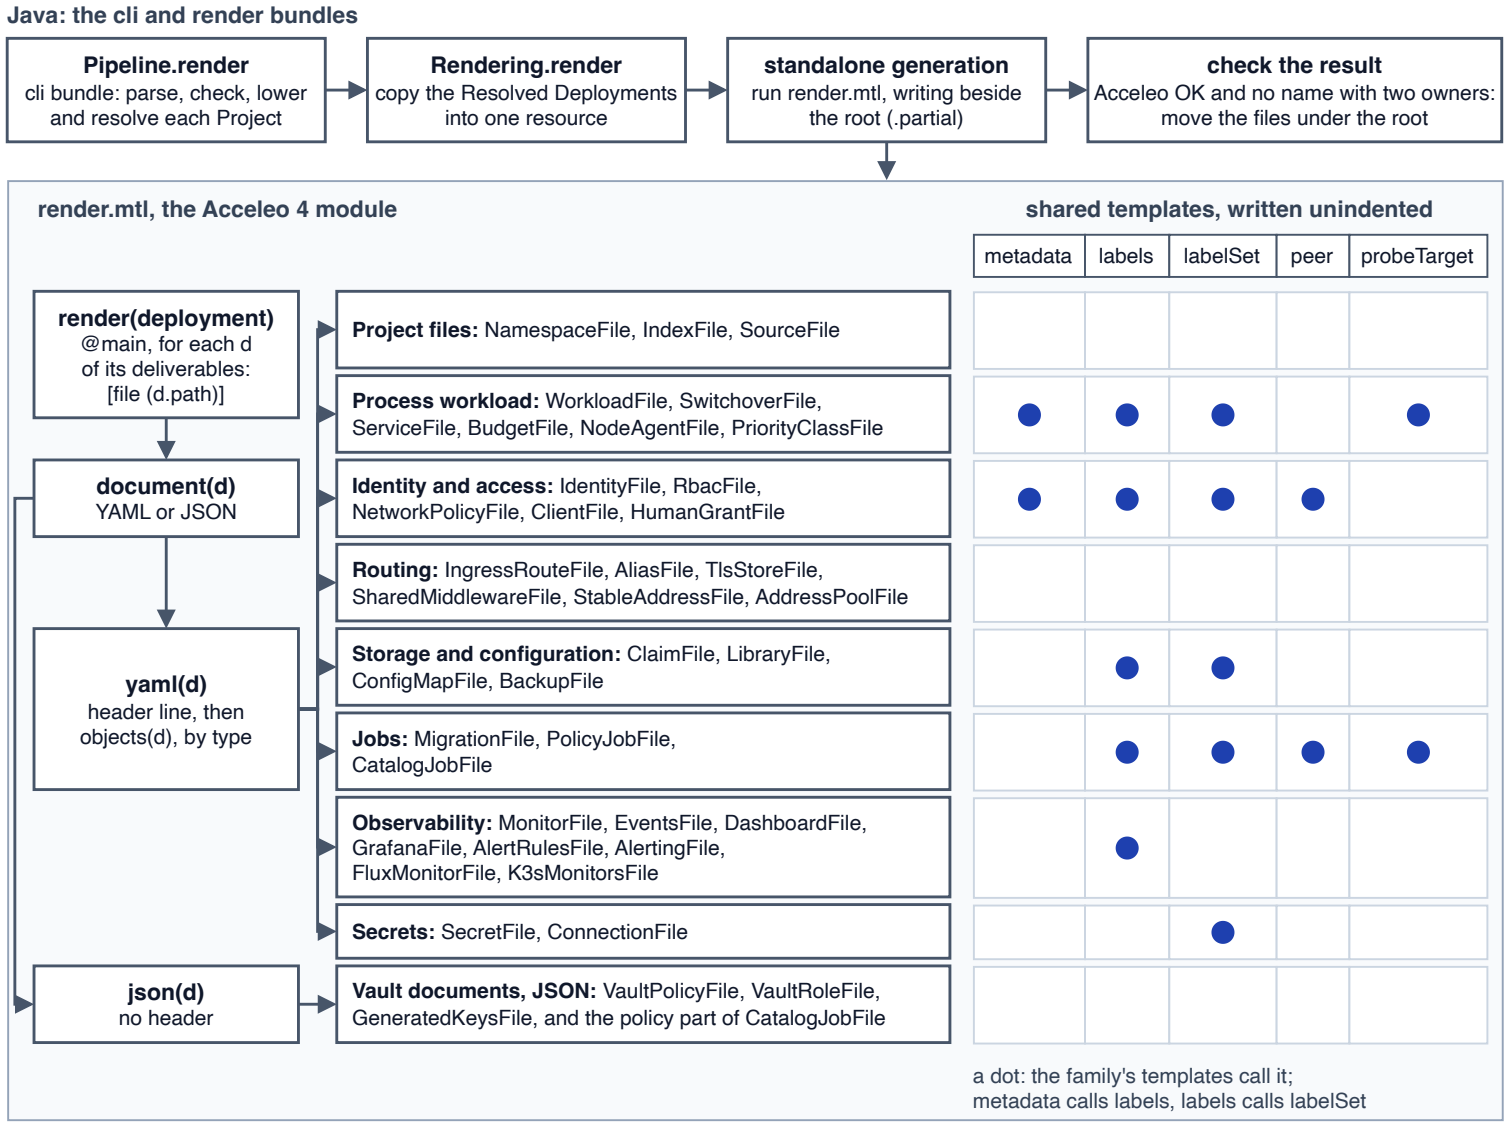
Java: the cli and render bundles
Pipeline.render
cli bundle: parse, check, lower and resolve each Project
Rendering.render
copy the Resolved Deployments into one resource
standalone generation
run render.mtl, writing beside the root (.partial)
check the result
Acceleo OK and no name with two owners: move the files under the root
render.mtl, the Acceleo 4 module
shared templates, written unindented
metadata
labels
labelSet
peer
probeTarget
render(deployment)
@main, for each d of its deliverables: [file (d.path)]
document(d)
YAML or JSON
yaml(d)
header line, then objects(d), by type
json(d)
no header
Project files: NamespaceFile, IndexFile, SourceFile
Process workload: WorkloadFile, SwitchoverFile, ServiceFile, BudgetFile, NodeAgentFile, PriorityClassFile
Identity and access: IdentityFile, RbacFile, NetworkPolicyFile, ClientFile, HumanGrantFile
Routing: IngressRouteFile, AliasFile, TlsStoreFile, SharedMiddlewareFile, StableAddressFile, AddressPoolFile
Storage and configuration: ClaimFile, LibraryFile, ConfigMapFile, BackupFile
Jobs: MigrationFile, PolicyJobFile, CatalogJobFile
Observability: MonitorFile, EventsFile, DashboardFile, GrafanaFile, AlertRulesFile, AlertingFile, FluxMonitorFile, K3sMonitorsFile
Secrets: SecretFile, ConnectionFile
Vault documents, JSON: VaultPolicyFile, VaultRoleFile, GeneratedKeysFile, and the policy part of CatalogJobFile
a dot: the family's templates call it;
metadata calls labels, labels calls labelSet