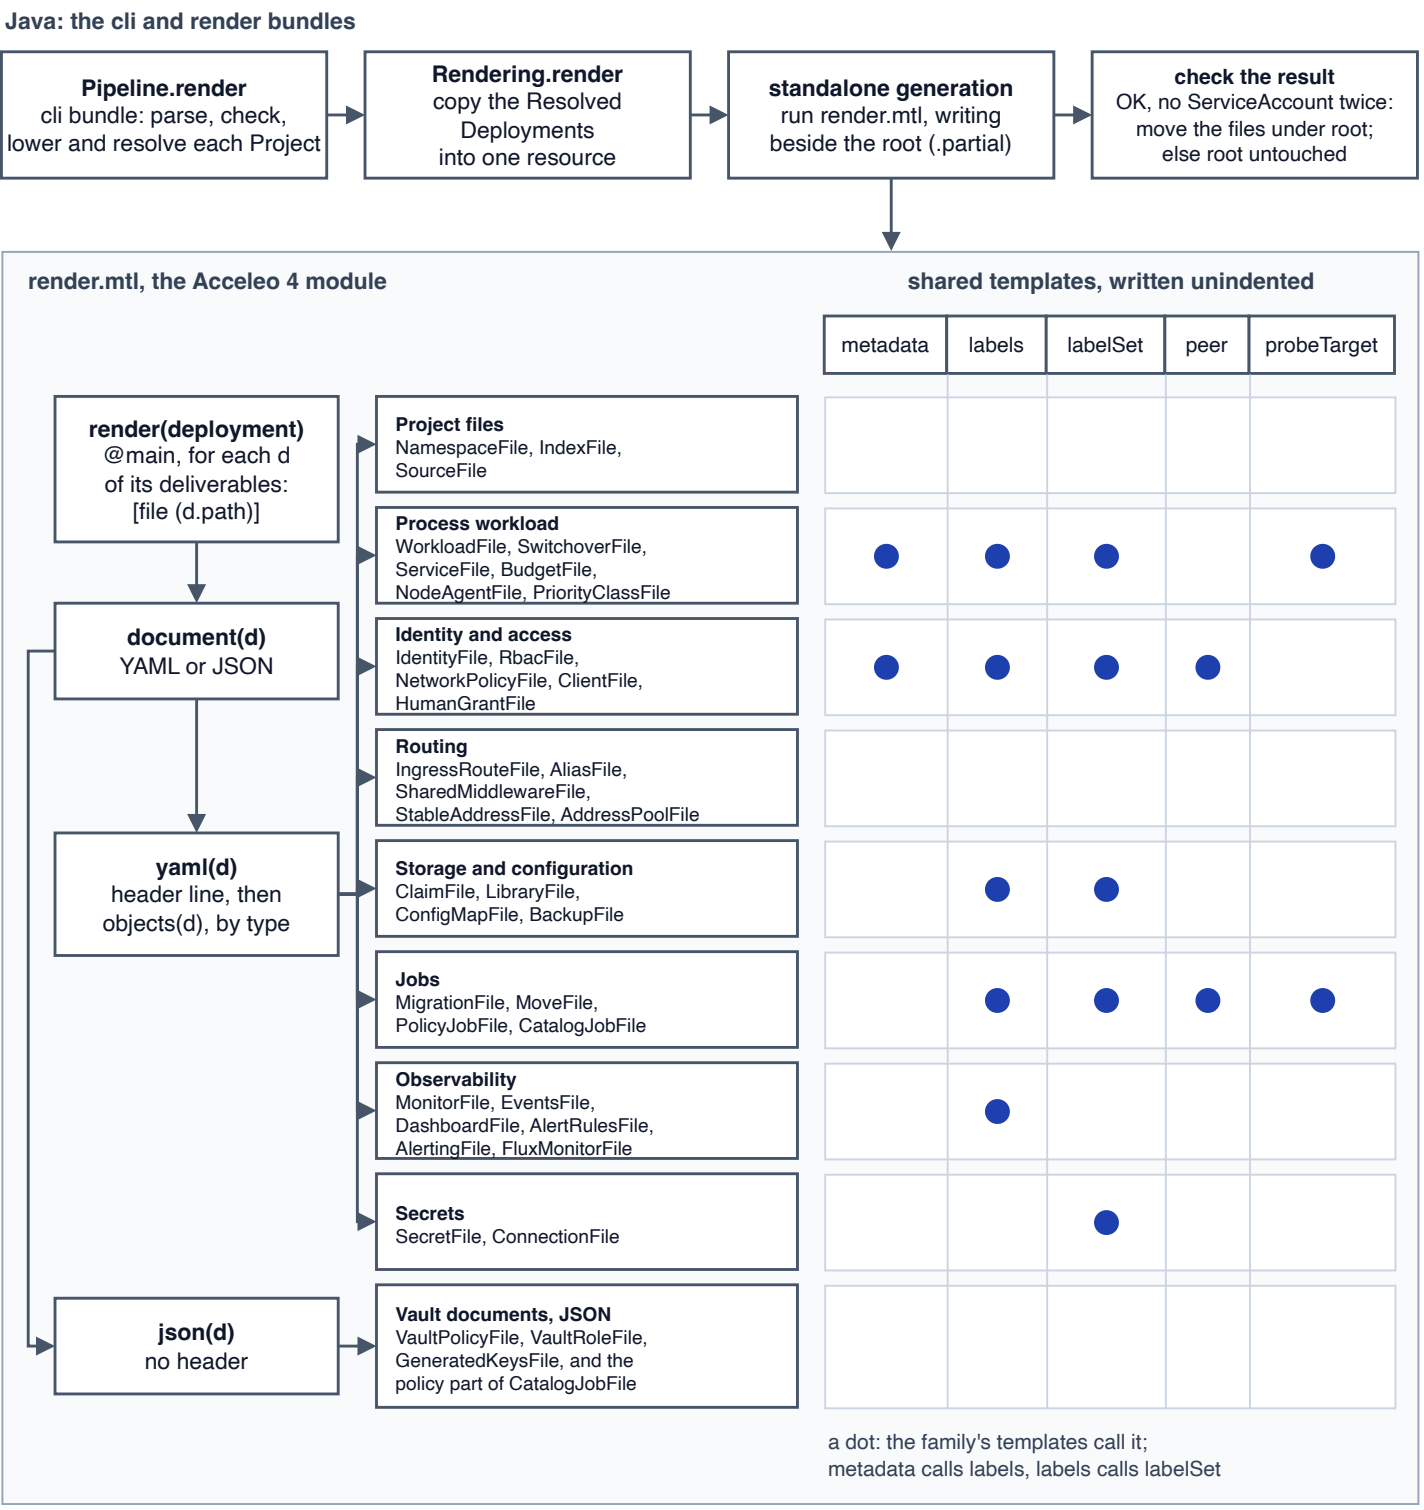

Java: the cli and render bundles
Pipeline.render
cli bundle: parse, check, lower and resolve each Project
Rendering.render
copy the Resolved Deployments into one resource
standalone generation
run render.mtl, writing beside the root (.partial)
check the result
OK, no ServiceAccount twice: move the files under root; else root untouched
render.mtl, the Acceleo 4 module
shared templates, written unindented
metadata
labels
labelSet
peer
probeTarget
render(deployment)
@main, for each d of its deliverables: [file (d.path)]
document(d)
YAML or JSON
yaml(d)
header line, then objects(d), by type
json(d)
no header
Project files
NamespaceFile, IndexFile, SourceFile
Process workload
WorkloadFile, SwitchoverFile, ServiceFile, BudgetFile, NodeAgentFile, PriorityClassFile
Identity and access
IdentityFile, RbacFile, NetworkPolicyFile, ClientFile, HumanGrantFile
Routing
IngressRouteFile, AliasFile, SharedMiddlewareFile, StableAddressFile, AddressPoolFile
Storage and configuration
ClaimFile, LibraryFile, ConfigMapFile, BackupFile
Jobs
MigrationFile, MoveFile, PolicyJobFile, CatalogJobFile
Observability
MonitorFile, EventsFile, DashboardFile, AlertRulesFile, AlertingFile, FluxMonitorFile
Secrets
SecretFile, ConnectionFile
Vault documents, JSON
VaultPolicyFile, VaultRoleFile, GeneratedKeysFile, and the policy part of CatalogJobFile
a dot: the family's templates call it;
metadata calls labels, labels calls labelSet