


## 通过Spring Initializr创建项目

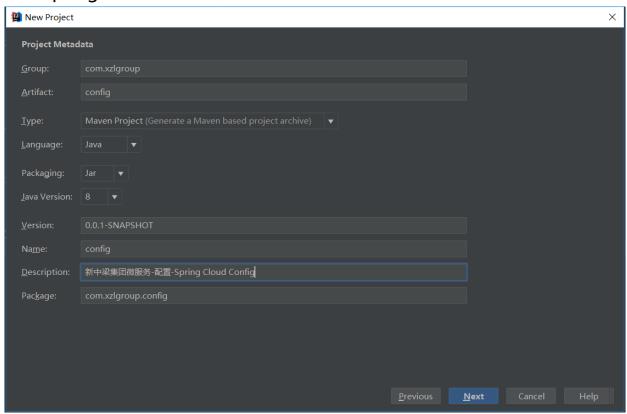

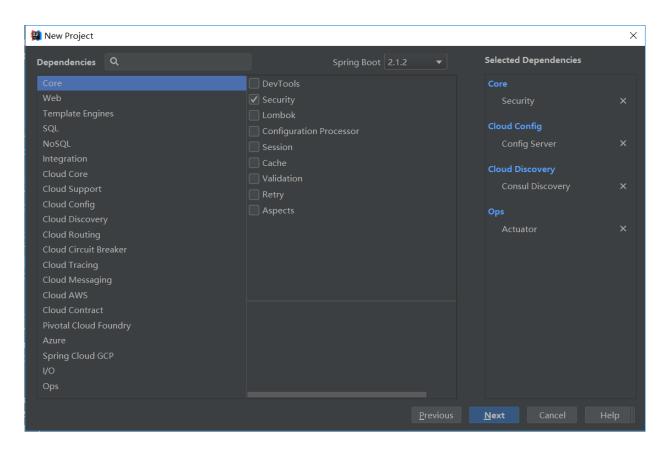

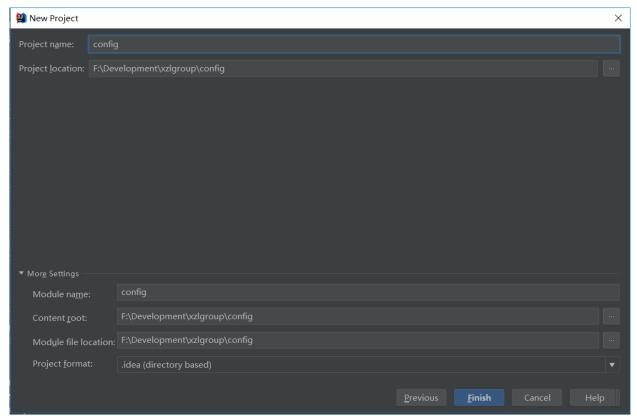


## 配置文件如下:

```
1 server:
  port: 8710
2
3
4 spring:
 application:
5
 name: xzl-config
6
 cloud:
7
  consul:
8
  host: 192.168.100.150
9
10 port: 8500
11 discovery:
   register-health-check: false
12
13 config:
14
  server:
    git:
15
    uri: https://github.com/JorkeMooN/xzl-config
16
    search-paths: beg
17
    username: JorkeMooN
18
    password: wjorke24
19
    label: master
20
21
    security:
22
```


```
23 user:
24 name: xzlgroup
25 password: xzlgroup
```

## 启动成功后

打开网页,由于使用了security,所以需要输入用户名密码

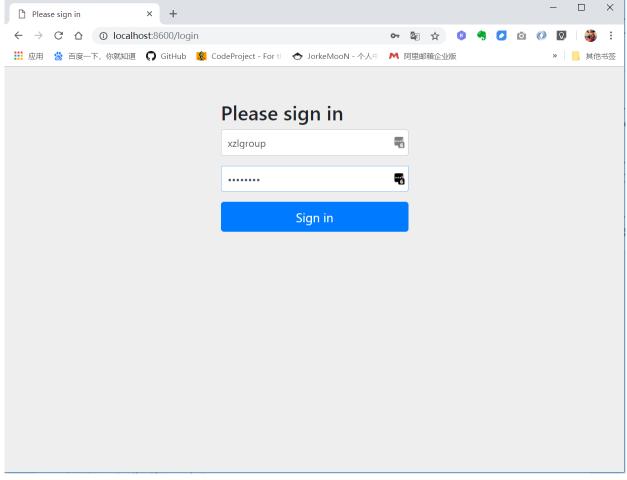

打开后显示这样,说明可以获取配置文件了

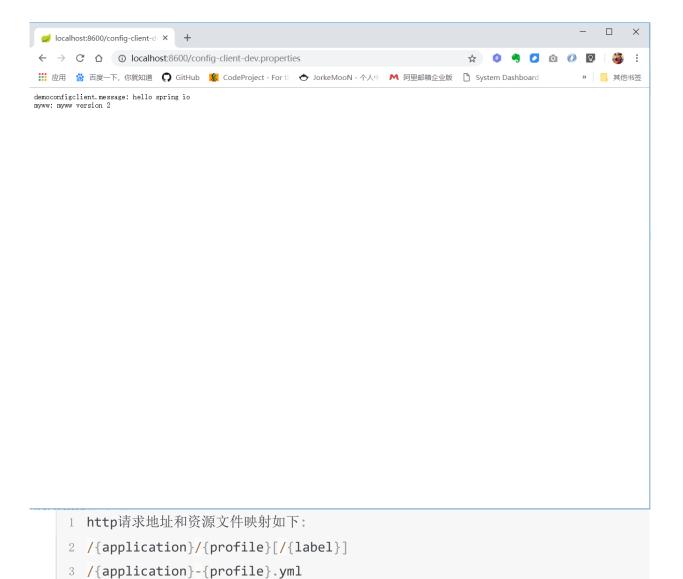

4 /{label}/{application}-{profile}.yml
5 /{application}-{profile}.properties

6 /{label}/{application}-{profile}.properties