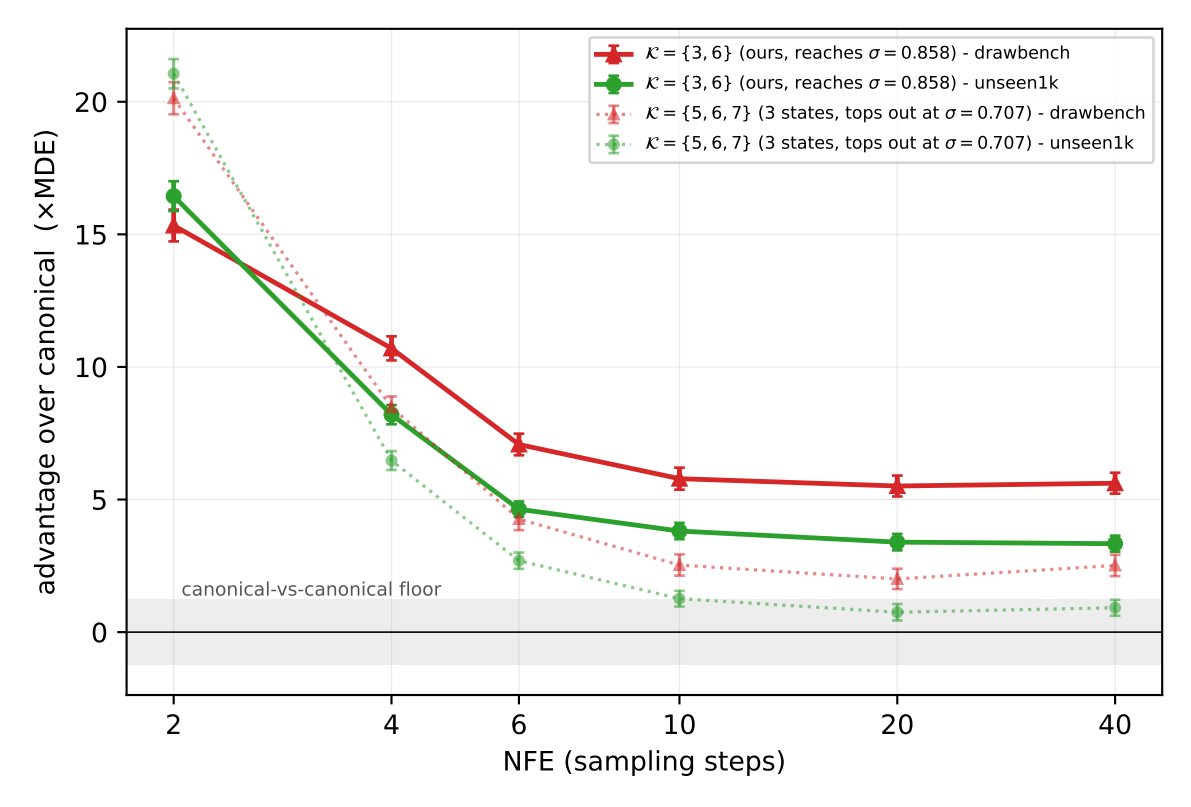
$\mathcal{K} = \{3, 6\}$ (ours, reaches $\sigma = 0.858$) - drawbench
$\mathcal{K} = \{3, 6\}$ (ours, reaches $\sigma = 0.858$) - unseen1k
$\mathcal{K} = \{5, 6, 7\}$ (3 states, tops out at $\sigma = 0.707$) - drawbench
$\mathcal{K} = \{5, 6, 7\}$ (3 states, tops out at $\sigma = 0.707$) - unseen1k
advantage over canonical (×MDE)
canonical-vs-canonical floor
NFE (sampling steps)
20
15
10
5
0
2
4
6
10
20
40