




- 4 (a) A linked list of nodes is used to store an ordered list of integers. Each node consists of the data, a left pointer and a right pointer, for example:

Left pointer Data Right pointer




The linked list will be organised as a binary tree.

–1 is used to represent a null pointer.

Complete the binary tree, including null pointers, to show how the data will be organised after the following integers have been added:

6, 15, 41, 66

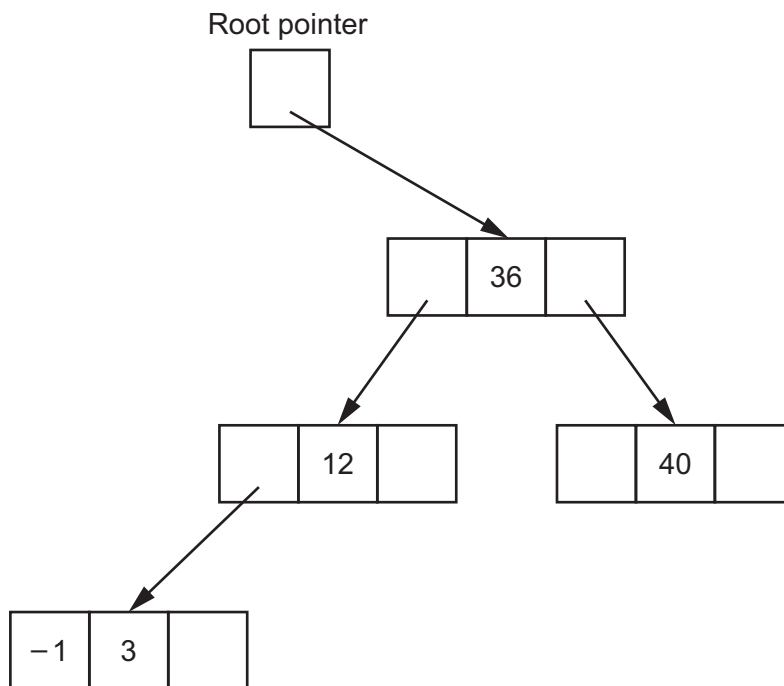

[4]

- (b) Describe what is meant by recursion.

.....

.....

.....

..... [2]

