


- 3 A program stores data in a binary tree that is designed using Object-Oriented Programming (OOP).

The tree stores data in ascending numerical order, for example:

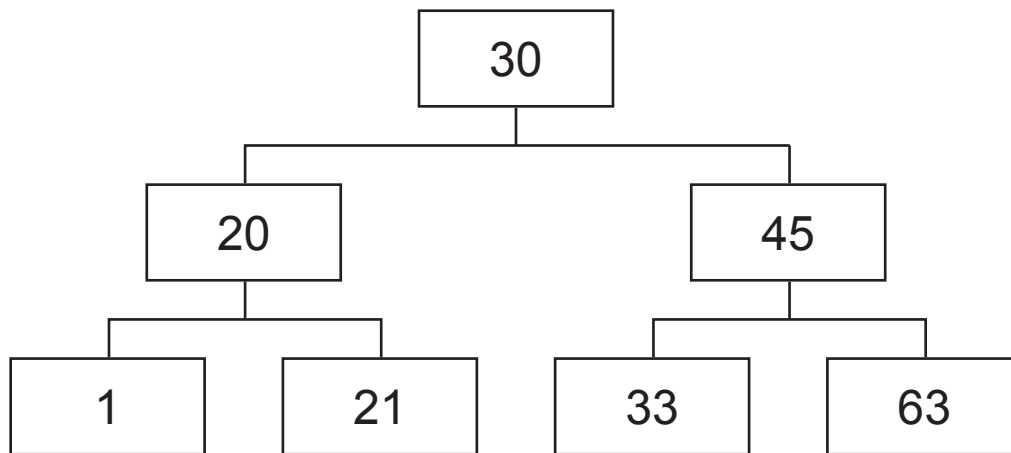

The class `Node` stores data about the nodes.

Node	
<code>NodeData : Integer</code>	stores the node's integer data
<code>LeftNode : Node</code>	stores the node that is stored to the left of the current node, or a null value if there is no node to the left
<code>RightNode : Node</code>	stores the node that is stored to the right of the current node, or a null value if there is no node to the right
<code>Constructor()</code>	initialises <code>NodeData</code> to its parameter value; initialises <code>LeftNode</code> and <code>RightNode</code> to a null value
<code>GetLeft()</code>	returns <code>LeftNode</code>
<code>GetRight()</code>	returns <code>RightNode</code>
<code>GetData()</code>	returns <code>NodeData</code>
<code>SetLeft()</code>	takes an object of type <code>Node</code> as a parameter and stores it in <code>LeftNode</code>
<code>SetRight()</code>	takes an object of type <code>Node</code> as a parameter and stores it in <code>RightNode</code>