


- 7 The flowchart shows an algorithm that is used to input 50 numbers. Each number is stored in the variable `Value` when it is input. Any number input that is less than or equal to -20 or greater than or equal to 50 is rejected and re-input. The accepted numbers are added together as they are entered and the total and average of these numbers are output at the end of the algorithm.

(a) Complete the flowchart.

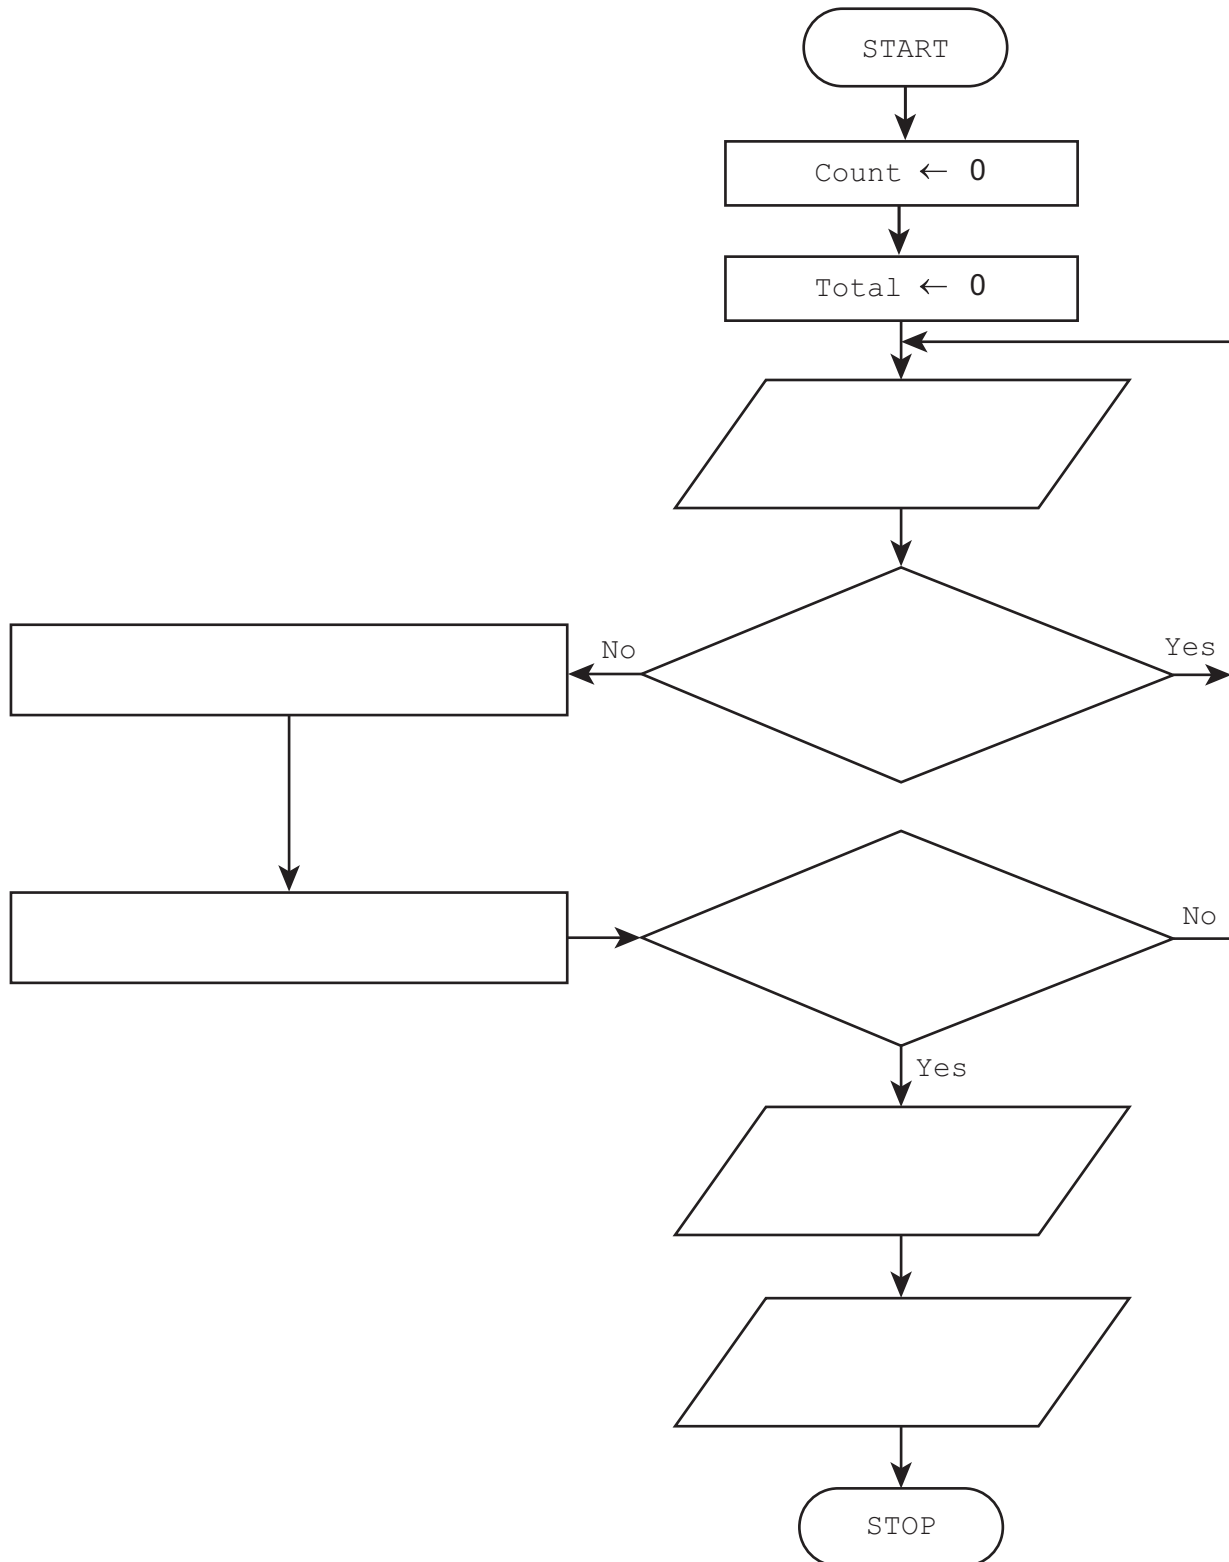

[6]