

Creamos el contenedor
Puerto 8080 y 8443

```
alumnado@iespsur:~/Descargas$ docker run -it --name prestashop-ssl  
-p 80:8080 -p 443:8443 antonio295/apache-php83-mariadb:v1 /bin/bash  
Unable to find image 'antonio295/apache-php83-mariadb:v1' locally  
v1: Pulling from antonio295/apache-php83-mariadb  
20043066d3d5: Pull complete  
58ca4e2a6d41: Pull complete  
Digest: sha256:7d95ad4bc29363b195820309a71ba04f307c4b4415580217f55f  
8dbad48f675f  
Status: Downloaded newer image for antonio295/apache-php83-mariadb:  
v1
```

```
ubuntu@ip-172-31-65-108:~$ docker run -it --name prestashop-ssl -p  
80:8080 -p 443:8443 antonio295/apache-php83-mariadb:v1 /bin/bash  
Unable to find image 'antonio295/apache-php83-mariadb:v1' locally  
v1: Pulling from antonio295/apache-php83-mariadb  
20043066d3d5: Pull complete  
58ca4e2a6d41: Pull complete  
Digest: sha256:7d95ad4bc29363b195820309a71ba04f307c4b4415580217f55f  
8dbad48f675f  
Status: Downloaded newer image for antonio295/apache-php83-mariadb:  
v1
```

/etc/apache2
vim ports.conf

```
root@ca29fa19c85d:/etc/apache2# ls  
apache2.conf  envvars      mods-enabled  sites-enabled  
conf-available  magic        ports.conf  
conf-enabled   mods-available  sites-available  
root@ca29fa19c85d:/etc/apache2# vim ports.conf
```

```
# If you just change the port or add more ports here, you will like  
ly also  
# have to change the VirtualHost statement in  
# /etc/apache2/sites-enabled/000-default.conf  
  
Listen 8080  
  
<IfModule ssl_module>  
    Listen 8443  
</IfModule>  
  
<IfModule mod_gnutls.c>  
    Listen 8443  
</IfModule>  
~
```

cd sites-enabled/
vim 000-default.conf

```
root@ca29fa19c85d: /etc/apache2/sites-avail...
root@ca29fa19c85d:/etc/apache2# ls
apache2.conf  envvars      mods-enabled  sites-enabled
conf-available  magic        ports.conf
conf-enabled   mods-available  sites-available
root@ca29fa19c85d:/etc/apache2# cd sites-enabled/
root@ca29fa19c85d:/etc/apache2/sites-enabled# vim 000-default.conf
```

Ponemos el puerto de escucha, que está en el 8080

```
root@ca29fa19c85d: /etc/apache2/sites-enab...
<VirtualHost *:8080>
    # The ServerName directive sets the request scheme, hostnam
    e and port that
    # the server uses to identify itself. This is used when cre
    ating
```

Cambiamos de directorio.

```
root@ca29fa19c85d: /etc/apache2/sites-available
root@ca29fa19c85d:/etc/apache2# cd sites-available/
root@ca29fa19c85d:/etc/apache2/sites-available# ls
000-default.conf  default-ssl.conf
root@ca29fa19c85d:/etc/apache2/sites-available# vim default-ssl.conf
```

Editamos el archivo default-ssl.conf que será el del HTTPS con el puerto 8443
vim default-ssl.conf

```
root@ca29fa19c85d: /etc/apache2/sites-available
<VirtualHost *:8443>
    ServerAdmin webmaster@localhost

    DocumentRoot /var/www/html
```

en mods-available, habilitamos el mod SSL

a2enmod ssl

```
root@ca29fa19c85d: /etc/apache2/mods-available
root@ca29fa19c85d:/etc/apache2/sites-available# cd ../mods-available/
root@ca29fa19c85d:/etc/apache2/mods-available# a2enmod ssl
Considering dependency mime for ssl:
Module mime already enabled
Considering dependency socache_shmcb for ssl:
Module socache_shmcb already enabled
Enabling module ssl.
See /usr/share/doc/apache2/README.Debian.gz on how to configure SSL and create self
-signed certificates.
To activate the new configuration, you need to run:
    service apache2 restart
root@ca29fa19c85d:/etc/apache2/mods-available# service apache2 restart
* Restarting Apache httpd web server apache2
AH00558: apache2: Could not reliably determine the server's fully qualified domain
name, using 172.17.0.2. Set the 'ServerName' directive globally to suppress this me
ssage
```

[OK]

reiniciamos el servicio apache (service apache2 restart)

Y finalmente, en sites-available, habilitamos el sitio ssl

cd ../sites-available

a2ensite default-ssl.conf

```
root@ca29fa19c85d: /etc/apache2/sites-available
root@ca29fa19c85d:/etc/apache2/sites-available# a2ensite default-ssl.conf
Enabling site default-ssl.
To activate the new configuration, you need to run:
  service apache2 reload
root@ca29fa19c85d:/etc/apache2/sites-available# service apache2 restart
* Restarting Apache httpd web server apache2
AH00558: apache2: Could not reliably determine the server's fully qualified domain
name, using 172.17.0.2. Set the 'ServerName' directive globally to suppress this me
ssage
[ OK ]
```

Generamos los certificados

openssl genrsa 2048 > /etc/ssl/private/marcosgarcia-rodriguez.key

```
root@ca29fa19c85d: ~
root@ca29fa19c85d:~# openssl genrsa 2048 > /etc/ssl/private/marcosgarcia-rodriguez.key
```

```
root@ca29fa19c85d: ~
root@ca29fa19c85d:~# openssl req -new -key /etc/ssl/private/marcosgarcia-rodriguez.key -x509
-days 365 -out /etc/ssl/certs/marcosgarcia-rodriguez.pem
You are about to be asked to enter information that will be incorporated
into your certificate request.
What you are about to enter is what is called a Distinguished Name or a DN.
There are quite a few fields but you can leave some blank
For some fields there will be a default value,
If you enter '.', the field will be left blank.
-----
Country Name (2 letter code) [AU]:ES
State or Province Name (full name) [Some-State]:Sevilla
Locality Name (eg, city) []:Sevilla
Organization Name (eg, company) [Internet Widgits Pty Ltd]:IESPSUR
Organizational Unit Name (eg, section) []:IESPSUR25
Common Name (e.g. server FQDN or YOUR name) []:Marcos
Email Address []:marcos.garcia.rodriguez.al@iespoligonosur.org
```

Comprobamos que están los certificados en sus lugares correspondientes y correctamente generados.

```
root@ca29fa19c85d:~# ls /etc/ssl/private/
marcosgarcia-rodriguez.key  ssl-cert-snakeoil.key
```

```
root@ca29fa19c85d:~# ls /etc/ssl/certs/ | grep marcos
marcosgarcia-rodriguez.pem
```

Agregamos las rutas en el archivo de configuración del sitio seguro
vim /etc/apache2/sites-enabled/default-ssl.conf

```
root@ca29fa19c85d:~# vim /etc/apache2/sites-enabled/default-ssl.conf
```

Y agregamos las líneas, que serán simplemente editar las rutas activas por los archivos que acabamos de crear.

```
root@ca29fa19c85d: ~
<VirtualHost *:8443>
    ServerAdmin webmaster@localhost

    DocumentRoot /var/www/html

    # Available loglevels: trace8, ..., trace1, debug, info, notice, warn,
    # error, crit, alert, emerg.
    # It is also possible to configure the loglevel for particular
    # modules, e.g.
    #LogLevel info ssl:warn

    ErrorLog ${APACHE_LOG_DIR}/error.log
    CustomLog ${APACHE_LOG_DIR}/access.log combined

    # For most configuration files from conf-available/, which are
    # enabled or disabled at a global level, it is possible to
    # include a line for only one particular virtual host. For example the
    # following line enables the CGI configuration for this host only
    # after it has been globally disabled with "a2disconf".
    #Include conf-available/serve-cgi-bin.conf

    # SSL Engine Switch:
    # Enable/Disable SSL for this virtual host.
    SSLEngine on

    # A self-signed (snakeoil) certificate can be created by installing
    # the ssl-cert package. See
    # /usr/share/doc/apache2/README.Debian.gz for more info.
    # If both key and certificate are stored in the same file, only the
    # SSLCertificateFile directive is needed.
    SSLCertificateFile      /etc/ssl/certs/marcosgarciarodriguez.pem
    SSLCertificateKeyFile   /etc/ssl/private/marcosgarciarodriguez.key
```

Reiniciamos el servicio por si acaso
service apache2 restart

```
root@ca29fa19c85d:~# service apache2 restart
* Restarting Apache httpd web server apache2
AH00558: apache2: Could not reliably determine the server's fully qualified domain name, us
ing 172.17.0.2. Set the 'ServerName' directive globally to suppress this message
[ OK ]
```

Entramos en la IP con HTTPS y vemos el certificado.

Visor de certificados: Marcos

General

Detalles

Enviado a

Nombre común (CN)

Organización (O)

Unidad organizativa (OU)

Marcos

IESPSUR

IESPSUR25

Emitido por

Nombre común (CN)

Organización (O)

Unidad organizativa (OU)

Marcos

IESPSUR

IESPSUR25

Periodo de validez

Emitido el

Vencimiento el

jueves, 11 de diciembre de 2025, 12:28:33

viernes, 11 de diciembre de 2026, 12:28:33

Huellas digitales SHA-256

Certificado

Clave pública

3eedc9e76bf7ace9c9872a8a59d247d4fae011bbf793e26a38561505bd330cd6

dc91474ee233b0133ba1b2a991ef917293b11e8109e2888d32a6c569883b5b52

INSTALACIÓN DE PRESTASHOP

Habilitamos el redirect en ambos protocolos para moodle.

```
root@ca29fa19c85d:/etc/apache2/sites-enabled# vim 000-default.conf
```

```
root@ca29fa19c85d: /etc/apache2/sites-enabled

<VirtualHost *:8080>
    # The ServerName directive sets the request scheme, hostname and port that
    # the server uses to identify itself. This is used when creating
    # redirection URLs. In the context of virtual hosts, the ServerName
    # specifies what hostname must appear in the request's Host: header to
    # match this virtual host. For the default virtual host (this file) this
    # value is not decisive as it is used as a last resort host regardless.
    # However, you must set it for any further virtual host explicitly.
    #ServerName www.example.com

    ServerAdmin webmaster@localhost
    DocumentRoot /var/www/html
    redirect /aulavirtual /https://www.moodle.org
```

```
root@ca29fa19c85d:/etc/apache2/sites-enabled# vim 000-default.conf
```

```
root@ca29fa19c85d: /etc/apache2/sites-enabled

<VirtualHost *:8443>
    ServerAdmin webmaster@localhost

    DocumentRoot /var/www/html

    # Available loglevels: trace8, ..., trace1, debug, info, notice, warn,
    # error, crit, alert, emerg.
    # It is also possible to configure the loglevel for particular
    # modules, e.g.
    #LogLevel info ssl:warn

    ErrorLog ${APACHE_LOG_DIR}/error.log
    CustomLog ${APACHE_LOG_DIR}/access.log combined
    redirect /aulavirtual /https://www.moodle.org
```

Reiniciamos el servicio

```
root@ca29fa19c85d:/etc/apache2/sites-enabled# service apache2 restart
 * Restarting Apache httpd web server apache2
AH00558: apache2: Could not reliably determine the server's fully qualified domain name, using 172.
17.0.2. Set the 'ServerName' directive globally to suppress this message

[ OK ]
```


Instalamos el servicio
Creamos la BBDD.

```
root@ca29fa19c85d:/# mysql -u root -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 34
Server version: 10.11.13-MariaDB-0ubuntu0.24.04.1 Ubuntu 24.04

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> show databases;
+-----+
| Database |
+-----+
| ddbb      |
| information_schema |
| mysql     |
| performance_schema |
| sys       |
+-----+
5 rows in set (0.003 sec)

MariaDB [(none)]> CREATE DATABASE prestashop;
Query OK, 1 row affected (0.000 sec)

MariaDB [(none)]> CREATE USER 'usuario'@'localhost' IDENTIFIED BY 'Hola2025.';
Query OK, 0 rows affected (0.002 sec)

MariaDB [(none)]> GRANT ALL PRIVILEGES ON prestashop.* TO 'usuario'@'localhost';
Query OK, 0 rows affected (0.002 sec)

MariaDB [(none)]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.001 sec)

MariaDB [(none)]> EXIT;
Bye
```

Descargamos el zip de prestashop indicado en otra tarea de classroom.
wget

https://assets.prestashop3.com/dst/edition/corporate/9.0.0-1.0/prestashop_edition_classic_version_9.0.0-1.0.zip

```
root@ca29fa19c85d:/var/www/html# wget https://assets.prestashop3.com/dst/edition/corporate/9.0.0-1.0/prestashop_edition_classic_version_9.0.0-1.0.zip
--2025-12-12 12:33:37-- https://assets.prestashop3.com/dst/edition/corporate/9.0.0-1.0/prestashop_edition_classic_version_9.0.0-1.0.zip
Resolving assets.prestashop3.com (assets.prestashop3.com)... 104.18.12.212, 104.18.13.212, 2606:4700::6812:dd4, ...
Connecting to assets.prestashop3.com (assets.prestashop3.com)|104.18.12.212|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 122558555 (117M) [application/zip]
Saving to: 'prestashop_edition_classic_version_9.0.0-1.0.zip'

prestashop_edition_classi 100%[=====] 116.88M  39.1MB/s   in 3.0s


2025-12-12 12:33:41 (39.1 MB/s) - 'prestashop_edition_classic_version_9.0.0-1.0.zip' saved [122558555/122558555]
```

```
root@ca29fa19c85d:/var/www/html# ls
index.html  prestashop_edition_classic_version_9.0.0-1.0.zip
root@ca29fa19c85d:/var/www/html# unzip prestashop_edition_classic_version_9.0.0-1.0.zip
Archive:  prestashop_edition_classic_version_9.0.0-1.0.zip
  inflating: prestashop.zip
  inflating: index.php
  inflating: Install_PrestaShop.html
root@ca29fa19c85d:/var/www/html# ls
Install_PrestaShop.html  index.php  prestashop_edition_classic_version_9.0.0-1.0.zip
index.html              prestashop.zip
```

Eliminamos el index.html

```
root@ca29fa19c85d:/var/www/html# rm index.html
root@ca29fa19c85d:/var/www/html# ls
Install_PrestaShop.html  prestashop.zip
index.php                prestashop_edition_classic_version_9.0.0-1.0.zip
```

Accedemos a la web desde la IP, ya no tenemos que indicar puertos porque lo tenemos configurado.

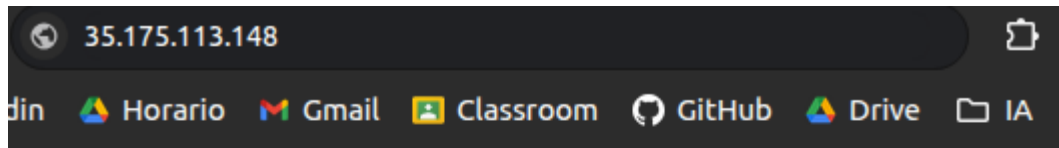

Installing Prestashop 9.0.0

0 %

An error has occurred:
You must install PHP zip extension first

Instalamos la extensión zip

```
root@ca29fa19c85d:/var/www/html# apt install php-zip
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
```

```
root@ca29fa19c85d:/var/www/html# cd /etc/php/8.3/apache2/
root@ca29fa19c85d:/etc/php/8.3/apache2# ls
conf.d  php.ini
root@ca29fa19c85d:/etc/php/8.3/apache2# vim php.ini
```

```
;extension=xsl
extension=zip
```



```
root@ca29fa19c85d: /etc/php/8.3/apache2

;extension=tidy
;extension=xsl
extension=zip
```

Instalación de nuevo

Borramos todas las versiones de PHP. Se queda la 8.3 por paquetes asociados y no se eliminan con este comando.

```
root@ca29fa19c85d:/var/www# apt remove php-* -y --purge
```

Borramos también la versión 8.3 específicamente con este comando

```
root@ca29fa19c85d:/var/www# apt remove php8.3
```

```
root@ca29fa19c85d:/var/www# apt remove --purge php8.3*
```

Eliminamos los servicios de LAM

```
root@ca29fa19c85d:/var/www# apt remove apache2* mariadb-server*
```

Volvemos a instalar todos los servicios, y instalamos php indicando la versión 8.4

```
root@ca29fa19c85d:/var/www# apt install apache2 mariadb-server php8.4
```

Instalamos todas las dependencias.

```
root@ca29fa19c85d:/var/www# apt install libapache2-mod-php php-mysql php-cli php-curl php-xml php-gd php-mbstring php-zip php-intl php-soap php-bcmath
```

Reiniciamos el servicio apache y asignamos permisos

```
root@ca29fa19c85d:/var/www# chown -R www-data:www-data html/
```