



TECNOLÓGICO NACIONAL DE MEXICO

INSTITUTO TECNOLÓGICO DE VERACRUZ
ING. EN SISTEMAS COMPUTACIONALES
ADMINISTRACION DE BASES DE DATOS

Grupo:

6J3

ACTIVIDAD:

Instalación y configuración de una base de datos de grafos
(Neo4j)


ALUMNO:

Ramírez Sánchez Luis Eduardo

NUMERO DE CONTROL:

22020500

1.-Se inicializo git y se pusieron los datos de github

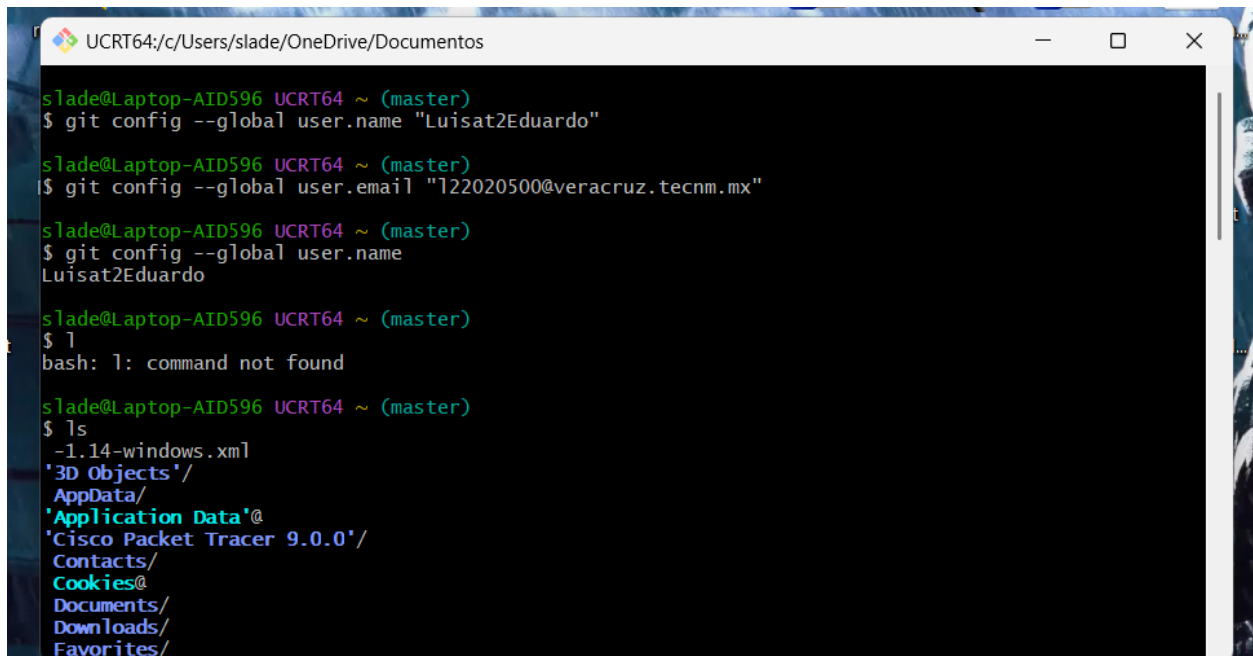

```
UCRT64;c/Users/slade/OneDrive/Documentos
slade@Laptop-AID596 UCRT64 ~ (master)
$ git config --global user.name "Luisat2Eduardo"


slade@Laptop-AID596 UCRT64 ~ (master)
$ git config --global user.email "l22020500@veracruz.tecnm.mx"

slade@Laptop-AID596 UCRT64 ~ (master)
$ git config --global user.name
Luisat2Eduardo

slade@Laptop-AID596 UCRT64 ~ (master)
$ l
bash: l: command not found

slade@Laptop-AID596 UCRT64 ~ (master)
$ ls
-1.14-windows.xml
'3D Objects'/
AppData/
'Application Data'@
'Cisco Packet Tracer 9.0.0'/
Contacts/
Cookies@
Documents/
Downloads/
Favorites/
```

2.- Se clono el repositorio de la materia mediante "git clone"

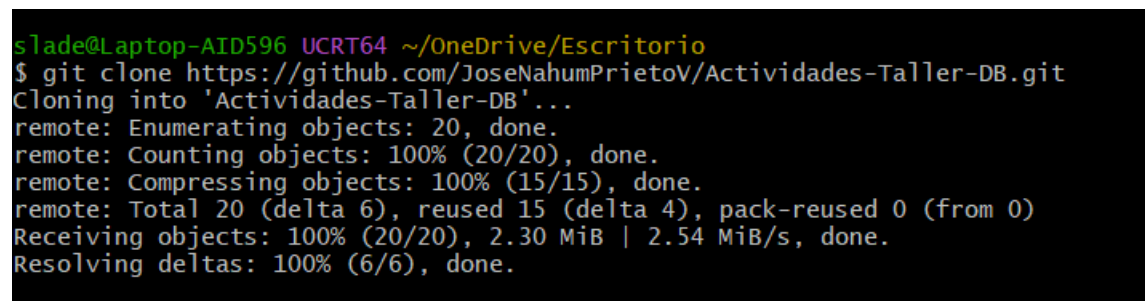

```
slade@Laptop-AID596 UCRT64 ~/OneDrive/Escritorio
$ git clone https://github.com/JoseNahumPrietoV/Actividades-Taller-DB.git
Cloning into 'Actividades-Taller-DB'...
remote: Enumerating objects: 20, done.
remote: Counting objects: 100% (20/20), done.
remote: Compressing objects: 100% (15/15), done.
remote: Total 20 (delta 6), reused 15 (delta 4), pack-reused 0 (from 0)
Receiving objects: 100% (20/20), 2.30 MiB | 2.54 MiB/s, done.
Resolving deltas: 100% (6/6), done.
```

3.- Se cambio el directorio hacia la carpeta del repositorio, se movio el archivo a al carpeta y mediante git status corroboramos que debemos ejecutar “git add .” y finalmente se hizo el commit al repositorio

```
slade@Laptop-AID596 UCRT64 ~/OneDrive/Escritorio
$ cd Actividades-Taller-DB/

slade@Laptop-AID596 UCRT64 ~/OneDrive/Escritorio/Actividades-Taller-DB (main)
$ ls
'Documentacion Admin de BD - Actividad 1 y 2 - Ahri Pamela Castro Ortiz.pdf' 'Practica 1.pdf'
'Documentación podman.docx' README.md

slade@Laptop-AID596 UCRT64 ~/OneDrive/Escritorio/Actividades-Taller-DB (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
  RamirezSanchezLuisEduardo_Practica1Y2_AdminDB.pdf

nothing added to commit but untracked files present (use "git add" to track)

slade@Laptop-AID596 UCRT64 ~/OneDrive/Escritorio/Actividades-Taller-DB (main)
$ git add.
git: 'add.' is not a git command. See 'git --help'.

The most similar command is
  add

slade@Laptop-AID596 UCRT64 ~/OneDrive/Escritorio/Actividades-Taller-DB (main)
$ git add .

slade@Laptop-AID596 UCRT64 ~/OneDrive/Escritorio/Actividades-Taller-DB (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
  new file:   RamirezSanchezLuisEduardo_Practica1Y2_AdminDB.pdf
```

```

slade@Laptop-AID596 UCRT64 ~/OneDrive/Escritorio/Actividades-Taller-DB (main)
$ git commit -m "Practica 1 y 2 Luis Eduardo"
[main ae4395b] Practica 1 y 2 Luis Eduardo
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 RamirezSanchezLuisEduardo_Practica1Y2_AdminDB.pdf

slade@Laptop-AID596 UCRT64 ~/OneDrive/Escritorio/Actividades-Taller-DB (main)
$ git push origin main
remote: Invalid username or token. Password authentication is not supported for Git operations.
fatal: Authentication failed for 'https://github.com/JoseNahumPrietoV/Actividades-Taller-DB.git/'

slade@Laptop-AID596 UCRT64 ~/OneDrive/Escritorio/Actividades-Taller-DB (main)
$ git push origin main
info: please complete authentication in your browser...

slade@Laptop-AID596 UCRT64 ~/OneDrive/Escritorio/Actividades-Taller-DB (main)
$ git push origin main
info: please complete authentication in your browser...
To https://github.com/JoseNahumPrietoV/Actividades-Taller-DB.git
 ! [rejected]        main -> main (fetch first)
error: failed to push some refs to 'https://github.com/JoseNahumPrietoV/Actividades-Taller-DB.git'
hint: Updates were rejected because the remote contains work that you do not
hint: have locally. This is usually caused by another repository pushing to
hint: the same ref. If you want to integrate the remote changes, use
hint: 'git pull' before pushing again.
hint: See the 'Note about fast-forwards' in 'git push --help' for details.

slade@Laptop-AID596 UCRT64 ~/OneDrive/Escritorio/Actividades-Taller-DB (main)
$ git pull --rebase origin main
remote: Enumerating objects: 5, done.
remote: Counting objects: 100% (5/5), done.
remote: Compressing objects: 100% (3/3), done.
remote: Total 4 (delta 1), reused 4 (delta 1), pack-reused 0 (from 0)
Unpacking objects: 100% (4/4), 350.00 KiB | 1.06 MiB/s, done.
From https://github.com/JoseNahumPrietoV/Actividades-Taller-DB
 * branch            main      -> FETCH_HEAD
 * 44225f1..282b47c  main      -> origin/main
Successfully rebased and updated refs/heads/main.

slade@Laptop-AID596 UCRT64 ~/OneDrive/Escritorio/Actividades-Taller-DB (main)
$ git push origin main
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 8 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 611.98 KiB | 21.10 MiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/JoseNahumPrietoV/Actividades-Taller-DB.git
 282b47c..eab7586  main -> main

slade@Laptop-AID596 UCRT64 ~/OneDrive/Escritorio/Actividades-Taller-DB (main)
$

```


4.- Se hizo un pull para obtener la imagen de neo4j , una vez terminada la descarga se configuro las credenciales de acceso default y los puertos que usara los cuales son 2 debido a que tiene un puerto web y uno convencional inmediatamente después se inicio el contenedor con el servicio

```


eduardo@localhost:~$ podman pull docker.io/library/neo4j:5
Trying to pull docker.io/library/neo4j:5...
Getting image source signatures
Copying blob 6b37362b3da7 skipped: already exists
Copying blob 4f4fb700ef54 done |
Copying blob c4f47c9e92a5 done |
Copying blob 5b03c90e3c65 done |
Copying blob 80dcd183d2b7 done |
Copying config 2d8d9803fb done |
Writing manifest to image destination
2d8d9803fbc0cb13143971c97618d30a77dc597b96a2dea20a776a64e5fc9c8c
eduardo@localhost:~$ podman create --name neo4j -e NEO4J_AUTH=neo4j/Metalslug6 -p 7474:7474 -p 7687:7687 -v neo4j_data:/data:Z docker.io/library/neo4j:5
f0134c07c270149c21d846b06534e06bab544933598a269ed99d6af696748cd4
eduardo@localhost:~$ podman start neo4j
neo4j

```

5.-Se corroboro la conectividad con el socket de localhost y el puerto 7687 mostrando el panel web

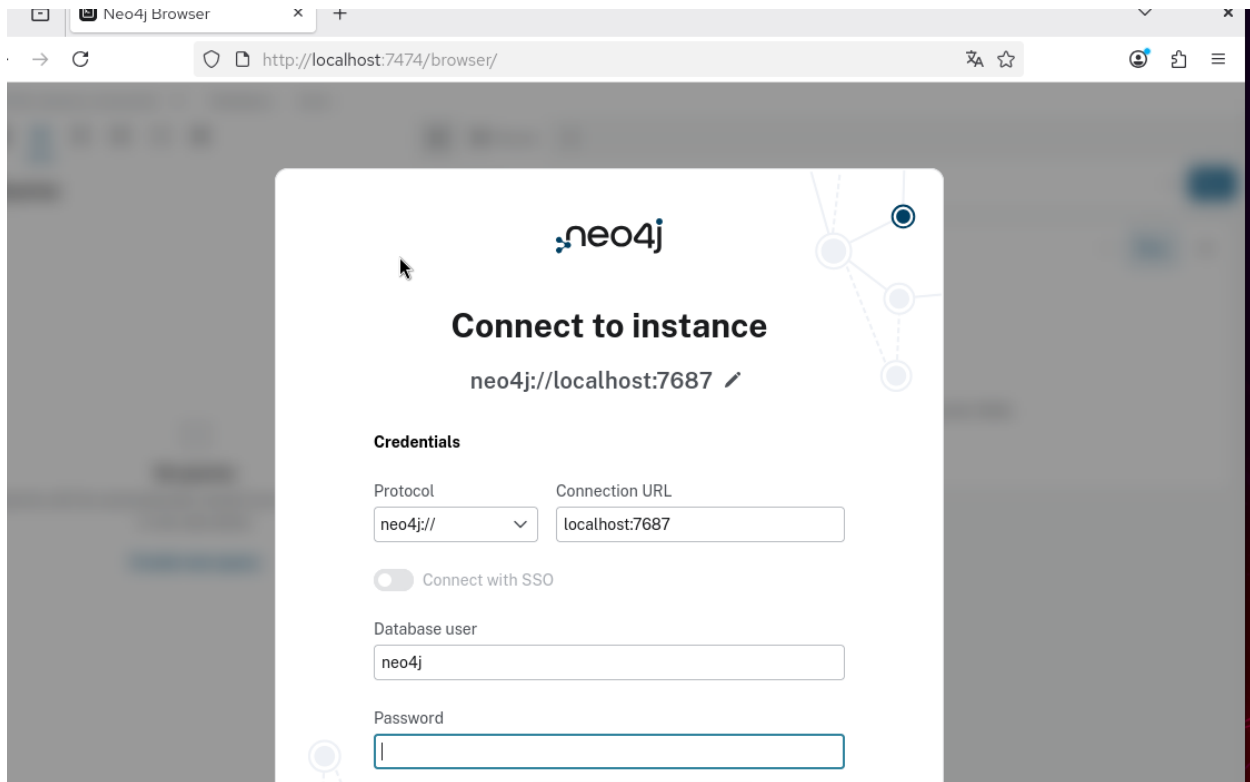

6.- Se inicio sesión correctamente con las credenciales

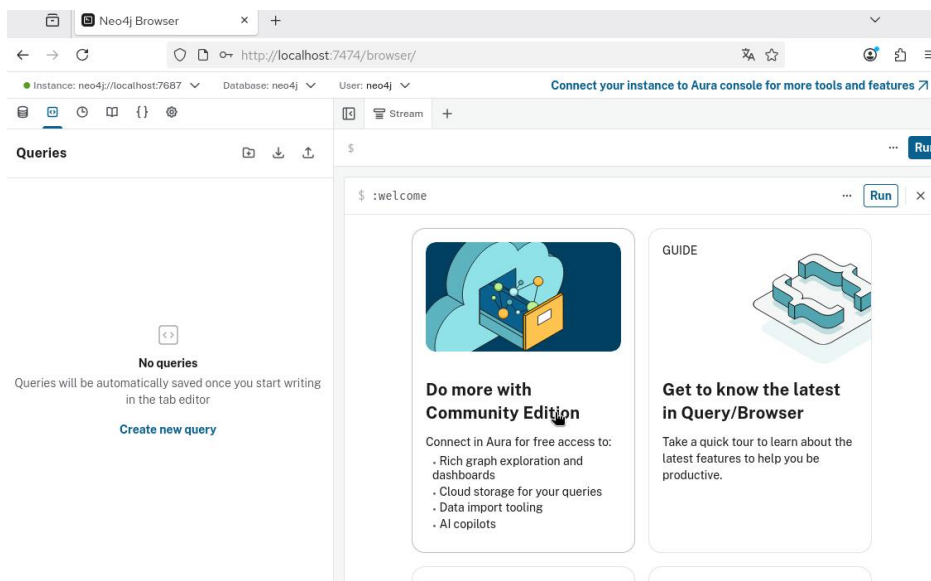

7.-Se establecio como un demonio predeterminado del sistema mediante systemctl , para que no se requiera su activación manual cada que arranque la computadora

```
eduardo@localhost:~/.config/systemd/user
~/config/systemd/user

eduardo@localhost:~$ cd ~/.config/systemd/user
eduardo@localhost:~/.config/systemd/user$ podman generate systemd --name neo4j --files

DEPRECATED command:
It is recommended to use Quadlets for running containers and pods under systemd.

Please refer to podman-systemd.unit(5) for details.
/home/eduardo/.config/systemd/user/container-neo4j.service
eduardo@localhost:~/.config/systemd/user$ systemctl --user daemon-reload
eduardo@localhost:~/.config/systemd/user$ systemctl --user enable container-neo4j.service
Created symlink '/home/eduardo/.config/systemd/user/default.target.wants/container-neo4j.service' → '/home/eduardo/.c
onfig/systemd/user/container-neo4j.service'.
eduardo@localhost:~/.config/systemd/user$ S
```