



TECNOLÓGICO NACIONAL DE MÉXICO

INSTITUTO TECNOLÓGICO DE VERACRUZ
ING. EN SISTEMAS COMPUTACIONALES
ADMINISTRACION DE BASES DE DATOS

Grupo:

6J3

ACTIVIDAD:

Creación de usuarios y roles en una base de datos de grafos
(Neo4j)


ALUMNO:

Ramírez Sánchez Luis Eduardo


NUMERO DE CONTROL:

22020500


1.-Mediante la obtención de los componentes corroboramos que la versión Desktop nos brinda un modelo Enterprise para pruebas

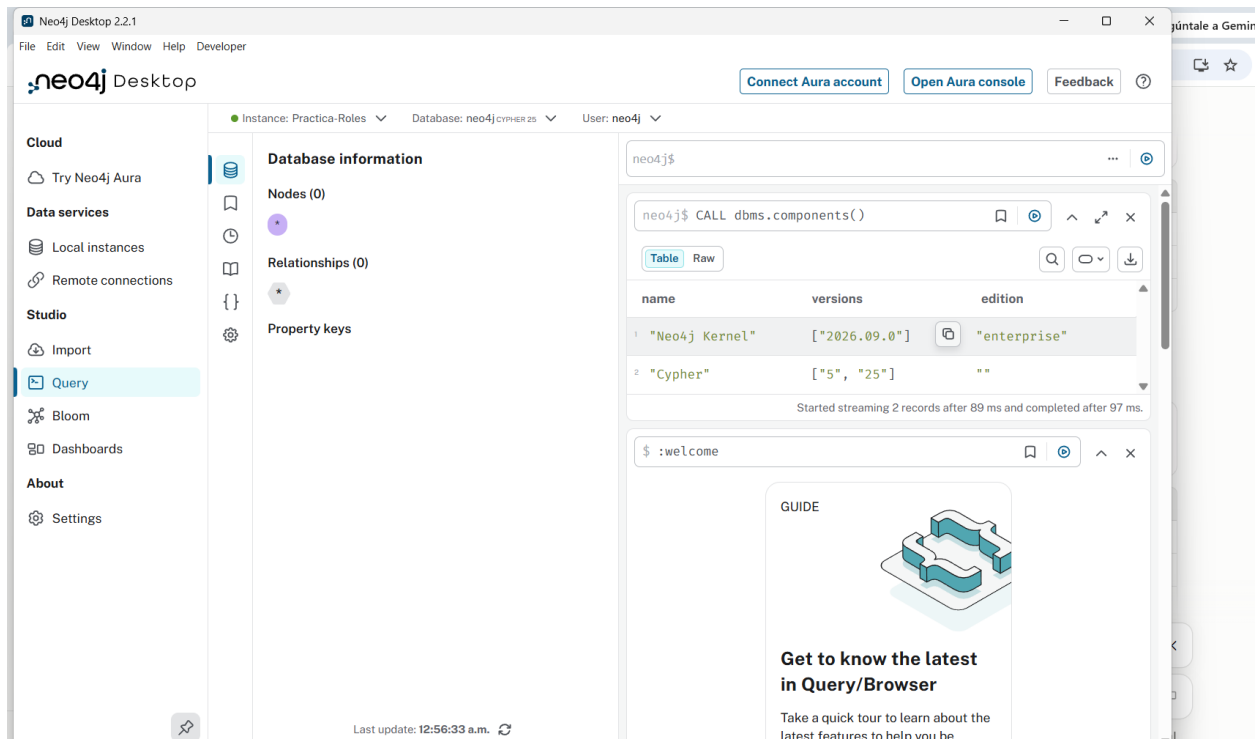

2.-Se cambio de “DATABASE” a system para guardar los usuarios y roles en la configuración del sistema además de crear 2 usuarios y especificar que no debe cambiar la contraseña al iniciar sesion

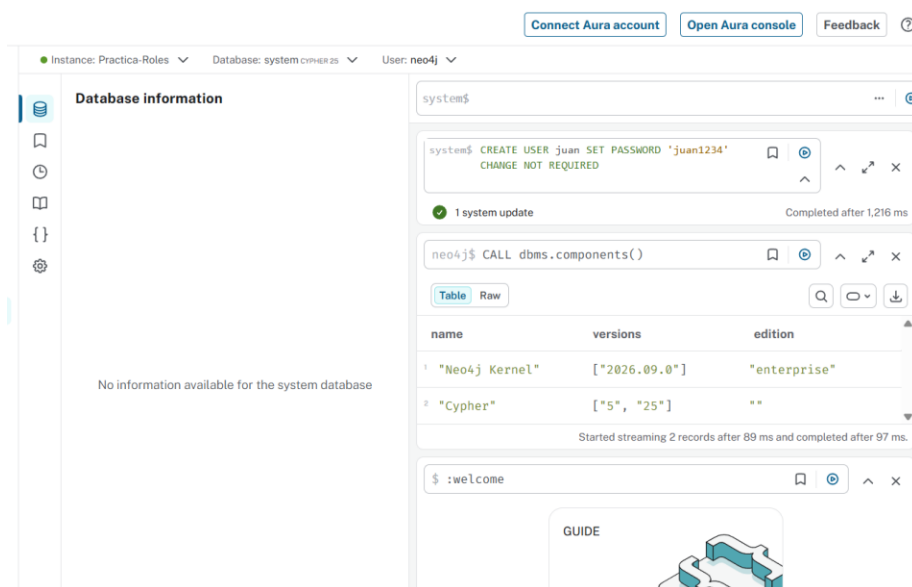

3.-Se corroboran los usuarios insertados

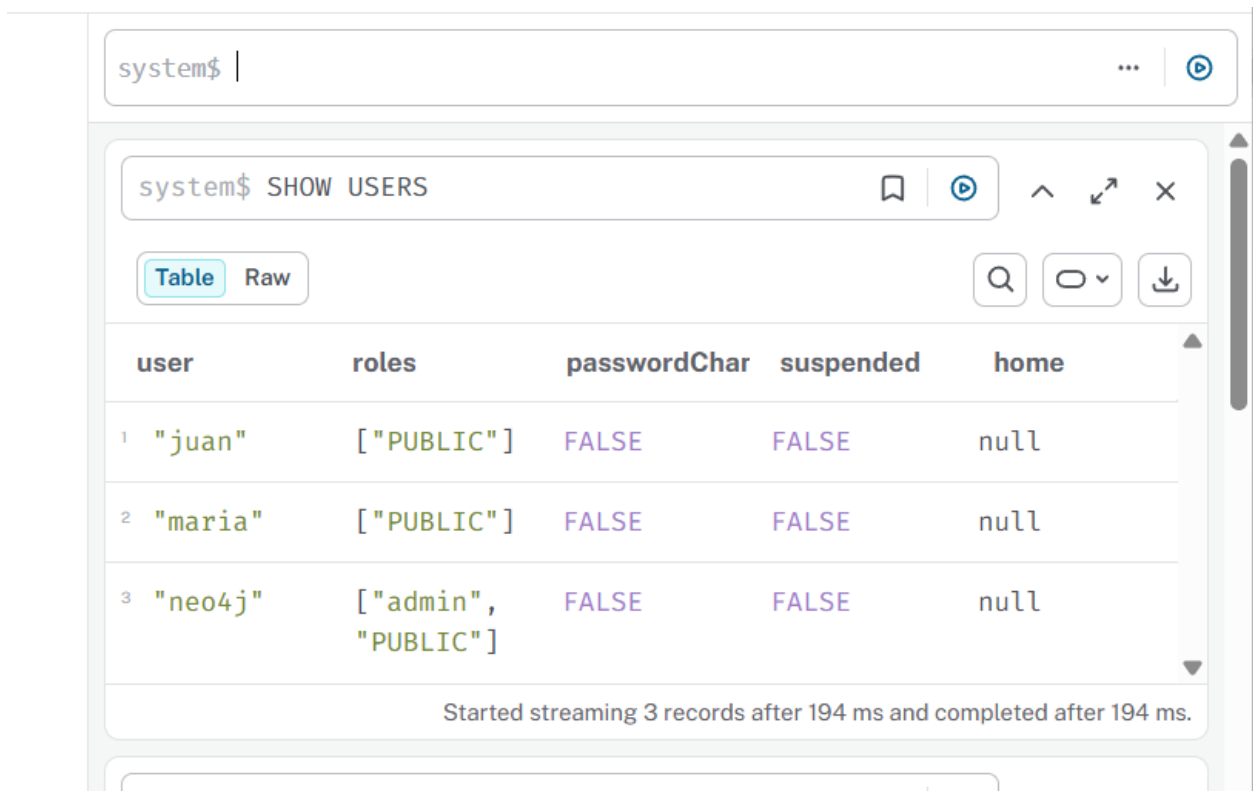

The screenshot shows the Neo4j Cypher Shell interface. At the top, the prompt is 'system\$'. Below it, the command 'system\$ SHOW USERS' is entered. The results are displayed in a table view, with columns: 'user', 'roles', 'passwordChar', 'suspended', and 'home'. There are three rows of data. Below the table, a status message reads: 'Started streaming 3 records after 194 ms and completed after 194 ms.'

	user	roles	passwordChar	suspended	home
1	"juan"	["PUBLIC"]	FALSE	FALSE	null
2	"maria"	["PUBLIC"]	FALSE	FALSE	null
3	"neo4j"	["admin", "PUBLIC"]	FALSE	FALSE	null

4.-Mediante "SHOW ROLES" podemos observar los roles por defecto en Neo4J , cada rol tiene los permisos del anterior en orden ascendente (a excepción de public ese lo tienen todos)

ice: Practica-Roles Database: system.cypher25 User: neo4j

Connect Aura account Open Aura console Feedback ?

Database information

system\$

system\$ SHOW ROLES

role
1 "PUBLIC"
2 "admin"
3 "architect"
4 "editor"
5 "publisher"
6 "reader"

No information available for the system database

Started streaming 6 records after 6 ms and completed after 8 ms.

neo4j\$ MATCH (n:Cliente) RETURN n LIMIT 25;

Graph Table Raw

Results overview

Nodes (2)

* (2) Cliente (2)

5.-Mediante GRANT ROLE asignamos uno de los roles predeterminados en este caso el de “lector” al usuario “juan”

User: neo4j


system\$

system\$ GRANT ROLE reader TO juan

1 system update Completed after 1,060 r

\$:welcome

GUIDE



system\$ |

system\$ SHOW USERS

Table Raw

	user	roles	passwordChar	suspended	home
1	"juan"	["reader", "PUBLIC"]	FALSE	FALSE	null
2	"maria"	["PUBLIC"]	FALSE	FALSE	null
3	"neo4j"	["admin", "PUBLIC"]	FALSE	FALSE	null

Started streaming 3 records after 194 ms and completed after 198 ms.

system\$ GRANT ROLE reader TO juan

tabase

6.-Se crea el rol para solo consultar clientes el cual inicia vacio de ahí se le da permiso para entrar a la BD neo4j le permitimos ver los nodos de cliente con todos sus propiedades gracias a "*" y finalmente se le asigna el rol a maria

system\$

system\$ CREATE ROLE consulta_clientes

1 system update Completed after 280 ms

system\$ SHOW USERS

system\$



```
system$ GRANT ACCESS ON DATABASE neo4j TO  
consulta_clientes
```



1 system update

Completed after 2,037 ms

```
system$ SHOW USERS
```



system\$ |



```
system$ GRANT MATCH {*} ON GRAPH neo4j NODES
```



1 system update

Completed after 784 ms

system\$ |



```
system$ GRANT ROLE consulta_clientes TO maria
```



1 system update

Completed after 255 ms