

Zurich ServiceNow AI Platform Capabilities

Last updated: January 16, 2026

Some examples and graphics depicted herein are provided for illustration only. No real association or connection to ServiceNow products or services is intended or should be inferred.

This PDF was created from content on docs.servicenow.com. The web site is updated frequently. For the most current ServiceNow product documentation, go to docs.servicenow.com.

Company Headquarters


2225 Lawson Lane
Santa Clara, CA 95054
United States
(408)501-8550

CMDB Workspace store app

The CMDB Workspace is an efficient, central, and modernized way for you to work. Use CMDB Workspace to search and explore the CMDB, examine health and recent activities, and access CMDB dashboards and tools to support tasks in your organization.

Watch the following video to get started with CMDB Workspace. Depending on the version of your CMDB Workspace, some UI elements and features might differ.

Get started

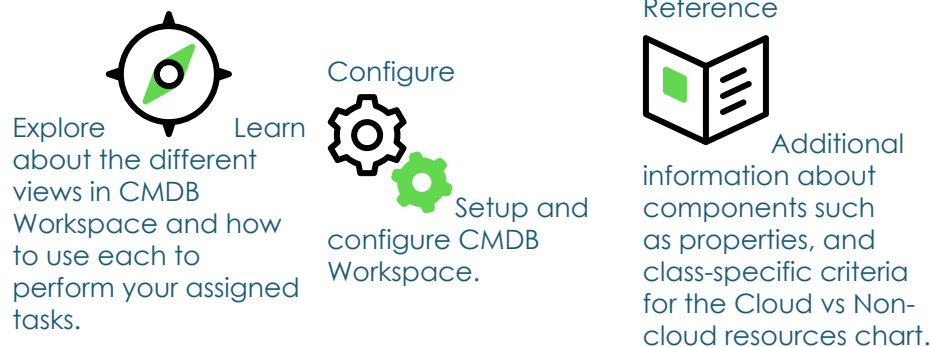

Troubleshoot and get help

- [Now Assist for Configuration Management Database \(CMDB\)](#)
- [Ask questions and explore other resources for in the ServiceNow Community](#)
- [Search the Known Error Portal for known error articles](#)
- [Contact Customer Service and Support](#)
- [Exploring CMDB Workspace](#)

Learn more about CMDB Workspace, its different views, and its benefits when using key CMDB features such as CMDB Health, CMDB Data Manager, and CMDB 360.

- [Configuring CMDB Workspace](#)

Plan and configure your implementation of CMDB Workspace.

- [Create a CI manually in CMDB Workspace](#)

Create a new CI in CMDB Workspace, while applying Identification and Reconciliation Engine (IRE) processes and other requirements for the CI's class. IRE identification rules enforce the new CI to be unique and to comply with other class requirements.

- [Manage CI details in CI Form](#)

Use CI Form in CMDB Workspace or in another workspace, to view, edit, and manage a comprehensive set of details of a CI such as its attributes, related lists, and CMDB 360 records. When updating CIs, IRE rules are applied to avoid potential issues such as duplicate CIs. CI Form supports derivation of form configurations throughout the CMDB hierarchy.

- [Resume a disabled Cloud vs Non-cloud resources scheduled job](#)

Reactivate a scheduled job to resume data collection for the Cloud vs Non-cloud resources chart in CMDB Workspace.

- [Edit a related table from CMDB performance insights](#)

Edit a related table on the Related Entries [cmdb_related_entry] table directly from the CMDB performance insights tool in the CMDB Workspace Insights view. Update the related table to correctly reference another CI in the Referenced field when a reference is missing from the related table.

- [Edit a data source from CMDB performance insights](#)

Edit a data source for your Service Graph Connectors to specify the data that an import set should ingest. Consider configuring a batch process to make ingestion more efficient and improve performance.

- [Edit a scheduled data import from CMDB performance insights](#)

Edit a scheduled data import directly from CMDB performance insights for your Service Graph Connectors. Consider enabling **Concurrent Import** with a custom size partition to split incoming data into multiple import sets and transform the import sets concurrently to reduce processing time.

- [CMDB Workspace reference](#)

Reference topics provide additional information about components such as properties, installed with CMDB Workspace and class-specific criteria for the Cloud vs Non-cloud resources chart.

Exploring CMDB Workspace

Learn more about CMDB Workspace, its different views, and its benefits when using key CMDB features such as CMDB Health, CMDB Data Manager, and CMDB 360.

CMDB Workspace overview

The CMDB Workspace is an efficient, central, and modernized way for you to work. Use CMDB Workspace to search and explore the CMDB, examine health and recent activity, and access various CMDB dashboards and tools to support tasks in your organization.

General interaction and additional information

- CMDB Workspace leverages many [Performance Analytics](#) capabilities and features, such as indicator sources. Throughout the CMDB Workspace views, you can select the various cards to drill down to Performance Analytics KPI Details panes that show trends for the associated data. On a KPI Details pane, you can modify different settings to change the scope of the data. You can also select **Show Records** to list the records associated with the chart.



- Lists throughout the CMDB Workspace have a filter icon () that you can select to show the filter definition used for the list.
- You can [open your Configurable Workspace experience in UI Builder](#) to access and edit your CMDB Workspace experience.

- See [List of workspaces](#) for a list of all Workspaces that ServiceNow® provides.
- CMDB Workspace doesn't support domain separation.

CI details

When you drill down to CI details, how those details appear depends on system settings:

CI Form

By default, the system property `sn_cmdb_ws_explore_ci.record.enabled` is set to **true**, enabling the experience of the CI Form feature for viewing CI details. Using CI Form, you are navigated to a centralized location with a comprehensive set of CI details organized by sections. Use the forms provided by CI Form to examine and edit CI attributes, relationships, tags, services and offerings, CMDB Health and CMDB 360 data associated with the CI, related lists, and activities. When updating CIs in CI Form, IRE rules are applied to avoid potential issues such as duplicate CIs.

For more information, see:

- [Components installed with CMDB Workspace:](#)
`sn_cmdb_ws_explore_ci.record.enabled` system property.
- [Manage CI details in CI Form.](#)

CI details pane

If `sn_cmdb_ws_explore_ci.record.enabled` is set to **false**, then the CI details pane is used for viewing CI details. When you drill down to a CI record in CMDB Workspace views and pages, the following details for the CI appear:

- CI Timeline - Last 14 days: A timeline of CI activities such as change requests.

Note: A CI timeline in CMDB Workspace fails to load when the number of any of the following activities exceeds its threshold:

- History: 200
- Incidents: 100
- Requests: 50
- Total Events: 200

Select the **Open CI Timeline** link in the error message to open the CI timeline in the base system, which shows activities for the CI, up to the specified threshold numbers.

•

CI Health: A summary of the health of the CI, showing related items such as critical incidents, incomplete attributes, and stale relationships for the CI.

Role requirement: itil (for accessing incidents).

- Details: CI attributes, grouped into categories such as Key attributes, Asset attributes, Discovery attributes, Operational attributes, and More attributes.

Note: Use the CMDB - Workspace form view for a CI class to configure which attributes appear.

- Activity: An activity stream to track what's changed in the CI record.
- Infrastructure Relationships: List of the infrastructure CIs related to the CI.
- Service Relationships: List of business applications, service offerings, and application services that the CI may be related to.

On the CI details pane, you can:

- Select **Open Dependency View** to open the [Dependency Views](#) map and display a graphic infrastructure view of the specific CI record.
- Select **View CMDB 360 Data** to show CMDB 360 details at the CI attribute level for the specific CI record.

- Select **Save** to save any changes made to attributes for the CI record.
- Select the More Actions icon (...) for additional functions:
 - Select **Create Change** to [create a new change request](#) for the CI record.
 - Select **Create Incident** to [create a new incident](#) for the CI record.
 - Select **Delete** to delete the CI record.

UI activity	Additional requirements
CI Details Accessible to: CMDB Admin, CMDB Editor, CMDB User	
CI Health Accessible to: • Incidents card: sn_incident_read to view • Change requests card: sn_change_read to view • For remaining cards: At least sn_cmdb_user	itil
Related Open Changes Accessible to: CMDB Admin, CMDB Editor, CMDB User	sn_change_read role

UI activity	Additional requirements
Related Incidents Accessible to: CMDB Admin, CMDB Editor, CMDB User	sn_incident_read role
Related Alerts Accessible to: CMDB Admin, CMDB Editor, CMDB User	Event Management (com.glideapp.itom.snac) plugin evt_mgmt_user role Set up Event Management
Related Application Services Accessible to: CMDB Admin, CMDB Editor, CMDB User	app_service_user role
View CMDB 360 Data Accessible to: CMDB Admin, CMDB Editor, CMDB User	Enable and configure CMDB 360
Save Accessible to: CMDB Admin	
More Actions/Delete Accessible to: CMDB Admin	

Shared pages

For information about the shared pages, see the Dev site as follows:

- [CI Service Relationships](#)
- [CI Infrastructure Relationships](#)

What to explore next

To learn more about configuring and using CMDB Workspace, see:

- CMDB views:
 - [Home view in CMDB Workspace](#)
 - [My Work view in CMDB Workspace](#)
 - [CMDB 360 view in CMDB Workspace](#)
 - [Insights view in CMDB Workspace](#)
 - [Management view in CMDB Workspace](#)
 - [SGC Central view in CMDB Workspace \(if installed\)](#)
- [Configuring CMDB Workspace](#)
- [Resume a disabled Cloud vs Non-cloud resources scheduled job](#)
- [Edit a related table from CMDB performance insights](#)
- [Edit a scheduled data import from CMDB performance insights](#)
- [Components installed with CMDB Workspace](#)
- [Home view in CMDB Workspace](#)

Home view is the default view in CMDB Workspace. It shows important tasks that you should tend to, various counts for activities in CMDB such as new CIs, CMDB Health aggregations, and various charts. The Home view also provides several links with immediate access to key CMDB tools.

- [My Work view in CMDB Workspace](#)

Use the My Work view in CMDB Workspace to manage your tasks. Tasks in this view are related to data compliance such as attestation, certification, and other life-cycle tasks.

- [CMDB 360 view in CMDB Workspace](#)

The CMDB 360 dashboard provides aggregations and analysis of CMDB 360 data. CMDB 360 collects data about all the discovery sources reporting attribute values for CIs. Use the CMDB 360 view in CMDB Workspace to track activities and identify potential issues of discovery sources. You can also create your own queries and associated schedules and reports to explore CMDB 360 data.

- [Insights view in CMDB Workspace](#)

Use the Insights view in CMDB Workspace to see and increase the level of adoption of key CMDB features and application services to improve the overall health of the CMDB. Explore how tools and features can maximize the health and efficiency of your CMDB and use direct links to install and start using features immediately.

- [Management view in CMDB Workspace](#)

The Management view provides CMDB Admins with quick access to key management tools and deep insights into CMDB health and activities. The view provides details such as duplicate CIs and recent activities in the CMDB.

- [Configuration identifiers framework](#)

Configuration identifiers provide a framework that lets you customize some behaviors of a CMDB Workspace feature, enabling different settings for that feature, on different workspaces. Most importantly, you can use this customization framework when integrating a CMDB Workspace feature into another workspace.

Home view in CMDB Workspace

Home view is the default view in CMDB Workspace. It shows important tasks that you should tend to, various counts for activities in CMDB such as new CIs, CMDB Health aggregations, and various charts. The Home view also provides several links with immediate access to key CMDB tools.

Access

Role requirements: sn_cmdb_admin (CMDB Admin), sn_cmdb_editor (CMDB Editor), or sn_cmdb_user (CMDB User).

To access the Home view, navigate to **Workspaces > CMDB Workspace** and then select **Home** in the CMDB Workspace menu bar.

Now Assist for CMDB

Select the Now Assist icon  to access Now Assist for CMDB skills, agents, and agentic workflows.

For more information, see [Now Assist for Configuration Management Database \(CMDB\)](#).

Intelligent Search

Accessible to: CMDB Admin, CMDB Editor, CMDB User.

Lets you use Natural Language Query (NLQ) search capabilities provided by [Intelligent Search for CMDB](#). Use the input field to construct a search string using everyday language. As you type, a dynamic list of relevant suggestions appears, with items matching single words or part phrases in the typed-in text, such as table names.

You can:

- Select **Search tips** to see tips about constructing search strings. See details about the usage, examples for single and multi-table search, advanced filtering, and relationships in Intelligent Search.
- Select **Search** to either run the query if the search string is already fully converted into a valid CMDB query, or to open the Refine your query dialog box.
-

If the search string has no ambiguities with the table name or relationships, then the query runs and the results appear in a list view format.

Only the first 100 results of the query appear in the results pane.

- Select **Load More Results** to view the next set of 100 results.
- Select **Load All Results** to view the rest of the query results, up to the number specified by the `glide.cmdb.query.max_results_limit` system property (10,000 by default).

If the constructed CMDB query contains more than a single table, then the **View in Query Builder** button appears. Select the button to open the [CMDB Query Builder](#) with your query fully constructed on the Query Builder canvas. You can use the Query Builder to continue editing the query.

- If there are any ambiguities with table names or relationship types in the search string, then the search string can't be converted into a valid CMDB query. In this case, the Refine your query dialog box appears letting you select from suggested CI classes and continue to parse your search string into a valid CMDB query. Those suggested CI classes are based on phrases in your search string. Use the drop-down lists to select the CI classes that match your intended search and then select **View search results** to run the query.
- If Intelligent Search is unable to convert your search string into a valid CMDB query, then selecting **Search** doesn't generate any query results. Instead, a feedback form appears. Fill out the form and select **Submit Feedback** to record your feedback for your CMDB Admin to review.
- Use the Sample searches list to get you started in running a pre-defined search. This list consists of more common searches, or searches that are more difficult to construct such as searches that involve application services.
- Use the Your recent searches list to rerun a previous search.
- Select **Results Feedback** to submit feedback on the search results for your CMDB Admin to review.

For more details about using NLQ with Intelligent Search, see [Intelligent Search for CMDB](#).

Alternatively, you can select **Use conditional search instead** to use a basic [condition builder](#) functionality where you can specify conditions to search for CIs of a specific class.

You can:

- Select **New condition set** to add a condition phrase.
- Select **Related List Condition** to [add a condition phrase for related lists](#).
- Select **Search** to search through the CMDB.
- Add and then adjust the `sn_cmdb_ws.list.record_count_limit` system property to limit the record count summation and so to minimize the performance impact of that operation. The record count shows on the Conditional search page, for example, above the results list. For more information about adding and modifying that system property, see [Components installed with CMDB Workspace](#).

In the results list, select a CI to see its details.

UI activity	Additional requirements
• Mapped Application Service • Application Service • Application Service Group • Dynamic CI Group • Tag Based Service	app_service_user role
• Business Service • Technical Service • Application Service Outage	service_viewer role

Important actions

Accessible to: CMDB Admin and CMDB Editor.

Important actions of various categories that require your attention or action. There are several task categories such as:

- Health tasks generated by [CMDB Health](#): In health-related cards, such as Duplicate CIs, Orphan CIs, stale CIs, and De-Duplication tasks, select **View CIs** or **View Tasks** to show the list of associated CIs or important tasks. In the CI list view page, you can select **CMDB Health Dashboard** to open the CMDB Health Dashboard. In de-duplication-related cards generated by [IRE](#), you can access the De-duplication dashboard and de-duplication libraries, to remediate de-duplication tasks in bulk.
- Data attestation and life cycle approval tasks generated by the [CMDB Data Manager](#): In data attestation-related cards, such as Reassignment Requests and Unassigned Overdue cards, select **View Tasks** to drill down to the associated important tasks.

Important actions are stored in the CMDB WS Imp Action Card Config [sn_cmdb_ws_imp_action_card_config] table that is accessible for editing only to users with the sn_cmdb_admin role. Authorized users can modify attributes of an important action such as Active and Filter conditions, but can't modify the Type, Persona, and Table attributes.

- Important action cards show per the logged in user role, as specified in the CMDB WS Imp Action Card Config [sn_cmdb_ws_imp_action_card_config] table.
- A card appears only if there is at least one record that meets the card's filter condition.
- If you drill down a Health-related card and modify an associated CI, any resulting impact to health KPIs might appear only after the next cycle of the [CMDB Health dashboard jobs](#).

For information about managing the cards in the Important actions tile, see [Modify important actions on the Home view of CMDB Workspace](#).

What's new

Accessible to: CMDB Admin, CMDB Editor, CMDB User.

Counts of newly created CIs within a recent time interval. The New CIs total counts all CI types including applications, hardware, and application services, which also appear in separate cards in the tile. By default, historical data is aggregated for the **Last 24 hours**, which you can set to a different time interval such as **Last 7 days**.

Select a card to drill down to a Performance Analytics KPI Details pane that shows the trend for the respective item.

Counts in the What's new cards are based on the following tables:

Count	Table
New CIs	Configuration Item [cmdb_ci]
New application	Application [cmdb_ci_appl]
New hardware	Hardware [cmdb_ci_hardware]
New application services	Service Instance [cmdb_ci_service_auto]

CI overview

The following tabs provide summaries about CIs:

CI Summary

Accessible to: CMDB Admin, CMDB Editor, CMDB User (without tabs).

A chart of all CIs in the CMDB, grouped by up to 20 CMDB groups. The CMDB groups in the chart are specified as groups of closely-related classes. On this chart, you can:

- Select a bar to drill down to the classes in the group and their CIs.
- Drill down a CI to show the CI form with a timeline, health overview, and several types of attributes such as key and discovery attributes.
- Drill down a class to access the Create CI experience to create a new CI in the selected class. For more information about the Create CI experience which applies Identification and Reconciliation Engine (IRE) processes, see [Create a CI manually in CMDB Workspace](#).
- Add custom class groups by creating [CMDB groups](#) with the following settings:
 - Group type is set to 'CMDB Workspace'.
 - Populated by encoded queries.

Such custom class groups will appear after the next time that the CMDB Workspace – Group and Encoded Query Counts scheduled jobs run and update the CMDB Workspace.

Note:

In systems with a very large number of CIs, for example a billion or more CIs, the set of queries that populate the CI Overview widget might run for an unreasonable length of time. In that case, you can choose to switch the default queries with a set of simpler queries that can handle such load and properly load the CI Overview widget. However, the results yielded from the simpler queries aren't as complete or accurate as the results of the original queries. A fundamental difference between the original and the simpler queries is that the simpler queries use only [Common Service Data Model \(CSDM\)](#) attributes for CI status (such as `life_cycle_stage`), while the default queries also use the legacy `operational_status` and `status` attributes. In an environment that hasn't migrated to CSDM, the simple queries yield fewer results.

You can examine (read access only) the simple query in the Simple Condition column in the `cmdb_group_contains_encoded_query` table.

To use the simpler set of queries, set the `sn_cmdb_ws.ci_overview.enable_simple_condition` system property to **true** (**false** by default).

My CIs

Accessible to: CMDB Admin, CMDB Editor.

A chart of CIs with Managed By Group being one of the groups you are a part of. CIs are grouped by up to 20 common class categories such as Applications, Devices, and Servers. If there are more than 20 classes to show, then all remaining classes are lumped into one additional bar on the chart.

Select a class bar to drill down into the CIs for the class. Then drill down to a CI's form with a timeline, health overview, and several types of attributes such as key and discovery attributes.

Use the [sn_cmdb_ws.ci_overview.managed_by_me.enabled](#) property to show or hide this chart.

Cloud vs Non-cloud resources

Charts showing counts and details for resources that are hosted on various cloud services versus those resources that aren't, with breakdown by key CI classes such as applications, databases, and datacenters. Resources can be deployed on cloud services such as the Microsoft Azure Cloud, or on the local instance or other non-cloud solutions. For some ongoing operations in the organization, it might be necessary to have those details that can be difficult to obtain.

The following conditions must be met for the Cloud vs Non-cloud resources charts to appear and to show meaningful data:

- The table Cloud Service Accounts [cmdb_ci_cloud_service_account] must exist.
- The Logical Datacenter [cmdb_ci_logical_datacenter] table must contain at least one record for a cloud datacenter.
-

The Datacenter Types [sn_cmdb_ws_datacenter_type] table must contain at least one record for a datacenter that is classified as cloud storage in the organization. In the base system, this table is pre-populated with several records for common cloud services such as the Azure Datacenter [cmdb_ci_azure_datacenter] class. The chart calculates and shows data only for cloud services for which there's a record in the Datacenter Types [sn_cmdb_ws_datacenter_type] table.

For details about adding datacenters in your organization, with the cloud or non-cloud classification, see [Configure datacenters for Cloud vs Non-cloud resources](#).

The following cloud vs Non-cloud charts are available:

- CI classes bar chart:

Each bar in the CI classes chart represents a pair of a CI class and a storage type (cloud, non-cloud), such as the bar for Applications/Cloud. For each bar, there's a scheduled job that runs every 24 hours to collect and calculate the data for the bar. The running time depends

on the amount and complexity of the data that a job collects, which can be different for each scheduled job. Also, the schedules of the jobs are staggered so that they don't all run at the same time and exhaust resources. For details about the class-specific criteria used for the chart calculations, see [Class criteria in Cloud vs Non-cloud resources chart](#).

If there's a CI class/type pair that isn't important in the organization, you can exclude that pair from the CI classes chart. For more details, see [Configure classes for Cloud vs Non-cloud resources](#).

On the CI classes chart, you can:

- Select a bar to open the Cloud vs Non-cloud resources pane. Then, select either of the following tabs to drill down into further details for the bar:

Cloud vs Non-cloud CIs

Shows a bar chart for CIs stored on a cloud service and those CIs that aren't, per CI class. For each CI class, select the cloud or the non-cloud bar to show the CIs that are associated with the selected bar, in a list view. You can then select a CI to see its details.

CI Classes by Cloud Providers

Pie charts per CI class with more granular details for those CIs that are hosted on cloud providers. Pie slices have randomly-selected colors, and they show a breakdown by cloud providers for various CI classes. For each pie, select a slice to show the CIs that are associated with the pie slice, in a list view. You can then select a CI to see its details.

- Select **Latest updates** to see updated status for the scheduled jobs that produce the data for the chart. Status is color-coded to indicate whether the job has completed successfully (green), or failed to complete (red).
- Application Services pie chart:
The Application Services pie chart uses the Service Configuration Item Associations [svc_ci_assoc] table and checks the cloud/non-cloud status of application service CIs in the CI classes chart. Application services in the Application Services pie chart are classified as follows:

- Cloud: All of the CIs in the application service have been determined to be hosted on a cloud service.
- Non-cloud: All of the CIs in the application service have been determined not to be hosted on a cloud service.
- Hybrid: The application service contains a mixture of CIs where some are hosted and some aren't hosted on cloud services.
- Unknown: The cloud/non-cloud classification couldn't be determined because some of the application service CIs aren't classified as cloud or non-cloud CIs.

Note: Because classification of Application Services depends on the classification of CIs in the CI classes chart, there might be some discrepancy between the two charts. This can occur if an application service CI changed its cloud/non-cloud status, and the Application Services chart hasn't refreshed yet to reflect that change.

Select the Application Services chart to access the list views of the associated application services, grouped by cloud/non-cloud classifications. From those list views, you can drill down to the [Dependency Views](#) map for application services.

The scheduled jobs associated with the charts are set up with several hard-coded limits that if exceeded, result in failure conditions that are reflected in the job status. Timing out is set to two hours and the maximum number of records to collect is set to 500,000. If a job exceeds any of those limits, it's automatically stopped.

A scheduled job that can't complete for 3 (default) consecutive days is automatically disabled for future runs. You can manage the disabling of scheduled jobs, in the following ways:

- Modify the default number of consecutive days that are counted by adding the `sn_cmdb_ws.insight.category.disable_after_failure` system property to the System Properties [sys_properties] table and then setting its value. For more details, see [Add a system property](#).
- [Resume a disabled scheduled job](#).

UI activity	Additional requirements
• Mapped Application Service view • Application Service • Dynamic CI Group • Tag Based Service	app_service_user role

My work

Accessible to: CMDB Admin, CMDB Editor, CMDB User.

All open tasks from [CMDB Data Manager](#) that are assigned to you, or to an assigned group in the Managed by Group attribute which you are a member of. For CMDB Admins, also tasks that aren't assigned to anyone so that CMDB Admins can assign those unassigned tasks. Tasks can be, for example, attestation tasks and life cycle-related tasks.

Select **Open tasks** and **Overdue tasks** to review and process the tasks.

CMDB Health

Accessible to: CMDB Admin, CMDB Editor, CMDB User.

KPIs health scores calculated by CMDB Health for CIs. Select a percentage number for a KPI to navigate to the KPIs tile on the CMDB Health Dashboard.

For more information, see [CMDB Health](#), [CMDB Health KPIs and metrics](#).

UI activity	Additional requirements
CMDB Health	asset or ifil role

UI activity	Additional requirements
	Configuring CMDB Health

Quick links

A list of links to key CMDB dashboards and tools. You can [add a link](#) to the list of quick links that are available to you.

- [Dependency Views](#): Provides a graphic infrastructure view for a CI and any application or business services that it's part of and that it supports.
- [Query Builder](#): Easily build complex infrastructure and service queries, that span multiple CMDB classes, non-CMDB tables, and that can involve many CIs that are connected by different relationships.
- [Data Manager](#): Centrally create, edit, review, publish, and track Data Manager policies and the tasks generated by the policies.
- [CI Class List](#): List view of CMDB CIs grouped by common classes.
- [Unified Map](#): Graphical map showing the hierarchy of CIs and the relationships between them, and application services. Directly from the map, you can access attributes of CIs and relationships, and related items such as changes, incidents, and problems for a CI.
- [CMDB Health Dashboard](#): View CMDB Health reports and configure the CMDB health KPIs and metrics that CIs are evaluated by in CMDB Health dashboards.
- [Relationship Health Dashboard](#): View the Relationship Health Dashboard with CMDB Health scores for CI relationship.
- [Create CI](#): Create a new CI while enforcing Identification and Reconciliation Engine (IRE) processes and other requirements that result in a valid and unique CI.
- [Data Certification Dashboard](#): View Data Certification instances, tasks and status such as past due certification tasks. Drill down to specific tasks to reassign them for faster resolution.

UI activity	Accessibility	Additional requirements
Dependency View	CMDB Admin, CMDB Editor, CMDB User	dependency_views role
Query Builder	CMDB Admin, CMDB Editor, CMDB User	cmdb_query_builder_read role
Data Manager	CMDB Admin	
Add or edit a custom quick link	CMDB Admin, CMDB Editor, CMDB User	

- [Cloud vs Non-cloud resources chart](#)

The Cloud vs Non-cloud resources chart appears on the Home view in CMDB Workspace.

Cloud vs Non-cloud resources chart

The Cloud vs Non-cloud resources chart appears on the Home view in CMDB Workspace.

Charts showing counts and details for resources that are hosted on various cloud services versus those resources that aren't, with breakdown by key CI classes such as applications, databases, and datacenters. Resources can be deployed on cloud services such as the Microsoft Azure Cloud, or on the local instance or other non-cloud solutions. For some ongoing operations in the organization, it might be necessary to have those details that can be difficult to obtain.

The following conditions must be met for the Cloud vs Non-cloud resources charts to appear and to show meaningful data:

- The table Cloud Service Accounts [cmdb_ci_cloud_service_account] must exist.
- The Logical Datacenter [cmdb_ci_logical_datacenter] table must contain at least one record for a cloud datacenter.

•

The Datacenter Types [sn_cmdb_ws_datacenter_type] table must contain at least one record for a datacenter that is classified as cloud storage in the organization. In the base system, this table is pre-populated with several records for common cloud services such as the Azure Datacenter [cmdb_ci_azure_datacenter] class. The chart calculates and shows data only for cloud services for which there's a record in the Datacenter Types [sn_cmdb_ws_datacenter_type] table.

For details about adding datacenters in your organization, with the cloud or non-cloud classification, see [Configure datacenters for Cloud vs Non-cloud resources](#).

The following cloud vs Non-cloud charts are available:

- CI classes bar chart:

Each bar in the CI classes chart represents a pair of a CI class and a storage type (cloud, non-cloud), such as the bar for Applications/Cloud. For each bar, there's a scheduled job that runs every 24 hours to collect and calculate the data for the bar. The running time depends on the amount and complexity of the data that a job collects, which can be different for each scheduled job. Also, the schedules of the jobs are staggered so that they don't all run at the same time and exhaust resources. For details about the class-specific criteria used for the chart calculations, see [Class criteria in Cloud vs Non-cloud resources chart](#).

If there's a CI class/type pair that isn't important in the organization, you can exclude that pair from the CI classes chart. For more details, see [Configure classes for Cloud vs Non-cloud resources](#).

On the CI classes chart, you can:

•

Select a bar to open the Cloud vs Non-cloud resources pane. Then, select either of the following tabs to drill down into further details for the bar:

Cloud vs Non-cloud CIs

Shows a bar chart for CIs stored on a cloud service and those CIs that aren't, per CI class. For each CI class, select the cloud or the non-cloud bar to show the CIs that are associated with the selected bar, in a list view. You can then select a CI from the list to further drill down to the CI details pane.

CI Classes by Cloud Providers

Pie charts per CI class with more granular details for those CIs that are hosted on cloud providers. Pie slices have randomly-selected colors, and they show a breakdown by cloud providers for various CI classes. For each pie, select a slice to show the CIs that are associated with the pie slice, in a list view. You can then select a CI from the list to further drill down to the CI details pane.

-

Select **Latest updates** to see updated status for the scheduled jobs that produce the data for the chart. Status is color-coded to indicate whether the job has completed successfully (green), or failed to complete (red).

- Application Services pie chart:
The Application Services pie chart uses the Service Configuration Item Associations [svc_ci_assoc] table and checks the cloud/non-cloud status of application service CIs in the CI classes chart. Application services in the Application Services pie chart are classified as follows:
 - Cloud: All of the CIs in the application service have been determined to be hosted on a cloud service.
 - Non-cloud: All of the CIs in the application service have been determined not to be hosted on a cloud service.
 - Hybrid: The application service contains a mixture of CIs where some are hosted and some aren't hosted on cloud services.
 - Unknown: The cloud/non-cloud classification couldn't be determined because some of the application service CIs aren't classified as cloud or non-cloud CIs.

Note: Because classification of Application Services depends on the classification of CIs in the CI classes chart, there might be some discrepancy between the two charts. This can occur if an application service CI changed its cloud/non-cloud status, and the Application Services chart hasn't refreshed yet to reflect that change.

Select the Application Services chart to access the list views of the associated application services, grouped by cloud/non-cloud classifications. From those list views, you can drill down to the [Dependency Views](#) map for application services.

The scheduled jobs associated with the charts are set up with several hard-coded limits that if exceeded, result in failure conditions that are reflected in the job status. Timing out is set to two hours and the maximum number of records to collect is set to 500,000. If a job exceeds any of those limits, it's automatically stopped.

A scheduled job that can't complete for 3 (default) consecutive days is automatically disabled for future runs. You can manage the disabling of scheduled jobs, in the following ways:

- Modify the default number of consecutive days that are counted by adding the `sn_cmdb_ws.insight.category.disable_after_failure` system property to the System Properties [sys_properties] table and then setting its value. For more details, see [Add a system property](#).
- [Resume a disabled scheduled job](#).

My Work view in CMDB Workspace

Use the My Work view in CMDB Workspace to manage your tasks. Tasks in this view are related to data compliance such as attestation, certification, and other life-cycle tasks.

For CMDB administrators, lists of tasks can also contain unassigned tasks, for reassignment. For managers, tasks of direct reports are included, and if you are a manager of a user group, then tasks of members in that group are also included.

Access

Role requirements: sn_cmdb_admin (CMDB Admin), sn_cmdb_editor (CMDB Editor), or sn_cmdb_user (CMDB User).

To access the My Work view, navigate to **Workspaces > CMDB Workspace** and then select **My Work** in the CMDB Workspace menu bar.

Task status

The Task status section provides overall counts of tasks by their status. Counts in each status card are for attestation, certification, and life-cycle tasks as applicable. Total tasks for example, is a count of all open tasks from [CMDB Data Manager](#) that are assigned to you, or to an assigned group in the Managed by Group attribute which you are a member of. For CMDB Admins, also tasks that aren't assigned to anyone are included. The Closed card counts all tasks that are in a closed state ('Closed Complete', 'Closed Canceled', 'Closed Incomplete', and 'Rejected').

Select a status card to show the associated tasks in the various lists such as **Attestation tasks** and **Certification** tabs in the My tasks section. For example, when you select the In progress status card in the Task status section, the **Attestation tasks** list shows attestation tasks that are in progress and the **All other tasks** list shows all non-attestation and non-certification tasks that are in progress.

Certification tasks

The **Certification tasks** tab in the My tasks section lists any Data Certification tasks assigned to you or to an assignment group that you belong to in accordance with [CMDB Data Manager](#) policies. For managers, tasks of direct reports are included, and for user group managers, tasks of members in the group are also included. Review and process these tasks by checking audit results for the associated CIs and attribute values. For more information about reviewing Data Certification tasks, see [Review certification tasks in CMDB Workspace](#).

Attestation tasks

The **Attestation tasks** tab in the My tasks section lists any attestation tasks assigned to you or to an assignment group that you belong to in accordance with CMDB Data Manager Attestation policies. For managers, tasks of direct reports are included, and for user group managers, tasks of members in the group are also included. Review and

process these attestation tasks by checking the physical existence of IT infrastructure or applications associated with the CIs in the tasks. For information about reviewing and processing attestation tasks, see [Review CMDB Data Manager attestation tasks in CMDB Workspace](#).

The **Overdue tasks** tab lists those tasks that are overdue so you can review those tasks at a higher priority.

Life-cycle tasks

The **All other tasks** tab in the My tasks section lists any tasks, aside from attestation and certification tasks, assigned to you or to an assignment group that you belong to in accordance with [CMDB Data Manager](#) policies. The list includes tasks that are in a closed state ('Closed Complete', 'Closed Canceled', 'Closed Incomplete', and 'Rejected'). For managers, tasks of direct reports are included, and for user group managers, tasks of members in the group are also included. For information about reviewing and processing life-cycle tasks, see [Review CMDB Data Manager tasks](#).

CMDB 360 view in CMDB Workspace

The CMDB 360 dashboard provides aggregations and analysis of CMDB 360 data. CMDB 360 collects data about all the discovery sources reporting attribute values for CIs. Use the CMDB 360 view in CMDB Workspace to track activities and identify potential issues of discovery sources. You can also create your own queries and associated schedules and reports to explore CMDB 360 data.

- For concepts and other background information about CMDB 360, see [CMDB 360/Multisource CMDB](#).
- For information about all CMDB 360 dashboard settings, see [Configure the CMDB 360 dashboard](#).
- For information about using the CMDB 360 view, see [CMDB 360 experience in CMDB Workspace](#).

Note: Most cards on the CMDB 360 dashboard support non-CMDB tables in their aggregation, or can be configured to provide support. However, the CIs not reported by discovery sources card, for example, doesn't apply to non-CMDB tables. Creating queries for non-CMDB tables is also supported. For information about support for non-CMDB tables, see [IRE support for non-CMDB tables](#).

Access

Requirements:

- Role requirement: sn_cmdb_user (CMDB user) or any role containing sn_cmdb_user
- Additional requirement: [Enable and configure CMDB 360](#)

To access the CMDB 360 view in the CMDB Workspace, navigate to **Workspaces > CMDB Workspace**. In the CMDB Workspace menu bar, select **CMDB 360**.

Insights view in CMDB Workspace

Use the Insights view in CMDB Workspace to see and increase the level of adoption of key CMDB features and application services to improve the overall health of the CMDB. Explore how tools and features can maximize the health and efficiency of your CMDB and use direct links to install and start using features immediately.

Access

Role requirement: sn_cmdb_user (CMDB User), or a user role containing sn_cmdb_user (sn_cmdb_admin, sn_cmdb_editor).

To access the Insights view, navigate to **Workspaces > CMDB Workspace** and then select **Insights** in the CMDB Workspace menu bar.

The Insights view includes the following tiles:

- CMDB feature adoption
- CMDB performance insights
- Application services

- Cloud vs Non-cloud resources

CMDB feature adoption

Shows dial charts for the overall adoption levels of all three categories of CMDB tools and features:

Data ingestion

Tools and features that support and ensure ingestion of high-quality data into the CMDB.

Data governance

Tools and features that let you manage the CMDB data after it has been ingested.

Search and analytics

Tools and features that provide meaningful and helpful insights into the CMDB data.

Select each dial chart in the tile to access its tab and associated cards with further details about the features in the category. Pay special attention to categories with low levels of adoption and those features that aren't yet implemented in the instance and which you should consider for adoption.

Each category tab shows cards for the features in the category and the following general cards:

- Overall adoption level for the tab: The calculated overall level of adoption for the tab. Calculations are specific for each tab, and can be based, for example, on the level of adoption of some or all the features in the tab.
- Adoption progress: Installation, activation, or usage status per feature in the tab. Select a feature link to access a relevant resource such as the feature's landing page with an overview dashboard or an installation location.

Depending on adoption level, a card might contain any of the following resource links:

- **Learn more:** Link to documentation to learn and explore the benefits and usage of the feature.
- **View demo:** Link to a short demo about the feature.
- **Get started:** Link to a landing page where you can start immediately utilizing the feature.
- **Install app:** Link to the ServiceNow Store where you can immediately install the app.

Cards use different methods to examine the instance and determine if the card's feature is installed, activated, and being used. For example, some cards check for the installation status of plugins and some cards rely on data in the specific feature tables. Many counts and aggregation data that appear on cards is based on [Performance Analytics indicators](#) built on top of the Base Aggregate Data [sn_cmdb_ws_base_aggregate_data] table.

- If the result is that the card's feature is installed or being used, then the card shows charts and counts about the level of usage. In which case, the card's label might slightly adjust.
- If the result is that the card's feature isn't installed or isn't in use, then links are provided to resources where you can explore, install, and start using the feature.

Most of the cards scheduled jobs run every 24 hours, therefore, depending on the type of data, some card data is based on recent but not current data. The Last updated timestamp in the cards reflects the collection time for the data that was used for the card. Also, immediately after getting started with a feature, a card won't reflect on the latest status or usage of the feature, until up to 24 hours when the card's scheduled job runs (for the CIs processed by IRE based on source card, the associated scheduled job, CMDB Workspace - Populate aggregates Monthly, runs monthly).

The following sections provide details for each card, including the calculation script used for the card.

CMDB feature adoption: Data ingestion

The overall adoption level for data ingestion maps to the following findings in the instance:

- Low (red): Less than 80% of CIs are processed by Identification and Reconciliation Engine (IRE)
- Moderate (amber): 80—90% of CIs are processed by IRE
- High (green): Over 90% of CIs are processed by IRE

Data ingestion contains the following features and aggregations:

CIs processed by IRE

Determines the percentage of CIs that are processed by [IRE](#), by checking the Source [sys_object_source] table. CIs that aren't processed by IRE introduce a data integrity risk.

The percentage of CIs that are being processed by IRE determines both, the level of adoption for this feature card and the overall adoption level for the entire data ingestion category.

Service Graph Connectors

Determines the installation and usage status of [Getting started with Service Graph Connectors](#), by checking:

- If the ITOM Licensing plugin (com.snc.itom.license) is active
- If there is at least one Service Graph Connector installed in the instance

If Service Graph Connectors are installed and are in use, then the card shows a count of those connectors.

Note: The count of Service Graph connectors that appears on the card might be slightly different than the number of connectors that show on the ServiceNow Store site because the counting methods that are used are different.

IntegrationHub ETL

Determines whether the [IntegrationHub ETL](#) store app is installed and used, based on records in the CMDB Integration Studio Application Data Sources [cmdb_inst_application_feed] table. If IntegrationHub ETL is in use, then the card shows a count of ETL transform maps in IntegrationHub ETL (demo ETL transform maps aren't counted).

Select **View ETL transform maps** to open IntegrationHub ETL where you can examine existing ETL transform maps and create new ones.

CIs processed by IRE based on source

Chart showing CIs processed by IRE, grouped by Service Graph Connectors, ServiceNow Discovery, a combination of both, and others, for the past six months.

The following discovery sources are counted as ServiceNow Discovery:

- ServiceNow
- ServiceWatch
- ACC-Visibility
- AgentClientCollector
- CredentiallessDiscovery

Point to the chart to show monthly aggregation data.

This card is hidden if there are no CIs processed by IRE.

CMDB application for APIs and CLI

Determines whether the [CMDB application for APIs and CLI](#) store app is installed.

This card appears only if the store app isn't installed, providing helpful resources for exploration and adoption.

CMDB feature adoption: Data governance

The overall adoption level for data governance maps to the following findings in the instance:

- Low (red): Less than 33% of features are used
- Moderate (amber): 33—66% of features are used
- High (green): Over 66% of features are used

The overall level of adoption of data governance is based on whether [CMDB Data Manager](#) features are used.

Note: Historical data might not be available for all past 90 days because CMDB Workspace version 3.4, which relies on Performance Analytics indicators to collect and save historical usage data, was deployed less than 90 days ago. This situation might result in a discrepancy between actual usage and what the card shows.

CMDB Data Manager/CIs used in Data Manager policies

Determines usage by checking if either of the following conditions is true:

- There are any user-created Delete, Retire, or Archive policies (by searching table CMDB Data Manager Policy and Attributes [cmdb_data_manager_policy_and_attributes])
- There are any CIs processed by these user-created Delete, Retire, or Archive policies, in the last 90 days (by searching table CMDB Data Management Policy Executions [cmdb_data_management_policy_execution])

If CMDB Data Manager is in use, shows a chart with CIs that were processed by these policies in the past six months, by month, and by policy type.

Data attestation/CIs used in data attestation

Determines usage by checking if either of the following conditions is true:

- There are any user-created [Attestation policies](#) (by searching table CMDB Data Manager Policy and Attributes [cmdb_data_manager_policy_and_attributes])
- There are any CIs processed by these user-created Attestation policies, in the last 90 days (by searching table CMDB Data Management Policy Executions [cmdb_data_management_policy_execution])

If data attestation is in use, shows a chart with CIs that were processed by attestation policy tasks in the past six months, by month.

Data synchronization

Checks if there is at least one class for which the managed_by_group attribute is globally set so that all class CIs are synchronized on the same value.

For information about synchronizing group assignment attributes using the CI Class Manager, see [Set the group for a CI or an entire class of CIs](#) and [Synchronizing group assignment attributes](#).

The Data synchronization card is available starting with CMDB Workspace v3.6.

Principal classes

Checks if the Principal Class filter is configured with at least one principal class. The Principal Class filter limits the number of CIs that appear in list views, to show only CIs of principal classes. Reducing the amount of data in list views to only relevant data, improves performance and efficiency.

For more information about managing the Principal Class filter in CI Class Manager, see [Update class list in the Principal Class filter](#).

The Principal class card is available starting with CMDB Workspace v3.6.

CMDB feature adoption: Search & analytics

The overall adoption level for search & analytics maps to the following findings in the instance:

- Low (red): Less than 33% of features are used
- Moderate (amber): 33—66% of features are used
- High (green): Over 66% of features are used

Search & analytics contains the following features and aggregations:

CMDB Query Builder/Query Builder queries

Determines if the [CMDB Query Builder](#) is in use, by checking if either of the following conditions is true:

- There are any records in the Saved Queries [qb_saved_query] table in which Source is **QB**
- There are any queries executed or queries executed with reports, in the last 90 days

Note: Historical data might not be available for all past 90 days because CMDB Workspace version 3.4, which relies on Performance Analytics indicators to collect and save historical usage data, was deployed less than 90 days ago. This situation might result in a discrepancy between actual usage and what the card shows.

If CMDB Query Builder is in use, shows a chart with counts of query executions and query executions in reports, for the past six months, by month.

Point to the chart to see monthly aggregation data.

Intelligent search

Determines if [Intelligent Search for CMDB](#) is in use by checking the NLQ Query Logs [nlq_query_log] table for any records where source is **CMDB_WS**, from the past 90 days. If Intelligent Search is in use, shows counts of Intelligent Search queries for the past six months, by month.

Note: Historical data might not be available for all past 90 days because CMDB Workspace version 3.4, which relies on Performance Analytics indicators to collect and save historical usage data, was deployed less than 90 days ago. This situation might result in a discrepancy between actual usage and what the card shows.

CMDB 360 — Records in Multisource

Total number of raw [CMDB 360](#) records in the CMDB 360 data store that contains records for each discovery source report, per each CI attribute. This card is identical to the [Total CMDB 360 records](#) card in the Discovery Sources tile in the CMDB 360 view.

This card appears only if CMDB 360 is enabled, which is determined by checking the ITOM Discovery License (com.snc.itom.discovery.license) plugin and the system property [glide.identification_engine.multisource_enabled](#).

CMDB 360 queries

Count of CMDB 360 queries that exist in the CMDB Multisource Queries [cmdb_multisource_query] table.

This card appears only if CMDB 360 is enabled, which is determined by checking the ITOM Discovery License (com.snc.itom.discovery.license) plugin and the system property [glide.identification_engine.multisource_enabled](#).

CMDB Data Foundation dashboard

Determines if the [CMDB and CSDM Data Foundations Dashboards](#) store app (which includes the CMDB Data Foundation dashboard) is installed.

This card appears only if the store app isn't installed, providing helpful resources for exploration and adoption. However, the feature is still included in calculating the search & analytics overall level of adoption.

CMDB Health Dashboard

Determines if [CMDB Health](#) is in use by checking if at least one CMDB Health Dashboard job is enabled.

This card appears only if the feature isn't in use, providing helpful resources for exploration and adoption. However, the feature is still included in calculating the search & analytics overall level of adoption.

CMDB performance insights

CMDB performance insights is available starting with CMDB Workspace v3.6 and only appears for users with the sn_cmdb_admin (CMDB Admin) role.

CMDB performance insights helps you understand the ways in which your configurations impact the performance of your CMDB. You can use the charts and tools within CMDB performance insights to troubleshoot, debug, or diagnose performance issues. CMDB performance insights also analyzes your CMDB and Service Graph Connectors on your instance to generate recommendations on how you can improve the performance of your CMDB. The CMDB performance insights tile itself can show up to two of those recommendations.

Select **View performance insights** to access the CMDB performance insights data.

The Payloads & CIs tab contains the following tiles:

Partial payloads

Partial payloads occur when the data source didn't provide enough information to uniquely identify the CI, preventing IRE from processing the CI.

- Total partial payload count:

Shows the total number of partial payloads that exist in your instance. Large numbers of partial payloads in your instance can cause performance deterioration of the CMDB.

For more information about partial payloads, see [Identification and Reconciliation engine \(IRE\)](#).

- Discovery source:

Breaks down the number of partial payloads by discovery sources. You can drill down on slices in this pie chart to see the list of partial payloads with errors, filtered by discovery source.

You can drill down on specific partial payloads to better understand the error that you're experiencing. When you drill down on a partial payload, you can see the full payload item, which you can review to troubleshoot and address the specific errors.

For more information about error types, see [Using identification simulation](#).

Related records

Data about related records that are missing references. A record is missing a reference when the Referenced field for that record is empty.

- Related records missing reference:

Shows the total number of records that do not reference a CI in the Referenced field in the Related table. You can see a full list of the Related tables and the associated Referenced fields in the Related Entries [cmdb_related_entry] table.

For more information about Related tables, see [Overview of CMDB](#).

- Related records missing reference by table:

Breaks down the number of CMDB records missing references, by table. You can drill down on slices in this chart to see the list of specific records filtered by table.

Before you can drill down on a slice of this pie chart, you must have any user roles required to view the table.

You can also select **New** from the list view to create a new related entry table record. For more information about creating or editing a related entry table record, see [Edit a related table from CMDB performance insights](#).

Duplicate and stale CIs

A CI is flagged as duplicate during identification and reconciliation. A CI is flagged as stale if it has not been updated within the Effective Duration time period specified in the [CMDB Health staleness rule](#) for the CI class.

- CIs:

Shows the number of CIs that are either duplicate or stale.

- Stale records by class:

Breaks down the number of stale CIs based on the CI class. You can drill down on slices in this pie chart to see the list of specific CI records filtered by class.

For more information about stale CIs, see [CMDB Health KPIs and metrics](#).

- Duplicate records by class:

Breaks down the number of duplicate CIs based on the CI class. You can drill down on slices in this pie chart to see the list of specific CI records.

For more information about duplicate CIs, see [Duplicate CIs remediation](#).

Relationship records missing parent or child

Shows the trend line and number of relationship records in the CI Relationships [cmdb_rel_ci] table that are missing a parent or child CI.

CIs that are missing a parent or child are considered invalid records and can have a performance impact on your instance.

Recommendations

Recommendations on this panel include a link to the related documentation and typically enable direct access to the associated tool, feature, or system property. Expand or minimize the panel by selecting the light bulb icon.

The first two recommendations appear on the CMDB performance insights tile of the Insights view.

You can only see a recommendation if you have the roles needed to access the feature, tool, or system property. Users with the `sn_cmdb_admin` role can hide recommendations or adjust the order in which recommendations appear. Users can use the **Active** and **Order** fields in the CMDB WS Imp Action Card Config [`sn_cmdb_ws_imp_action_card_config`] table to configure those elements.

The Service Graph connectors tab contains the following tiles:

Note:

- The Service Graph connectors tab only appears if your instance has at least one Service Graph Connector and you have the `cmdb_inst_admin` role.
- To edit data source or scheduled data import records from CMDB Workspace, you may need to set **Application scope** to the **Application** of the data source or data import.

Connectors data source

Configurations on your Service Graph Connector data sources affect the ingestion and processing of incoming data. Changing your Service Graph Connector data source configurations can streamline data handling, making your CMDB more efficient and reducing impacts on the performance of your instance.

- Sources with batch processing turned off:

Shows the percentage of Service Graph Connector data sources in the Data Sources [sys_data_source] table with disabled **Use Batch Import**. It also lists the total number of data sources, and the number of data sources with enabled or disabled batch processing.

To enable batch processing, access the record of a specific data source from the list view and select **Use Batch Import**. For more information about batch processing, see [Data source fields](#).

You can also select **Edit** to update a data source from the list view. For more information about editing a data source, see [Edit a data source from CMDB performance insights](#).

- Sources with concurrent import turned off:

Shows the percentage of scheduled data imports of Service Graph Connector data sources in the Scheduled Data Imports [scheduled_import_set] table with **Concurrent Import** turned off. It also lists the total number of scheduled data imports, and the number of scheduled data imports with **Concurrent Import** turned on or off.

To enable concurrent import, access the record of a specific scheduled data import from the list view and select **Concurrent Import**. For more information about concurrent import, see [Concurrent imports](#).

You can also select **Edit** to update a scheduled data import from the list view. For more information about editing a scheduled data import, see [Edit a scheduled data import from CMDB performance insights](#).

- Sources with non-custom size partition method:

Shows the percentage of scheduled data imports of Service Graph Connector data sources in the Scheduled Data Imports [scheduled_import_set] table that use a non-custom size partition method. It also lists the total number of scheduled data imports, and the number of scheduled data imports that use a non-custom size partition method.

To use a custom size partition method, access the record of a specific scheduled data import from the list view. Ensure that **Concurrent Import** is selected. From the **Partition Method** drop-down menu that appears, select **Custom size**. For more information about partition methods, see [Schedule a data import](#).

You can also select **Edit** to update a new scheduled data import from the list view. For more information about editing a scheduled data import, see [Edit a scheduled data import from CMDB performance insights](#).

Connectors execution trends

Aggregates Service Graph Connectors with outlier connector executions, where the number of imported rows or the rate of processing is significantly higher or lower than the 30-day trend.

- Connectors with processing rate outliers:

Shows the number of Service Graph Connectors that are considered outliers with connector execution processing rates outside the expected trend lines within the past 30 days.

- Connectors with import count outliers:

Shows the number of Service Graph Connectors that are considered outliers with connector execution import counts outside the expected trend lines within the past 30 days.

You can drill down the cards in the Connectors execution trends tile to access the Service Graph connector execution trends window. In that windows, a Service Graph Connector is available in the connectors drop-down menu only if it has an execution record.

Click the tabs on the Service Graph connector execution trends window to view the following charts and the Connector Execution list view of executed connector import sets:

- Processing rate:

Models the trend line of processing rates for connector executions. Shows the rate at which a connector processes rows of data over a period of time.

There are two zones, which are the Confidence Band and the Prediction Band. Service Graph Connectors with connection executions that have processing rates outside of the Prediction Band are considered outliers. These zones don't appear when you select more than one Service Graph Connector.

- Import count:

Models the trend line of rows processed for connector executions.
Shows the number of rows a connector processes over a period of time.

There are two zones, which are the Confidence Band and the Prediction Band. Service Graph Connectors with connector executions that have import row counts outside of the Prediction Band are considered outliers.

On both charts, you can select outlier and non-outlier Service Graph Connectors to see the trend lines against each other.

For more information about processing data with Service Graph Connectors, see [Getting started with Service Graph Connectors](#).

Cloud vs Non-cloud resources

Charts showing counts and details for resources and application services that are hosted on various cloud services versus those that aren't. Resources and application services can be deployed on cloud services such as the Microsoft Azure Cloud, or on the local instance or other non-cloud solutions. For some ongoing operations in the organization, it might be necessary to have those details which can be difficult to obtain.

For details about the charts, see 'Cloud vs Non-cloud resources' in the [Home view in CMDB Workspace](#) topic.

Application services

Shows a count of [application services](#) in your organization, based on records in the Service Instance [cmdb_ci_service_auto] table. The chart shows the trend of total number of application services per day, for the past seven days.

Select the tile to access the Application Services dashboard where you can monitor the adoption level and health of application services. For details about the Application Services dashboard, see [Use Application Services dashboard to monitor health](#).

Management view in CMDB Workspace

The Management view provides CMDB Admins with quick access to key management tools and deep insights into CMDB health and activities.

The view provides and details such as duplicate CIs and recent activities in the CMDB.

Access

Role requirement: `sn_cmdb_admin` (CMDB Admin)

To access the Management view, navigate to **Workspaces > CMDB Workspace** and then select **Management** in the CMDB Workspace menu bar.

CMDB Data Manager

The following cards show details about CIs and policies associated with [CMDB Data Manager](#):

Rejected CIs

CIs set as rejected during a review of [attestation tasks](#).

Excluded CIs

CIs set as [excluded](#) from CMDB Data Manager policies.

Draft policies

Draft [Data Manager policies](#) that were created but not published.

CI Correctness

Cards in this section show health state for the sub metrics of the [CMDB Health](#) correctness KPI. Counts are based on testing CIs against pre-defined data integrity rules such as:

- [Identification rules](#) (to detect duplicate CIs)
- [Orphan CI rules](#)
- [Staleness CI rules](#)

You can set the time interval used in calculations for these counts.

For more information about the correctness KPI, and the duplicate, orphan, and stale sub metrics, see [CMDB Health KPIs and metrics](#).

Recent activity trends

The following cards show recent activities in the CMDB:

Recent CI Activity

A 7-day chart showing metrics and trend line related to CIs such as the number of new CIs and updated CIs.

Recent Application Service Activity

A 7-day chart showing metrics and trend line related to [Application Services](#) such as the total number of Application Services, new and updated Application Services, and the number of Application Services with outages.

Management tools

Provides links that you can use to access CMDB dashboards, tools, and list views. The links are grouped by categories as described below.

Note: Some links are conditionally available based on installation of applications, active plugins, and your assigned role. For a link that doesn't appear, make sure that all the requirements for the link are met.

Manage:

-

[CI Class Manager](#): Centrally view, create, or edit class definitions and class settings for Identification and Reconciliation (IRE) and for CMDB Health.

Additional role requirement: `itil` or `personalize_dictionary`.

- [Data Manager](#): Centrally create, edit, review, publish, and track Data Manager policies and the tasks generated by the policies.
- [De-duplication Template Library](#): Create and manage de-duplication templates and libraries to remediate de-duplication tasks in bulk.
- [De-duplication Dashboard](#): Show counts and insights for duplicate CIs in the CMDB, and run and track de-duplication templates to remediate de-duplication tasks in bulk.

- **CMDB Groups:** Show a list view of current CMDB groups where you can create new CMDB groups, and manage the existing CMDB groups. A CMDB group is a collection of CIs to which you can apply CI actions collectively to all the CIs in the group. For example, CMDB Health can monitor CIs in a Health-type CMDB group, and report the aggregated health for the group as a whole.
- **Dynamic CI Groups:** Show a list view of current dynamic CI groups where you can create new dynamic CI groups, and manage the existing ones. Dynamic CI Groups act as application services that are populated with members of the CMDB group that is associated with the dynamic CI group. For more information about dynamic CI groups, see [Application services](#).

Optimize:

- **CMDB Health:** View the CMDB Health dashboards and configure the CMDB health KPIs and metrics that CIs are evaluated by in CMDB Health dashboards.
Additional requirements:
 - [Set up and configure CMDB Health](#)
 - Roles: asset or itil
- **CMDB Data Foundations Dashboard:** View the CMDB Data Foundations dashboard where you can explore potential risks in the CMDB implementation, and verify that important data is valid and properly configured.
Additional requirements:
 - [Set up CSDM and CMDB Data Foundations Dashboards](#)
 - Roles: asset, Itil_admin, or admin
 - Plugin: com.snc.cmdb.getwell
- **CSDM Data Foundations Dashboard:** View the CSDM Data Foundations dashboard where you can explore key CSDM metrics on a single page to assist you in getting the full benefit from your implementation.
Additional requirements:
 - [Set up CSDM and CMDB Data Foundations Dashboards](#)

- Roles: app_service_admin, app_service_user, asset, cmdb_read, itil_admin, portfolio_admin, service_viewer, or technology_service_owner
- Plugin: com.snc.cmdb.getwell
- **De-Duplication Tasks:** Remediate a de-duplication task by using the Duplicate CI Remediator wizard which guides you through the duplicate CI reconciliation process.

Additional role requirement: itil.

- **CMDB Remediation Rules:** Rules associated with a **CMDB Health** task that was created for a failed CMDB Health test. A CMDB remediation rule runs a remediation workflow to remediate an issue reported by CMDB Health.

Visualize:

- **Dependency Views:** Provides a graphic infrastructure view for a CI and any applications or business services that it is part of and that it supports.

Additional role requirement: dependency_views.

- **Query Builder:** Easily build complex infrastructure and service queries, that span multiple CMDB classes, non-CMDB tables, and that can involve many CIs that are connected by different relationships.

Additional role requirement: cmdb_query_builder_read.

Create: [New Technical Service](#)

Additional role requirement: service_admin.

Configuration identifiers framework

Configuration identifiers provide a framework that lets you customize some behaviors of a CMDB Workspace feature, enabling different settings for that feature, on different workspaces. Most importantly, you can use this customization framework when integrating a CMDB Workspace feature into another workspace.

Configuration identifier

A configuration identifier (also referred to as config identifier) is a configuration element within the configuration identifiers framework. A config identifier contains custom settings for a CMDB Workspace feature, that is applicable to a specific workspace. A config identifier contains settings and table-driven configurations used in a UX application such as a workspace. Using config identifiers lets you for example, integrate CMDB Workspace Unified Map into another workspace, with the integrated Unified Map being customized for the workspace. Config identifiers are stored in the Config identifiers [sn_cmdb_ws_config_identifier] table.

A config Identifier acts as the parent record for a set of configurations that are specific to a workspace and therefore overrides default behavior only for that workspace.

Default config identifier

Initially, the Config identifiers [sn_cmdb_ws_config_identifier] table in CMDB Workspace, contains a single config identifier named 'Default' and which is workspace-agnostic. This Default config identifier has its Default column set to **Yes**, a setting that can't be modified. Only a single config identifier can be set to **Yes**, therefore, any additional config identifiers that you create are set to **No**.

The default config identifier contains default settings for CMDB Workspace features. Any subsequent Config Identifier that you configure, is set for a specific workspace. When integrating a CMDB Workspace feature into another workspace and there are no entries in the table-driven configuration for that feature, look-up uses the settings in the default configuration identifier.

Key roles

The following roles are needed in order to use the configuration identifiers framework:

- sn_cmdb_ws.config_editor: Can modify child config tables, such as sn_cmdb_ws_config_property.
- sn_cmdb_ws.config_admin: Can modify both sn_cmdb_ws_config_identifier and child config tables.

- `sn_cmdb_admin`: Role required to modify default config records under the default identifier or the default identifier itself.

For more information about these roles, see [Components installed with CMDB Workspace](#).

Examples of CMDB Workspace features using the configuration identifiers framework for feature settings

- Unified Map:
 - Configure how many nodes can appear on a map
 - Configure the default or maximum number of levels on maps
 - Configure endpoint de-duplication on maps
 - Configure which attributes to display in the Attributes panel
 - Create a class profile of visible layers for classes
 - Configure CIs to appear based on life cycle stage value
- Create CI:
 - Request additional attributes for new CIs
 - Limit the class list for new CIs created in a workspace

Configuring CMDB Workspace

Plan and configure your implementation of CMDB Workspace.

Configuration overview

1. Set up CMDB Workspace

Request the store app and enable demo data.

2. Configure any of the following options to show the most relevant data in your organization:

- Modify important actions on the Home view of CMDB Workspace
- Add a quick link to the Home view of CMDB Workspace

- Configure datacenters for Cloud vs Non-cloud resources
- Configure classes for Cloud vs Non-cloud resources
- Set up CMDB Workspace

Set up and access the CMDB Workspace store app.

- Modify important actions on the Home view of CMDB Workspace

Modify the appearance order and other properties of the important action cards that appear on the Home view of the CMDB Workspace.

- Add a quick link to the Home view of CMDB Workspace

For an immediate access to tools or data that you need, add your own quick link to the Home view of CMDB Workspace.

- Configure datacenters for Cloud vs Non-cloud resources

The Cloud vs Non-cloud resources chart in CMDB Workspace determines which CIs and application services are stored on a cloud and which aren't in the organization. In addition to base system classifications, you can add cloud versus non-cloud classifications that reflect specific datacenter deployments in the organization.

- Configure classes for Cloud vs Non-cloud resources

Include or exclude pairs of CI Class/Type in the Cloud vs Non-cloud resources chart in CMDB Workspace.

- Request additional attributes for new CIs

Integrate a request for specific CI attributes when manually creating a new CI in your workspace. Then, when creating a new CI in the respective workspace, users can enter values for the requested attributes, as appropriate for the new CI.

- Limit the class list for new CIs created in a workspace

Limit the selection of classes for a new CI being manually created in your workspace, to only those classes that are relevant to that workspace. When then creating a new CI in the respective workspace, users can only select a class that is authorized as an option.

Set up CMDB Workspace

Set up and access the CMDB Workspace store app.

Request apps on the Store

Visit the [ServiceNow Store](#) website to view all the available apps and for information about submitting requests to the store. For cumulative release notes information for all released apps, see the [ServiceNow Store version history release notes](#).

Note: The CMDB Workspace store app is automatically installed when installing or upgrading the product.

Enable demo data

Enable demo data to install demo data-specific scheduled jobs that if the needed requirement is met, generates and populates demo data in CMDB Workspace cards such as:

- Cloud vs Non-cloud resources chart in the CMDB Workspace landing page and the Insights view: If Cloud Service Accounts [cmdb_ci_cloud_service_account] table exists
- Cards in the CMDB 360 view: If CMDB 360 is enabled
- Cards in the Insights view, CMDB Feature Adoption tile:
 - CIs processed by IRE
 - CIs processed by IRE based on source
 - Data Manager
 - Data attestation
 - Query Builder
 - Intelligent Search
- Cards in the What's new tile in the CMDB Workspace landing page.

To populate CMDB Workspace dashboards with demo data:

1. When installing the CMDB Workspace store app, check **Load demo data**.
2. Access the [Demo] — CMDB Workspace demo data scheduled job and select **Execute Now**.

Note: As a general practice, don't enable demo data in a production instance to prevent demo data mixing with real production data.

Prerequisites

- Plugins:

-

Recommended: CSDM Activation (com.snc.cmdb.csdm.activation)

Allows for legacy Lifecycle Status field mappings and synchronization to legacy status fields. For details about use and customization of retirement definitions when this plugin isn't activated, see [Retirement definitions](#).

- Required (activated by default): CMDB CSDM Support (com.snc.cmdb.csdm)
- Required (activated by default): CMDB Page Templates (sn_cmdb_pg_tmplts)
- Required (activated by default): CMDB NLQ Search Connected (sn-cmdb-nlq-search)

For details about activating a plugin, see [Activate a plugin](#).

- Roles: To access the CMDB Workspace, you must, at a minimum, have one of the following roles, which are essential for interacting with the CMDB Workspace. Depending on which of these roles is assigned to you, you might only have access to some of the features available in the CMDB Workspace:
 - sn_cmdb_admin
 - sn_cmdb_editor
 - sn_cmdb_user

Note: As you drill down in the CMDB Workspace, there are some dashboards and list views that require specific roles in addition to the key CMDB Admin, CMDB Editor, or CMDB User roles.

- **Features:** CMDB Workspace provides access to a wide range of applications and features. However, for CMDB Workspace to provide meaningful reports, overviews, and trends, you must set up and configure some of those features. Setup for such features is listed under Additional requirements.

Access the CMDB Workspace

Navigate to **Workspaces > CMDB Workspace** to access CMDB Workspace.

Home view is the default view of CMDB Workspace and you can also use other views to access CMDB features:

- **Home view in CMDB Workspace:** View various CMDB Health aggregations, use Intelligent Search to search through the CMDB, see what changed in the CMDB, and access important tasks. This is the default view for CMDB Workspace.
- **My Work view:** Manage CMDB Data Manager tasks such as [attestation tasks](#), that are assigned to you.
- **CMDB 360 view:** View aggregations and analysis of CMDB 360 data on a dashboard, and create CMDB 360 queries.
- **Management view:** View recent key activities and health indicators for the CMDB, and access management tools and dashboards (accessible only to CMDB admins) that support your management tasks.
- **Insights view:** View level of adoption of key CMDB tools, features, and application services. Explore benefits and install those tools and features to maximize the efficiency of your CMDB functionality.

Modify important actions on the Home view of CMDB Workspace

Modify the appearance order and other properties of the important action cards that appear on the Home view of the CMDB Workspace.

Before you begin

Role required: `sn_cmdb_admin`

About this task

The task cards that appear in the Important tasks tile on the landing page of the CMDB Workspace, are stored in the CMDB WS Imp Action Card Config [`sn_cmdb_ws_imp_action_card_config`] table. You can edit some attributes of these cards, including the setting that controls whether a specific card appears at all. Cards in the Important actions tile are available only for the CMDB Admin [`sn_cmdb_admin`] and the CMDB Editor [`sn_cmdb_editor`] user roles and each is configured per one of those roles.

There is some overlap in the task cards that appear for a CMDB Admin and for a CMDB Editor, however, the filters in those task cards are different. Typically, for CMDB Admins, the card filter also includes unassigned tasks that a CMDB Admin needs to assign.

Only editing is possible, you can't add or delete action records in this table.

Procedure

1. Navigate to **All**.
2. In the navigation filter, enter `sn_cmdb_ws_imp_action_card_config.list`.
3. In the list view of the table, edit the table row that you want to modify or click the row to open the record form.

Field	Description
Persona	The logged on user (such as CMDB Admin) for which this card appears. You can't edit this field.

Field	Description
Type	Tasks group that this task belongs to, such as Duplicate CIs. You can't edit this field.
Table	The table used in the card filter. You can't edit this field.
Active	Determines whether the card for this action appears in CMDB Workspace.
Order	Numeric value that determines the order of each card within the rest of the cards in the Important actions tile. Cards with lower order numbers appear before cards with higher order numbers.
Filter condition	Filters for the tasks that are included for the card.
List columns	Columns that appear in the list view when you click a card to show its associated tasks.
List groupby	Attribute to group by the card's associated tasks in the card's list view. The card's list view appears when you click a card to show its associated tasks.

4. Click **Update**.

Add a quick link to the Home view of CMDB Workspace

For an immediate access to tools or data that you need, add your own quick link to the Home view of CMDB Workspace.

Before you begin

Role required: sn_cmdb_admin, sn_cmdb_editor, or sn_cmdb_user

About this task

Quick links are stored in the Quick Links [sn_cmdb_ws_quick_links] table including those that are included in the base system. Only the user that added a quick link has access to that link, and can subsequently edit or delete that added link.

Procedure

1. Navigate to **Workspaces > CMDB Workspace**.
2. In the Quick links section, click the '+' icon.
3. Enter the **URL** and **Display text** for the link and then click **Add**.

A valid URL must start with "http:" or "https:". To link to a tool in the instance such as the CI Class Manager, enter the full URL to the tool's landing page.

4. Click **Done**.

Result

The new link is available only for the user that created the link, in the Quick links section in the landing page of the CMDB Workspace.

What to do next

Click on the Edit quick links icon to edit, delete, or reposition an added link. Then use the up and down arrows to move a link within the list, and click the Edit icon next to a link that you want to modify or delete from the list.

Configure datacenters for Cloud vs Non-cloud resources

The Cloud vs Non-cloud resources chart in CMDB Workspace determines which CIs and application services are stored on a cloud and which aren't in the organization. In addition to base system classifications, you can add cloud versus non-cloud classifications that reflect specific datacenter deployments in the organization.

Before you begin

Role required: `sn_cmdb_admin`

About this task

The Datacenter Types [`sn_cmdb_ws_datacenter_type`] table stores datacenter classes with a classification of being used as a cloud storage or not in the organization. The calculations for the Cloud vs Non-cloud resources chart in the CI overview tile in [CMDB Workspace](#), reflects on the datacenters in that table and their classifications.

CIs are counted as non-cloud mainly if either of the following conditions is met:

- The CI is not associated with any datacenter.
- The CI is associated with a datacenter that is classified as non-cloud in the Datacenter Types table.

In the base system, the Datacenter Types table contains several common datacenters. For example, the Azure Datacenter [`cmdb_ci_azure_datacenter`] class is classified as 'Cloud'. Therefore, the Cloud vs Non-cloud resources chart includes in its calculations and bars the Azure Datacenter [`cmdb_ci_azure_datacenter`] class.

Procedure

1. Select **All**.
2. In the Filter navigator, enter `sn_cmdb_ws_datacenter_type.list` to access the Datacenter Types table.

- Click **New** and fill out the Datacenter Type form for a datacenter that is used in the organization.

Field	Description
Datacenter class	A child class of the Logical Datacenter [cmdb_ci_logical_datacenter] class which is used in the organization.
Type	Classification that reflects whether the specified Datacenter class is being used as cloud storage or not.
Cloud Provider	Custom label for the cloud provider.

- Click **Submit**.

Configure classes for Cloud vs Non-cloud resources

Include or exclude pairs of CI Class/Type in the Cloud vs Non-cloud resources chart in CMDB Workspace.

Before you begin

Role required: sn_cmdb_admin

About this task

The CMDB Insight Query Categories [sn_cmdb_ws_insight_query_category] table contains the pairs of CI Class/Type for the Cloud vs Non-cloud resources chart in the CI overview tile in [CMDB Workspace](#). The Active setting in a record determines if the respective CI Class/Type pair appears in the chart. By default, all pairs are configured to appear in the chart.

A CI Class/Type pair appears or doesn't appear according to its Active setting and regardless of the status of its associated scheduled job.

Procedure

1. Select **All**.
2. In the Filter navigator, enter `sn_cmdb_ws_insight_query_category.list` to access the CMDB Insight Query Categories table.
3. Set Active to **true** or **false** for a CI Class/Type pair.
For example, set Active to **false** for the **Applications/Non-cloud** pair.
This setting will exclude from the chart all CIs in the Applications class which are determined to be non-cloud.

Request additional attributes for new CIs

Integrate a request for specific CI attributes when manually creating a new CI in your workspace. Then, when creating a new CI in the respective workspace, users can enter values for the requested attributes, as appropriate for the new CI.

About this task

Creating a new CI is an experience in CMDB Workspace which you might be integrating into another workspace. Within CMDB Workspace, there are default settings for some of the behaviors of the create CI experience. However, you can use configuration identifiers to customize some of those default settings for CMDB Workspace or other workspaces. For example, you can customize the list of attributes that is requested for the new CI.

Requests for additional attributes for new CIs are stored in the CI additional attributes config [sn_cmdb_ws_ci_additional_attributes] table which is part of the configuration identifiers framework. Therefore, to manage requests for additional attributes in your workspace, you must use config identifiers. By default, the CI additional attributes config table contains a single entry for CMDB Workspace, that applies to the entire CMDB hierarchy. Any workspace or class without a direct config identifier for additional attributes, uses the default entry.

For more information:

- About configuration identifiers, see [Configuration identifiers framework](#).

- About the experience of manually creating a new CI in CMDB Workspace, see [Create a CI manually in CMDB Workspace](#).

Before you begin

Role required: sn_cmdb_ws.config_editor

Procedure

1. Navigate to **All** and in the navigation filter, enter `sn_cmdb_ws_ci_additional_attributes.list` to access the CI additional attributes config table.
2. On the table list view page, select **New** and fill out the form.

Field	Description
Config identifier	Name of a configuration identifier from the Config identifier [sn_cmdb_ws_config_identifier] table. The default value of 'Default' is used as a fallback for any workspace without its own config identifiers.
CI class	Class for which the specified additional attributes will be requested when creating a new CI.
Active	Option to activate or deactivate the request for the additional attributes when creating a new CI.

Field	Description
Additional attributes	List of class attributes that will be requested when creating a new CI of the CI class .
Apply to hierarchy	Apply the request for additional attributes to all classes descending from the specified CI class .
Feature	Pre-set to 'Create CI'.

3. Select **Submit**.

Result

When manually creating a new CI for the specified **CI class** in the respective workspace, users are requested to enter values for the specified **Additional attributes** on the Additional attributes page.

Limit the class list for new CIs created in a workspace

Limit the selection of classes for a new CI being manually created in your workspace, to only those classes that are relevant to that workspace. When then creating a new CI in the respective workspace, users can only select a class that is authorized as an option.

About this task

Creating a new CI is an experience in CMDB Workspace which you might be integrating into another workspace. Within CMDB Workspace, there are default settings for some of the behaviors of the create CI experience. However, you can use configuration identifiers to customize some of those default settings for CMDB Workspace or other workspaces. For example, you can customize the list of classes to choose from, for the new CI.

By default, when creating a new CI in CMDB Workspace, the list of classes to choose from for the new CI, contains almost all classes in the CMDB hierarchy. For your workspace, it might be important to reduce that list to specific classes or hierarchy branches.

Settings for specific classes available for new CIs are stored in the CI class config [sn_cmdb_ws_ci_class_config] table which is part of the configuration identifiers framework. Therefore, to manage the list of classes for new CIs in your workspace, you must use config identifiers. To manage that list, you must create a config identifier for each class or hierarchy branch that you want to include or exclude in the class drop-down list. By default, the CI class config table contains a single entry for the Configuration Item [cmdb_ci] class, which is derived by the entire CMDB hierarchy. Any class or workspace without direct config identifiers for inclusion or exclusion, uses the default entry.

For more information:

- About configuration identifiers, see [Configuration identifiers framework](#).
- About the experience of manually creating a new CI in CMDB Workspace, see [Create a CI manually in CMDB Workspace](#).

Before you begin

Role required: sn_cmdb_ws.config_editor

Procedure

1. Navigate to **All** and in the navigation filter, enter `sn_cmdb_ws_ci_class_config.list` to access the CI class config table.
2. On the table list view page, select **New** and fill out the form.

Field	Description
Config identifier	Name of a configuration identifier from the Config identifier [sn_cmdb_ws_config_identifier] table. The default value of 'Default' is used as a fallback for

Field	Description
	any workspace without its own config identifiers.
CI class	Class to be included or excluded from the list of classes available for a new CI.
Active	Option to activate or deactivate the setting in the experience of creating a new CI.
Feature	Pre-set to 'Create CI'.
Apply to hierarchy	Apply the class setting to all classes descending from the specified CI class .
Operation	Include or exclude the CI class in the list of classes for a new CI.

3. Select **Submit**.

Result

When manually creating a new CI in the respective workspace, the specified **CI class** is included in the **Class** drop-down list on the Select class page only if it is set to be available.

Create a CI manually in CMDB Workspace

Create a new CI in CMDB Workspace, while applying Identification and Reconciliation Engine (IRE) processes and other requirements for the CI's class. IRE identification rules enforce the new CI to be unique and to comply with other class requirements.

About this task

Creating specialty CIs such as an application service, isn't supported in this Create CI experience. Typically, such CIs aren't discoverable and

you must create them manually using specific wizards, such as the [Application service wizard](#).

You can access the Create CI experience in either of the following ways:

- Selecting the **Create CI** quick link on the Home view of CMDB Workspace which lets you then select a class for the new CI.
- Drilling down a class group bar in the CI Summary tab on the CI overview tile, in which case the class you are drilling down from becomes the class for the new CI. This option is available only if you drill down a class that isn't excluded for the Create CI experience. For information about excluding classes for the Create CI experience in CMDB Workspace, see [Limit the class list for new CIs created in a workspace](#).

As you progress through the procedure, fields appear dynamically according to your selections and entries on the current or previous pages.

To manually create a new CI without applying IRE processes (Core UI), see [Populating the CMDB](#). For more information about mandatory attributes, IRE processes, dependent CIs, and the CI relationship editor (Core UI), see:

- [Set a CI attribute to be mandatory](#)
- [Identification rules](#)
- [CMDB classifications and class dependency](#)
- [CI relationship editor](#)

Before you begin

Configure any customizations to the create CI experience before creating new CIs:

- Complete any request by an administrator for additional non-mandatory attributes. For information about how an administrator can use configuration identifiers to incorporate requests for attributes into the flow of creating a new CI, see [Request additional attributes for new CIs](#).

- Complete any settings for limiting the list of classes available to choose from, for a new CI. For information about how an administrator can use configuration identifiers to create a custom list of classes for a new CI, see [Limit the class list for new CIs created in a workspace](#).

If you want additional actions to be performed after creating a CI, such as creating a record that references the new CI, implement the `ManualCreateCIExtPoint` extension point:

- In the `getAppld()` function, add the `sys_id` of the application containing the workspace from the `UX Application [sys_ux_page_registry]` table.
- In the `postInsertCI()` function, define the additional actions you want to perform.

Your extension point implementation runs after a new CI is created in the application specified in `getAppld()`. You can create additional implementations as needed for additional applications. For more information about extension points, see [Using extension points to extend application functionality](#).

Role required: `cmdb_manual_ci_ire_access` (contained in the `sn_cmdb_editor` role by default)

Procedure

1. Navigate to **Workspaces > CMDB Workspace**.
2. On the Home view of CMDB Workspace, use one of the following options:
 - Select the **Create CI** quick link, and then:
 - a: On the **Select class** page, select the class for the new CI from the **Class** drop-down list. Classes without a valid identification rule are grayed out in the list and you can't select them.
 - b: Select **Continue**.
 - On the CI overview tile, select the CI Summary tab, and then:
 - a: Select the group bar with the class that you want to create the new CI in.

- b. Scroll down to the list view for the class group, and select the class in which you want to create the new CI.
- c. On the class list view page, select the **Create CI** button.

Note: If you selected a class that is excluded from the Create CI experience, the **New** button appears. Select **New** to manually create a new CI without applying IRE processes (Core UI).

Continue to fill out the rest of the Create a new CI pages as described in the following steps.

3. On the Home view of CMDB Workspace, select the **Create CI** quick link and then fill out all the Create a new CI pages as described in the following steps.
4. **Select class:**

Select the class for the new CI from the **Class** drop-down list. Classes without a valid identification rule are grayed out in the list and you can't select them.

Select **Continue**.

5. **Required attributes:**
Configure attributes that are either mandatory for the new CI's class, or which the identification rule for the new CI's class requires. Also, if the new CI is a dependent CI, configure the dependency relationship.

-

In the Dependent-upon CI section, select a CI that the new CI depends on.

Dependent-upon class: Select the class of the dependent-upon CI.

Dependent-upon CI: Select the search icon and in the Dependent-upon CI dialog box, select a CI by selecting its link in the Name column.

-

In the Identifier entries section, select criterion attributes and set their values to uniquely identify the CI.

Criterion attributes: In the drop-down list, select one or more criterion attributes sets. This drop-down list omits criterion attributes that are based on the Product instance identifier attribute.

•

In the criterion attribute fields section scroll down the page if needed and enter values for the criterion attributes fields for the CI.

Select **Continue**. If the new CI is detected as a duplicate of an existing CI, then the CI already exists dialog box appears. Select **Review existing CI** and then decide whether to change the existing or the new CI to prevent the duplication and to continue creating the CI.

6. **Additional attributes:**

Enter values for attributes, such as Operational status, that your administrator is requesting in addition to the required attributes from previous pages.

Select **Continue**.

7. **Relationship definition:**

Review any existing relationships and decide whether to add a relationship for the new CI. For dependent CIs, a dependent relationship was already created in an earlier step.

a. Select **Add**.

b. On the Add relationships page, select a **Relationship type**.

The Parent/Child notations in each relationship type denotes whether the new CI will have the role of a child or a parent in the new relationship.

c. In the Configuration Item list, select the CIs that the new CI will have the relationship with. Whichever parent/child role you selected for the new CI, the selected CIs will have the other role.

d. Select **Add**.

Note: Creating relationships to the User and the Group tables is supported, however, those relationships aren't processed by IRE.

On the Relationship definition page, select **Continue**.

8. **Review:**

Review all the details of the new CI. Select **Create** to approve and create the new CI, or **Back** to change definitions.

9. In the New CI created dialog box, select **Done** to exit the operation, **Review new CI** to open the form view for the new CI, or **Create another CI**.

Result

In the new CI:

- Discovery source is set to **Manual via IRE**.
- **Operational status** is set to **Design** until the new CI is fully configured and ready to be used. You can modify the CI's status, for example, to **Operational** if appropriate.

In the new CI, Discovery source is set to **Manual via IRE**.

What to do next

You can view the new CI or other CIs, using CI Form in CMDB Workspace. For more information about using the CI Form, see [Manage CI details in CI Form](#).

Manage CI details in CI Form

Use CI Form in CMDB Workspace or in another workspace, to view, edit, and manage a comprehensive set of details of a CI such as its attributes, related lists, and CMDB 360 records. When updating CIs, IRE rules are applied to avoid potential issues such as duplicate CIs. CI Form supports derivation of form configurations throughout the CMDB hierarchy.

The CI Form feature is a centralized location with a comprehensive set of CI details, organized in sections. Anywhere CMDB Workspace provides

a function to view a CI record, such as a list or a chart, CI Form is used for the selected CI when you select that function. Use the forms provided by CI Form to examine and edit CI attributes, relationships, tags, services and offerings, CMDB Health and CMDB 360 data associated with the CI, related lists, and activities.

General operations you can perform in CI Form:

- Select the Now Assist for CMDB CI Summarization skill: Requires that Now Assist for CMDB is set up. For more information, see [Configure the CI summarization skill](#).
- Select **Open map** to open the CI map in [Unified Map](#). This function isn't available for a non-operational CI. For information about using the Life cycle stage attribute to define a CI's operational state, see [Configure CIs to appear based on life cycle stage value](#).

In general, a CMDB Admin and a CMDB Editor can view and edit CI records, and a CMDB User can view CI details on the form.

Explore CI view

By default, CI Form uses the Explore CI view, which is stored in the UI Views [sys_ui_view] table. The Explore CI view defines the structure of the view, its sections and attributes, and related lists that appear on the form. The system provides predefined Explore CI forms for many CMDB classes. Those forms are derived by child classes, which don't have their own form definition, throughout the CMDB hierarchy.

The various sections in Explore CI view are described in this topic.

Configuration

You can control the use and content of CI Form as follows:

-

Set system property `sn_cmdb_ws_explore_ci.record.enabled`:

This property toggles the use of CI Form when viewing CI records in CMDB Workspace, or in another workspace, if applicable. This property is set to **true** by default, enabling the experience of CI Form. For more information about this property, see [Components installed with CMDB Workspace](#).

-

Configure the Explore CI view:

Select the More Actions icon (...) on the form and then select an option to modify the Explore CI view:

-

Select **Configure attributes** to modify the Summary and Attributes sections on the form, in Form Builder. For example, to add sections, modify section titles or the attributes included in sections: Requires the `personalize_form` user role.

For more information about Form Builder and Table Builder, see [Forms in Table Builder](#) and [Add fields to a form layout in Table Builder](#).

- Select **Configure resources** to modify the Resources section on the form. For example, to add or remove subsections or items within subsections: Requires the `personalize_list` user role.

Highlighted attributes

Several key attributes are preconfigured to be highlighted on a CI form when specific conditions are met. Those highlights are meant to draw your attention to specific states, which are either healthy, or that indicate a problem and require your attention. Attribute highlight definitions are stored in the Highlighted Values [`sys_highlighted_value`] ServiceNow AI Platform table, which you can search for records where Table is prefixed by 'cmdb_ci'. For example, the `operational_status` attribute is configured as follows:

- If the attribute value is **'Operational'**, then the attribute appears with a green highlight.
- If the attribute value is anything other than **'Operational'**, then the highlight is red.

To see those preconfigured highlight records that are used in CI Form and in various other CMDB Workspace features, navigate to **All > Workspace Experience > Administration > Highlighted Values**.

For more information about configuring attribute highlights in the ServiceNow AI Platform, see [Highlight list fields](#).

Summary

By default, the Summary tile shows the most meaningful CI attributes and appears at the top of all other form sections. You can select **Show more** or **Show less** to adjust the page layout. The Summary tile shows attributes such as Created, key ownership attributes such as Managed by, and other important attributes such as Discovery source and Operational status. The attributes that appear in this section map to the first section defined in the Explore CI view.

By default, the Important attributes tile shows CI attributes such as Operating System and Serial number. The attributes that appear in this tile map to the Important attributes section defined in the Explore CI view, if one exists.

Role requirements for operations in this section:

- Editing attributes by selecting the Edit icon: Permitted for attributes that you have permission to
- Modifying this section in the Explore CI view: `personalize_form`

Attributes

This section shows all the UI sections that are configured in the Explore CI view for the class, excluding:

- The first section (which populates the Summary tile).
- The Important attributes section, if one exists (which populates the Important attributes tile).

Select **Attributes** to access the subsections within. By default, the Discovery and the Operational attribute subsections map to the Discovery and the Operational sections in the Explore CI view. The All subsection shows all the CI attributes. Mandatory attributes are noted on the form by an "*" and must be set with a value.

When updating CI attributes, any Identification and Reconciliation Engine (IRE) rules that exist for the CI class are applied to help prevent potential problems with the update. IRE processes detect potential issues such as CI duplication and a dependent CI missing valid parent relationships. In these situations, the update is paused and you're presented with mitigation options to avoid the issue. Applying IRE

processes might result in a partial update of attributes as reconciliation rules might block updates to some attributes and enable updates of others.

If there are no IRE rules for the class, the CI is updated directly without using IRE processes.

A CI that is updated in CI Form, has its `discovery_source` attribute set to **Manual via IRE** unless you set it to a different value.

More information:

- [Identification and Reconciliation engine \(IRE\)](#)
- [Reconciliation rules](#)
- [Identification rules](#)
- [Mandatory attributes](#)

Role requirements for operations in this section:

- Updating attributes: `sn_cmdb_editor`
- Modifying this section in the Explore CI view: `personalize_form`

Tags

This section shows the list of tags, stored as key/value pairs in the Key Values [cmdb_key_value] table. These tags are typically associated with CIs and resources for cloud providers such as Amazon Web Services and Google Cloud Platform, and in general are referred to as cloud tags. Cloud tags are used in ITOM applications, such as Tag Governance, and function as key dependencies in Tag-based discovery in Service Mapping. Discovery and Service Graph Connectors automatically populate cloud tags, which can then be grouped and managed as needed in an organization.

The Tags section in CI Form doesn't contain details about Platform tags, which are another type of tags that are stored in the Tags column that exists in most platform tables.

To manage tags, select **Manage** in the Tags tile, and then, in the Manage tags dialog box you can:

- Enter a **Key** and a **Value** pair, and then select the Add new tag ('+') icon.
- Select the Delete tag icon for a tag.
- Modify the **Key** or the **Value** fields for a tag.
- Select **Save** to save any changes to tags.

Managing tags requires the sn_cmdb_editor user role.
More information:

- [Tag-based discovery in Service Mapping](#)
- [Data collected for Amazon AWS Cloud Discovery](#)
- [Data collected for Microsoft Azure Cloud Discovery](#)

Resources

This section shows resources linked to the CI, and maps to the Related Lists specified in the Explore CI view. By default, resources include tables such as File Systems [cmdb_ci_file_system], Software Installed [cmdb_ci_spkg], and Network Adapters [cmdb_ci_network_adapter].

In this section, you can:

- Select **Manage** to add or remove records from a resource list, which is applicable to related lists that have many-to-many relationships. If you're authorized to update in the CMDB Workspace scope, then you're navigated to a list selector for the resource where you can add or remove multiple items. If you aren't authorized, then you're navigated to the Core UI experience.
- Select one or more related items and then select the **Delete** button, which is visible only if you have delete access to any of the related list tables.
- Select **New** to add a related list item. The **New** button is available for all the resource tables that you have access to.
Important notes about creating a new related list item:

If the related list table is within the cmdb_ci hierarchy, has an IRE identification rule, and isn't an excluded table, then you're navigated to the Create CI experience in CMDB Workspace or another workspace if applicable. In the Create CI experience, some CI attributes are pre-populated with the proper values for the class. For example, in the Required attributes section for dependent CIs, the **Dependent-upon CI** attribute is pre-populated with the parent of the current CI. Relationships and resources are also pre-populated according to the CI class definitions.

For information about the Create CI experience, see [Create a CI manually in CMDB Workspace](#).

- If the related list table doesn't have an IRE identification rule, then you're navigated to a basic list view page instead of CI Form.
- The system automatically creates the matching reference back to the current class. For example, for a dependent CI the system creates the file system and the necessary relationship to connect the file system to the computer CI.
- For some resources such as CI IPs, **New** isn't available and the **Dependent-upon CI** isn't pre-populated. This behavior applies to CIs with scripted relationships.
- After creating a new related list item, select the Refresh List icon to show the new record in the list on the Resource section.
- Configure the Resources section in the Explore CI view by selecting the More actions icon and then selecting **Configure resources**. Use the related lists slushbucket to add or remove resources and then select **Save**: Requires the personalize_list role.

Role requirements for operations in this section:

- Configuring resources in the Explore CI view: personalize_list
- Creating, updating, or deleting records in related tables included as Resources for a CI record: Requires create, update, and delete access to the resource table.

Activity

This section shows related items such as open incidents and the activity stream for the CI on the following tabs:

Related items

Pie charts that by default include Open incidents (Incidents table), Open changes (Change Request table), and Open problems (Problem table), broken down by priority or state.

In this tab, you can:

- Select a chart to drill down to the records associated with different chart sections. Depending on configuration, records open in CMDB Workspace or in another workspace.
- Configure the list of tables for which charts appear, which is stored in the Explore CI Related Item Configurations [sn_cmdb_ws_explore_ci_related_item_config] table. You can add records to that table, or modify behavior settings such as where a record opens when selected: Requires the sn_cmdb_ws.config_editor role.
- Configure your preferences for which of the available charts appear when you log in. Select the Related Item Settings icon in the Related Items tab and in the Related item settings dialog box, select any charts that you prefer to hide.

CI history

History of the activities related to the CI, such as value changes in the CI attributes, listed in chronological order.

More information:

- [Problem Management](#)
- [Incident Management](#)
- [Change Management](#)

Role requirements for operations in this section:

- Accessing the Explore CI Related Item Configurations [sn_cmdb_ws_explore_ci_related_item_config] table to configure the list of charts that appear in the Related Items tab: sn_cmdb_ws.config_editor

- Configuring your preferences for which related item charts appear by selecting the Related Item Settings icon in the Related Items tab: Any logged in user

Relationships

This section shows the CI relationships, which include:

- Total relationships: Total number of relationships for this CI
- Duplicate relationships: Total number of duplicate relationship for this CI
- Stale relationships: Total number of stale relationship for this CI

In this section, you can:

- Switch between the following view types:
 - Tree view: Shows the downstream and upstream relationships in a tree format. You can expand and collapse any level that you want to see more or less details for.
 - Flat view: Shows the CI relationships in a flat view. You can adjust the number of levels of relationships to show, or filter to show only specific CIs.
- Select **Edit relationships** to open Unified Map for the CI in edit mode and with the following map settings:
 - Home node set to the current CI.
 - Relationship levels set to 1 level.
 - Layers set to show Business, Service Instances, Applications, and infrastructure.
 - Layout is set to Vertical.

This function isn't available for a non-operational CI. For information about using the Life cycle stage attribute to define a CI's operational state, see [Configure CIs to appear based on life cycle stage value](#).

If the CI class is a Service Instance [cmdb_ci_service_auto] or a derived class, then you must either use Service Mapping (if installed) to edit a

map for a Service Instance, or edit dependency relationships in Unified Map.

- Select **Refresh** after saving changes in Unified Map, to reflect your updates in the Relationship section.

More information about relationships and about editing relationships in Unified Map:

- [CI relationships in the CMDB](#)
- [Edit relationships in Unified Map](#)
- [CI relationship editor](#)
- [Service Mapping](#)
- [Unified Map](#)

Role requirements for operations in this section: **Edit relationships** requires `sn_cmdb_editor`

Services and Offerings

This section shows cards with counts of the following services and offerings associated with the CI:

- Service Instance: Any CI related to the Service Instance [cmdb_ci_service_auto] table where Service Classification is **Application Service**.
- Business Service Offering: Any Service Instance (Service Classification is **Application Service**) that this CI is related to, and which has a relationship to Service_Offering where Service Classification is **Business Service**.
- Technology Management Offering: Any Service Instance (Service Classification is **Application Service**) that this CI is related to, and which has a relationship to Service_Offering where Service Classification is **Technical Service** or the CI is related to a Dynamic CI Group, which is part of a Technical Service Offering.
- Technology Management Service: Parent of a Technology Management Offering.

Select a tile to drill down to the specific records associated with the tile.

More information:

- [CSDM terms](#)
- [Service Delivery domain in the CSDM model](#)
- [Access CSDM features](#)
- [CSDM implementation stage — Walk](#)
- [Application services](#)

Health

This section shows aggregations from the latest CMDB Health test results for the Completeness, Correctness, Compliance, and Relationship KPIs, and the aggregated state of attestation. Color codes are used to denote pass/fail scores.

This section shows meaningful details only if CMDB Health is set up and the associated dashboard jobs are running.

More information:

- [CMDB Health](#)
- [CMDB Health KPIs and metrics](#)
- [CIs attestation](#)
- [Configuring CMDB Health](#)

CMDB 360

This section shows discovery sources data from the CMDB 360 data store for the CI. It shows the CI attributes and for each attribute, its current CMDB value, and any values that were reported by discovery sources for that attribute.

This section appears only if CMDB 360 is enabled and configured.

More information:

- CMDB 360/Multisource CMDB
- CMDB 360 experience in CMDB Workspace
- Configure the CMDB 360 dashboard

Resume a disabled Cloud vs Non-cloud resources scheduled job

Reactivate a scheduled job to resume data collection for the Cloud vs Non-cloud resources chart in CMDB Workspace.

Before you begin

Role required: `cmdb_query_builder` (contained in the `sn_cmdb_user`, `sn_cmdb_editor`, `sn_cmdb_admin` user roles)

About this task

The [Cloud vs Non-cloud resources](#) chart in CMDB Workspace Home view uses several scheduled jobs that gather and calculate the data for the charts. Each bar in the CI classes chart represents a pair of a CI class and a storage type (cloud, non-cloud) such as Applications/Cloud. Each bar is associated with its own scheduled job. When a scheduled job exceeds its limits of time and amount of collected data, it is automatically stopped. A job that can't complete for 3 (default) consecutive days is automatically disabled for future runs.

Use the following procedure to later resume that disabled scheduled job.

Procedure

1. Click **All**.
2. In the Filter navigator, enter `sysauto_query_builder.list` and open the Scheduled Email of Query Builders table.
3. In the **Scheduled Email of Query Builders** list view, set **Active** to **true** for the scheduled job to resume.

Edit a related table from CMDB performance insights

Edit a related table on the Related Entries [cmdb_related_entry] table directly from the CMDB performance insights tool in the CMDB Workspace Insights view. Update the related table to correctly reference another CI in the Referenced field when a reference is missing from the related table.

Before you begin

Role required: sn_cmdb_admin (CMDB Admin) and any role needed to access a related table.

About this task

A record is missing a reference when the **Referenced** field for that record is empty. CMDB performance insights enables you to easily edit related tables that are missing a reference after you drill down on a slice of the Related records missing reference chart.

You can see the full list of related tables and associated referenced fields in the Related Entries [cmdb_related_entry] table.

Procedure

1. Navigate to **Workspaces > CMDB Workspace**, and then in the CMDB Workspace menu bar, select **Insights**.
2. On the CMDB performance insights tile, select **View performance insights**.
3. Navigate to the Related records tile of the **Payloads & CIs** tab and then select a slice of the chart in the Related records missing reference by table card.
4. Select a check box next to a record and then select **Edit**.
5. Specify applicable CMDB CI references and then select **Update**.

Related concepts

- [Overview of CMDB](#)

- [Insights view in CMDB Workspace](#)

Edit a data source from CMDB performance insights

Edit a data source for your Service Graph Connectors to specify the data that an import set should ingest. Consider configuring a batch process to make ingestion more efficient and improve performance.

Before you begin

Role required: sn_cmdb_admin (CMDB Admin) and import_admin.

Procedure

1. Navigate to **Workspaces > CMDB Workspace**.
2. In the CMDB Workspace menu bar, select **Insights**.
3. On the CMDB performance insights tile, select **View performance insights**.
4. Select the Sources with batch processing turned off card in the Service Graph connectors tab.
5. On the Data sources list view, select a check box next to a record.
6. Select **Edit**.
7. Configure the data source.
For more information about data sources, see:
 - [Create a data source](#)
 - [Data source fields](#)
8. Select **Update**.

Edit a scheduled data import from CMDB performance insights

Edit a scheduled data import directly from CMDB performance insights for your Service Graph Connectors. Consider enabling **Concurrent Import**

with a custom size partition to split incoming data into multiple import sets and transform the import sets concurrently to reduce processing time.

Before you begin

Role required: sn_cmdb_admin (CMDB Admin) and one of these roles:

- import_scheduler
- import_admin

Procedure

1. Navigate to **Workspaces > CMDB Workspace**.
2. In the CMDB Workspace menu bar, select **Insights**.
3. On the CMDB performance insights tile, select **View performance insights**.
4. In the Service Graph connectors tab, click the Sources with concurrent import turned off card or the Sources with non-custom size partition method card.
5. In the Scheduled Import sets list view, select a check box next to a record.
6. Select **Edit**.
7. Configure the scheduled data import.
You may need to change your application scope to create or edit a scheduled data import from CMDB Workspace.

For more information about updating a scheduled data import, see [Schedule a data import](#).

8. Select **Update**.

Related concepts

- [Insights view in CMDB Workspace](#)

CMDB Workspace reference

Reference topics provide additional information about components such as properties, installed with CMDB Workspace and class-specific criteria for the Cloud vs Non-cloud resources chart.

- [Class criteria in Cloud vs Non-cloud resources chart](#)

The Cloud vs Non-cloud resources chart provides counts for several key classes. The chart uses different classes and relationship criteria for each class to determine which resources count as cloud and which count as non-cloud.

- [Components installed with CMDB Workspace](#)

Several types of components are installed with the activation of the CMDB Workspace (sn_cmdb_ws) plugin, including properties, tables, user roles, and scheduled jobs.

Class criteria in Cloud vs Non-cloud resources chart

The Cloud vs Non-cloud resources chart provides counts for several key classes. The chart uses different classes and relationship criteria for each class to determine which resources count as cloud and which count as non-cloud.

The Cloud vs Non-cloud resources chart shows in the CI overview tile in the [CMDB Workspace store app](#).

Virtual Machine Instance [cmdb_ci_vm_instance]:

- Cloud:

Virtual Machine Instance [cmdb_ci_vm_instance] -> (Hosted on::Hosts) -> Datacenter class (one of the [configured cloud datacenters](#)) -> (Hosted on::Hosts) -> Cloud Service Account [cmdb_ci_cloud_service-account]

- Non-Cloud:

Virtual Machine Instance [cmdb_ci_vm_instance] -> (Hosted on::Hosts) -> Datacenter class (one of the [configured non-cloud datacenters](#))

- Total: Equals the record count in the Virtual Machine Instance [cmdb_ci_vm_instance] table (unless there are Virtual Machine Instance records without any relationships)

Server [cmdb_ci_server]:

- Cloud:

Server [cmdb_ci_server] -> (Virtualized by::Virtualizes) -> Virtual Machine Instance [cmdb_ci_vm_instance] -> (Hosted on::Hosts) -> Datacenter (one of the [configured cloud datacenters](#)) -> (Hosted on::Hosts) -> Cloud Service Account [cmdb_ci_cloud_service-account]

- Non-Cloud:

Server [cmdb_ci_server] -> Virtual Machine Instance [cmdb_ci_vm_instance] -> Datacenter class (one of the [configured non-cloud datacenters](#))

OR

Server [cmdb_ci_server] has no relationships with Virtual Machine Instance [cmdb_ci_vm_instance]

- Total: Equals the record count in the Server [cmdb_ci_server] table (unless there are Server records without any relationships)

Application [cmdb_ci_appl]:

- Cloud:

Application [cmdb_ci_appl] -> (Runs on::Runs) -> Server [cmdb_ci_server]-> (Virtualized by::Virtualizes) -> Virtual Machine Instance [cmdb_ci_vm_instance] -> (Hosted on::Hosts) -> Datacenter

(one of the [configured cloud datacenters](#)) -> (Hosted on::Hosts) -> Cloud Service Account [cmdb_ci_cloud_service-account]

OR

Application [cmdb_ci_appl] -> (Hosted on::Hosts) -> Datacenter class (one of the [configured cloud datacenters](#))-> (Hosted on::Hosts) -> Cloud Service Account [cmdb_ci_cloud_service-account]

- Non-Cloud:

Application [cmdb_ci_appl] -> Server [cmdb_ci_server] -> Virtual Machine Instance [cmdb_ci_vm_instance] -> Datacenter Datacenter class (one of the [configured non-cloud datacenters](#))

OR

Application [cmdb_ci_appl] -> Server [cmdb_ci_server] -> no relationship with Virtual Machine Instance [cmdb_ci_vm_instance]

- Total: Equals the sum of Cloud + Non-Cloud (not the record count in the Application [cmdb_ci_appl] table)

Kubernetes Cluster [cmdb_ci_kubernetes_cluster]:

- Cloud:

Kubernetes Cluster [cmdb_ci_kubernetes_cluster] -> (Hosted on::Hosts) -> Datacenter (cloud logical data center) -> (Hosted on::Hosts) -> Cloud Service Account [cmdb_ci_cloud_service-account]

- Non-Cloud:

Kubernetes Cluster [cmdb_ci_kubernetes_cluster] -> Datacenter (non-cloud logical datacenter)

OR

Kubernetes Cluster [cmdb_ci_kubernetes_cluster] -> no relationship with -> Datacenter

- Total: Equals the record count in the Kubernetes Cluster [cmdb_ci_kubernetes_cluster] table (unless there are Kubernetes Cluster records without any relationships)

Database Instance [cmdb_ci_db_instance]:

- Cloud:

Database Instance [cmdb_ci_db_instance] -> (Runs on::Runs) -> Server -> (Virtualized by::Virtualizes) -> Virtual Machine Instance [cmdb_ci_vm_instance] -> (Hosted on::Hosts) -> Logical Datacenter (one of the [configured cloud datacenters](#)) -> (Hosted on::Hosts) -> Cloud Service Account [cmdb_ci_cloud_service-account]

OR

Database Instance [cmdb_ci_db_instance] -> Logical Datacenter [cmdb_ci_logical_datacenter] (one of the [configured cloud datacenters](#)) -> (Hosted on::Hosts) -> Cloud Service Account [cmdb_ci_cloud_service-account]

- Non-Cloud:

Database Instance [cmdb_ci_db_instance] -> Server [cmdb_ci_server] -> Virtual Machine Instance [cmdb_ci_vm_instance] -> datacenter (non-cloud logical datacenter)

OR

Database Instance [cmdb_ci_db_instance] -> Server [cmdb_ci_server] with no relationship -> Virtual Machine Instance [cmdb_ci_vm_instance]

- Total: Sum of Cloud + Non-cloud (can be less than total number of records, subtracting the badly created records)

Storage Volume [cmdb_ci_storage_volume]:

- Cloud:

cmdb_ci_storage_volume -> (Hosted on::Hosts) -> Logical Datacenter [cmdb_ci_logical_datacenter] (one of the [configured cloud datacenters](#))-> (Hosted on::Hosts) -> Cloud Service Account [cmdb_ci_cloud_service-account]

- Non-Cloud:

cmdb_ci_storage_volume -> Logical Datacenter [cmdb_ci_logical_datacenter] (one of the [configured non-cloud datacenters](#))

OR

cmdb_ci_storage_volume -> no relationships with Datacenter

Cloud Object Storage [cmdb_ci_cloud_object_storage]:

- Cloud:

Cloud Object Storage [cmdb_ci_cloud_object_storage] -> (Hosted on::Hosts) -> Logical Datacenter [cmdb_ci_logical_datacenter] -> (Hosted on::Hosts) -> Cloud Service Account [cmdb_ci_cloud_service-account] (requires [CMDB CI Class Models](#))

- Non-Cloud:

N/A (This table can never have non cloud records)

Service Accounts [cmdb_ci_cloud_service_account]:

- Cloud:

datacenter_type attribute is populated with correct datacenter class

- Non-Cloud:

N/A (This table can never have non-cloud records)

Components installed with CMDB Workspace

Several types of components are installed with the activation of the CMDB Workspace (sn_cmdb_ws) plugin, including properties, tables, user roles, and scheduled jobs.

Note: The Application Files table lists the components that are installed with this application. For instructions on how to access this table, see [Find components installed with an application](#).

In addition, the CMDB Workspace plugin adds the CMDB Group type 'CMDB Workspace'. For components associated with the CMDB Data Manager, see [Components related to CMDB Data Manager](#).

Properties installed

The following properties are installed by the Configuration Management (CMDB) (com.snc.cmdb) plugin which is included in base systems.

Property	Description
sn_cmdb_ws.ci_overview.managed_by_me.enabled	Shows/hides the My CIs section of CI Overview on the CMDB Workspace landing page, for users with sn_cmdb_editor role. - Type: true false - Default: true - Location: Add to System Properties [sys_properties] table.
sn_cmdb_ws.total_cis.enabled	Shows/hides the Total CIs section on the CMDB Workspace landing page. Type: true false

Property	Description
	• Default: true • Location: Add to System Properties [sys_properties] table.
sn_cmdb_ws.ms.discovery_source_not_reporting_max_days	Number of days after which if one or more discovery sources stop reporting CIs, that CI is included in the CIs not reported by discovery sources chart in the CMDB 360 view. • Type: integer • Default: 7 • Location: Navigate to Workspaces > CMDB Workspace and then select CMDB 360. Select Settings and configure Number of days since CIs were last discovered by a discovery source in the Potential issues section. • Learn more: Configure the CMDB 360 dashboard.
sn_cmdb_ws.ms.report_max_limit	Maximum number of records that appear as list views when drilling down from the following charts: • CIs not reported by discovery sources • Data mismatch • CIs by number of discovery sources

Property	Description
	• CIs with a single source Details: • Type: integer • Default: 100,000 • Location: Navigate to Workspaces > CMDB Workspace and then select CMDB 360. Select Settings and configure Maximum number of records to process in the Global section. • Learn more: Configure the CMDB 360 dashboard.
sn_cmdb_ws.unifiedmap.map_search_filter.default_levels	Initial default number of levels from the home node, up and down the CMDB hierarchy, to show on a map. Up the hierarchy goes from all parents to their parents up to the specified level. Down the hierarchy goes from all children to their children up to the specified level. • Type: integer • Default: 3 • Location: Add to System Properties [sys_properties] table. Editing affects all users and requires the sn_cmdb_admin user role.

Property	Description
sn_cmdb_ws.unifiedmap.map_search_filter.max_levels	Maximum number of levels from the home node, up and down the CMDB hierarchy, to show on a map. Up the hierarchy goes from all parents to their parents up to the specified level. Down the hierarchy goes from all children to their children up to the specified level. • Type: integer • Default: 25 • Location: System Properties [sys_properties] table Editing affects all users and requires the sn_cmdb_admin user role.
sn_cmdb_ws.list.record_count_limit	The maximum number of results that the system counts for when using conditional search to search for CIs on the Home view in CMDB Workspace. This count shows for example, at the top of the search results list. • Type: integer • Default: 100,000 • Location: Add to System Properties [sys_properties] table. • More information: CMDB Workspace store app

Property	Description
	For example, if a limit of 100,000 is reached, the count shows "100,000 +" to indicate that counting stopped at 100,000 and that there are additional uncounted results. Increasing the value of this property directly results in greater impact on performance. However, if a precise count is needed, set this limit to a number that isn't reached by the anticipated count.
sn_cmdb_ws_explore_ci.record.enabled	Enables the use of the CI Form feature when selecting CIs to view in CMDB Workspace or in another workspace. When false, the system shows CI records in a basic list view instead of CI Form. You might need to temporarily disable the CI Form experience if its not yet ready to be used. For example, you might need to migrate previous custom configurations to CI Form to prepare it for use. • Type: true false • Default: true • Location: Add to System Properties [sys_properties] table. • More information: Manage CI details in CI Form

Roles installed

The following roles are installed by the Configuration Management (CMDB) (com.snc.cmdb) plugin which is included in base systems. These roles are required for access and interaction with the CMDB Workspace, and are included for completeness.

Note: On an instance that has been upgraded to the Zurich release, to correctly configure some of the user roles as described below, such as CMDB Admin and CMDB Editor, you must run the 'Remove CMDB Roles from ITIL roles and Add CUD access to sn_cmdb_admin/sn_cmdb_editor roles' scheduled job. For more information about this scheduled job and its use, see the [Zurich Configuration Management Database \(CMDB\) release notes](#).

Role title [name]	Description	Role containment
CMDB Admin [sn_cmdb_admin]	Provides the highest level of access to tools and UIs within CMDB Workspace, including full access to the Configuration Item [cmdb_ci] table. A CMDB Admin, for example, can set policies in the CI Class Manager and application service requirements. CMDB Admin can also modify default config records under the default identifier or the default identifier itself.	Contains: • data_manager_admin • canvas_admin • sn_cmdb_editor • cmdb_ms_admin • cmdb_dedup_admin
CMDB Editor	Provides access to tools and UIs within	Contains: • sn_cmdb_user

Role title [name]	Description	Role containment
[sn_cmdb_editor]	CMDB Workspace including full access to the Configuration Item [cmdb_ci] table. A CMDB Editor has writing privileges to CMDB Data Manager tasks and to CIs but can't change policies such as in the CMDB Data Manager or in the CI Class Manager.	cmdb_ms_editor
CMDB User [sn_cmdb_user]	Provides read-only access to the CMDB data and to basic UIs such as CMDB reports and dashboards, within CMDB Workspace.	Contained by: - itil (indirectly) Contains roles: - canvas_user - data_manager_user - cmdb_ms_user
Multisource CMDB Admin [cmdb_ms_admin]	Provides full access to data, dashboard configurations, and queries related to Multisource CMDB and CMDB 360.	Contains: cmdb_ms_editor
Multisource CMDB Editor [cmdb_ms_editor]	Provides access to CMDB 360 records and enables users to create and edit CMDB 360 queries.	Contains: cmdb_ms_user

Role title [name]	Description	Role containment
Multisource CMDB User [cmdb_ms_user]	Provides read-only access to multisource data, CMDB 360 queries, and to related UIs such as CMDB 360 reports and dashboards, and Multisource Report Builder.	Contains: cmdb_read
Workspace Config Admin [sn_cmdb_ws.config_admin]	Provides an administrator full access to the Config identifiers [sn_cmdb_ws.config_identifier] table and its descendent config tables. Can modify non-default config or config identifier records. Since config tables contain properties which belong to different applications, Workspace Config Admins should only modify records related to their application.	Contains: sn_cmdb_ws.config_editor
Workspace Config Editor [sn_cmdb_ws.config_editor]	Provides editing access to child config tables such as the Workspace Config Properties	

Role title [name]	Description	Role containment
	[sn_cmdb_ws_config_property] table. Can modify non-default config records. Since config tables contain properties which belong to different applications, Workspace Config Editors should only modify records related to their application.	
[cmdb_manual_ci_ire_access]	Provides access to the experience of manual CI creation in CMDB Workspace and in other workspaces.	

Scheduled jobs installed

Scheduled job	Description
CMDB Workspace Collection	Updates the information in all the 7-Day Activity charts such as the CI Activity in Last 7 Days chart.
Multisource Dashboard Analytics Population	Runs daily to calculate the aggregate statistics of CMDB 360 data and populates the CMDB 360 dashboard landing page.
Multisource Dashboard Collection	Collects CMDB 360 data and then invokes the Multisource Dashboard Analytics Population scheduled job.

Scheduled job	Description
Multisource Dashboard Data Generator (Demo data)	Demo job that populates CMDB 360 tables with simulated data, to showcase the CMDB 360 dashboard landing page. Runs on demand.
insight – cloud non-cloud aggregate	Runs every 30 minutes to collect data for the Cloud and non-cloud resources chart.
Insight - Cloud Applications	Collects cloud data for the cmdb_ci_appl table.
Insight - Non-cloud Applications	Collects non-cloud data for the cmdb_ci_appl table.
Insight - Cloud Object Storage	Collects cloud data for the cmdb_ci_cloud_object_storage table.
Insight - Cloud Service Account	Collects cloud data for the cmdb_ci_cloud_service_account table.
Insight - Cloud DB Instances	Collects cloud data for the cmdb_ci_db_instance table.
Insight - Non-cloud DB Instances	Collects non-cloud data for the cmdb_ci_db_instance table.
Insight - Cloud Kubernetes Cluster	Collects cloud data for the cmdb_ci_kubernetes_cluster table.
Insight - Non-cloud Kubernetes Cluster	Collects non-cloud data for the cmdb_ci_kubernetes_cluster table.
Insight - Cloud Servers	Collects cloud data for the cmdb_ci_server table.

Scheduled job	Description
Insight - Non-cloud Servers	Collects non-cloud data for the cmdb_ci_server table.
Insight - Cloud Storage Volume	Collects cloud data for the cmdb_ci_storage_volume table.
Insight - Non-cloud Storage Volume	Collects non-cloud data for the cmdb_ci_storage_volume table.
Insight - Cloud VM Instances	Collects cloud data for the cmdb_ci_vm_instance table.
Insight - Non-cloud VM Instances	Collects non-cloud data for the cmdb_ci_vm_instance table.
CMDB Workspace – Populate aggregates Daily	Runs daily to collect the latest data from the instance for cards such as the CI Summary chart in the CMDB Workspace landing page, and the following cards in the Insights view: • CIs processed by IRE • CIs used in Data Manager policies • CIs used in data attestation • Query Builder queries • Intelligent search Populates the Base Aggregate Data [sn_cmdb_ws_base_aggregate_data] table with the collected data. Once collection completes, invokes the CMDB Workspace

Scheduled job	Description
	Aggregates Daily Collection scheduled job.
CMDB Workspace – Populate aggregates Monthly	Runs monthly to collect data from the instance for cards such as the following, in the Insights view: • CIs processed by IRE based on source • CIs processed by IRE Once collection completes, invokes the CMDB Workspace Aggregates Monthly Collection scheduled job.
CMDB Workspace Aggregates Daily Collection	A Performance Analytics job that stores the latest data generated by the CMDB Workspace – Populate aggregates Daily scheduled job. The stored data is then shown in respective cards in the Insights view.
CMDB Workspace Aggregates Monthly Collection	A Performance Analytics job that stores the latest data generated by the CMDB Workspace – Populate aggregates Monthly scheduled job. The stored data is then shown in respective cards in the Insights view.
[Demo] — CMDB Workspace Collection	Supports demo data for CMDB Workspace charts in various views such as the Home view. Installed only if Load demo data was checked when the CMDB

Scheduled job	Description
	Workspace store app was installed or upgraded.
[Demo] — CMDB Workspace demo data	Activates demo data for CMDB Workspace charts in views such as the Insights view, and CMDB 360 view (if CMDB 360 is enabled). Populates the Base Aggregate Data [sn_cmdb_ws_base_aggregate_data] table with random numbers that illustrate trend lines in charts in the Home and Insights views. It then runs demo data collection scheduled jobs. Installed only if Load demo data was checked when the CMDB Workspace store app was installed or upgraded.
[Demo] CMDB Workspace Aggregates Daily Collection	A Performance Analytics job that supports demo data for CMDB Workspace charts in various views such as the Insights view and which is installed only if Load demo data was checked when the CMDB Workspace store app was installed or upgraded. Stores the demo data generated by the CMDB Workspace – Populate aggregates Daily scheduled job. The demo data is then shown in respective cards in the Insights view.

Scheduled job	Description
[Demo] CMDB Workspace Aggregates Monthly Collection	A Performance Analytics job that supports demo data for CMDB Workspace charts in various views such as the Insights view and which is installed only if Load demo data was checked when the CMDB Workspace store app was installed or upgraded. Stores the demo data generated by the CMDB Workspace – Populate aggregates Monthly scheduled job. The demo data is then shown in respective cards in the Insights view.
CMDB Workspace Collection On Demand With Lookback	Collects historical data (past 30 days) for some indicators such as the Integration outliers. Runs automatically during install or upgrade and isn't configured with any recurring schedule.
PopulateDuplicate Task Group Daily	Runs daily to populate the following tables: - Group Task Mapping [sn_cmdb_ws_reconcile_duplicate_task_group_m2m] - Remediate Duplicate Task Groups [sn_cmdb_ws_reconcile_duplicate_task_group]

Scheduled job	Description
	Reads de-duplication task data records and calculates the root cause analysis for the duplication. Used in support of Now Assist for CMDB.

Tables installed

Table	Description
CMDB Group Metadata [sn_cmdb_ws_group_metadata]	CMDB group data with count of CIs in each group.
CMDB Group Query Metadata [sn_cmdb_ws_group_query_metadata]	Encoded queries with count of CIs in each encoded query subgroup.
NLQ Sample Search [sn_cmdb_ws_nlq_sample_search]	Sample searches that appear when selecting the search box of an Intelligent Search for CMDB widget.
NLQ Sample Search Table [sn_cmdb_ws_nlq_sample_search_table]	References the actual tables associated with sample searches that appear when selecting the search box of an Intelligent Search for CMDB widget.
NLQ Excluded Table	Tables with ambiguous names that should be excluded from Intelligent Search. These tables

Table	Description
[sn_cmdb_ws_nfq_excluded_table]	won't appear in suggestions, and other tables with similar names are given higher priority in search results.
Important Actions Configuration [sn_cmdb_ws_imp_action_card_config]	Configuration of appearance and behavior of Important action cards that appear on the landing page of the CMDB Workspace. Editing in this table is accessible only to users with the sn_cmdb_admin role. Authorized users can modify attributes of an important action such as Active and Filter conditions, but can't modify the Type, Persona, and Table attributes.
Quick Links [sn_cmdb_ws_quick_links]	Quick links that appear on the CMDB Workspace landing page.
CIs by Number of Sources [sn_cmdb_ws_ms_cis_by_number_of_sources]	CIs grouped by the number of discovery sources they were discovered by. Records appear as a list view when clicking on the CIs by number of discovery sources bar chart in the CMDB 360 view.
CIs With a Single Source [sn_cmdb_ws_ms_cis_with_single_source]	CIs reported by only one discovery source. Records appear as a list view when selecting the CIs with a single discovery source chart in the CMDB 360 view.
CMDB Workspace Multisource Class Metadata	Class configuration settings such as class selections and weights, that CMDB Admins can modify from the CMDB 360 view. Used

Table	Description
[sn_cmdb_ws_ms_class_metadata]	by CMDB 360 analytics population queries to store a sample set of coverage data for the CIs by number of sources and CIs with a single source drill-downs cards.
Multisource Data Mismatch Records [sn_cmdb_ws_ms_data_mismatch]	Data mismatch records found from attribute discrepancies from various data sources. Records appear as a list view when selecting the Data mismatch chart in the CMDB 360 view.
CMDB Workspace Multisource Data Mismatch Configurations [sn_cmdb_ws_ms_data_mismatch_config]	Data mismatch settings, such as the selection of classes, attributes, conditions, and weights, that CMDB Admins can modify in the CMDB 360 view. Used by CMDB 360 analytics population queries to store a sample set of data mismatch records in the sn_cmdb_ws_ms_data_mismatch table.
Discovery sources not reporting CIs [sn_cmdb_ws_ms_discovery_sources_not_reporting]	Data for when one or more discovery sources stop reporting CIs after the specific X number of days (X can be set in the CMDB 360 view and is stored in the sn_cmdb_ws.ms.discovery_source_not_reporting_max_days system property). Records appear as a list view when selecting the CIs not reported by discovery sources chart in the CMDB 360 view.
Multisource Workspace Settings Weight Type	Weight type (automatic or manual) for data mismatch and coverage settings in CMDB 360 view.

Table	Description
[sn_cmdb_ws_ms_settings_weight_type]	
Datacenter Types [sn_cmdb_ws_datacenter_type]	Classifications of datacenter classes which are considered cloud or non-cloud in the organization, which is used for the Cloud and non-cloud resources chart.
CMDB Insight Query Categories [sn_cmdb_ws_insight_query_category]	Class categories and their status for inclusion in the Cloud and non-cloud resources chart.
CMDB Insight Data [sn_cmdb_ws_insight_data]	Legacy table for storing data for the Cloud and non-cloud resources chart. Starting with CMDB Workspace version 3.4, the CMDB Product Insight Data [sn_cmdb_ws_product_insight_data] table is used instead.
Base Aggregate Data [sn_cmdb_ws_base_aggregate_data]	Aggregation data for CMDB Workspace cards and parent table to other aggregation tables. When processing for a count completes, State of the existing record for that count is set to retired and a new record for that count is created with the updated count value. Cards in CMDB

Table	Description
	Workspace views show values only for counts where State = ready. Read only.
Service Graph Connector [sn_cmdb_ws_service_graph_connector]	Details about all Service Graph Connectors that are currently available in the ServiceNow Store (excluding any Innovation Lab connectors). Data is used to provide a current count for the Service Graph Connectors card in the Insights view. Read only.
Rating Configuration [sn_cmdb_ws_rating_config]	Start and end values for different ratings of a category. For example, start and end values for low, moderate, and high adoption level ratings for the data governance category in the Insights view. Read only.
Feature Category [sn_cmdb_ws_feature_category]	Metadata of the feature card for most of the features at CMDB Workspace level. Read only.

Table	Description
CMDB Product Insight Data [sn_cmdb_ws_product_insight_data]	Aggregated count for each class and datacenter class, used for cards in the Insights view. Read only.
Feature Category Runtime Attributes [sn_cmdb_ws_feature_category_runtime_attribute]	Runtime attributes related to performance insights, that can be used when running various scheduled jobs. Read only.
Integration Aggregate Data [sn_cmdb_ws_integration_aggregate_data]	Integration outlier information related to performance insights. Details for each Integration with execution records which contain processing rate or rows outliers. Read only.
Partial Payload Items [sn_cmdb_ws_partial_payload_item]	Extracted partial payload information related to performance insights. Includes discovery source, error, and class, associated with each partial payload item. Read only.
Application Service Insights Data	Application services details such as classification (cloud vs. non-cloud, hybrid, or unknown) and count of

Table	Description
[sn_cmdb_ws_app_svc_insight_data]	CIs associated with the application service. Read only.
Table Attributes [sn_cmdb_ws_node_map_table_attributes]	Set of extended properties, per class, that appear in the Attributes pane in the contextual side panel for a selected CI in Unified Map. This table leverages the use of the configuration identifiers framework. For more information, see Configure which attributes to display in the Attributes panel.
Node Map Related Items [sn_cmdb_ws_node_map_related_item]	Categorization and order of related items, per class, that appear in the Related items panel, in CI badges, and on the timeline in Unified Map. This table leverages the use of the configuration identifiers framework. For more information, see Configure how to display related items on the map.
Node Map References [sn_cmdb_ws_node_map_reference]	Reference relationships that appear as a dotted line relationship in Unified Map.

Table	Description
	This table leverages the use of the configuration identifiers framework. For more information, see Configure display of connections to a referenced class.
Class Icons [sn_cmdb_ws_class_icon]	Maps ServiceNow platform UI Builder (UIB) icon values (for example 'serverbox-outline') to CMDB class display names that they are used for (for example 'Network Disk') in Unified Map.
Node Map Profiles [sn_cmdb_ws_node_map_profiles]	Class profiles that include default filters and some Unified Map settings, per class. A class profile is applied if no filter preset is in effect, to the initial map and when setting the filter preset to Default view. Specifying a class profile can be especially useful for Service Mapping data with the Mapped Application Service class. This table leverages the use of the configuration identifiers framework. For more information, see Create a class profile of visible layers for classes.
CMDB Data Management Certification Task To Document	Mappings between certification tasks and each of their associated CI records targeted for certification.

Table	Description
[sn_cmdb_ws_dm_certification_task_to_document]	
CMDB Certification Attribute Status [sn_cmdb_ws_dm_certification_attribute_status]	Flattened failed attribute status JSON. Used for reporting certification exceptions.
CMDB Data Management Task Execution Context [sn_cmdb_ws_dm_task_execution_context]	Mappings between tasks and a policy's' execution context.
Remediate Duplicate Task Groups [sn_cmdb_ws_reconcile_duplicate_task_group]	Groupings of de-duplication tasks, the CI class affected, any discovery source associated with the de-duplication task, and the CI identification rule that was used to discover the CIs. Used in support of Now Assist for CMDB. • sn_cmdb_admin role has create/write/delete privileges • sn_cmdb_user OR dedup_admin roles have read privileges
Group Task Mapping	Reference to the Remediate Duplicate Task Groups table and a root cause analysis summary of the

Table	Description
[sn_cmdb_ws_reconcile_duplicate_task_group_m2m]	reason that the Cis were added to the de-duplication task Used in support of Now Assist for CMDB. • sn_cmdb_admin role has create/write/delete privileges • sn_cmdb_user OR dedup_admin roles have read privileges
Config identifiers [sn_cmdb_ws_config_identifier]	Parent table of the configuration identifiers framework. By default, contains the 'Default' config identifier with default settings for various CMDB Workspace features. Stores any additional config identifiers, configured with custom settings for a CMDB Workspace feature, that is applicable to a specific workspace. For information about the configuration identifiers framework, see Configuration identifiers framework.
Workspace Config Properties [sn_cmdb_ws_config_property]	Collection of properties that control different behaviors in Unified Map. This table leverages the use of the configuration identifiers framework.

Table	Description
CI additional attributes config [sn_cmdb_ws_ci_additional_attributes]	Settings of requests for specific CI attributes when using the CMDB Workspace feature of manually creating a new CI. This table leverages the use of the configuration identifiers framework. For more information, see Request additional attributes for new CIs.
CI class configs [sn_cmdb_ws_ci_class_config]	Settings that limit the selection of classes for a new CI when using the CMDB Workspace feature of creating manually a new CI. This table leverages the use of the configuration identifiers framework. For more information, see Limit the class list for new CIs created in a workspace.