

# Zurich ServiceNow AI Platform Capabilities

Last updated: January 16, 2026

Some examples and graphics depicted herein are provided for illustration only. No real association or connection to ServiceNow products or services is intended or should be inferred.

This PDF was created from content on [docs.servicenow.com](https://docs.servicenow.com). The web site is updated frequently. For the most current ServiceNow product documentation, go to [docs.servicenow.com](https://docs.servicenow.com).

**Company Headquarters**

2225 Lawson Lane  
Santa Clara, CA 95054  
United States  
(408)501-8550


## Backing up CMDB data

The `cmdb_backup_storage_information` table (part of the [app-cmdb-content] ServiceNow Store application) holds generic backup storage information for a CI as a platform related item. The table includes a CI as a reference attribute and stores information for hardware, cloud, containers, and other CI types.

### Backup Store Information [`cmdb_backup_storage_information`] table

The table captures backup policy, last successful backup, last backup attempt, execution mode, backup source, backup source ID, and backup service.

To mitigate the risk of uncontrolled growth of the table, a cascade-delete rule applies to the Backup Source (CI) reference field. When a CI is deleted, the corresponding rows in the table are deleted.

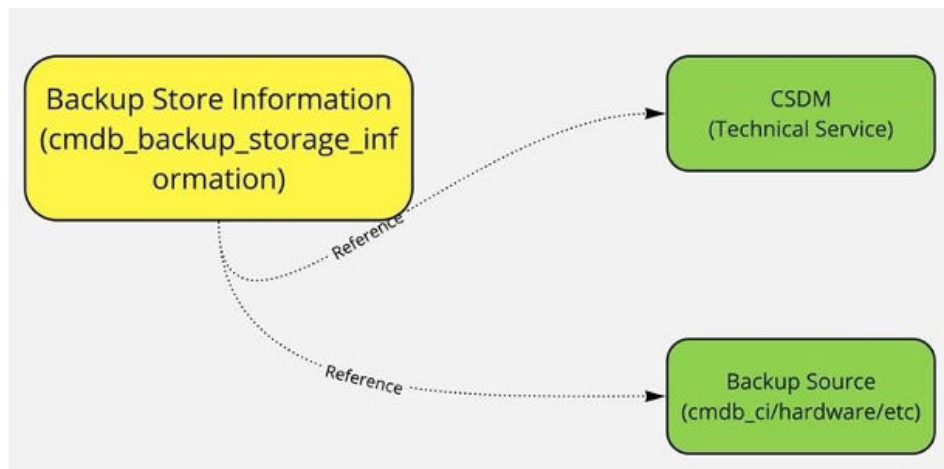

## Tables related to backup operations

### Tables related to backup operations

| Table                                                         | Contents                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Backup Store Information<br>[cmdb_backup_storage_information] | Informational object that stores CI backup/snapshot information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| cmdb_related_entry                                            | <p>To populate the cmdb_backup_storage_information with an IRE payload, you define a CMDB-related rule in cmdb_related_entry. For the related rule, use the Backup Source ID criteria attributes and Backup Source as a reference field. Example:</p> <pre>//. Sample IRE payload var payload = {   "items": [     {       "className": "cmdb_ci_hardware",       "sys_object_source_info": {         "source_name": "ServiceNow",         "source_native_key": "some key"       },       "values": {         "name": "I am a good cat"       },       "lookup": [],       "related": [         {           "className": "cmdb_backup_storage_information",</pre> |

| Table            | Contents                                                                                                                                                                                                                                                                                                                                                            |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                  | <pre>         "values": {           "backup_policy" : "true",           "last_backup": " 2023-02-02",           "backup_id": "sed e-09191-fet"         }       ]     }   ] } var jsonUntil = new JSON() ; var input = jsonUntil.encode(payload); var output = SNC.IdentificationEngineScriptableApi.createOrUpdateCI('ServiceNow', input); gs.print(output); </pre> |
| sys_security_acl | Reports and user access.                                                                                                                                                                                                                                                                                                                                            |
| sys_ui_related   | Multisource configuration, default forms.                                                                                                                                                                                                                                                                                                                           |

## Columns in cmdb\_backup\_storage\_information

### Columns in cmdb\_backup\_storage\_information

| Column                                                | Description                                                                                                                                                                                                                                      |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Backup Configuration Status<br>[backup_config_status] | String (choice) <ul style="list-style-type: none"> <li>Backup Disabled [False, default]: CI has not been</li> <li>Backup Enabled [True]: CI has policies and confi system, service, or appliance for regular backups</li> <li>Unknown</li> </ul> |

| Column                                             | Description                                                                                                                                                                                                                                                                                                      |
|----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                    | <ul style="list-style-type: none"> <li>• Not Applicable</li> <li>• Planned</li> <li>• Not Planned</li> </ul>                                                                                                                                                                                                     |
| Last Successful Backup<br>[last_successful_backup] | <p>glide_date_time</p> <p>Date and time of last successful backup. Platform-start or end of the backup attempt as reported by the start time of the backup attempt.</p>                                                                                                                                          |
| Last Backup Attempt [last_backup_attempt]          | <p>glide_date_time</p> <p>Date and time of the last successful or failed backup that can be either the start or the end of the backup platform API. If ambiguous, use the start time of the backup attempt.</p> <p>For a successful backup, both last_backup and last_successful_backup have the same value.</p> |
| Execution Mode [backup_execution_mode]             | <p>String (choice)</p> <ul style="list-style-type: none"> <li>• Manual: Run as needed.</li> <li>• Automatic: Run periodically.</li> <li>• Unknown</li> </ul>                                                                                                                                                     |
| sys_domain and sys_domain_path                     | <p>glide columns</p> <p>Values copied from cmdb_ci.</p>                                                                                                                                                                                                                                                          |

| Column                                              | Description                                                                                                                     |
|-----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| managed_by and managed_by_group                     | Values copied from cmdb_ci.                                                                                                     |
| Backup Source [backup_source_configuration_item]    | reference (ci)<br>Backup status details for the referenced CI being b                                                           |
| Backup Source ID [backup_source_id]                 | String (1024)<br>Backup Service source identifier for the CI. Identifie<br>service such as host_id, vcenter_id, instance_id, an |
| Backup Service [backup_service_configuration_item]  | reference (ci)<br>Reference to the CSDM technical service that hos<br>system, service, or appliance.                            |
| Recovery Point Objective [recovery_point_objective] | Duration<br>Time that can elapse between backups and the a                                                                      |