

Zurich ServiceNow AI Platform Capabilities

Last updated: January 16, 2026

Some examples and graphics depicted herein are provided for illustration only. No real association or connection to ServiceNow products or services is intended or should be inferred.

This PDF was created from content on docs.servicenow.com. The web site is updated frequently. For the most current ServiceNow product documentation, go to docs.servicenow.com.

Company Headquarters

2225 Lawson Lane
Santa Clara, CA 95054
United States
(408)501-8550

Exploring CMDB

Use the topics in this section to learn and explore CMDB concepts, its predefined tables and the relationships between them.

Overview of CMDB

The Configuration Management Database (CMDB) creates and maintains the logical configurations your network infrastructure needs to support a ServiceNow service.

In CMDB, the logical service configurations are mapped to the physical layout data of the supporting network and application infrastructure in each of your respective domains. They track the physical and logical state of IT service elements and associate incidents to the state of service elements, which helps in analyzing trends and reducing problems and incidents.

The configurations are stored in a configuration management database (ServiceNow CMDB) which consists of entities, called Configuration Items (CI), that are part of your environment. A CI may be:

- A physical entity, such as a computer or router
- A logical entity, such as an instance of a database
- Conceptual, such as a Requisition Service

In each case, there are attributes about the CI that you want to maintain, and there is control you want to have over the CI. There are changes that may need to be made and tracked against the CI. Also, a CI does not exist on its own. CIs have dependencies and relationship with other CIs. For example, the loss of disk drives may take a database instance down, which affects the requisition service that the HR department uses to order equipment for new employees.

It is this relationship data that makes the CMDB a powerful decision support tool. Understanding the dependencies and other relationships among your CIs can tell you, for example, exactly who and what is affected by the loss of that bank of disk drives. When you find out that a router has failed, you will be able to assess the effect of that outage.

When you decide to upgrade the processor in a server, you can tell who or what will be affected during the outage.

Configuration items differ from environment to environment because each customer has unique needs. Details about the exact physical attributes of a computer may be needed by one customer, but may represent meaningless data to another. The NOW Platform provides a mechanism to easily define new classes of configuration items and new relationships that may exist between CIs. New classes can be defined that extend other classes. For example, a laptop class exists that extends the computer class. The computer class itself extends the base CI class. Customer class extensions are automatically part of the ServiceNow environment and blend seamlessly into the integration points for other ITIL processes.

You can for example, set the Used for attribute in the `cmdb_ci_server` table to a value such as 'development', 'test', or 'production'. These values indicate the environment that the CI is supporting, and serve as a way of tracking a CI through its life cycle in a changing environment.

Extended CMDB

In base systems, CMDB provides core functionality for the configuration management database, including modules for hardware and configuration items. The separate Extended CMDB plugin includes a collection of modules for specialized configuration items, such as radio hardware, test equipment, and voice system hardware.

To extend the CMDB you can [activate](#) the following plugins to access the modules for specialized configuration items.


- CMDB Mainframe (`com.snc.cmdb.mainframe`)
- CMDB Radio Category (`com.snc.cmdb.radio.category`)
- CMDB Telecom Category (`com.snc.cmdb.telecom.category`)
- CMDB Test Equipment (`com.snc.cmdb.test.equipment`)

CMDB hierarchy and CI Class Manager

Sets of CIs that share attributes are stored in their own class table. All CMDB tables are connected by relationships and inherit attributes from each other to form a web of tables referred to as the CMDB hierarchy.

Use the [CI Class Manager](#) to manage CMDB classes within the CMDB hierarchy, CMDB Health, and other class-related definitions. For example, in the CI Class Manager you can view class attributes, class identification rules, and the list of CIs for a specific class. To view the list of CIs in the CMDB, you can also enter `cmdb_ci_list.do` in the filter navigator.

Architecture

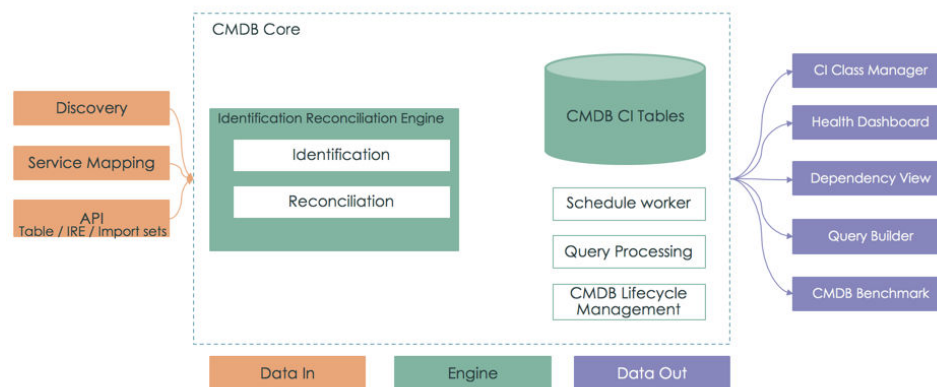

Related tables

There are tables that are not part of the CMDB hierarchy but which still qualify as CMDB data. Related tables, such as the Serial Number [cmdb_serial_number] table, don't inherit from the Configuration Item [cmdb_ci] table, but have at least one column that references a CMDB CI. Related tables are specified in the Related Entries [cmdb_related_entry] table.

Some scenarios that involve related tables, can result in orphan or otherwise stale records in related tables. A CI in a related table can, for example, become orphan if the referenced CI in the CMDB is deleted. You can use the [CMDB Data Manager](#) to create a policy of the 'Delete CMDB Related Entry' policy type, that will cascade-delete that un-needed related items data. For more information about creating that CMDB Data Manager policy, see [Create a CMDB Data Manager policy](#).

Localization

Using the Translated Text field type (instead of string) for attributes in CMDB tables, can reduce overall performance, including performance of features such as CMDB Health. This is because values in CMDB tables are dynamic and are likely to change often, and the data itself is likely to continuously grow. Using the Translated Text field also requires manual update of related text. The Translated Text field type is typically effective with static data that doesn't change and doesn't grow. For more information about field types, see [Field types reference](#).

Roles required

Reading CMDB tables directly requires the `cmdb_read` role, however accessing the **Configuration** module requires the `asset`, `itil`, or `itil_admin` roles. For viewing CMDB-related records in the user interface, the `itil` role is usually sufficient. For updating records and for other manipulation of records, roles with higher credentials are usually required, as noted in each procedure throughout the documentation set.

For details about CMDB and other roles, see [Base system roles](#), or see a feature components topic such as [Components installed with CMDB Workspace](#).

Related concepts

- [CMDB schema model](#)

CMDB tables descriptions

List of tables in the CMDB in a base system with its name, label, and a description of the type of information that is stored in the table.

You can extend tables in a base system by installing a CMDB CI Class Models store app which adds class models that support specific technologies. These extensions include class definitions, identification rules, identifier entries, and dependent relationships if applicable. A CMDB CI Class Models store app can also modify the label of a base class. For more information, see [CMDB CI Class Models](#).

Class descriptions are integrated into the CI Class Manager and appear in the **Description** field on the Basic Info page for a class. For more

information about viewing class descriptions, see [View and edit class definitions and metadata](#).

Table name	Label (display name)	Table description
cmdb_ci	Configuration Item	Base configuration item (CI) table.
cmdb_ci_acc	Accessory	Accessories for phones, computers, and so on.
cmdb_ci_ad_controller	Active Directory Domain Controller	Microsoft Active Directory domain controller.
cmdb_ci_ad_domain	AD Domain	Microsoft Active Directory domain.
cmdb_ci_aix_server	AIX Server	Server running the AIX operating system.
cmdb_ci_alias	Alias	Pseudonym for data locations, virtual email addresses, pointers, and so on.
cmdb_ci_apache_web_server	Apache Web Server	Server hosting Apache web server software.
cmdb_ci_appl	Application	Application, which is a collection of files and data that deliver a service and manage business processes.
cmdb_ci_appl_now_app	ServiceNow Application	CIs that Event Management generates for various

Table name	Label (display name)	Table description
		components such as Impact calculator, which is used to bind alerts that are later shown in maps. Used internally by self-health when monitoring internal health checks for key components such as connector instance status and MID Server status. Parent class for all ServiceNow applications.
cmdb_ci_application_cluster	Application Cluster	Logical group of servers with clustering software installed on each of the servers in the group so that the group acts like a single system.
cmdb_ci_application_server_resource	Application Server Resource	Parent class for application servers such as Coldfusion application server.
cmdb_ci_app_server	Application Server	A base table for logical CIs, which indicate the primary function of a physical or virtual server such as a Tomcat server or a WebSphere server.

Table name	Label (display name)	Table description
cmdb_ci_app_server_composer	Composer	Server hosting IBM WebSphere Multichannel Bank Transformation Toolkit.
cmdb_ci_app_server_datapower	Data Power	Server hosting IBM DataPower Gateway Secure software.
cmdb_ci_app_server_domino	Domino	Server hosting IBM Domino software.
cmdb_ci_app_server_hp_ucmdb	HP uCMDB	Server hosting HP uCMDB software.
cmdb_ci_app_server_java	JavaServer	Server hosting Java applications.
cmdb_ci_app_server_jb_module	delivery Controller	Server hosting an inner module of JBoss application (deployed application).
cmdb_ci_app_server_jboss	JBoss	Server hosting a JBoss Application Server (JBoss AS), which is a cross-platform Java application server, open-source developed by the JBoss software company.
cmdb_ci_app_server_jrun	Jrun	Server hosting JRun applications.
cmdb_ci_app_server_jrun_war	Jrun WAR	Server hosting the inner module of a JRun

Table name	Label (display name)	Table description
		application (deployed application).
cmdb_ci_app_server_ora_ess	Oracle Essbase Server	Server hosting Oracle Essbase software.
cmdb_ci_app_server_ora_ias	Oracle iAS	Server hosting Oracle internet Application Server.
cmdb_ci_app_server_ora_ias_m	Oracle iAS Web module	Server hosting the inner module of the Oracle iAS application (deployed application).
cmdb_ci_app_server_remedy	Remedy HSServer	Server hosting Remedy HSServer application.
cmdb_ci_app_server_tomcat	Tomcat	Server hosting Apache Tomcat software.
cmdb_ci_app_server_tomcat_war	Tomcat WAR	Server hosting inner module of Apache Tomcat application (deployed application).
cmdb_ci_app_server_vendavo	Vendavo Application Server	Server hosting Vendavo Application Server software.
cmdb_ci_app_server_weblogic	BEA Weblogic	Server hosting Oracle WebLogic Server.
cmdb_ci_app_server_webseal	Webseal	Server hosting IBM Tivoli Access Manager solution.

Table name	Label (display name)	Table description
cmdb_ci_app_server_websphere	IBM Websphere	Server hosting IBM WebSphere software.
cmdb_ci_app_server_wl_module	WeblogicModule	Server hosting inner module of WebLogic.
cmdb_ci_app_server_ws_ear	Websphere EAR	Server hosting inner module of IBM WebSphere software.
cmdb_ci_app_server_ws_odr	Websphere ODR LB	Server hosting WebSphere ODR LB application.
cmdb_ci_appl_active_directory	Active Directory Service	Inner software module of AD Domain application.
cmdb_ci_appl_biztalk	BizTalk	Microsoft BizTalk Server software.
cmdb_ci_appl_biztalk_orch	BizTalk Orchestration	Inner module of Microsoft Biztalk Server software.
cmdb_ci_appl_ca	CA Enterprise Communicator	CA Enterprise Communicator software.
cmdb_ci_appl_ca_dir_server	CA eTrust Directory Server	CA eTrust Directory Server software.
cmdb_ci_appl_ca_ent_man	CA Introscope Enterprise Manager	CA introscope Enterprise Manager software.
cmdb_ci_appl_ca_id_man	CA Identity Manager	CA Identity Manager Server software.

Table name	Label (display name)	Table description
	Provisioning Server	
cmdb_ci_appl_cisco_call_man	Cisco CallManager	Cisco CallManager (Cisco Unified Communications Manager) software.
cmdb_ci_appl_cisco_fibre	Cisco Fibre InterConnect	Cisco Fibre InterConnect software.
cmdb_ci_appl_citrix_app	Citrix Application Icon	Inner module of Citrix software.
cmdb_ci_appl_citrix_collector	Citrix Collector	Citrix Collector software.
cmdb_ci_appl_citrix_xenapp	Citrix XenAPP or Presentation Server	Citrix XenApp software.
cmdb_ci_appl_connectit	Connect-It Service	Connect-It software.
cmdb_ci_appl_controlm	Control-M	Control-M software.
cmdb_ci_appl_delivery_controller	Delivery Controller	Application delivery controller software.
cmdb_ci_appl_doc_brava_processor	Documentum Brava Job Processor	Brava (EMC Documentum) job processor software.
cmdb_ci_appl_doc_brava_server	Documentum Brava License Server	Brava (EMC Documentum) License Server software.

Table name	Label (display name)	Table description
cmdb_ci_appl_doc_docbase	Documentum DocBase	Documentum Docbase software.
cmdb_ci_appl_doc_docbroker	Documentum Broker	Documentum Docbase broker software.
cmdb_ci_appl_dot_net	.NET Application	Microsoft .NET application software.
cmdb_ci_appl_fastsearch	Fast Search	Microsoft FAST Search software (for the SharePoint collaboration platform).
cmdb_ci_appl_generic	Generic Application	Generic application, which is identified by the system when there is an endpoint with an open port in listen mode and there is no pattern for it.
cmdb_ci_appl_glassfish	GlassFish	Oracle GlassFish Server software.
cmdb_ci_appl_glassfish_war	GlassFish WAR	Inner module of GlassFish application (deployed application).
cmdb_ci_appl_groundwork	Groundwork	Groundwork (open source) monitoring software.
cmdb_ci_appl_hp_index	HP SM Index Server	HP Service Manager Index Server software.

Table name	Label (display name)	Table description
cmdb_ci_appl_hp_operations	HP Operations Manager	HP Operations Manager software.
cmdb_ci_appl_hp_qc	HP Quality Center	HP Quality Center software.
cmdb_ci_appl_hp_service	HP Service Manager	HP Service Manager software.
cmdb_ci_appl_hp_sm_kb	HP SM KnowledgeBase	HP Service Manager KnowledgeBase software.
cmdb_ci_appl_ibm_cics	IBM CICS	IBM CICS Transaction Server software.
cmdb_ci_appl_ibm_ctg	IBM CTG	IBM CICS Transaction Gateway software.
cmdb_ci_appl_ibm_wmb	IBM WebSphere Message Broker	IBM WebSphere Message Broker software.
cmdb_ci_appl_ibm_wmb_listener	IBM WMB HTTP Listener	IBM WebSphere HTTP Listener software.
cmdb_ci_appl_ibm_wmq	IBM MQ Manager (Formerly IBM WebSphere MQ)	IBM MQ software.
cmdb_ci_appl_ibm_wmq_queue	IBM MQ Queue (Formerly IBM WebSphere MQ Queue)	Inner module of IBM MQ software.

Table name	Label (display name)	Table description
cmdb_ci_appl_itam	ITAM Asset Center	HP Asset Center software.
cmdb_ci_appl_mongo_config_serv	Mongo Config Server	Mongo Configuration Server software.
cmdb_ci_appl_mongos	Mongos Server	MongoDB server software.
cmdb_ci_appl_ms_dynamic_crm	Dynamic CRM Component	Microsoft Dynamic CRM software.
cmdb_ci_appl MSMQ	MSMQ	Microsoft Message Queuing (MSMQ) software.
cmdb_ci_appl_ora_conc	Oracle Concurrent Server	Oracle Concurrent Server software.
cmdb_ci_appl_ora_disc	Oracle Discoverer Engine	Oracle Discoverer software.
cmdb_ci_appl_ora_disc_ui	Oracle Discoverer UI	Oracle Discoverer UI module software.
cmdb_ci_appl_ora_ebs	Oracle ESB	Oracle Enterprise Service Bus software.
cmdb_ci_appl_ora_forms	Oracle Forms Engine	Oracle Forms software.
cmdb_ci_appl_ora_forms_ui	Oracle Forms UI	Oracle Forms UI software.
cmdb_ci_appl_ora_fs	Oracle Fulfillment Server	Oracle Fulfillment Server software.

Table name	Label (display name)	Table description
cmdb_ci_appl_ora_http	Oracle HTTP Server	Oracle HTTP Server software (web tier of Oracle Fusion middleware).
cmdb_ci_appl_ora_jms_queue	Oracle Weblogic JMS Queue	Oracle WebLogic JMS software.
cmdb_ci_appl_ora_metric_client	Oracle Metric Client	Oracle Metric client software.
cmdb_ci_appl_ora_metric_svr	Oracle Metric Server	Oracle Metric server software.
cmdb_ci_appl_ora_notif_svr	Oracle Notification Server	Oracle Notification Server (ONS) software.
cmdb_ci_appl_ora_oacore	Oracle OACORE Server	Oracle OACORE server software.
cmdb_ci_appl_ora_oafm	Oracle OAFM Server	Oracle OAFM server software.
cmdb_ci_appl_ora_pm	Oracle Process Manager	Oracle BPEL Process Manager server software.
cmdb_ci_appl_ora_queue	Advanced Queue Queue	Oracle Advanced Queuing software.
cmdb_ci_appl_ora_report	Oracle Report Server	The Oracle Report Server software.
cmdb_ci_appl_ora_tns	Oracle App TNS Service	Oracle Application Express (TNS) listener software.

Table name	Label (display name)	Table description
cmdb_ci_appl_ora_tnslnr	Oracle TNS Listener Engine	Oracle Application Express software.
cmdb_ci_appl_peoplesoft	Peoplesoft Application Server	Peoplesoft Application Server software.
cmdb_ci_appl_rabbitmq	RabbitMQ	RabbitMQ (open source) software.
cmdb_ci_appl_rabbitmq_cluster	RabbitMQ Cluster	RabbitMQ Cluster (open source) software.
cmdb_ci_appl_sap_ascs	SAP ASCS Application	SAP ASCS software.
cmdb_ci_appl_sap_bo	SAP Business Objects CMS Server	SAP Business Objects CMS server software.
cmdb_ci_appl_sap_bo_scheduler	SAP BO BOXIScheduleRouter	SAP BO BOXIScheduleRouter software.
cmdb_ci_appl_sap_bus_obj	SAP Business Objects	SAP business Object application.
cmdb_ci_appl_sap_ci	SAP CI Application	The SAP Central Instance software.
cmdb_ci_appl_sap_di	SAP DI Application	Oracle Development Infrastructure (DI) software.
cmdb_ci_appl_sap_ers	SAP ERS Application	Oracle Evaluated Receipt Settlement (ERS) software.

Table name	Label (display name)	Table description
cmdb_ci_appl_sap_hana_db	SAP Hana Db	SAP HANA software.
cmdb_ci_appl_sap_jc	SAP JC Application	SAP JC (java application) software.
cmdb_ci_appl_sap_scs	SAP SCS Application	SAP SCS (central services) software.
cmdb_ci_appl_sendmail	Sendmail	Sendmail (open source) software.
cmdb_ci_appl_sharepoint	SharePoint	Microsoft SharePoint software.
cmdb_ci_appl_sp_service	SharePoint Service	Microsoft Windows Sharepoint Services (WSS) software.
cmdb_ci_appl_tibco_hawk	Tibco Hawk	TIBCO Hawk software.
cmdb_ci_appl_tibco_matrix	ActiveMatrix Business Works	TIBCO ActiveMatrix BusinessWorks software.
cmdb_ci_appl_tibco_matrix_proc	ActiveMatrix Business Works Process	TIBCO ActiveMatrix BusinessWorks Process software.
cmdb_ci_appl_tibco_message	Tibco Enterprise Message Service	TIBCO Enterprise Message Service software.
cmdb_ci_appl_tibco_queue	EMS Queue	Tibco EMS (Enterprise Message Service) Queues software.
cmdb_ci_appl_tuxedo	Tuxedo	Tuxedo software (middleware transactions for UNIX, Extended

Table name	Label (display name)	Table description
		for Distributed Operations).
cmdb_ci_appl_tuxedo_portal	Tuxedo Portal	Tuxedo portal software.
cmdb_ci_appl_vign_content_svr	Vignette Content Management Server	Vignette (Open Text Corp) Content Management Server software.
cmdb_ci_appl_vignette_search	Vignette Search Starter	Vignette (Open Text Corp) Search Server software.
cmdb_ci_appl_vignette_server	Vignette Server	Vignette (Open Text Corp) Server software.
cmdb_ci_appl_weblogic_jms	Weblogic JMS Server	WebLogic JMS software.
cmdb_ci_appl_weblogic_lb	Weblogic LB	WebLogic Server load balancer software.
cmdb_ci_appl_weblogicmodule	Weblogic Module Server	WebLogic Server software.
cmdb_ci_appl_websphere_portal	Websphere Portal	WebSphere Portal software.
cmdb_ci_appl_wmb	WMB Flow	WebSphere Message Broker software.
cmdb_ci_application_cluster	Application Cluster	Logical cluster of application-tier servers.
cmdb_ci_application_software	Application Software	Computer program designed to perform a

Table name	Label (display name)	Table description
		group of coordinated functions, tasks, or activities for the benefit of the user. An extension of the Software table, providing installed software information (not a running process).
cmdb_ci_ats_power_eq	Automatic Transfer Switch	Electrical power switch that switches a load between two sources.
cmdb_ci_availability_set	Availability Set	Logical grouping of virtual machines running on Microsoft Azure platform.
cmdb_ci_base_rpa_process	Base Bot Process	Business reason, process type, and schedule.
cmdb_ci_base_rpa_robot	Base Robot	Machine where robot is running, state, and type.
cmdb_ci_batch_job	Batch Job	A computer program or set of programs processed in batch mode.
cmdb_ci_aws_datacenter	AWS datacenter	Logical representation of an Amazon Web Services datacenter.

Table name	Label (display name)	Table description
cmdb_ci_azure_datacenter	Azure datacenter	Logical representation of a Microsoft Azure datacenter.
cmdb_ci_business_app	Business Application	All business applications.
cmdb_ci_business_process	Business Process	A process that is owned and carried out by the business and contributes to the delivery of a product or business service to a business customer.
cmdb_ci_chassis_server	Server Chassis	A metal structure that is used to house or physically assemble servers in various different form factors.
cmdb_ci_cim_profile	CIM Profiles	CIM Profiles (UML).
cmdb_ci_cim_server	CIM Server	Server hosting CIM profiles.
cmdb_ci_circuit	Circuit	Electrical circuits information.
cmdb_ci_cloud_database	Cloud Database	Database which runs on a cloud computing platform.
cmdb_ci_cloud_ip_address	Cloud IP Address	Web server which runs on a cloud computing platform.
cmdb_ci_cluster	Cluster	Logical group of computing resources bound together by

Table name	Label (display name)	Table description
		software to function as one logical computing resource.
cmdb_ci_cluster_node	Cluster Node	Single computing resource which is logically/operationally bound into a cluster.
cmdb_ci_cluster_resource	Cluster Resource	System object that is a set or grouping of cluster resources that are used to manage events that occur in a clustered environment.
cmdb_ci_cluster_vip	Cluster Virtual IP	Cluster VIP information.
cmdb_ci_cmp_price_product_base	Cloud Product Price Base	Used to calculate the approximate monthly cost of running a stack built on Virtual Servers in cloud environment: • Cloud Price Base: Common price base to store pricing info of all the resources of all the supported clouds. • Cloud Price Product Base: Base table to store the common attributes of all the pricing resources. • VM Instance Price: Specific table that

Table name	Label (display name)	Table description
		extends the Cloud Price Product base to store the VM specific product info of all the supported clouds. Parent class for cloud product prices such as VM instance price.
cmdb_ci_cmp_resource	Cloud Resource	Generic cloud resources.
cmdb_ci_comm	Communication Device	Communication devices information. A choice list containing devices such as cellphone, phone, conference phone, and Wi-Fi.
cmdb_ci_computer	Computer	An extension of the Hardware table, capturing computer properties.
cmdb_ci_computer_room	Computer Room	Logical representation of a computer room.
cmdb_ci_config_automation_server	Management Server	Dev Ops tools such as Chef and Puppet, that are used to manage server configurations.

Table name	Label (display name)	Table description
		Parent class for application management servers.
cmdb_ci_config_file	Configuration file	Configuration files which establish the parameters and initial settings for some computer programs.
cmdb_ci_crac	Computer Room AC	Air conditioning units used to cool data centers.
cmdb_ci_csu_dsu_network	CSU/DSU	Digital-interface device used to connect networking equipment to a digital circuit.
cmdb_ci_database	Database	Organized collection of data such as the set of files where data is stored, the reason for a database, and the metadata about the data.
cmdb_ci_datacenter	Data Center	Facility used to house computer systems and associated components, such as telecommunications and storage systems. It generally includes redundant or backup power supplies, redundant data communications connections,

Table name	Label (display name)	Table description
		environmental controls (such as air conditioning and fire suppression), and various security devices.
cmdb_ci_datapower_server	Data Power Hosting Server	Server running IBM DataPower Gateway software.
cmdb_ci_datastore	Datastore	Datastores are like file systems, abstracting the physical storage and providing a model for storing files. The child class represents the VMware specific Datastore. Parent class for VMWare datastore object types such as vCenter Datastores.
cmdb_ci_db_catalog	Database Catalog	Metadata which defines database objects such as base tables, views (virtual tables), synonyms, value ranges, indexes, users, and user groups, for a specific database instance.
cmdb_ci_db_db2_catalog	DB2 Catalog	Database catalog for DB2 database.

Table name	Label (display name)	Table description
cmdb_ci_db_db2_instance	DB2 Instance	Instance of a DB2 database.
cmdb_ci_db_hbase_instance	HBase Instance	Instance of an HBase database.
cmdb_ci_db_instance	Database Instance	Software and memory used to manipulate data in a database.
cmdb_ci_db_mongodb_instance	MongoDB Instance	Instance of a MongoDB database.
cmdb_ci_db_mssql_analysis	SQL Server Analysis Services	Microsoft SQL Server Analysis Services software.
cmdb_ci_db_mssql_catalog	MSFT SQL Catalog	Database catalog for a specific instance of a Microsoft SQL database.
cmdb_ci_db_mssql_instance	MSFT SQL Instance	Microsoft SQL instance.
cmdb_ci_db_mssql_int_job	SQL Server Integration Services Job	Scheduled job to run a SQL Server Integration Service package.
cmdb_ci_db_mssql_integration	SQL Server Integration Services	MSQL Server Integration Services software.
cmdb_ci_db_mssql_reporting	SQL Server Reporting Services	SQL Server software used for server-based reporting generation.

Table name	Label (display name)	Table description
cmdb_ci_db_mysql_catalog	MySQL Catalog	Database catalog for a specific instance of a MySQL database.
cmdb_ci_db_mysql_clustermg node	MySQLClusterM GMNode	MySQL primary administrative interface to a running cluster.
cmdb_ci_db_mysql_clusternode	MySQLClusterDataNode	Summary table used in the [nbd] or [nbd default] sections of a config.ini file for configuring MySQL Cluster data nodes.
cmdb_ci_db_mysql_instance	MySQL Instance	Instance of a MySQL database.
cmdb_ci_db_ora_catalog	Oracle Catalog	Database catalog for a specific instance of an Oracle database.
cmdb_ci_db_ora_instance	Oracle Instance	Instance of an Oracle database.
cmdb_ci_db_ora_listener	Oracle Database Listener	Process that runs on an Oracle Database Server.
cmdb_ci_db_postgresql_instance	PostgreSQL Instance	Instance of a PostgreSQL database.
cmdb_ci_db_syb_catalog	Sybase Catalog	Database catalog for a specific instance of a Sybase database.
cmdb_ci_db_syb_instance	Sybase Instance	Instance of a Sybase database.

Table name	Label (display name)	Table description
cmdb_ci_desktop_software	Desktop Software	Software used on desktops and laptops.
cmdb_ci_dir_policy_server	Policy Server	Policy server, which provides a security component of a policy-based network that provides authorization services and facilitates tracking and control of files.
cmdb_ci_dir_site_minder_server	Site Minder	Server running SiteMinder software.
cmdb_ci_directory_ad_forest	AD Forest	Active Directory forest.
cmdb_ci_directory_ha	HA Proxy	HAProxy software.
cmdb_ci_directory_iifp	IIFP	Identity Identification Feature Pack (Active Directory) software.
cmdb_ci_directory_ldap	LDAP DB	LDAP (Lightweight Directory Access Protocol) database software.
cmdb_ci_directory_server	Directory Server	Server running LDAP software.
cmdb_ci_disk	Disk	General category of data storage mechanisms.
cmdb_ci_disk_partition	Disk Partition	Sections of a disk separated so that information in each

Table name	Label (display name)	Table description
		section can be managed separately.
cmdb_ci_display_hardware	Display Hardware	Hardware used to display information in visual form.
cmdb_ci_dns_alias	DNS Alias	Synonym for the host used to resolve DNS addresses.
cmdb_ci_dns_name	DNS Name	Primary DNS names.
cmdb_ci_docker	Docker Container	Docker containers (a runtime instance of a docker image).
cmdb_ci_docker_engine	Docker Engine	Docker software for running and managing Docker containers.
cmdb_ci_docker_image	Docker Image	Docker images. Ordered collection of root filesystem changes and the corresponding execution parameters for use within a container runtime.
cmdb_ci_docker_image_tag	Docker Image Tag	Docker tag, which is a label applied to a Docker image in a repository.
cmdb_ci_docker_local_image	Docker Local Image	Locally managed Docker image.

Table name	Label (display name)	Table description
cmdb_ci_drs_vm_config	DRS VM Config	Distributed Resource Scheduler (DRS) behavior for the VMs in the vCenter that override the cluster behavior.
cmdb_ci_ec2_instance	EC2 Virtual Machine Instance	Virtual machine running in the Amazon Elastic Compute Cloud (EC2) platform.
cmdb_ci_email_server	Email Server	Server running email software.
cmdb_ci_email_server_jes	JES	Server running JES software (multi-featured hybrid MTA/MDA server).
cmdb_ci_endpoint	Endpoint	Endpoint, which represents the entry point to a service, a process, or a queue or topic destination in service-oriented architecture.
cmdb_ci_environment	Environment	Logical grouping of hardware and software used to develop, test, and deliver computing services. For example: development, test, quality assurance, and production.

Table name	Label (display name)	Table description
cmdb_ci_esx_resource_pool	ESX Resource Pool	VMware set of physical resources.
cmdb_ci_esx_server	ESX Server	Physical ESX server running the VMware ESXi operating system.
cmdb_ci_exchange_backend	ExchangeBackendServer	Server running Exchange software.
cmdb_ci_exchange_cas	Exchange Client Access Server	Server running Exchange software providing client access services.
cmdb_ci_exchange_edge_transport_server	Exchange Edge Transport Server	Server running Exchange Edge Transport software.
cmdb_ci_exchange_frontend	ExchangeFrontEndServer	Server running Exchange software.
cmdb_ci_exchange_hub	ExchangeHub	Server running Exchange Hub software.
cmdb_ci_exchange_hub_transport_server	Exchange Hub Transport Server	Server running Exchange Hub software providing transport services.
cmdb_ci_exchange_mailbox	Exchange MailBox	Exchange email account.
cmdb_ci_exchange_mailbox_server	Exchange Mailbox Server	Server running Exchange software providing client access services.

Table name	Label (display name)	Table description
cmdb_ci_exchange_service_component	Exchange Service Component	Exchange Service Component software.
cmdb_ci_facility_hardware	Facility Hardware	Base class for hardware used to facilities services such as electric, water, sewer, air, and security.
cmdb_ci_fc_disk	Fibre Channel Disk	Base table for fibre channel disk.
cmdb_ci_fc_export	Fibre Channel Export	Storage volume exported by a storage server via Fibre Channel protocol.
cmdb_ci_fc_port	Fibre Channel Port	Fibre Channel port on a storage server, FC switch, or on a host's HBA.
cmdb_ci_fddi_network	FDDI Cards	Fiber Distributed Data Interface cards.
cmdb_ci_file_system	File System	File system information for a server, capturing details such as mount point, capacity, and type of file system.
cmdb_ci_file_system_nfs	NFS File system	Extension of File System, which provides NFS file system information.
cmdb_ci_file_system_smb	SMB File system	Extension of File System, which

Table name	Label (display name)	Table description
		provides SMB file system information.
cmdb_ci_firewall_network	Firewall Hardware	Firewall hardware.
cmdb_ci_ftp_server	FTP Server	Server providing FTP services.
cmdb_ci_fuel_tank	Fuel Tank	Fuel tank.
cmdb_ci_generator_power_eq	Power Generator	Power generator.
cmdb_ci_group	Group	Logical group of CIs.
cmdb_ci_hardware	Hardware	Base class for hardware.
cmdb_ci_host_cluster	Host Cluster	Cloud agnostic way of representing a group of hosts as a cluster. The child class represents VMware vCenter Cluster specific details. Parent class for VMWare host cluster object types such as vCenter Clusters.
cmdb_ci_hpx_server	HPUX Server	Server running HPUX software.
cmdb_ci_hub_network	Hub Hardware	Physical network hub.

Table name	Label (display name)	Table description
cmdb_ci_hvac	HVAC Equipment	Heating, ventilation, and air conditioning equipment.
cmdb_ci_hyper_v_cluster	Hyper-V Cluster	Cluster of the Hyper-V servers.
cmdb_ci_hyper_v_instance	Hyper-V Virtual Machine Instance	Hyper-V virtual machine instance. This table extends the generic Virtual Machine Instance [cmdb_ci_vm_instance] table.
cmdb_ci_hyper_v_network	Hyper-V Virtual Network	Hyper-V virtual network.
cmdb_ci_hyper_v_object	Hyper-V Object	Base class for all Hyper-V objects.
cmdb_ci_hyper_v_resource_pool	Hyper-V Resource Pool	Hyper-V resource pool.
cmdb_ci_hyper_v_rpool_component	Hyper-V Resource Pool Component	Resource pool component belonging to resource pool.
cmdb_ci_hyper_v_server	Hyper-V Server	Server running Hyper-V software.
cmdb_ci_ids_network	Intrusion Detection System	Security intrusion detection systems.
cmdb_ci_iisdirectory	IIS Virtual Directory	Virtual Directory in IIS Manager.

Table name	Label (display name)	Table description
cmdb_ci_imaging_hardware	Imaging Hardware	Hardware used to create electronic/ physical images.
cmdb_ci_inetinfo	Inetinfo service	Inetinfo service of IIS application.
cmdb_ci_inf_software	Infrastructure Software	Base class for enterprise software or programs specifically designed to help business organizations perform basic tasks such as workforce support, business transactions and internal services, and processes.
cmdb_ci_information_object	Information Object	Types of information that a business application or any other entity handles. For example: 'Employee Salary Data', 'Employee Personal Data', and 'Sales Data'.
cmdb_ci_installed_bundles	Installed Bundles	Extension of the Virtual Machine Object [cmdb_ci_vm_object] table, which represents bundles of installed software.

Table name	Label (display name)	Table description
cmdb_ci_infra_service	Infrastructure Service	IT services which support providing computing infrastructure.
cmdb_ci_infra_service_ldap	LDAP Service	Running LDAP service.
cmdb_ci_ip_address	IP Address	IP address.
cmdb_ci_ip_device	IP Device	Base class for devices with an IP address.
cmdb_ci_ip_firewall	IP Firewall	Firewall hardware.
cmdb_ci_ip_network	IP Network	IP network information capturing details such as subnet, router, and router_interface_type.
cmdb_ci_ip_phone	IP Phone	IP-enabled (VOIP) phone.
cmdb_ci_ip_router	IP Router	Specialization of the Network Gear [cmdb_ci_netgear] table.
cmdb_ci_ip_server	IP Server	Server hardware.
cmdb_ci_ip_service	IP Service Instance	Base table for IP services running on a server such as Unix daemon or Windows service.
cmdb_ci_ip_switch	IP Switch	Specialization of the Network Gear [cmdb_ci_netgear] table.

Table name	Label (display name)	Table description
cmdb_ci_ipplanet_web_server	Iplanet Web Server	Server running Oracle iPlanet Web Server (OiWS) software.
cmdb_ci_isam_server	ISAM Server	Server running ISAM software.
cmdb_ci_iscsi_disk	iSCSI Disk	Host mount of an iSCSI disk.
cmdb_ci_iscsi_export	iSCSI Export	Storage volume exported by a storage server via iSCSI.
cmdb_ci_kubernetes_component	Kubernetes Component	Kubernetes cluster, ingress, namespace, node, pod, service, volume, and workload. Also represents open shift build conf, deployment conf, docker images repository, group, images, stream, project, route, and user. Parent class for Kubernetes components such as Pods and Clusters.
cmdb_ci_kvm	KVM	Hypervisor that manages kernel-based virtual machines (KVMs).

Table name	Label (display name)	Table description
cmdb_ci_kvm_network	Network	KVM Virtual network.
cmdb_ci_kvm_object	KVM Object	Base object for all KVM objects.
cmdb_ci_kvm_storage_pool	Storage Pool	KVM storage pool.
cmdb_ci_kvm_storage_volume	Storage Volume	KVM storage volume.
cmdb_ci_kvm_vm_instance	KVM Virtual Machine Instance	Virtual machine instance running on a KVM hypervisor.
cmdb_ci_lb	Load Balancer	Server functioning as a load balancer.
cmdb_ci_lb_a10	A10 Load Balancer	Server functioning as an A10 load balancer.
cmdb_ci_lb_ace	ACE	Server functioning as an ACE load balancer.
cmdb_ci_lb_alteon	Alteon	Server functioning as an Alteon load balancer.
cmdb_ci_lb_appl	Load Balancer Application	Application that provides load balancing functionality.
cmdb_ci_lb_backend_server	LB Backend Server	Server functioning as a backend load balancer.

Table name	Label (display name)	Table description
cmdb_ci_lb_bigip	F5 BIG-IP	Server functioning as an F5 BIG-IP load balancer.
cmdb_ci_lb_cisco_csm	Cisco CSM	Server functioning as a Cisco CSM load balancer.
cmdb_ci_lb_cisco_css	Cisco CSS	Server functioning as a Cisco CSS load balancer.
cmdb_ci_lb_f5_gtm	F5 BigIP GTM	Server functioning as an F5 BigIP GTM load balancer.
cmdb_ci_lb_f5_ltm	F5 BigIP LTM	Server functioning as an F5 BigIP LTM load balancer.
cmdb_ci_lb_haproxy	HAProxy Load Balancer	Server functioning as an HA Proxy load balancer.
cmdb_ci_lb_isa	ISA Server	Server functioning as an ISA load balancer.
cmdb_ci_lb_modjk	Modjk Load Balancer	Server functioning as a Cisco CSM load balancer.
cmdb_ci_lb_modproxy	ModProxy Load Balancer	Server functioning as a ModProxy load balancer.
cmdb_ci_lb_netscaler	Citrix Netscaler	Server functioning as a Citrix Netscaler load balancer.

Table name	Label (display name)	Table description
cmdb_ci_lb_network	Network Load Balancer	Server performing network load balancing.
cmdb_ci_lb_nginx	Nginx Load Balancer	Server functioning as an Nginx load balancer.
cmdb_ci_lb_pool	Load Balancer Pool	Collection of host-to-port mappings to be balanced.
cmdb_ci_lb_pool_member	Load Balancer Pool Member	Host-to-port mapping of a request to be balanced.
cmdb_ci_lb_radware	Radware Load Balancer	Server functioning as a Radware load balancer.
cmdb_ci_lb_service	Load Balancer Service	Virtual service that the device balances by forwarding requests to members within a pool.
cmdb_ci_lb_template	Load Balancer Template	Load balancer template which contains load balancer-related configuration settings for a specific type of network traffic.
cmdb_ci_lif	LIF	Logical interface.
cmdb_ci_lb_vlan	Load Balancer VLAN	Virtual LAN segment.

Table name	Label (display name)	Table description
cmdb_ci_linux_server	Linux Server	Server running Linux software.
cmdb_ci_logical_datacenter	Logical Datacenter	VMware vCenter logical datacenter.
cmdb_ci_lpar	Logical Partition	Logical partition, commonly called an LPAR, is a subset of a computer's hardware resources, virtualized as a separate computer.
cmdb_ci_lvm_pool	LVM Pool	Linux Volume Manager storage pool.
cmdb_ci_lvm_pool_member	LVM Pool Member	Linux Volume Manager storage pool member.
cmdb_ci_mainframe	IBM Mainframe	IBM large-scale computer system.
cmdb_ci_mainframe_hardware	Mainframe Hardware	The hardware components of a large-scale computer system.
cmdb_ci_mainframe_lpar	IBM Mainframe LPAR	Logical partition, which is commonly called an LPAR, and is a subset of a mainframes computer's hardware resources, virtualized as a separate computer.

Table name	Label (display name)	Table description
cmdb_ci_memory_module	Memory Module	Circuit board that provides for memory storage.
cmdb_ci_mfp_printer	Multi-function Printer	Physical device with scan, copy, and fax capabilities.
cmdb_ci_microsoft_iis_web_server	Microsoft iis Web Server	Server running Internet Information Services (IIS) for Windows software.
cmdb_ci_modem_network	Modem Hardware	Physical modem hardware.
cmdb_ci_mpio_pool	Multipath IO Pool	Multipath IO pool, representing multiple redundant paths to storage.
cmdb_ci_mpio_pool_group	Multipath IO Pool Group	Group of multipath IO pools.
cmdb_ci_mpio_pool_path	Multipath IO Pool Path	Single path in an MPIO pool.
cmdb_ci_msdc	Mass Storage Device	Physical storage device.
cmdb_ci_nas_file_system	NAS File System	Extension of the File System [cmdb_ci_file_system] table, representing network attached storage.
cmdb_ci_nat_gateway	NAT Gateway	Functionality for NAT gateway.

Table name	Label (display name)	Table description
cmdb_ci_netapp_cdot	NetApp CDOT	Functionality of NetApp Clustered Data OnTap operating system
cmdb_ci_netapp_datacenter	NetApp Datacenter	NetApp logical datacenter.
cmdb_ci_netapp_svm	NetApp SVM	NetApp Storage Virtual Machine.
cmdb_ci_netapp_volume	NetApp Volume	NetApp FlexVol storage volume.
cmdb_ci_net_app_server	Network Appliance Hardware	Server configured to perform as a networking appliance.
cmdb_ci_netgear	Network Gear	Extension of the Hardware table, that captures network equipment such as router, switch, hub, gateway, and bridge.
cmdb_ci_networkware_server	Network Server	Server running NetWare software.
cmdb_ci_network	Cloud Network	VMware vCenter cloud network.
cmdb_ci_network_acl	Network ACL	Network access control list (ACL).
cmdb_ci_network_acl_rule	Network ACL Rule	Rule used to control networking access rights.

Table name	Label (display name)	Table description
cmdb_ci_network_adapter	Network Adapter	Network adapter hardware.
cmdb_ci_network_policy_group	Network Policy Group	Group policy consumed by Active Directory services.
cmdb_ci_network_template	Network Template	OpenStack file used to configure a network.
cmdb_ci_nic	Cloud Mgmt Network Interface	Virtual network adapter.
cmdb_ci_nginx_web_server	Nginx Web Server	Server running Nginx software.
cmdb_ci_openstack_datacenter	OpenStack Datacenter	OpenStack logical datacenter.
cmdb_ci_optical_transport (Installed with the com.snc.cmdb.telecom.category plugin)	Fiber Optic Equipment	Fiber optics which are used for long-distance and high-performance data networking. Fiber optics are commonly used in telecommunication services such as internet, television, and telephones. Child class of Transport Hardware and parent class for telecom fiber optic equipment such as optical

Table name	Label (display name)	Table description
		multiplexers and terminal equipment.
cmdb_ci_oslv_container	Operating-system-level Virtualization Container	Containers (a runtime instance of a docker image).
cmdb_ci_oslv_engine	Operating-system-level Virtualization Engine	Software for running and managing containers.
cmdb_ci_oslv_image	Operating-system-level Virtualization Image	Container images. Ordered collection of root filesystem changes and the corresponding execution parameters for use within a container runtime.
cmdb_ci_oslv_image_tag	Operating-system-level Virtualization Image Tag	Container tag, which is a label applied to a container image in a repository.
cmdb_ci_oslv_local_image	Operating-system-level Virtualization Local Image	Locally managed container image.
cmdb_ci_osx_server	OS/X Server	Server running OS/X operating system.
cmdb_ci_os_template	Image	Software files used to create a new instance of a compute resource such as

Table name	Label (display name)	Table description
		server, desktop, virtual machine, and virtual router.
cmdb_ci_outofband_device	Out-of-Band Device	Hardware used to perform out-of-band management.
cmdb_ci_patches	Patch	Patch software to fix or improve a computer program or its supporting data.
cmdb_ci_pc_hardware	Personal Computer	Multi-purpose electronic computer whose size, capabilities, and price make it feasible for individual use.
cmdb_ci_pcf_component	CloudFoundry Component	Cloud Foundry provides a highly efficient, modern model for cloud native application delivery on top of Kubernetes. Component represents application, domain, organization, quota, routes, service, service plan, space, and space instances. Parent class for price base of cloud products such as virtual machines.

Table name	Label (display name)	Table description
cmdb_ci_pdu	PDU	Power distribution unit (PDU).
cmdb_ci_pdu_outlet	Outlet	Single outlet of a PDU.
cmdb_ci_peripheral	Computer Peripheral	Various computer peripherals such as monitor, docking station, KVM switch, projector, scanner, keyboard, mouse, and UPS.
cmdb_ci_personal_printer	Personal Printer	Printer whose size, capabilities and price make it feasible for individual use.
cmdb_ci_plotter	Plotter	Printer with capabilities to print large vector graphic images.
cmdb_ci_power_eq	Power Equipment	Hardware used to manage electrical power.
cmdb_ci_port	Port	Interface between a computer and other electronic devices.
cmdb_ci_port_group	Port Group	Group of ports on a virtual switch.
cmdb_ci_print_queue	Puppet Primary	Print queue, which is a list of printer output jobs held in a reserved memory area, including the most current status of

Table name	Label (display name)	Table description
		all active and pending print jobs.
cmdb_ci_printer	Printer	Physical device which makes a persistent human-readable representation of graphics or text on paper or similar physical media.
cmdb_ci_printing_hardware	Printing Hardware	Physical device which makes a persistent human-readable representation of graphics or text on paper or similar physical media.
cmdb_ci_puppet_master		Server running PuppetMaster application.
cmdb_ci_qtree	Qtree	Qtree file system.
cmdb_ci_qualifier	Qualifier	Relation qualifier CIs which contain important information about CI relationships. In a relation qualifier, you can annotate arbitrary unique information about the relationship between two CIs. You can define multiple qualifiers for a single relationship, resulting in a qualifier chain.

Table name	Label (display name)	Table description
		However, there can be only a single qualifier chain for a specific relationship type between two CIs. Parent class for the various relation qualifier types such as EntryPoint Markers and Boundary Connections.
cmdb_ci_rack	Rack	Datacenter racks containing details such as rack units, rack units in use, and power consumption.
cmdb_ci_raid	RAID	Storage pool using RAID mechanisms to ensure data integrity.
cmdb_ci_raid_member	RAID Member	Member of storage pool using RAID mechanisms.
cmdb_ci_resource_group	Resource Group	Resource pool is a logical abstraction for flexible management of resources.
cmdb_ci_sa_scaling_policy_base	Scaling Policy	Parent class for virtual machines scaling policy options such as simple and dynamic.

Table name	Label (display name)	Table description
cmdb_ci_san	Storage Area Network	Network which provides access to block level storage.
cmdb_ci_san_connection	SAN Connection	Connection in a SAN network.
cmdb_ci_san_disk	SAN Disk	Base table for the iSCSI Disk [cmdb_ci_iscsi_disk] and the Fibre Channel Disk [cmdb_ci_fc_disk] tables.
cmdb_ci_san_endpoint	SAN Endpoint	One end of a SAN connection.
cmdb_ci_san_export	SAN Export	Base table for the iSCSI Export [cmdb_ci_iscsi_export] and the Fibre Channel Export [cmdb_ci_fc_export] tables.
cmdb_ci_san_fabric	SAN Fabric	Hardware that connects workstations and servers to storage devices in a SAN. Referred to as a "fabric."
cmdb_ci_san_zone	SAN Zone	Subset of SAN storage that certain users are restricted to.
cmdb_ci_san_zone_alias	SAN Zone Alias	Collection of SAN zone members.

Table name	Label (display name)	Table description
cmdb_ci_san_zone_alias_member	SAN Zone Alias Member	M2m relationship between SAN zone aliases and SAN zone members.
cmdb_ci_san_zone_member	SAN Zone Member	Ports and devices in a SAN zone.
cmdb_ci_san_zone_set	SAN Zone Set	Collection of SAN zones.
cmdb_ci_scanner	Scanner	Hardware used to create digital imagine of paper documents.
cmdb_ci_server	Server	Base class for all types of servers.
cmdb_ci_server_snapshot	Server Snapshot	Server snapshot, which is the state of a system at a particular point in time.
cmdb_ci_service	Service	IT Service that directly supports a Business Process (ITIL).
cmdb_ci_service_auto	Service Instance	Services that can be monitored by the system, which in the base system, includes only application services. If Service Mapping is activated, there can also be records for dynamic CI groups. If Event Management is activated, there can

Table name	Label (display name)	Table description
		be records for alert groups.
cmdb_ci_service_business	Business Service	Business services are published to business users and typically underpin one or more business capabilities. Business services are often orderable by business users.
cmdb_ci_service_discovered	Mapped Application Service	Application services, created by the Manual service population method. For each application service, there is a container CI record that models the application service.
cmdb_ci_service_technical	Technology Management Service (formerly Technical Service)	Technology management services are published to service owners and typically underpin one or more business services. A technology management service may have an operational view made up of one or more technical management offerings.
cmdb_ci_solaris_instance	Solaris Virtual Machine Instance	Virtual machine instance running Solaris software.

Table name	Label (display name)	Table description
cmdb_ci_solaris_server	Solaris Server	Physical server running Solaris software.
cmdb_ci_spkg	Software	Software package information containing details such as version, install count, license count, package name, and key (when SAM enabled).
cmdb_ci_storage_controller	Storage Controller	Logical device that controls a storage volume or Fibre Channel port.
cmdb_ci_storage_device	Storage Device	Base table for block storage devices such as DAS, SAN, and NAS.
cmdb_ci_storage_disk	Storage Disk	Disk installed in a storage server.
cmdb_ci_storage_export	Storage Export	Base table for the SAN Export [cmdb_ci_san_export] table.
cmdb_ci_storage_fileshare	Storage File Share	NAS file system on a storage server (an exported file system).
cmdb_ci_storage_hba	Storage HBA	Host bust adapter for Fibre Channel. The physical device that provides Fibre Channel ports.

Table name	Label (display name)	Table description
cmdb_ci_storage_pool	Storage Pool	Logical collection of storage.
cmdb_ci_storage_pool_member	Storage Pool Member	Logical volume in a storage pool.
cmdb_ci_storage_switch	Storage Switch	Fibre Channel switch.
cmdb_ci_storage_volume	Storage Volume	Volume on a storage server.
cmdb_ci_storage_vol_snapshot	Storage Volume Snapshot	Server snapshot is the state of a system at a particular point in time.
cmdb_ci_subnet	Cloud Mgmt Subnet	Part of a larger network.
cmdb_ci_sun_dir_proxy_server	Sun Directory Proxy Server	Server running Sun ONE Directory Proxy Server software.
cmdb_ci_sun_ldap_dir_server	Sun LDAP Server	Server running Sun ONE Directory Server (LDAP) software.
cmdb_ci_surge_power_eq	Surge Protection Equipment	Power equipment used to prevent power surges.
cmdb_ci_tape_server	Server Tape Unit	Hardware for using magnetic tape storage.
cmdb_ci_tomcat_connector	Tomcat Connector	Software which provides web server plugins to connect web servers with

Table name	Label (display name)	Table description
		Tomcat and other backends.
cmdb_ci_tower_eq	Tower Equipment	Parent class for facility towers and tower equipment such as lights and beacons.
cmdb_ci_translation_rule	NAT	Rules to allow router to remap one network address to another.
cmdb_ci_transport_hardware	Transport Hardware	Telecommunication hardware used for digital communication and related hardware such as telecommunication racks, servers to connect port to LAN, relays, channel banks, and network circuit switch. Parent class for telecom transport hardware such as multiplexers and fiber optic equipment.
cmdb_ci_ucs_blade	Cisco UCS Blade	Physical Cisco UCS Blade server hardware.
cmdb_ci_ucs_chassis	Cisco UCS Chassis	Physical Cisco UCS chassis hardware used to hold Cisco

Table name	Label (display name)	Table description
		UCS Blade server hardware.
cmdb_ci_ucs_equipment	Cisco UCS Equipment	Cisco Unified Computing System (UCS) products.
cmdb_ci_unix_cluster	UNIX Cluster	Set of computers clustered together to present a single Unix server resource.
cmdb_ci_unix_daemon	UNIX Daemon	Long running Unix background process used to answer requests for services.
cmdb_ci_unix_server	UNIX Server	Server running Unix software.
cmdb_ci_ups	UPS	Uninterrupted Power Supply devices, where devices are traditional UPS devices.
cmdb_ci_ups_alarm	UPS Alarm	Uninterrupted Power Supply alarm.
cmdb_ci_ups_bypass	UPS Bypass	Uninterrupted Power Supply bypass.
cmdb_ci_ups_input	UPS Input	Electrical input to an Uninterrupted Power Supply device.
cmdb_ci_ups_output	UPS Output	Electrical output from an Uninterrupted Power Supply device.

Table name	Label (display name)	Table description
cmdb_ci_ups_power_eq	Uninterruptible Power Supply	Uninterrupted Power Supply devices, where devices are any non-traditional UPS devices that manage electrical power.
cmdb_ci_vcenter	VMware vCenter Instance	Installed instance of VMware VCenter software.
cmdb_ci_vcenter_cluster	VMware vCenter Cluster	Set of servers that work together while running VMware VCenter software.
cmdb_ci_vcenter_cluster_drs_rule	VMWare vCenter Cluster DRS Rule	vCenter specific table which stores Distributed Resource Scheduler (DRS) basic rule information. Stores the affinity rule specifying that the members of a selected virtual machine DRS group can or must run on the members of a specific host DRS group. Populated by the vCenter API ClusterRuleInfo(vim.cluster.RuleInfo).
cmdb_ci_vcenter_datacenter	VMware vCenter Datacenter	VMware VCenter data center objects.

Table name	Label (display name)	Table description
cmdb_ci_vcenter_datastore	VMware vCenter Datastore	VMware VCenter datastore objects containing details such as capacity, freespace, filesystem, and type.
cmdb_ci_vcenter_datastore_disk	Datastore Disk	Individual VMware VCenter datastore disk.
cmdb_ci_vcenter_folder	VMware vCenter Folder	VCenter folders, which can be used to group objects of the same type for easier management.
cmdb_ci_vcenter_network	VMware vCenter Network	VMWare vCenter virtual network.
cmdb_ci_vcenter_object	VMware vCenter Object	Base class for most VMware VCenter objects.
cmdb_ci_vcenter_server_obj	VMware vCenter Server Object	VMware hypervisor.
cmdb_ci_veritas_disk	Veritas Disk	Physical disk that is controlled by Veritas Volume Manager.
cmdb_ci_veritas_disk_group	Veritas Disk Group	Collection of disks in Veritas Volume Manager.

Table name	Label (display name)	Table description
cmdb_ci_veritas_plex	Veritas Plex	Logical partition in Veritas Volume Manager.
cmdb_ci_veritas_subdisk	Veritas Subdisk	Partition of a Veritas_disk.
cmdb_ci_veritas_volume	Veritas Volume	Aggregation of plexes.
cmdb_ci_virtualization_server	Virtualization Server	Base table used by the ESX Server [cmdb_ci_esx_server] table.
cmdb_ci_virtual_desktop	Virtual Desktop	User's desktop environment (such as icons, wallpaper, windows, folders, toolbars, and widgets) is stored remotely on a server.
cmdb_ci_virtual_pvt_gateway	Virtual Private Gateway	Two VPN endpoints for automatic failover.
cmdb_ci_vm	Virtual Machine Hypervisor	Hypevisor software.
cmdb_ci_vm_instance	Virtual Machine Instance	Generic virtual machines information.
cmdb_ci_vm_object	Virtual Machine Object	Base class for all VM objects. Parent for all objects such as Hyper-V object and KVM object.

Table name	Label (display name)	Table description
cmdb_ci_vm_parallels	Parallels	Instance of Parallels software.
cmdb_ci_vm_template	Virtual Machine Template	Template, which is a main copy of a virtual machine that can be used to create many clones. Base table for all VM templates.
cmdb_ci_vm_user_credentials	VM User Credentials	Credentials, which are used to authenticate access rights and permissions.
cmdb_ci_vm_vmware	VMware	Note: No longer used. VMWare specialization of the Virtual Machine table.
cmdb_ci_vm_zones	Zones	Partitioned virtual OS environment working in a Solaris operating system space.
cmdb_ci_voice_hardware (Installed with the com.snc.cmdb.telecom.category plugin)	Voice System Hardware	Telecommunication systems that represent telephone systems, telephone exchanges, and voice mail. Parent class for telecom voice system hardware such as

Table name	Label (display name)	Table description
		voicemail and private branch exchanges.
cmdb_ci_volume_template	Volume Template	Set of rules that specify one or more capabilities of a storage volume (storage selection and layout rules).
cmdb_ci_vmware_instance	VMware Virtual Machine Instance	VMware VM instance on VMware hypervisor.
cmdb_ci_vmware_template	VMware Virtual Machine Template	Main copy of a VMware virtual machine that can be used to create many clones.
cmdb_ci_vpc	Virtual Private Cloud	On-demand configurable pool of shared computing resources allocated within a public cloud environment.
cmdb_ci_vpn	Virtual Private Network	Private network configured to run across a public network.
cmdb_ci_vpn_connection	VPN Connection	Secure connection to another network over the Internet.
cmdb_ci_vserver_peer	Vserver Peer	Extends the Virtual Machine Object [cmdb_ci_vm_object]

Table name	Label (display name)	Table description
		table. Peer relationship between the Vservers (NetApp).
cmdb_ci_wap_network	Wireless Access Point	Networking hardware device that allows a Wi-Fi compliant device to connect to a wired network.
cmdb_ci_web_application	Web Application	Client-server software application in which the client (or user interface) runs in a web browser.
cmdb_ci_web_domino	Lotus Domino HTTP Server	Server running IBM Notes software (formerly Lotus Notes/IBM Domino).
cmdb_ci_web_server	Web Server	Computer system that processes requests via HTTP from the World Wide Web.
cmdb_ci_web_service	Web Service	Service offered by an electronic device to another electronic device, communicating with each other via the World Wide Web.
cmdb_ci_web_site	Web Site	A collection of related web pages.
cmdb_ci_websphere_cell	Websphere Cell	A logical grouping of IBM Websphere nodes (each of which

Table name	Label (display name)	Table description
		runs one or more application servers) that are centrally managed.
cmdb_ci_win_cluster	Windows Cluster	A single (virtual) server composed of one or more physical Windows Servers.
cmdb_ci_win_cluster_node	Windows Cluster Node	A physical member of the Windows Cluster application.
cmdb_ci_win_cluster_resource	Windows Cluster Resource	A logical or physical entity managed by the Windows Cluster application.
cmdb_ci_win_domain_controller	Windows Domain Controller	A server that responds to security authentication requests within a Windows Server domain.
cmdb_ci_win_server	Windows Server	A server running Microsoft Windows Server operating system.
cmdb_ci_windows_service	Windows Service	A Windows computer program that operates in the background.
cmdb_ci_zone	Data Center Zone	A specified portion of a data center facility.

Service tables

In the CMDB, child tables of the Service [cmdb_ci_service] table store information about services, including application services.

Key fields in the Service table

Field	Description
Business criticality	The importance of this service to the business. This field can be used to determine disaster recovery strategies for this service. Default options are: • 1 - most critical • 2 - somewhat critical • 3 - less critical • 4 - not critical
SLA	A reference to the Agreement [sla] table.
Service classification	Designates the type of the service. • Application Service (For more information, see Application services) • Technical Service (For more information, see Application services and Use the Dynamic CI Group method to populate application services) • Service Offering (For more information, see Service Portfolio Management service offerings)

Field	Description
	• Shared Service (For more information, see IT shared services) • Billable Service (To represents a service that is billed, or that is cost managed)
Used for	Designates how this service is used. Default options are: • Production • Staging • QA • Test • Development • Demonstration • Training • Disaster Recovery
Users supported	The users that this service supports. A reference to the Group [sys_users_group] table.
Version	Use this field for your own versioning processes.

Service Configuration Item Association table

The Service Configuration Item Association table [svc_ci_assoc] binds an application service and a CI to track which CIs are part of each application service.

Field	Description
Configuration Item Id	A reference to the Configuration Item [cmdb_ci] table.
Service Id	A reference to the Service [cmdb_ci_service] table.

CMDB schema model

The Configuration Management Database (CMDB) schema model is a series of connected tables that contain all the assets and business services controlled by a company and its configurations.

Related ServiceNow® Store apps and reference information:

- [CMDB tables descriptions](#): Descriptions of key CMDB tables in the base system.
- [CMDB CI Class Models](#): A ServiceNow Store app that adds class models that extend the base CMDB class hierarchy. This includes class descriptions, identification rules, identifier entries, and dependent relationships if applicable. You can then use the added classes as any other CMDB base class.
- [Populating the CMDB](#): Information about the various options for populating the CMDB.
- [Discovery patterns](#): A ServiceNow Store app that provides a library of Discovery patterns for discovering specific devices and applications in the industry.
- [Getting started with Service Graph Connectors](#): ServiceNow Store apps that provide pre-defined integrations for importing and integrating common third-party data into CMDB classes. Also includes the [IntegrationHub ETL](#) wizard for creating new ETL transform maps.

CMDB tables contain information about computers and devices on the network, software contracts and licenses, business services, and so on. The IT desk can use the CMDB to better understand their network users' equipment, and the relationships between them. The CMDB can also be referenced by other processes within the system.

Applications such as Asset Management and Contract Management, operate in conjunction with the CMDB. Asset Management and Software Asset Management link to CMDB all assets, hardware, software, assets in stock, as well as records for manufacturers and vendors. The Contract Management application contains information about contracts, including leases, service contracts, purchase orders, warranties, and software licenses. The Configuration Management Database (CMDB) application has a focus on operation.

For more background information about the CMDB, see the ServiceNow Community post at [CMDB 101- What is a configuration management database and why do you need one?](#).

Key categories of classes

The following items are general class categories that are typically key in organizations. You can for example, use this list as a general guideline for choosing classes to be set as Principal Class so you can track health and pay attention to the most important classes in your CMDB. For more information about Principal Class, see [Update class list in the Principal Class filter](#):

- Servers (physical and virtual): Classes that are typically well-understood, relatively stable, and which form the backbone of most infrastructure.
- Databases: Classes of high business impact, critical for incident triage, and relatively straightforward to discover and maintain.
- Network devices (core infrastructure): Classes such as routers, switches, firewalls, and load balancers—hardware that connects everything. If setting as Principal Class, then as a general guideline, prioritize core and critical devices over access switches.
- Application servers.
- Storage.

Key CMDB classes

Key classes in the CMDB:

- The Base Configuration Item [cmdb] class, which is the core CMDB class for non IT CIs (descending classes are non IT CIs).

- The core Configuration Item [cmdb_ci] class, which stores the basic attributes of all the CIs. The admin, itil, or asset user role is required to access this table (descending classes are IT CIs).
- The CI Relationship [cmdb_rel_ci] class, which defines all relationships between CIs.


The Configuration Item class is extended to other classes, such as Database [cmdb_ci_database] and Computer [cmdb_ci_computer]. The Computer class is extended to the Server [cmdb_ci_server] class, which is extended to the UNIX Server [cmdb_ci_unix_server] class, and so on.

Note: The Base Configuration Item [cmdb] class uses the table per partition extension model, which has different behaviors for replicating and deriving information than other extended tables. See [Table extension and classes](#).

You can use the schema map to view more details of class and their relationships:

1. Navigate to **System Definition > Tables & Columns**.
2. Select a table and click **Schema Map**.

Schema Map

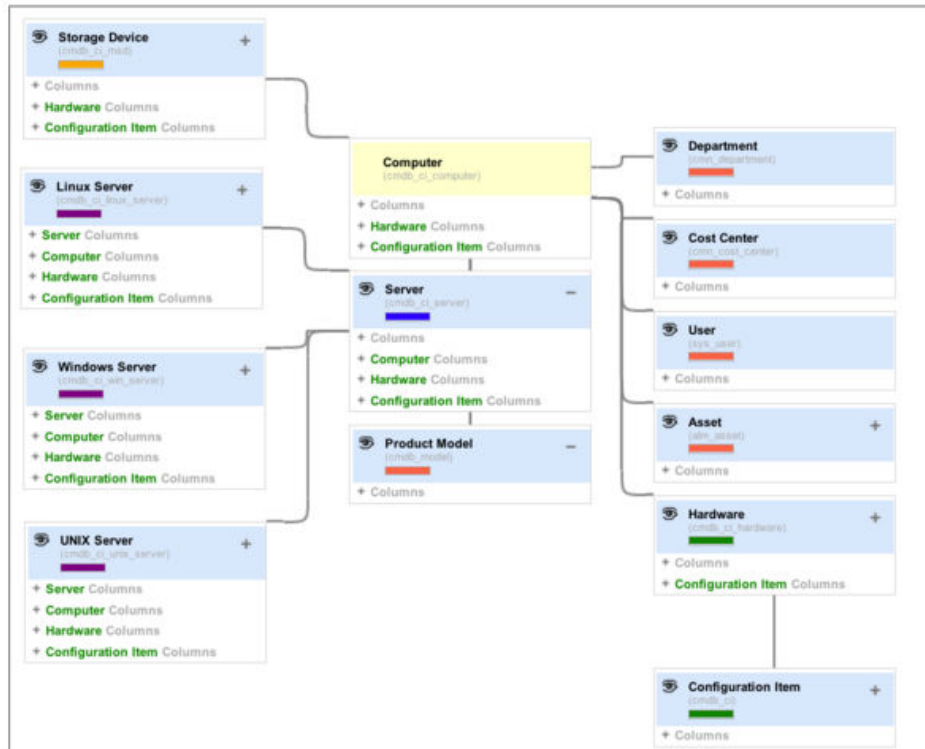

Note: CIs not extended from the Configuration Item [cmdb_ci] table, are not displayed in Dependency Views maps and in CI relation formatters.

CI attributes

Attributes apply to all the CIs in a classification. To change attribute values for a CI, edit the appropriate CI. To add a unique attribute to a class, extend the class table and create a new classification for that CI.

The position of a CI in a classification hierarchy is determined by the attributes it shares with the CIs below it. Each time a CI has a single different attribute from its parent, the classification hierarchy branches.

For example, servers have different attributes from computers, which include workstations and laptops. Linux servers and UNIX servers have different attributes from the parent server classification and from each other, so they occupy separate branches in the hierarchy.


Configuration Item [cmdb_ci] class

Attributes in the Configuration Item [cmdb_ci] class, which extends the Base Configuration Item [cmdb] class.

Warning: Do not modify any of these attributes in the dictionary. For example, do not modify the type of the location attribute from reference to list. Such modifications may prevent features that use the CMDB, from functioning properly.


For descriptions of common CMDB tables in a base system, see [CMDB tables descriptions](#).

Common core, user tables

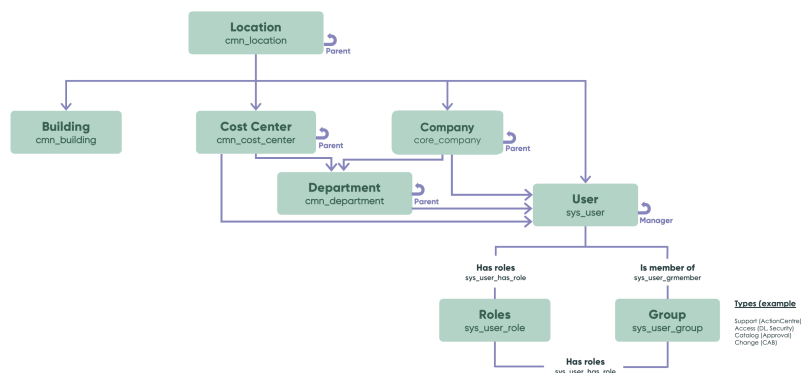

now.

CMDB CI schema related to common core and non-core tables

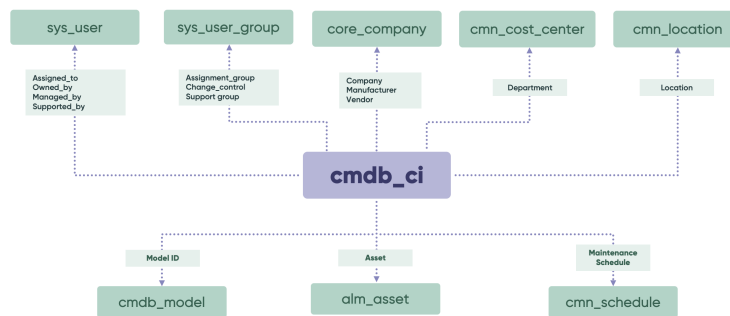

Attributes

Attribute	Description
Asset tag	Asset tag/service tag for the specific asset
Assigned	Date and time of assignment to user
Attributes	Description of usage of attributes for the instance
Can Print	Indicates whether the instance can print
Category	Name of category applicable to the instance
Checked in	Date and time of checking in
Checked out	Date and time of checking out

Attribute	Description
Class	System class name
Comments	Comments related to the instance
Correlation ID	ID of the instance from another data source
Cost	Financial value in local currency (as defined in the Cost Currency field)
Cost currency	Name of currency (such as dollars, pounds, Euros)
Created	Date and time record was created
Created by	Name of person/data source which initially created the record
Description	Fit (how deployed) and function (purpose) of the instance
Discovery source	Name of primary (most trusted) discovery source
DNS Domain	Name of the DNS domain to which the instance belongs
Domain	ID of the domain to which the instance belongs
Domain Path	Path of the domain to which the instance belongs
Due	Date and time instance was due
Due in	Description of the manner of which the instance was due

Attribute	Description
Fault Count	Number of faulty recorded against the instance to date
First Discovered	Date and time instance was initially discovered
Fully Qualified Domain Name	Full path name of domain to which the instance belongs
GL account	General Ledger account name/number
Installed	Date and time instance was most recently installed
Invoice number	Invoice number used in acquisition process
IP Address	Primary IP address used by the instance
Justification	Description of the justification for the instance
Lease contract	Number of current leasing contracts
MAC Address	MAC address of the instance
Model Number	Manufacturer original model number
Monitor	Indicates whether the instance is monitored
Most Recent Discovery	Date and time instance was last discovered
Name	Name of the CI instance

Attribute	Description
Operational Status	Configurable choice list with values for current operational states
Order received	Date and time instance was initially received
Ordered	Date and time instance was initially ordered
PO number	Purchase order number used in acquisition process
Purchased	Date instance was purchased
Requires verification	Flag indicating whether verification is required for the instance
Serial number	Serial number of the instance
Skip sync	Flag indicating whether synchronization between Asset Management and CMDB can be skipped
Start Date	Date and time the instance was last started
Subcategory	Name of Subcategory applicable to the instance
Sys ID	ServiceNow Sys ID (GUID)
Tags	Related tags
Updated	Date and time instance was last updated
Updated by	Person/data source which last updated the record

Attribute	Description
Updates	Configurable choice list with values for update states
Warranty expiration	Date current warranty expires

Reference attribute	Reference to
Approval Group	Group table
Asset	Asset table
Assigned to	User table
Change Group	Group table
Company	Company table
Cost center	Cost Center table
Department	Department table
Location	Location table
Maintenance Schedule	Schedule table
Managed by	User table
Manufacturer	Company table
Model ID	Product Model table
Owned by	User table
Schedule	Schedule table (for normal processing)
Support group	Group table
Supported by	User


Reference attribute	Reference to
Vendor	Company table

Hardware [cmdb_ci_hardware] class

Attributes, identification rule, and other important schema structures for the CMDB Hardware [cmdb_ci_hardware] class.

For descriptions of common CMDB tables in a base system, see [CMDB tables descriptions](#).

Hardware, Computer, Server Schema

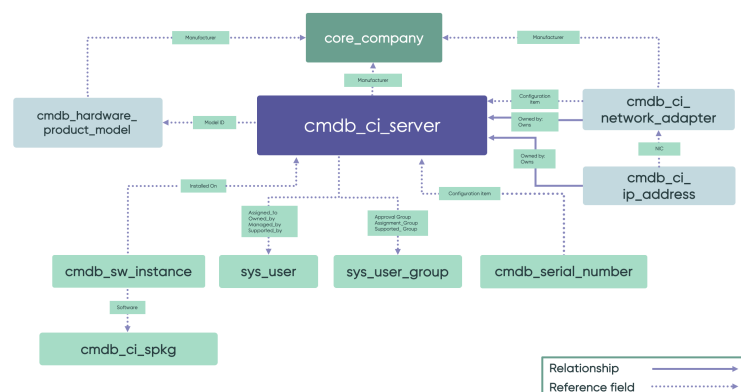

Note: cmdb_sw_instance noted in the diagram, is a reference to the cmdb_software_instance class, and Supported_Group is a reference to Support_Group.

Attributes

The Hardware class adds the following unique attributes:

Attribute	Description
hardware_status	Status of hardware such as In Maintenance or Retired . Used to sync status to the Asset class.
hardware_substatus	Secondary hardware status. Each setting in hardware_status results in a different set of choices available for this field.
default_gateway	Default gateway that the computer is connected through.

Key relationship structures

Use the following key relationships as important guidelines when creating Hardware, Computer, or Server CIs:

-

Serial number: During CI identification, Identification and Reconciliation Engine (IRE) processes search for a serial number in two locations. One is the CI serial number attribute, and the second one is the Serial Number [cmdb_serial_number] table, with reference back to the Hardware [cmdb_ci_hardware] table.

- Store any serial number of any type other than System, only in the Serial Number table (and not in the server CI attribute).
- If the system serial number is available, store it in both the Serial Number attribute of the CI and in the Serial Number table.

The Serial Number table is a many to one relationship linking back to the server CI. This table has a type field for specifying the type of the serial number (system, uuid, chassis, bios, or baseboard) and storing the actual value itself. Use the following Windows standards for serial number types in the Serial Number [cmdb_serial_number] table:

- system: Product identification such as a serial number for software, a die number on a hardware chip, or a project number (for noncommercial products).

- **uuid:** Universally unique identifier (UUID) for the product. A UUID is a 128-bit identifier that is guaranteed to be different from other generated UUIDs.
- **chassis:** Manufacturer-allocated number that is used to identify a physical element. Value is the Serial Number member of the System Enclosure or Chassis structure in the SMBIOS information. This type represents the properties associated with a physical system enclosure.
- **bios:** The assigned serial number of the BIOS. This type represents the attributes of the computer system basic input/output services (BIOS) that are installed on the computer.
- **baseboard:** Manufacturer-allocated number that is used to identify the physical element. This property is inherited from CIM_PhysicalElement, and is sometimes referred to as the 'Motherboard Serial Number'.

•

Network adapter:

- Use the Network Adapter [cmdb_ci_network_adapter] class to store network adapters.
- Set the Name attribute in the Network Adapter class to be the name of the Network Adapter device (such as eth0, eth1).

•

Set the MAC Address attribute to be the MAC address value. Format the string with colon separators between octets and lower case hexadecimal characters with padded zeros.

For example: 'f8:f2:1e:00:d4:66'

- In the CI Relationship [cmdb_rel_ci] table, create an Owned By::Owns relationship to the associated Hardware CI. Specify a reference from the Network Adapter [cmdb_ci_network_adapter] table using the CI with a reference to the associated Hardware CI.

•

IP address:

- Use the IP Address [cmdb_ci_ip_address] class to store IP addresses.
- Store an IP address value in the IP Address attribute, and in the Name attribute (to avoid empty Name attributes).
- Store an IPv4 IP address value using the format 'NNN.NNN.NNN.NNN', with decimal-based octets and period separators. Non-conforming values should be considered invalid and cleansed to null values.
- Store an IPv6 IP address value using lower case hexadecimal with colon separators. Non-confirming values should be considered invalid and cleansed to null values.
- Set the Netmask attribute to the IP address.
- In the CI Relationship [cmdb_rel_ci] table, create an **Owned By::Owns** relationship to the associated Hardware CI.
- Specify for the IP address a reference to the Network Adapter [cmdb_ci_network_adapter] table using the Configuration Item with a reference to the associated Hardware CI.
- To ensure that base system identification rules work properly, also store the IP address in the associated Network Adapter class.

•

Network adapter and IP address:

- Store the MAC address of the network adapter installed on a server, in the Network Adapter [cmdb_ci_network_adapter] class.
- Store the IP address in the IP Address [cmdb_ci_ip_address] class.
- Do not store the MAC address or the IP address in the Server [cmdb_ci_server] class.

Key reference structures

Use the following key references as important guidelines when creating Hardware, Computer, or Server CIs:

•

Software and processes running on a server: The Software [cmdb_ci_spkg] class contains the generic software package that is

related to the server CI. The `cmdb_software_instance` table instantiates each instance of the software package with:

- One to one reference back to the Server [`cmdb_ci_server`] class
 - Many to one reference back to the Software class
- These references are stored in the Installed on and the Product Name reference attributes respectively.

If either the Software Asset Management Foundation [`com.snc.sams`] or the Software Asset Management [`com.snc.software_asset_management`] plugin is installed, then store software details in the Software Installation [`cmdb_sam_sw_install`] table instead of the `cmdb_software_instance` table.

- The Manufacturer and Model ID are reference attributes to the Company [`core_company`] and Product Model [`cmdb_model`] tables respectively.
- The Owned By, Assigned To, Managed By, and Supported By are reference attributes to the User [`sys_user`] table. The Change Group and Support Group are reference attributes to the Group [`sys_user_group`] table.

Identification rule

The base system contains pre-defined identification rules for the Hardware, Computer, and Server classes, which are identical. That identification rule has the following key identifier entries, listed in priority order:

1. Identifier entry which uses lookup-based identification specified with Serial Number [`cmdb_serial_number`] as the lookup table. The Serial Number table is a many to one reference from Serial Number back to the server CI.
2. Identifier entry specified with the Serial Number attribute in the CI.
3. Identifier entry for the Name attribute. If Serial Number is not available, then the Name (which is the hostname) attribute is used. If both the Serial Number and the Name attributes are provided, then Identification and Reconciliation Engine (IRE) looks first for the Serial Number. Then, if a Serial Number is not found, IRE falls back to using Name.

- Identifier entry specified for the MAC Address/IP Address attributes in the Network Adapter table. However, do not rely only on the MAC Address/IP Address.

If both Serial Number and Name are not available, and only MAC Address/IP Address are available, use MAC Address as the name of the CI. Using the MAC Address as the name of the CI ensures that you don't create an empty CI.


For more information, see [CMDB Identification and Reconciliation \(IRE\)](#).

Computer [cmdb_ci_computer] class

Attributes, identification rule, and other important schema structures for the CMDB Computer [cmdb_ci_computer] class.

For descriptions of common CMDB tables in a base system, see [CMDB tables descriptions](#).

Hardware, Computer, Server Schema

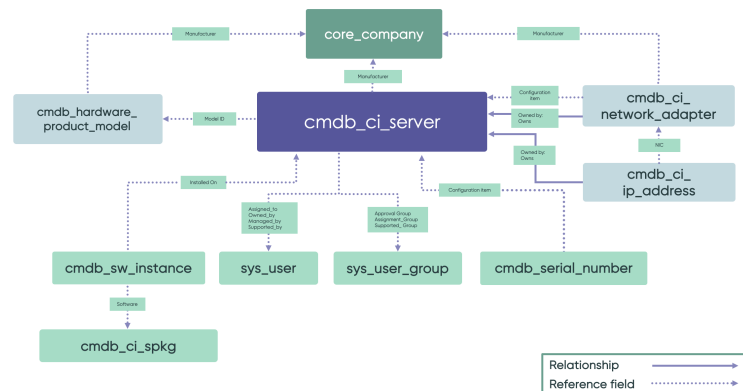

Note: cmdb_sw_instance noted in the diagram, is a reference to the cmdb_software_instance class, and Supported_Group is a reference to Support_Group.

Attributes

The Computer class adds the following unique attributes:

Attribute	Description
CD_ROM	Denotes whether a CD ROM exists.
CD Speed	Speed of CD_ROM.
Chassis type	Type of computer chassis.
CPU core count	Number of cores per CPU.
CPU core thread	Number of threads per core.
CPU count	Number of CPUs.
CPU name	Name of CPU.
CPU speed (MHz)	Speed of CPU.
CPU type	CPU type.
Disk space (GB)	Amount of disk space (in GB).
Floppy	Type of floppy drive.
Form factor	Form factor of the computer.
Object ID	Object ID of the computer (such as the virtual machine ID associated with the computer).
Operating System	Name of the operating system.
OS Address Width (bits)	Operating system bit (such as 32, 64).
OS Domain	NA

Attribute	Description
OS Service Pack	Service pack installed on the operating system.
OS Version	Version of the operating system.
RAM (MB)	Amount of RAM on the computer.
IsVirtual	True/False denoting whether the device is running on a virtual machine instance.

Reference attribute	Reference to
CPU manufacturer	Company [core_company] table

Schema description

The CMDB schema model does not separate between servers and computers that are physical and servers and computer that are virtual. Instead, the Computer and the Server classes have a field named IsVirtual. If a computer or server is a virtual instance, set this IsVirtual attribute to **true**.

As described in the Virtual Machine schema section, to fully model a virtual machine, set the IsVirtual attribute in the Computer or Server CI to **true**. Create a Virtual Machine Instance [cmdb_ci_vm_instance] record using the BIOS UUID attribute as the key identifier. Then create a Hosted_On relationship between the Virtual Machine Instance record and the Computer or Server instance and set IsVirtual to **true**.

Key relationship structures

Use the following key relationships as important guidelines when creating Hardware, Computer, or Server CIs:

-

Serial number: During CI identification, Identification and Reconciliation Engine (IRE) processes search for a serial number in two locations. One is the CI serial number attribute, and the second one is the

Serial Number [cmdb_serial_number] table, with reference back to the Hardware [cmdb_ci_hardware] table.

- Store any serial number of any type other than System, only in the Serial Number table (and not in the server CI attribute).
- If the system serial number is available, store it in both the Serial Number attribute of the CI and in the Serial Number table.

The Serial Number table is a many to one relationship linking back to the server CI. This table has a type field for specifying the type of the serial number (system, uuid, chassis, bios, or baseboard) and storing the actual value itself. Use the following Windows standards for serial number types in the Serial Number [cmdb_serial_number] table:

- system: Product identification such as a serial number for software, a die number on a hardware chip, or a project number (for noncommercial products).
- uuid: Universally unique identifier (UUID) for the product. A UUID is a 128-bit identifier that is guaranteed to be different from other generated UUIDs.
- chassis: Manufacturer-allocated number that is used to identify a physical element. Value is the Serial Number member of the System Enclosure or Chassis structure in the SMBIOS information. This type represents the properties associated with a physical system enclosure.
- bios: The assigned serial number of the BIOS. This type represents the attributes of the computer system basic input/output services (BIOS) that are installed on the computer.
- baseboard: Manufacturer-allocated number that is used to identify the physical element. This property is inherited from CIM_PhysicalElement, and is sometimes referred to as the 'Motherboard Serial Number'.

•

Network adapter:

- Use the Network Adapter [cmdb_ci_network_adapter] class to store network adapters.

- Set the Name attribute in the Network Adapter class to be the name of the Network Adapter device (such as eth0, eth1).

•

Set the MAC Address attribute to be the MAC address value. Format the string with colon separators between octets and lower case hexadecimal characters with padded zeros.

For example: 'f8:f2:1e:00:d4:66'

- In the CI Relationship [cmdb_rel_ci] table, create an Owned By::Owns relationship to the associated Hardware CI. Specify a reference from the Network Adapter [cmdb_ci_network_adapter] table using the CI with a reference to the associated Hardware CI.

•

IP address:

- Use the IP Address [cmdb_ci_ip_address] class to store IP addresses.
- Store an IP address value in the IP Address attribute, and in the Name attribute (to avoid empty Name attributes).
- Store an IPv4 IP address value using the format 'NNN.NNN.NNN.NNN', with decimal-based octets and period separators. Non-conforming values should be considered invalid and cleansed to null values.
- Store an IPv6 IP address value using lower case hexadecimal with colon separators. Non-conforming values should be considered invalid and cleansed to null values.
- Set the Netmask attribute to the IP address.
- In the CI Relationship [cmdb_rel_ci] table, create an **Owned By::Owns** relationship to the associated Hardware CI.
- Specify for the IP address a reference to the Network Adapter [cmdb_ci_network_adapter] table using the Configuration Item with a reference to the associated Hardware CI.
- To ensure that base system identification rules work properly, also store the IP address in the associated Network Adapter class.

•

Network adapter and IP address:

- Store the MAC address of the network adapter installed on a server, in the Network Adapter [cmdb_ci_network_adapter] class.
- Store the IP address in the IP Address [cmdb_ci_ip_address] class.
- Do not store the MAC address or the IP address in the Server [cmdb_ci_server] class.

Key reference structures

Use the following key references as important guidelines when creating Hardware, Computer, or Server CIs:

- Software and processes running on a server: The Software [cmdb_ci_spkg] class contains the generic software package that is related to the server CI. The cmdb_software_instance table instantiates each instance of the software package with:

- One to one reference back to the Server [cmdb_ci_server] class
- Many to one reference back to the Software class

These references are stored in the Installed on and the Product Name reference attributes respectively.

If either the Software Asset Management Foundation [com.snc.sams] or the Software Asset Management [com.snc.software_asset_management] plugin is installed, then store software details in the Software Installation [cmdb_sam_sw_install] table instead of the cmdb_software_instance table.

- The Manufacturer and Model ID are reference attributes to the Company [core_company] and Product Model [cmdb_model] tables respectively.
- The Owned By, Assigned To, Managed By, and Supported By are reference attributes to the User [sys_user] table. The Change Group and Support Group are reference attributes to the Group [sys_user_group] table.

Identification rule

The base system contains pre-defined identification rules for the Hardware, Computer, and Server classes, which are identical. That identification rule has the following key identifier entries, listed in priority order:

1. Identifier entry which uses lookup-based identification specified with Serial Number [cmdb_serial_number] as the lookup table. The Serial Number table is a many to one reference from Serial Number back to the server CI.
2. Identifier entry specified with the Serial Number attribute in the CI.
3. Identifier entry for the Name attribute. If Serial Number is not available, then the Name (which is the hostname) attribute is used. If both the Serial Number and the Name attributes are provided, then Identification and Reconciliation Engine (IRE) looks first for the Serial Number. Then, if a Serial Number is not found, IRE falls back to using Name.
4. Identifier entry specified for the MAC Address/IP Address attributes in the Network Adapter table. However, do not rely only on the MAC Address/IP Address.

If both Serial Number and Name are not available, and only MAC Address/IP Address are available, use MAC Address as the name of the CI. Using the MAC Address as the name of the CI ensures that you don't create an empty CI.


For more information, see [CMDB Identification and Reconciliation \(IRE\)](#).

Server [cmdb_ci_server] class

Attributes, identification rule, and other important schema structures for the CMDB Server [cmdb_ci_server] class.

For descriptions of common CMDB tables in a base system, see [CMDB tables descriptions](#).

Hardware, Computer, Server Schema

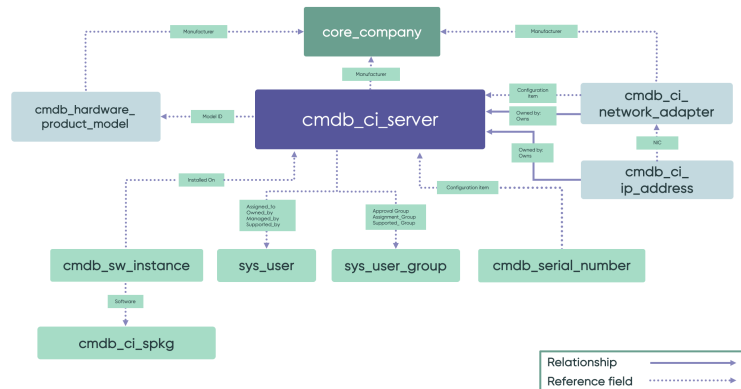

Note: cmdb_sw_instance noted in the diagram, is a reference to the cmdb_software_instance class, and Supported_Group is a reference to Support_Group.

Attributes

The Server class adds the following unique attributes:

Attribute	Description
Classification	Type of server, such as production, development, disaster recovery, or user acceptance testing (UAT).
Firewall status	Internet or intranet facing server.
Host name	Use the Name attribute to store the host name of the server instead of the Host name attribute.
Used for	Business service supported by the server, such as production, staging, or quality assurance (QA). This attribute uses the Used for

Attribute	Description
	choice list field from the Service [cmdb_ci_service] table.

Reference attribute	Reference to
Disaster backup	Server [cmdb_ci_server] table. Reference to another server that is the backup server for this server.

Reference classes

The following reference classes extend the Server class. They do not add any new attributes.

Reference class	Name	Description
cmdb_ci_solaris_server	Solaris Server	Server running Oracle Solaris operating system.
cmdb_ci_lb_cisco_csm	Cisco CSM	Cisco Security Manager (CSM) load balancer.
cmdb_ci_win_server	Windows Server	Server running Microsoft Windows Server operating system.
cmdb_ci_lb_ace	ACE	Cisco Application Control Engine load balancer.
cmdb_ci_lb_netscaler	Citrix Netscaler	Citrix Netscaler load balancer.
cmdb_ci_lb_alteon	Alteon	Alteon load balancer.

Reference class	Name	Description
cmdb_ci_lb	Load Balancer	Generic load balancer.
cmdb_ci_lb_a10	A10 Load Balancer	A10 load balancer.
cmdb_ci_lb_cisco_css	Cisco CSS	Cisco Content Services Switch (CSS) load balancer.
cmdb_ci_lb_cisco_gss	Cisco GSS	Cisco Global Site Selector (GSS) load balancer.
cmdb_ci_osx_Server	OS/X Server	Server running OS/X operating system.
cmdb_ci_HPUX_Server	HPUX Server	Server running HP-UX operating system.
cmdb_ci_tape_server	Server Tape Unit	Server using a tape drive.
cmdb_ci_Server_Hardware	Server Hardware	Server hardware.
cmdb_ci_datapower_server	Data Power Hosting Server	IBM DataPower hosting server.
cmdb_ci_net_app_server	Network Appliance Hardware	NetApp hardware.
cmdb_ci_netware_server	Netware Server	Server running NetWare operating system.
cmdb_ci_ibm_zos_server	IBM zOS Server	Server running IBM z/OS operating system .

Reference class	Name	Description
cmdb_ci_storage_node_element	Storage Node Element	Storage node.
cmdb_ci_chassis_server	Server Chassis	Server chassis.
cmdb_ci_lb_network	Network Load Balancer	Network load balancer hardware.
cmdb_ci_Unix_Server	Unix Server	Server running Unix operating system.
cmdb_ci_linux_server	Linux Server	Server running Linux operating system.
cmdb_ci_virtualization_server	Virtualization Server	Abstract base table used by Hyper-V Server [cmdb_ci_hyper_v_server] and ESX Server [cmdb_ci_esx_server].
cmdb_ci_mainframe	IBM Mainframe	Large-scale computer system with high-end capabilities.

Schema description

The CMDB schema model does not separate between servers and computers that are physical and servers and computer that are virtual. Instead, the Computer and the Server classes have a field named `IsVirtual`. If a computer or server is a virtual instance, set this `IsVirtual` attribute to **true**.

As described in the Virtual Machine schema section, to fully model a virtual machine, set the `IsVirtual` attribute in the Computer or Server CI to **true**. Create a Virtual Machine Instance [cmdb_ci_vm_instance] record using the BIOS UUID attribute as the key identifier. Then create a Hosted_On relationship between the Virtual Machine Instance record and the Computer or Server instance and set `IsVirtual` to **true**.

Key relationship structures

Use the following key relationships as important guidelines when creating Hardware, Computer, or Server CIs:

-

Serial number: During CI identification, Identification and Reconciliation Engine (IRE) processes search for a serial number in two locations. One is the CI serial number attribute, and the second one is the Serial Number [cmdb_serial_number] table, with reference back to the Hardware [cmdb_ci_hardware] table.

- Store any serial number of any type other than System, only in the Serial Number table (and not in the server CI attribute).
- If the system serial number is available, store it in both the Serial Number attribute of the CI and in the Serial Number table.

The Serial Number table is a many to one relationship linking back to the server CI. This table has a type field for specifying the type of the serial number (system, uuid, chassis, bios, or baseboard) and storing the actual value itself. Use the following Windows standards for serial number types in the Serial Number [cmdb_serial_number] table:

- system: Product identification such as a serial number for software, a die number on a hardware chip, or a project number (for noncommercial products).
- uuid: Universally unique identifier (UUID) for the product. A UUID is a 128-bit identifier that is guaranteed to be different from other generated UUIDs.
- chassis: Manufacturer-allocated number that is used to identify a physical element. Value is the Serial Number member of the System Enclosure or Chassis structure in the SMBIOS information. This type represents the properties associated with a physical system enclosure.
- bios: The assigned serial number of the BIOS. This type represents the attributes of the computer system basic input/output services (BIOS) that are installed on the computer.
- baseboard: Manufacturer-allocated number that is used to identify the physical element. This property is inherited from

CIM_PhysicalElement, and is sometimes referred to as the 'Motherboard Serial Number'.

-

Network adapter:

- Use the Network Adapter [cmdb_ci_network_adapter] class to store network adapters.
- Set the Name attribute in the Network Adapter class to be the name of the Network Adapter device (such as eth0, eth1).

-

Set the MAC Address attribute to be the MAC address value. Format the string with colon separators between octets and lower case hexadecimal characters with padded zeros.

For example: 'f8:f2:1e:00:d4:66'

- In the CI Relationship [cmdb_rel_ci] table, create an Owned By::Owns relationship to the associated Hardware CI. Specify a reference from the Network Adapter [cmdb_ci_network_adapter] table using the CI with a reference to the associated Hardware CI.

-

IP address:

- Use the IP Address [cmdb_ci_ip_address] class to store IP addresses.
- Store an IP address value in the IP Address attribute, and in the Name attribute (to avoid empty Name attributes).
- Store an IPv4 IP address value using the format 'NNN.NNN.NNN.NNN', with decimal-based octets and period separators. Non-conforming values should be considered invalid and cleansed to null values.
- Store an IPv6 IP address value using lower case hexadecimal with colon separators. Non-conforming values should be considered invalid and cleansed to null values.
- Set the Netmask attribute to the IP address.

- In the CI Relationship [cmdb_rel_ci] table, create an **Owned By::Owns** relationship to the associated Hardware CI.
- Specify for the IP address a reference to the Network Adapter [cmdb_ci_network_adapter] table using the Configuration Item with a reference to the associated Hardware CI.
- To ensure that base system identification rules work properly, also store the IP address in the associated Network Adapter class.

•

Network adapter and IP address:

- Store the MAC address of the network adapter installed on a server, in the Network Adapter [cmdb_ci_network_adapter] class.
- Store the IP address in the IP Address [cmdb_ci_ip_address] class.
- Do not store the MAC address or the IP address in the Server [cmdb_ci_server] class.

Key reference structures

Use the following key references as important guidelines when creating Hardware, Computer, or Server CIs:

•

Software and processes running on a server: The Software [cmdb_ci_spkg] class contains the generic software package that is related to the server CI. The cmdb_software_instance table instantiates each instance of the software package with:

- One to one reference back to the Server [cmdb_ci_server] class
- Many to one reference back to the Software class

These references are stored in the Installed on and the Product Name reference attributes respectively.

If either the Software Asset Management Foundation [com.snc.sams] or the Software Asset Management [com.snc.software_asset_management] plugin is installed, then store software details in the Software Installation [cmdb_sam_sw_install] table instead of the cmdb_software_instance table.

- The Manufacturer and Model ID are reference attributes to the Company [core_company] and Product Model [cmdb_model] tables respectively.
- The Owned By, Assigned To, Managed By, and Supported By are reference attributes to the User [sys_user] table. The Change Group and Support Group are reference attributes to the Group [sys_user_group] table.

Identification rule

The base system contains pre-defined identification rules for the Hardware, Computer, and Server classes, which are identical. That identification rule has the following key identifier entries, listed in priority order:

1. Identifier entry which uses lookup-based identification specified with Serial Number [cmdb_serial_number] as the lookup table. The Serial Number table is a many to one reference from Serial Number back to the server CI.
2. Identifier entry specified with the Serial Number attribute in the CI.
3. Identifier entry for the Name attribute. If Serial Number is not available, then the Name (which is the hostname) attribute is used. If both the Serial Number and the Name attributes are provided, then Identification and Reconciliation Engine (IRE) looks first for the Serial Number. Then, if a Serial Number is not found, IRE falls back to using Name.
4. Identifier entry specified for the MAC Address/IP Address attributes in the Network Adapter table. However, do not rely only on the MAC Address/IP Address.

If both Serial Number and Name are not available, and only MAC Address/IP Address are available, use MAC Address as the name of the CI. Using the MAC Address as the name of the CI ensures that you don't create an empty CI.

For more information, see [CMDB Identification and Reconciliation \(IRE\)](#).

VMware vCenter Object [cmdb_ci_vcenter_object] class

Attributes, identification rule, and other important schema structures for Virtual Machine related classes.

For descriptions of common CMDB tables in a base system, see [CMDB tables descriptions](#).


Schema description

ServiceNow® has an extensive modeling of virtual machines (VMs) environment, with classes such as:

- VMware vCenter Cluster [cmdb_ci_vcenter_cluster]
- VMware vCenter datacenter [cmdb_ci_vcenter_datacenter]
- VMware Virtual Machine Instance [cmdb_ci_vmware_instance]

Virtual machines are modeled just like any other server, but with the `IsVirtual` attribute set to **true**.

VMWare vCenter Instance schema structure

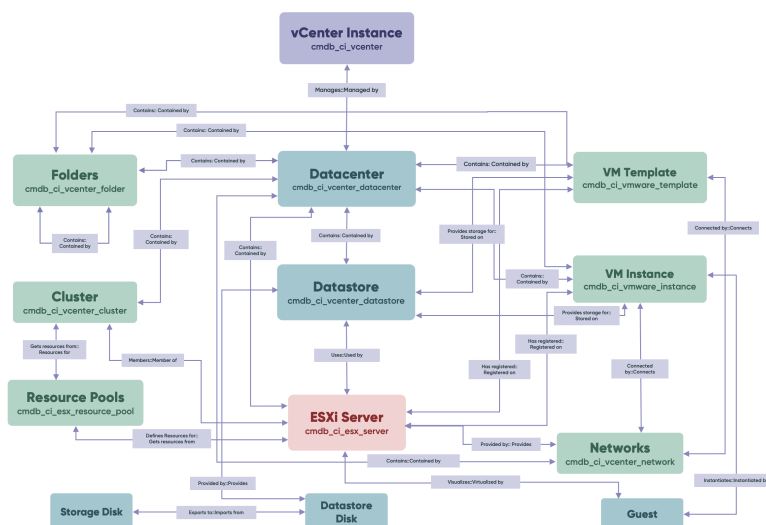

In the diagram above, the 'Discovered' virtual server is referred to as the 'Guest' (VM object). Follow the preceding diagram for any further modeling of VMWare components.

Key reference structures

The Guest has the following important key reference structures:

- An Instantiates::InstantiatedBy relationship with the cmdb_ci_vmware_instance (which is the VM instance reported by Center).
- A Virtualizes::Virtualized by relationship with ESXi Server (the hardware with the ESXi virtualization software installed).
- Guest (Discovered, VMObject) also has a HasRegistered::RegisteredOn relationship to ESXi Server.

Identification rules

- Guest operating system: Guest operating system is modeled as Server (with IsVirtual set to **true**) and therefore identification rules follow the rules for the Server class. In most operating systems, BIOS UUID is reported as serial number. It is essential that you follow proper VMware guidelines to ensure that BIOS UUID is not being reused. Having a cloned BIOS UUID causes issues with identification rules.
- VM Instances: IRE uses instance MosRef ID as key identifier.
- ESX Server: Server is modeled as bare metal Server (with IsVirtual set to **false**) and therefore applies the Server class identification rules.

Cloud class

Description, identification rule, and other important schema structures for the CMDB cloud classes.

For descriptions of common CMDB tables in a base system, see [CMDB tables descriptions](#).

[illegible]


Notations

- Green line - Identification Relationships
- Green line - New CI Class or Credential Table
- Purple line - Involvement Relationship
- Red line - Commitment Relationship
- Yellow line - Reference Relationship

The diagram illustrates a cloud architecture dependency graph. The components and their relationships are as follows:

- Service Account** (Green) is identified by **Location Group** (Green), **Availability Zone** (Green), **VM Container** (Green), **Image** (Green), **Hardware** (Green), **SSH Key Pair** (Green), **Resource Group** (Green), **Org** (Green), and **Space** (Green).
- Location Group** (Green) is identified by **Availability Zone** (Green).
- Availability Zone** (Green) is identified by **VM Container** (Green), **Image** (Green), **Hardware** (Green), **SSH Key Pair** (Green), **Resource Group** (Green), **Org** (Green), and **Space** (Green).
- VM Container** (Green) is identified by **Image** (Green), **Hardware** (Green), **SSH Key Pair** (Green), **Resource Group** (Green), **Org** (Green), and **Space** (Green).
- Image** (Green) is identified by **Hardware** (Green), **SSH Key Pair** (Green), **Resource Group** (Green), **Org** (Green), and **Space** (Green).
- Hardware** (Green) is identified by **SSH Key Pair** (Green), **Resource Group** (Green), **Org** (Green), and **Space** (Green).
- SSH Key Pair** (Green) is identified by **Resource Group** (Green), **Org** (Green), and **Space** (Green).
- Resource Group** (Green) is identified by **Org** (Green) and **Space** (Green).
- Org** (Green) is identified by **Space** (Green).
- Space** (Green) is identified by **Security Group** (Green), **Network** (Green), **Subnet** (Green), **NIC** (Green), **NIC Endpoint** (Green), **Virtual Server** (Green), **Block Endpoint** (Green), **Storage Volume** (Green), **Volume Endpoint** (Green), **Load Balancer** (Green), **LB Health Service** (Green), **LB Service** (Green), **LB Pool** (Green), and **LB Pool Member** (Green).
- Security Group** (Green) is identified by **Network** (Green).
- Network** (Green) is identified by **Subnet** (Green).
- Subnet** (Green) is identified by **NIC** (Green), **NIC Endpoint** (Green), **Virtual Server** (Green), **Block Endpoint** (Green), **Storage Volume** (Green), **Volume Endpoint** (Green), **Load Balancer** (Green), **LB Health Service** (Green), **LB Service** (Green), **LB Pool** (Green), and **LB Pool Member** (Green).
- NIC** (Green) is identified by **NIC Endpoint** (Green).
- NIC Endpoint** (Green) is identified by **Virtual Server** (Green), **Block Endpoint** (Green), **Storage Volume** (Green), **Volume Endpoint** (Green), **Load Balancer** (Green), **LB Health Service** (Green), **LB Service** (Green), **LB Pool** (Green), and **LB Pool Member** (Green).
- Virtual Server** (Green) is identified by **Block Endpoint** (Green), **Storage Volume** (Green), **Volume Endpoint** (Green), **Load Balancer** (Green), **LB Health Service** (Green), **LB Service** (Green), **LB Pool** (Green), and **LB Pool Member** (Green).
- Block Endpoint** (Green) is identified by **Storage Volume** (Green), **Volume Endpoint** (Green), **Load Balancer** (Green), **LB Health Service** (Green), **LB Service** (Green), **LB Pool** (Green), and **LB Pool Member** (Green).
- Storage Volume** (Green) is identified by **Volume Endpoint** (Green), **Load Balancer** (Green), **LB Health Service** (Green), **LB Service** (Green), **LB Pool** (Green), and **LB Pool Member** (Green).
- Volume Endpoint** (Green) is identified by **Load Balancer** (Green), **LB Health Service** (Green), **LB Service** (Green), **LB Pool** (Green), and **LB Pool Member** (Green).
- Load Balancer** (Green) is identified by **LB Health Service** (Green), **LB Service** (Green), **LB Pool** (Green), and **LB Pool Member** (Green).
- LB Health Service** (Green) is identified by **LB Service** (Green), **LB Pool** (Green), and **LB Pool Member** (Green).
- LB Service** (Green) is identified by **LB Pool** (Green) and **LB Pool Member** (Green).
- LB Pool** (Green) is identified by **LB Pool Member** (Green).
- LB Pool Member** (Green) is identified by **LB Pool** (Green).

Google Datacenter Schema Model

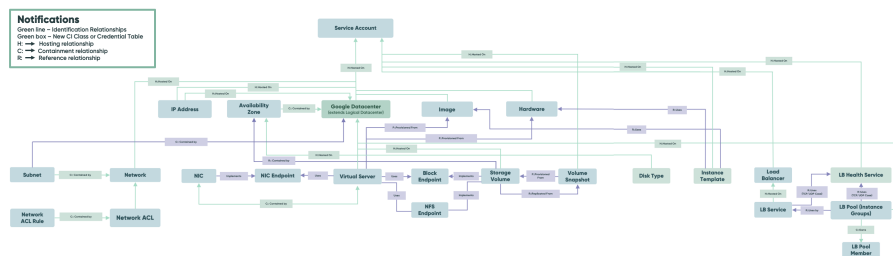

Cloud schema description

ServiceNow has extensive models of cloud environments including Amazon Web Services (AWS), Microsoft Azure service, Google Cloud Platform (GCP), and IBM Cloud. Focusing on the compute side, the models for cloud environments and for Virtual Servers are similar. For example, instances of Amazon Elastic Compute Cloud (EC2) and Microsoft® Azure Cloud Compute, are an extension of Virtual Machine instances, where CIs are typically created by connecting directly to cloud inventory. However, Virtual Machine instances do not represent actual usage of the cloud instance.

Cloud Service Account [cmdb_ci_cloud_service_account] is the main class for tracking cloud accounts such as AWS, GCP, and Azure (replacing for example, use of the cmdb_ci_aws_account table for AWS).

For example, you can represent a Linux guest host running on Amazon EC2 by the Server [cmdb_ci_server] class, with the IsVirtual attribute set to **true** and with the relationship Runs on:Runs to the EC2 instance. Integrating the AWS Config Service or the Amazon CloudWatch application, provides information on the EC2 object ID. Running Discovery or another discovery program on the guest Linux host, provides the hostname.

Ensure the following:

- Getting the correct UUID which gets stored in the Serial Number [cmdb_serial_number] table.
- Connecting/creating the cloud instance to Host OS, matching on the UUID/Object ID and creating the Runs On:Runs relationship.

Also, there is a complete model of Storage, Networking, Lambda/Functions in addition to modeling of different regions using the concept of the table Logical Datacenter [cmdb_ci_logical_datacenter] with Hosts:HostedOn relationship with Compute, Storage, and such.

Identification rule

The base system contains pre-defined identification rules for cloud schema classes. A cloud object requires the following identification items:

- Object ID: Which is synonymous with the IDs that cloud vendors use for each type of cloud resource, such as Azure Compute, EC2, and Amazon Simple Storage Service (S3).

•

Object ID is unique per region and therefore has dependent relationship requiring information from the Logical Datacenter [cmdb_ci_logical_data_center] table, about the region where the cloud resource is being hosted. For example, AWS Datacenter [cmdb_ci_aws_datacenter], Azure Datacenter [cmdb_ci_azure_datacenter], Google Datacenter [cmdb_ci_google_datacenter] that are extended from Logical Datacenter.

Logical Datacenter itself, has two identifier entries:

- Object ID: Unique ID of the logical datacenter where applicable
- Region: The region of the cloud resource

•

Logical Datacenter has a dependency on cloud service accounts, which has two identifier entries:

- Object ID: Unique ID of the account where applicable.

- Account ID: The unique Account ID that encompasses the different cloud resources. Account ID is generally more applicable than Object ID.

For more information, see [CMDB Identification and Reconciliation \(IRE\)](#).