

Zurich ServiceNow AI Platform Capabilities

Last updated: January 16, 2026

Some examples and graphics depicted herein are provided for illustration only. No real association or connection to ServiceNow products or services is intended or should be inferred.

This PDF was created from content on docs.servicenow.com. The web site is updated frequently. For the most current ServiceNow product documentation, go to docs.servicenow.com.

Company Headquarters

2225 Lawson Lane
Santa Clara, CA 95054
United States
(408)501-8550

Working in Unified Map

Unified Map presents a graphical display of CMDB CIs and the connections between to enable powerful insights.


Opening a map

Use any of the following methods to open Unified Map:

- Navigate to **All > CMDB Workspace > Unified Map**.
- While working in the CMDB Workspace, select **Unified Map** in the Quick Links section.
- On a CI form for any CI in an **operational** state, select **Open Map** to open a map with the CI as the home node.

Note: An admin can specify additional operational status values for this option. For more information, see [Configure CIs to appear based on life cycle stage value](#).

Tip: To view a map in full-screen mode, select the Unpin All icon.

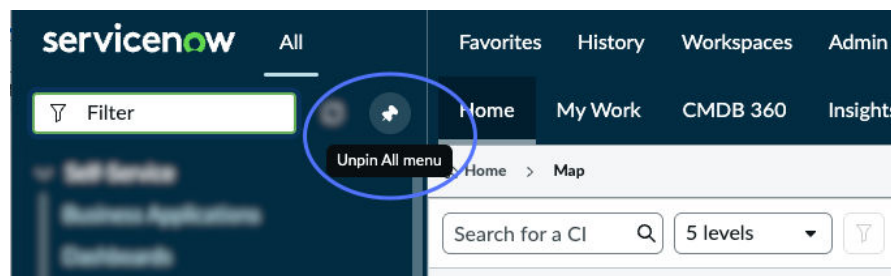

Map operations

- [Controlling Unified Map contents and appearance](#)
- [Use filters to specify which nodes should appear on a map](#)
- [View a summary of map contents on the Overview panel](#)
- [View the attributes of a CI or a relationship](#)

- View service instances for a CI
- View related items for a CI
- Viewing related items on the Unified Map timeline
- View historical changes for a CI
- Editing maps in Unified Map

Controlling Unified Map contents and appearance

Manipulating the contents and layout of a map can greatly assist with understanding and optimizing your CMDB. You can control which elements appear on the map, isolate and analyze relationships between CIs, and simplify the map to isolate issues.

Important: This topic describes changes that you can make to your view of the map. The changes do not affect other users. In contrast, administrators can configure general settings that affect all users in the workspace, as described in [Configuring Unified Map — Admin settings](#).

Save a map as a PDF document

In the toolbox, select the Export map icon  to save the current appearance of the map as a PDF document on your local drive.

Controlling map content

Controlling map content

Change	Tool and actions
Specify or change the home node	The home node is the CI that all other CIs on the map are associated with, directly or indirectly. The home node icon has a thicker border that pulsates. The

Change	Tool and actions
	map is redrawn when you specify a home node. Use either of the following methods: • Use the Search box to find and select a CI. • Right-click a node on the map and select Set as home node. Note: Connecting lines between nodes represent relationships and references, not data flow. • In the vertical layout, the home node appears at the center of CI connections. Upstream connections appear at the top and downstream at the bottom. This is the default layout for displaying mapped service instances (formerly application services) [cmdb_ci_service_discovered]. • In the force layout, the home node appears at the center of CI connections.
Reload the map after a change	Select the Reload map icon 

Change	Tool and actions
Configure a filter to display only pertinent items	Select the Filter icon  When a user applies a shared preset or a user preset, all filter settings are overridden. Filter attributes from a shared preset or a user preset that do not apply to the current map are listed in the Unused filter attributes section of the filter panel. The order of filter-setting precedence from the various sources is as follows: 1. user presets 2. shared presets 3. shared presets that are defined in a Unified Map shared presets profile 4. class profile (Class profiles contain only layer settings and are defined in the Node Map Profiles related list.) Note: Filter settings that would filter out the home node might appear in the list. You can't, however, filter out the home node even if it meets filter settings. For more information, see Use filters to specify which nodes should appear on a map.

Change	Tool and actions
Show/hide filtered items	Select the Show/Hide filtered items icon  to expose the filtered items on the map as dimmed view-only nodes. For more information, see Use filters to specify which nodes should appear on a map.
Show complete CI details	Select a CI (CI border thickens) to display its details in the Overview, Attributes, Service instances, Related items, or Changes panel. For group CIs, such as a service instance or a dynamic CI group, the Attributes panel also shows detail cards for the CIs that are members of the group.
Show relationship details	Two CIs might be connected by one or more relationships (stored in the CI Relationship [cmdb_rel_ci] table). For example, two CIs might be connected by the Runs On::Runs, Depends On::Discovered From, and by the Owned By::Owns relationships. • A solid line indicates a relationship. The arrowhead indicates the dependent node. • A dashed line indicates a reference.

Change	Tool and actions
	A badge on a line indicates the number of relationships between the CIs. Select a connection to display its attributes in the Attributes panel. For a CI with multiple relationships, select the badge to view details for all relationships.
Set the number of relationship levels to display on the map	Use the Levels drop-down list to specify how many relationship levels to display on the map (default 3). A low setting is useful for viewing a simplified map that shows only direct connections and for limiting the overall size of a map. A higher setting enables you to review more complex CMDB structures. When a mapped application service (service instance) CI is set as the home node, the Levels setting has no effect and all levels of relationships appear. Note: Connecting lines between nodes represent relationships and references, not data flow.
Highlight the relationships between CIs	Point to a CI to animate the connections between CIs. Connected nodes are highlighted for a few seconds. Two CIs might be connected by one or more relationships (stored

Change	Tool and actions
	in the CI Relationship [cmdb_rel_ci] table). For example, two CIs might be connected by the Runs On::Runs, Depends On::Discovered From, and by the Owned By::Owns relationships. • A solid line indicates a relationship. The arrowhead indicates the dependent node. • A dashed line indicates a reference. • A badge on a line indicates the number of relationships between the CIs. Note: Connecting lines between nodes represent relationships and references, not data flow.
View mapped application services (service instances)	The Service Mapping app might use mapped application services. Mapped application services appear as group CIs that you can expand to show members. Mapped application services [cmdb_ci_service_discovered] are descendents of the Service Instance [cmdb_ci_service_auto] class, such as service instances and dynamic CI groups. • A badge shows the number of members in the group.

Change	Tool and actions
	- Select the badge to expand the group and show its member CIs. Select again to collapse. - In the expanded mode, point to any member CI to temporarily highlight all group members.
Show or hide the timeline	Select the Show/Hide timeline icon . For more information, see Viewing related items on the Unified Map timeline.
View non-operational CIs	- Non-operational CIs do not appear in search results or on the map. - The Open Map button on a CI form isn't available for non-operational CIs. - Only CIs for which the Life Cycle Stage attribute is Operational or empty appear on maps. An administrator can change the default behavior to show non-operational CIs or CIs of any combination of Life Cycle Stage values. For more information, see Configure CIs to appear based on life cycle stage value.

Controlling map appearance

Controlling appearance of the map

Change	Tool and actions
Zoom in or out	Use any of the following methods: • Select + or - in the toolbox. • Scroll up or down in the map pane. • Specify a zoom value in the mini-map navigator.
Align the map to the home node	In the toolbox, select the Align to home node icon .
Fit all CIs on the map	Select the Fit to map icon . Result: Center the map on the canvas and set the zoom level to the maximum level that enables the entire map to fit on the canvas. By default, up to 250 nodes can appear on a map. CIs in a collapsed group CI are counted. Note: Admins set the maximum node count using the unifiedmap.map_search.max_nodes property in the workspace-specific [sn_cmdb_ws_config_property] table. Higher values can decrease performance.

Change	Tool and actions
Move a CI to another location	Drag a CI to a different place on the map. Map elements that are connected to that CI might be moved to accommodate the new placement.
Move the entire map on the canvas and set the zoom level	Use either of the following methods: • Drag the rectangle in the mini-map navigator. • Select an empty area on the map and drag.
Show CI key details on the map	Point to a CI to show its full name and class (or zoom into the map until those details appear), its related items details, and the direction of the CI relationships. If there are multiple related items associated with a CI, then the CI badge contains the string 'Multiple' and a badge showing the count of related items appears on the timeline. You can point to the badge on the timeline to show all related items.
Switch the layout of the map	• Vertical layout: Displays nodes in a vertical tree pattern: upstream relationships top and downstream bottom. This is the default layout for displaying mapped application services and service instances. In the

Change	Tool and actions
	toolbox, select the Vertical layout icon . Force layout: Displays nodes in a clustered arrangement around the home node, regardless of upstream or downstream relationships. In the toolbox, select the Force layout icon . Note: Connecting lines between nodes represent relationships and references, not data flow.

Use filters to specify which nodes should appear on a map

Customize the map to focus on the CIs that you want to work on by filtering out (hiding) irrelevant CIs. You can filter by layer count, CI class, relationship type, discovery source, location, and CI ownership.

Before you begin

Role required:

- To access maps: sn_cmdb_user, sn_cmdb_editor or sn_cmdb_admin
- To access maps with operational service instances: app_service_user, and sm_user or sm_admin
- To access maps with operational and non-operational service instances: app_service_admin, and sm_user or sm_admin
- To access and view related items: itil

About this task

When a user applies a shared preset or a user preset, all filter settings are overridden. Filter attributes from a shared preset or a user preset that do not apply to the current map are listed in the **Unused filter attributes** section of the filter panel. The order of filter-setting precedence from the various sources is as follows:

1. user presets
2. shared presets
3. shared presets that are defined in a **Unified Map shared presets** profile
4. class profile (Class profiles contain only layer settings and are defined in the **Node Map Profiles** related list.)

Note: Filter settings that would filter out the home node might appear in the list. You can't, however, filter out the home node even if it meets filter settings.

Procedure

1. While working in a map, select the Map filter icon  and then select or clear criteria in any filter category. Only attributes of elements currently on the map are listed as filter criteria. Attributes that do not apply to the current elements are listed in the **Unused filter attributes** list.

2. Close the Map filter panel.

- A dot appears on the Map filter icon  to indicate that filters are applied.

- To expose filtered CIs and relationships on the map as dimmed

view-only images, select the Show filtered items icon .

- You can save filter settings for reuse. For more information, see [Create or manage a user preset](#).
- Maps show up to 250 CMDB elements. Remaining elements are truncated and don't appear on the map.

What to do next

To apply the home CI's default filter settings, select **Reset filter**.

Admins can save filter settings as a shared preset that all users can apply. For more information, see [Create or manage a user preset](#).

Related tasks

- [Create or manage a user preset](#)

Create or manage a user preset

Save useful Unified Map filter settings as a user preset that you can apply to a map at any time. For example, define a filter to display only CIs of a particular class and then save the filter settings as a user preset.

Before you begin

Role required:

- To access maps: sn_cmdb_user, sn_cmdb_editor or sn_cmdb_admin
- To access maps with operational service instances: app_service_user, and sm_user or sm_admin
- To access maps with operational and non-operational service instances: app_service_admin, and sm_user or sm_admin
- To access and view related items: itil

About this task

- Follow this procedure to create a user preset that applies specified filter settings. Only you can apply your user presets to your personal view of the map.

- In addition, admins can define shared presets that you and other users can access. For more information, see [Create or manage a shared preset](#).

When a user applies a shared preset or a user preset, all filter settings are overridden. Filter attributes from a shared preset or a user preset that do not apply to the current map are listed in the **Unused filter attributes** section of the filter panel. The order of filter-setting precedence from the various sources is as follows:

1. user presets
2. shared presets
3. shared presets that are defined in a **Unified Map shared presets** profile
4. class profile (Class profiles contain only layer settings and are defined in the **Node Map Profiles** related list.)

Note: Filter settings that would filter out the home node might appear in the list. You can't, however, filter out the home node even if it meets filter settings.

Procedure

1. While working in a map, select the Map filter icon  and then select or clear criteria in any filter category. Only attributes of elements currently on the map are listed as filter criteria. Attributes that do not apply to the current elements are listed in the **Unused filter attributes** list.
2. Select the Manage presets icon  and then, in the Manage my presets list, select **Create preset**.
3. Enter a preset name and then select **Save**.
4. Close the Map filter panel.

What to do next

To apply a preset:

1. While working in a map, select the open filter panel icon 
2. Select the View preset list icon  and then select the preset.

To update a preset or save an updated version as a new preset:

1. While working in a map, select the open filter panel icon 
2. Apply the preset that you want to update and then make the desired changes.
3. Select the Manage presets icon  and then select **Update preset** or **Update shared preset**.
4. Select one of the following actions:
 - Select **Update preset** to update the current preset with the current filter settings.
 - Select **Save as new preset** and then enter a new name.
5. Select **Save**.

To delete a preset:

1. While working in a map, select the open filter panel icon 
2. Apply the preset that you want to delete.
3. Select the Manage presets icon  and then select **Delete preset** or **Delete shared preset**.
4. Select **Yes**.

To apply the home CI's default filter settings

Select **Reset filter**.

Related tasks

- Use filters to specify which nodes should appear on a map

View a summary of map contents on the Overview panel

The Overview panel displays summary data for items on the map that are associated with the home node — counts and types of CIs and connections, discovery sources, and so on.

Before you begin

Role required: sn_cmdb_user

About this task

Note: The information on the Overview panel isn't affected by zoom settings or by filter settings even if nodes that are associated with the home node are not visible on the map.

Procedure

While working in a map, in the Search bar, search for and select the CI to set as the home node and then select the Overview icon .

Overview

Home node
server1_V-W2K3-
Node01_Cluster

Home node type
Application Cluster

Cls
26

CI types
13

Connections
39

Connection types
2

Discovery sources
1

Map time
2024-10-02 14:00:46

i

Information on the Overview panel

Field	Description
Home node	The CI that is currently the home node. For more information, see Specify the home node .
Home node type	The CI type of the home node CI.
Cls	Count of CIs that are associated with the home node.
CI types	Count of types of CI for CIs that are associated with the home node.

Field	Description
Connections	Count of connections for CIs that are associated with the home node.
Connection types	Count of connection types for the CIs that are associated with the home node.
Discovery sources	Count of discovery sources related to the CIs that are associated with the home node.
Map time	The timestamp that is specified on the timeline. The time is set to "now" when you first open a map. For more information, see Viewing related items on the Unified Map timeline .

View the attributes of a CI or a relationship

Open the **Attributes** panel in Unified Map to view attributes like location and life cycle stage for a CI or a relationship.

Before you begin

Role required:

- To access maps: sn_cmdb_user, sn_cmdb_editor or sn_cmdb_admin
- To access maps with operational service instances: app_service_user, and sm_user or sm_admin
- To access maps with operational and non-operational service instances: app_service_admin, and sm_user or sm_admin

- To access and view related items: itil

About this task

When you select a group CI such as a service instance or a dynamic CI group as the home node, the **Attributes** panel shows the attributes of the group CI itself and a card for each CI and relationship member of the group. When you open a map for a service instance CI, a badge on group CIs shows the number of members. Select a badge to expand or collapse the group.

Procedure

While working in a map, select a CI or a relationship on the map and then select the Attributes icon .

Attributes

nc6500-a01

Network Gear

Class

cmdb_ci_netgear

Location

Charlotte,NC

Owned by

None

Updated

2024-07-15 23:34:52

Discovery source

Most recent discovery

None

None

Default Gateway

None

Estimated bandwidth

None

Firmware manufacturer

None

Firmware version

None

Fully qualified domain name

None

IP Address

10.2.30.1

Life Cycle Stage

None

Manufacturer

Cisco

Operational status

Operational

Physical interface count

None

Ports

512

RAM (MB)

512

PDF generated on January 16, 2026

©2026 ServiceNow. All rights reserved.

[Terms of Use](#) [Privacy Statement](#)

ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company and product names may be trademarks of the respective companies with which they are associated.

The **Attributes** panel shows the following details:

- For a non-group CI: The top section displays base properties — common key attributes, such as Class and Discovery source that appear for CIs of any class (other than service instance CIs). You cannot change the group of properties that appear in this section.
- The bottom section displays extended properties — attributes that uniquely extend the class of a CI in the CMDB hierarchy. You can specify the properties that should appear in this section. For more information, see [Configure which attributes to display in the Attributes panel](#).
- For a group CI: The top card shows attributes of the group CI. The cards in the Configuration items section display attributes for each of the group member CIs.
- For a single relationship: A card with the attributes for the selected relationship.
- For a multi-relationship badge: A card for each of the relationships in the relationship set that shows the attributes for the relationship. The number of cards is equal to the number on the relationship badge, which is a count of the different types of relationships between the two CIs in that direction. Relationship connections are based on records in the CI Relationship [cmdb_rel_ci] table.

What to do next

In a CI card on the **Service instances** panel, select the **Actions** menu and then select any of the following options:

- Select **View CI details** to open the CI form for the CI.
- Select **Open in new map** to open an additional map with the current CI set as the home node.
- Select **Set CI as home** to set the selected CI as the home node for the map.

Select a mapped service instance (formerly application service) CI [cmdb_ci_service_discovered] on the map to display its entry points on the **Attributes** panel.

View service instances for a CI

For a selected CI, the **Service instances** panel in Unified Map lists details in the Service Mapping application for all associated service instances (formerly application services).

Before you begin

Service Mapping must be installed. For more information, see [Service Mapping](#).

Role required:

- To access maps: sn_cmdb_user, sn_cmdb_editor or sn_cmdb_admin
- To access maps with operational service instances: app_service_user, and sm_user or sm_admin
- To access maps with operational and non-operational service instances: app_service_admin, and sm_user or sm_admin
- To access and view related items: itil

About this task

The information that appears on a service instance card is described in [Service Mapping data](#).

Procedure

While working in a map, select a CI on the map and then select the Service Instances icon .

The panel displays a card with details for each related service instance.

Service instances 5

Q Search

↑

Not CriticalNon-Operational

All Windows

Dynamic CI Group

OwnerNone

Classcmdb_ci_query_based_service

Discovery sourceNone

Last discoveredNone

Not CriticalOperational

Consumer Analytics

Mapped Application Service

OwnerNone

Classcmdb_ci_service_discovered

Discovery sourceNone

Last discoveredNone

Somewhat CriticalOperational

DCG1

Dynamic CI Group

OwnerNone

Classcmdb_ci_query_based_service

Discovery sourceNone

Last discoveredNone

Not CriticalOperational

PDF generated on January 16, 2026

©2026 ServiceNow. All rights reserved.

[Terms of Use](#) [Privacy Statement](#)

ServiceNow, the ServiceNow logo, Now, and other ServiceNow marks are trademarks and/or registered trademarks of ServiceNow, Inc., in the United States and/or other countries. Other company and product names may be trademarks of the respective companies with which they are associated.

What to do next

- Select another CI on the map to show its related service instances.
- Select an empty space on the map to show all service instances for any of the CIs on the map.
- In the **Service instances** (formerly Application services) panel:
 - Use the Search box to search for a specific service instance.



- Select the Open filter icon to open the filter panel, and then select a category and a sort order by which to sort the service instance cards. Close the filter panel to apply your settings.
- On an individual service instance card, select the additional actions



icon and then select one of the following options:

- Select **View CI details** to open the CI form for the service instance CI.
- Select **Open in new map** to open a new map in which the service instance is set as the home node.
- Select **Set CI as home** to set the service instance as the home node on the map and redraw the map accordingly.

Some fields, such as Business criticality, are color-coded to denote specific values. For example, a status of Most Critical is highlighted with a red background.

Related reference

- [Service Mapping data that appears on maps](#)

Service Mapping data that appears on maps

Service instances that are populated using Service Mapping methods are included in maps. Service Mapping provides significant information for mapped service instances (application services) [cmdb_ci_service_discovered] such as relationships and grouping.

Considerations

If Service Mapping is installed and the `sn_sm_scoped_app.sa.unified_map.enabled` system property is enabled, you can access Unified Map from the Service Mapping workspace. For more information, see [Access the Unified Map feature from the Service Mapping Workspace](#).

If Service Mapping is not installed, only service instances that are populated by CMDB-related methods appear on maps. Unified Map traverses the CMDB hierarchical data both up and down using user-specified levels.

Related topics

- [Configuring Service Mapping](#)

View related items for a CI

Open the **Related items** panel in Unified Map to show all related items (typically, events such as changes, active incidents, or active problems) for the selected CI.

Before you begin

Role required:


- To access maps: `sn_cmdb_user`, `sn_cmdb_editor` or `sn_cmdb_admin`
- To access maps with operational service instances: `app_service_user`, and `sm_user` or `sm_admin`
- To access maps with operational and non-operational service instances: `app_service_admin`, and `sm_user` or `sm_admin`
- To access and view related items: `itil`

About this task

Note: The timeline also indicates related items (events). One important difference is that the timeline indicates only historical related items — events that occurred before the timeline's map time. In contrast, the **Related items** panel lists all related items. For more information, see [Viewing related items on the Unified Map timeline](#).

Procedure

1. While working in a map, select a CI on the map and then select the Related items icon . Related items are grouped by category. Badges show the count of related items for the selected CI (or for all CIs if no CI is selected).

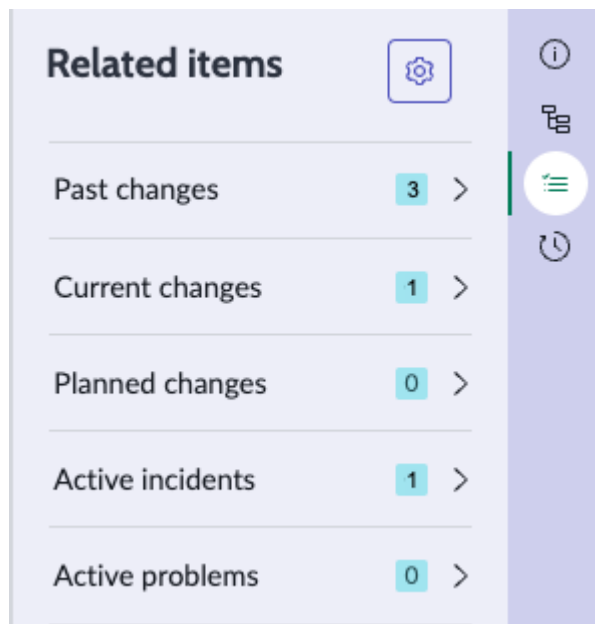

To specify which related item categories should appear on the **Related items** panel, see [Configure the Related items panel](#).

2. Select an arrow to view the details of the related item record.

Details of the change, incident, or problem appear on a card in the Related items panel. Select a card to highlight the associated CI on the map.

What to do next

- Select another CI on the map to show its related items.
- Select an empty space on the map to show all related items for all CIs on the map.
- Select a related item category with one or more items to view detailed related item cards. On a card:
 - Select the related item link to drill down to the related item record.
 - Open the filter panel to set a sorting category and order for the cards.
 - Some details, such as Priority and Risk, are color-coded using the default platform color code settings.

Configure the Related items panel

Configure which categories of related items, such as active incidents and active problems, appear on the Unified Map **Related items** panel.

Before you begin

Role required:

- To access maps: sn_cmdb_user, sn_cmdb_editor or sn_cmdb_admin
- To access maps with operational service instances: app_service_user, and sm_user or sm_admin
- To access maps with operational and non-operational service instances: app_service_admin, and sm_user or sm_admin
- To access and view related items: itil

About this task

The Related items panel groups related items by category on the side panel. Administrators configure which related item categories are globally available, and you can further customize the settings.

Procedure

1. While working in a map, select the Related items icon .
2. In the **Related items** panel, select the User preferences icon



3. In the Related items settings pop-up, move desired items to the **Selected items** list and undesired items to the **Available items** list.
4. Select **Apply**.
When you select a CI on the map, the desired related item categories appear.

Viewing related items on the Unified Map timeline

The timeline indicates related items like incidents, problems, and changes over a specified period of time for the selected CI. You can use the timeline to visualize the history of changes to a CI and how they affect the topology of the CMDB.

Viewing related items

•


When you first open a map, CIs and relationships appear as they are at the current moment in time. When you select a CI on the map, the timeline displays related items for the CI.

•

You can drag the map time marker (A in the image) on the timeline to specify the end date (the map time) for data that should appear on

the map and on the timeline. The default map time is "now", but you can specify a particular date or drag the marker to a date.

The map and the timeline are synchronized. The map shows the selected CI and its connections as they existed (based on the creation date of nodes) at the specified map time. The timeline displays markers (B in the image) to indicate related items that happened at or before map time.

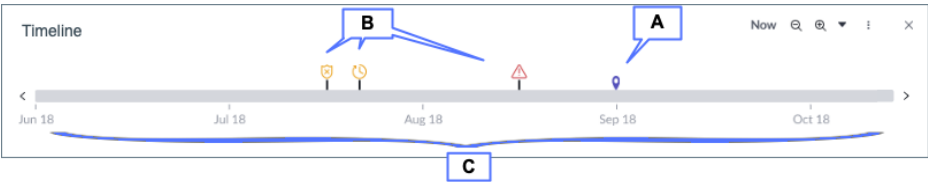

You can also specify the overall time span (C in the image) of the timeline view.

- CIs that were created after the map time don't appear on the timeline and don't affect items on the timeline.
- Multiple related items on the same date are indicated by a badge that shows the count of related items.

Actions on the timeline

Desired result	Action
Show or hide the timeline	Select the Timeline icon  .
Set the map time marker (and therefore the items on the map) to the current time	Select Now .
Set map time to a particular date and time	Drag the map time marker.

Desired result	Action
Scroll the timeline toward the past or the future	Select an arrow at the side of the timeline.
View the date and time for a related item marker	Point to the marker.
View the details for a related item	Point to the badge for the related item.
Change the time span of the timeline	Select a zoom icon  or . The time span can range from six months in the past to six months in the future. A related item that has occurred or that will occur outside the range doesn't appear on the timeline. Such related items, however, still appear in the corresponding Related items panel. In addition, a badge in the map might show data for the related item.
Manage a marker	Select the marker, select the more actions icon , and then select one of the following actions: • Replace marker: Replace the current marker with a marker for the specified date. • Clear marker: Clear all markers. • Add marker: Add a marker for the specified date.

Desired result	Action
View related items for all CIs on the map	Select an empty space on the map.

Configuring general timeline properties

Admins can configure some properties of the timeline that affect all users, such as which related item details appear on timelines. For more information, see [Configure how to display related items on the map](#).

View historical changes for a CI

The **Changes** panel in Unified Map displays change details such as changes to life cycle stage or operational state for the selected CI.

Before you begin

Role required:

- To access maps: sn_cmdb_user, sn_cmdb_editor or sn_cmdb_admin
- To access maps with operational service instances: app_service_user, and sm_user or sm_admin
- To access maps with operational and non-operational service instances: app_service_admin, and sm_user or sm_admin
- To access and view related items: itil

About this task

Changes are also indicated on the timeline. For more information, see [Viewing related items on the Unified Map timeline](#).

Procedure

1. While working in a map, select a CI on the map and then select the Changes icon .

All changes for the selected CI appear on the panel.

Changes

CMDB Admin
Field changes • 2024-07-15 16:34:00

Attestation Status Not Yet Reviewed was *Empty*

S System
Field changes • 2024-07-10 22:30:40

Vendor Amazon was *Empty*

Assigned 2023-08-21 01:00:00 was *Empty*

Installed 2023-06-18 00:00:00 was ~~2011-11-05 00:00:00~~

Model ID Asus G Series was *Empty*

System Administrator
Field changes • 2021-06-14 08:55:16

Is Virtual	false
Skip sync	false
Operational ...	Operational
Can Print	false

[Show more](#)

- Select **Show more** / **Show less** for details on a card.

•

To flag a change as important, hold the cursor over a change and then select the Flag as important icon.

2. Perform other tasks.

- Select another CI on the map to view its changes.



- Select the Open filters and then select and configure any of the following filter types:

- Post types
- Field changes
- Flagged
- Filter sets



- Select the Search icon and enter text in the Search Activity Stream field to find specific changes by entering terms.



- Select the ascending or descending sort icon to toggle between ascending or descending sort.
- Create a filter set to supplement the existing filtering options on the Changes panel. You can save filter settings for reuse. For more information, see [Create or manage a user preset](#).

Related concepts

- [Viewing related items on the Unified Map timeline](#)

Editing maps in Unified Map

While you work in the map editor, you can add a CI to the map and remove (hide) a CI from the map. Removing a CI node from a map deletes the records of the CI's relationships, but does not delete the CI record from the CMDB. You can also add, modify, and delete CI relationships in the CMDB.

Actions you can take in the map editor

You can perform the following actions in the map editor:

- Right-click a CI, relationship, or anywhere in the map to open a context menu.
- Select the Attributes icon  to manage CIs and relationships.
- Select the Add CI icon  to add an existing CI and its existing relationships to the map.
- Select a relationship or CI and then select the Manage relationship icon  to add, update, or delete relationships.
- You can remove (hide) a CI from the map only if you added it during the current editing session and have not yet saved the map. You cannot remove a CI that was on the map when you started the editing session. Select **Remove** for a CI to delete the CMDB records for all relationships to and from the CI. The CI is removed from the map, but the CI record isn't deleted from the CMDB. For more information, see [Delete a connection using the map editor](#)

Working in the map editor

- You must have either the sn_cmdb_admin or sn_cmdb_editor role to use the map editor.
- Before editing a map, prepare it to optimize your experience. Use filters and levels to display the minimum set of CIs to work on. Minimizing the map makes it easier to understand and control the effects of changes that you make.
- To edit a map, select the edit map icon . A thick blue outline on the map indicates that the map editor is active.
- While you work in the map editor, no changes are made to the CMDB until you select **Save**.
- During an editing session, related items and associate badges are not shown on the map.
- At any time, select the reset icon  to undo all unsaved changes.

- End an editing session by selecting **Exit**. You must exit the editor to access the timeline and controls (search, filter, zoom, and so on).

Adding a CI to or removing a CI from the map

- You can view an existing CI on the map to enable you to create, modify, or delete its connections.
- You can add only CIs that have existing records in the CMDB.
- If you try add a CI that already has a connection to another CI on the map, the map re-centers and the CI is highlighted. In some cases, due to filter settings, the CI isn't displayed.
- An added CI appears on the map but its CMDB record isn't changed unless you change the CI's connections and save the changes. After you add a CI, it can be saved to the map only if it has a path (direct or indirect) to the home node.
- You can remove (hide) a CI from the map only if you added it during the current editing session and have not yet saved the map. You cannot remove a CI that was on the map when you started the editing session. When you remove (hide) a CI from the map, the record of the CI in the CMDB is not deleted. In contrast, connection records for a removed CI are affected as described in [Deleting a connection](#).
- When you delete all connections between one CI and another CI so that no connection path remains to the home node, the isolated CI and all of its downstream connections are considered an island branch. When you save, changes that you made to downstream connections are saved and the island branch CI is removed from the map (hidden). The CI record is not, however, removed from the CMDB.

Creating or modifying a connection (relationship or reference) between CIs

Use the map editor to add a connection between two CIs or to modify an existing connection.

To learn more, see [CI relationships in the CMDB](#).

Deleting a connection

Warning: Deleting a connection might result in an invalid CMDB state. Attempting to save a map that includes an orphan CI generates a warning.

Connections that are not editable are dimmed and view-only.

-

When you delete a connection, the connection is removed from the map (hidden). The relationship is deleted from the [cmdb_ci_rel] table only when you save your changes.

- When you delete all connections between one CI and another CI so that no connection path remains to the home node, the isolated CI and all of its downstream connections are considered an island branch. When you save, changes that you made to downstream connections are saved and the island branch CI is removed from the map (hidden). The CI record is not, however, removed from the CMDB.
- When you delete all connections to and from a CI and save the change, the following actions occur:
 - The records of all relationships — both upstream to and downstream from — the CI are deleted from the CMDB [cmdb_ci_rel] table.
 - The CI is removed from the map (hidden).
 - The record of the CI in the CMDB is not deleted.

Limitations

The map editor does not support the following actions:

- Editing mapped application services (service instances).
- Deleting a CI record from or adding a CI record to the CMDB.
- Attempting to save a map that includes an orphan CI generates a warning.
- Adding endpoint CIs to or removing endpoint CIs from the map.

- Deleting reference or endpoint connections or removing from the map a CI that has reference or endpoint connections.
- Updating the applicative flow relationship type (connection between endpoint CIs).

Related tasks

- [Add a suggested relationship](#)
- [Add a CI to a map using the map editor](#)
- [Create or modify a connection using the map editor](#)
- [Delete a connection using the map editor](#)

Related concepts

- [CI relationships in the CMDB](#)

Related reference

- [Suggested class relationships](#)

Add a CI to a map using the map editor

You can view an existing CI on the map to enable you to create, modify, or delete its connections.

Before you begin

Role required: `sn_cmdb_admin` or `sn_cmdb_editor`

About this task

- You can add only one CI at a time.
- You can remove an added CI from the map if you have not yet saved the CI to the map.
- You can add only CIs that have existing records in the CMDB.

- If you try add a CI that already has a connection to another CI on the map, the map re-centers and the CI is highlighted. In some cases, due to filter settings, the CI isn't displayed.
- An added CI appears on the map but its CMDB record isn't changed unless you change the CI's connections and save the changes.
- The map editor doesn't support adding endpoint CIs.
- After you add a CI, it can be saved to the map only if it has a path (direct or indirect) to the home node.

Procedure

1. While working in a map, select the edit map icon  and then take one of the following actions:
 - Right-click in a blank spot on the map and select **Add CI**.
 - Select the Add CI icon .
2. On the Add a CI panel, specify the class of CI to add.
3. Define a filter that will generate a list of CIs of the class that you specified.
 - a. Select one CI in the filtered results list and then select **Apply filters**.
 - b. (Optional) Save the condition set as a custom filter for future use.
 Select the save custom icon  and specify a name for the filter.
 You can select the filter whenever you add a CI.
4. To add a CI that is already connected to another CI on the map, select **Add to map** or skip this step for a CI that is not yet connected to another CI on the map.

The map re-centers on the added CI. Skip the remaining steps.

5. To add a CI that is not yet connected to another CI on the map, select **Add to map and connect**.
 The map re-centers on the added CI and the Manage connection panel  opens.

6. On the Manage connection panel () , specify the settings.

Manage connection panel

Field	Description
Source CI	You can select the swap icon  to swap source and target. Note: In the context of a CI relationship, this is the parent CI.
Target CI	You can select the swap icon  to swap source and target. Note: In the context of a CI relationship, this is the child CI.
Show suggested relationships	Option to control the contents of the Relationship type selection box: The relationship types that are most appropriate for the two CIs appear at the top of the list.
Relationship type	The relationship between the CIs. For example, the relationship between the parent 'Tomcat' and the child 'WAR File' is Contains::Contained By.

7. When you have specified all connection settings, select **Create connection**.

Remove a CI from a map using the map editor

You can remove (hide) a CI from the map only if you added it during the current editing session and have not yet saved the map. You cannot remove a CI that was on the map when you started the editing session.

Before you begin

Role required: admin

About this task

When you remove (hide) a CI from the map, the record of the CI in the CMDB is not deleted. In contrast, connection records for a removed CI are affected as described in [Deleting a connection](#).

Procedure

While editing a map, take one of the following actions:

- Select the CI and then select **Remove** in the Attributes panel.
- Right-click the CI and then select **Remove**.

Create or modify a connection using the map editor

Use the map editor to add a relationship between two CIs or to modify an existing relationship.

Before you begin

Role required: sn_cmdb_admin or sn_cmdb_editor

About this task

- A solid line indicates a relationship. The arrowhead indicates the dependent node.
- A dashed line indicates a reference.
- A badge on a line indicates the number of relationships between the CIs.

Two CIs might be connected by one or more relationships (stored in the CI Relationship [cmdb_rel_ci] table). For example, two CIs might be connected by the Runs On::Runs, Depends On::Discovered From, and by the Owned By::Owns relationships.

You can learn more about relationships at [CI relationships in the CMDB](#).

The map editor does not support the following actions:

- Editing mapped application services (service instances).
- Deleting reference or endpoint connections or removing from the map a CI that has reference or endpoint connections.
- Updating the applicative flow relationship type (connection between endpoint CIs).

Note: At any time, select the reset icon  to undo all unsaved changes.

Procedure

1. While editing a map, specify whether to create or modify a connection.

Action	Procedure
Create a connection	Take one of the following actions: • Right-click a CI and select Connect to. • Select a CI for the connection (either the parent or the child) and then select the Manage connection icon .
Modify an existing connection	Take one of the following actions:

Action	Procedure
	• Select the connection and then select the Manage connection icon . • Select a CI for the connection (either the parent or the child) and then select the Attributes icon . All connections for the CI are listed in boxes. Source CI SAP AppSRV01 Target CI SAP ORA01 Relationship Type Depends on:Used by Remove Change Select Change.
Delete a connection	For instructions, see Delete a connection using the map editor .

2. On the Manage connection panel (), specify the settings.

Manage connection panel

Field	Description
Source CI	You can select the swap icon  to swap source and target. Note: In the context of a CI relationship, this is the parent CI.

Field	Description
Target CI	You can select the swap icon  to swap source and target. Note: In the context of a CI relationship, this is the child CI.
Show suggested relationships	Option to control the contents of the Relationship type selection box: The relationship types that are most appropriate for the two CIs appear at the top of the list.
Relationship type	The relationship between the CIs. For example, the relationship between the parent 'Tomcat' and the child 'WAR File' is Contains::Contained By.

- When you have specified all connection settings, select **Change** to change an existing connection or **Create connection** to add a connection.

Related tasks

- [Add a suggested relationship](#)
- [Delete a connection using the map editor](#)

Related concepts

- [CI relationships in the CMDB](#)
- [Editing maps in Unified Map](#)

Related reference

- [Suggested class relationships](#)

Delete a connection using the map editor

While editing a map, you can delete a connection (a relationship record) from the CMDB. The CIs that are involved in the connection are not deleted from the CMDB.

Before you begin

Role required: `sn_cmdb_admin` or `sn_cmdb_editor`

About this task

Warning: Deleting a connection might result in an invalid CMDB state. Attempting to save a map that includes an orphan CI generates a warning.

The map editor does not support the following actions:

- Editing mapped application services (service instances).
- Deleting reference or endpoint connections or removing from the map a CI that has reference or endpoint connections.
- Updating the applicative flow relationship type (connection between endpoint CIs).
-

When you delete a connection, the connection is removed from the map (hidden). The relationship is deleted from the `[cmdb_ci_rel]` table only when you save your changes.

- When you delete all connections between one CI and another CI so that no connection path remains to the home node, the isolated CI and all of its downstream connections are considered an island branch. When you save, changes that you made to downstream connections are saved and the island branch CI is removed from the map (hidden). The CI record is not, however, removed from the CMDB.

- When you delete all connections to and from a CI and save the change, the following actions occur:
 - The records of all relationships — both upstream to and downstream from — the CI are deleted from the CMDB [cmdb_ci_rel] table.
 - The CI is removed from the map (hidden).
 - The record of the CI in the CMDB is not deleted.

You can learn more about relationships at [CI relationships in the CMDB](#).

At any time, select the reset icon  to undo all unsaved changes.

Procedure

1. While editing a map, take one of the following actions:

Note: No deletions happen until you select **Save**.

- To delete a single connection, select it and then select **Delete** in the Attributes panel. Alternatively, right-click the connection and then select **Delete**.
- To delete only particular connections for a CI, select the CI. In the editing panel, scroll to the connections and select **Delete**.
- To delete all connections both upstream and downstream of a CI, select the CI and then select **Remove CI**.

2. Deletions happen when you select **Save**.

Related tasks

- [Add a suggested relationship](#)
- [Create or modify a connection using the map editor](#)

Related concepts

- [CI relationships in the CMDB](#)

Related reference

- [Suggested class relationships](#)