


WILDFLY




Joseba Diaz Gonzalez 2º DAW

- En primer lugar descargamos la imagen en el Docker Hub:

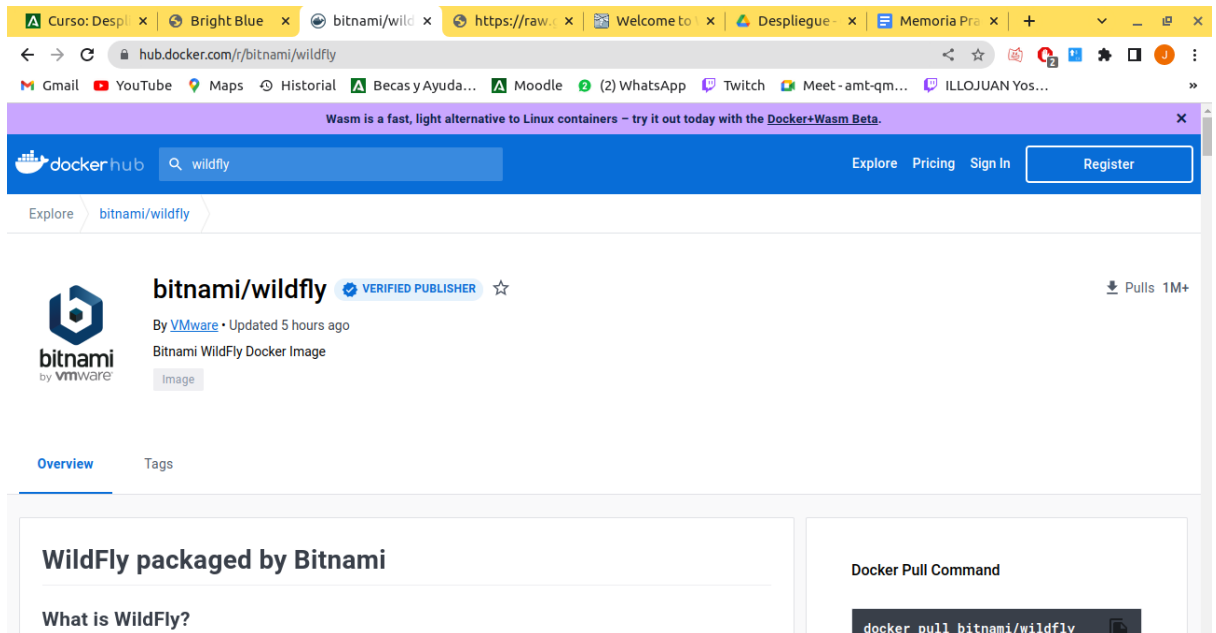

- A continuación, levantamos el contenedor con `docker-compose up` y ahora nos vamos al navegador e introducimos el puerto en el que está corriendo y nos sale la siguiente página:

```
estudiante@DAW1: ~  
estudiante@DAW1:~$ curl -sSL https://raw.githubusercontent.com/bitnami/containers/main/bitnami/wildfly/docker-compose.yml > docker-compose.yml  
estudiante@DAW1:~$ docker-compose up -d  
Creating network "estudiante_default" with the default driver  
Creating volume "estudiante_wildfly_data" with local driver  
Pulling wildfly (docker.io/bitnami/wildfly:27)...  
27: Pulling from bitnami/wildfly  
dc7f5a1b7281: Downloading [>] 311.3kB/30.89MB  
dc7f5a1b7281: Downloading [==>] 2.198MB/30.89MB  
dc7f5a1b7281: Downloading [===>] 3.14MB/30.89MB  
dc7f5a1b7281: Downloading [====>] 4.082MB/30.89MB  
dc7f5a1b7281: Downloading [=====>] 5.036MB/30.89MB  
dc7f5a1b7281: Downloading [=====>] 5.659MB/30.89MB  
dc7f5a1b7281: Pull complete  
64a0dced5e15: Downloading [=====>] 299.3MB/445.5MB
```



Welcome to WildFly

Your WildFly instance is running.

[Documentation](#) | [Quickstarts](#) | [Administration Console](#)

[WildFly Project](#) | [User Forum](#) | [Report an issue](#)

JBoss Community

To replace this page simply deploy your own war with / as its context path.
To disable it, remove the "welcome-content" handler for location / in the undertow subsystem.