

# <sup>1</sup> Cardiotensor: A Python Library for Orientation Analysis and Tractography in 3D Cardiac Imaging

<sup>3</sup> **Joseph Brunet**  <sup>1,2</sup>, **Lisa Chestnutt**  <sup>3</sup>, **Matthieu Chourrout**  <sup>1</sup>, **Hector Dejea**  <sup>2</sup>, **Vaishnavi Sabarigirivasan**  <sup>3,4</sup>, **Peter D. Lee**  <sup>1,5</sup>, and **Andrew C. Cook** 

<sup>6</sup> **1** Department of Mechanical Engineering, University College London, London, UK **2** European Synchrotron Radiation Facility, Grenoble, France **3** UCL Institute of Cardiovascular Science, London, UK **4** UCL Division of Medicine, University College London, London, UK **5** Research Complex at Harwell, Didcot, UK

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

## Software

- <sup>10</sup> [Review](#) 
- [Repository](#) 
- [Archive](#) 

Editor: [Open Journals](#) 

## Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

## License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).  


## <sup>10</sup> Summary

<sup>11</sup> Understanding the architecture of the human heart requires analysis of its microstructural organization across scales. With the advent of high-resolution imaging techniques such as synchrotron-based tomography, it has become possible to visualize entire hearts at micron-scale resolution. However, translating these large, complex volumetric datasets into interpretable, quantitative descriptors of cardiac organization remains a major challenge. Here we present cardiotensor, an open-source Python package designed to quantify 3D cardiomyocyte orientation in whole- or partial-heart imaging datasets. It provides efficient, scalable implementations of structure tensor analysis, enabling extraction of directional metrics such as helical angle (HA), intrusion angle (IA), and fractional anisotropy (FA). The package supports datasets reaching teravoxel-scale and is optimized for high-performance computing environments, including parallel and chunk-based processing pipelines. In addition, cardiotensor includes tractography functionality to reconstruct continuous cardiomyocyte trajectories. This enables multi-scale myoaggregate visualization down to the myocyte level, depending on resolution. These capabilities enable detailed structural mapping of cardiac tissue, supporting the assessment of anatomical continuity and regional organization.

## <sup>26</sup> Statement of Need


<sup>27</sup> Despite major advances in high-resolution 3D imaging, there is a lack of open-source tools to analyze cardiomyocyte orientation in large volumetric datasets. Most established frameworks were developed for diffusion tensor MRI (DT-MRI), where orientation is inferred from local diffusion of water. Examples include MRtrix3 ([Tournier et al., 2019](#)), DIPY ([Garyfallidis et al., 2014](#)), and DSI Studio ([Yeh, 2025](#)). While powerful for diffusion-based neuro and cardiac applications ([Mekkaoui et al., 2017](#)), these packages are not designed to handle direct image-gradient-based orientation estimation or the teravoxel-scale datasets produced by synchrotron tomography, micro-CT, or 3D optical microscopy.

<sup>35</sup> For non-diffusion imaging modalities, such as micro-CT ([Reichardt et al., 2020](#)), optical microscopy ([Dileep et al., 2023; Garcia-Canadilla et al., 2022](#)), and synchrotron tomography ([Brunet et al., 2024; Dejea et al., 2019](#)), researchers have historically relied on custom structure tensor implementations to estimate myoaggregate orientation directly from image intensity gradients. However, most of these are in-house codes, often unpublished or not scalable. Existing tools like OrientationJ (Fiji) and OrientationPy (Python) enable 2D and 3D structure tensor analysis ([Navaee et al., 2023](#)), but are not optimized for teravoxel-scale datasets, do not

42 compute classical cardiac microstructure descriptors such as HA and IA, and do not support  
 43 tractography for myoaggregate orientation mapping.

44 Cardiotensor addresses this gap by providing an open-source Python package specifically  
 45 tailored to structure tensor analysis of large cardiac volumes. Rather than relying on diffusion  
 46 modeling, cardiotensor infers tissue orientation directly from image intensity gradients, making  
 47 it applicable across a wide range of modalities and scales. Previous studies have demonstrated  
 48 strong agreement between structure tensor-based orientation and DT-MRI-derived metrics  
 49 when applied to the same human hearts (Teh et al., 2016). The package supports full pipelines  
 50 from raw image stacks to myocyte orientation maps and tractography. Its architecture is  
 51 optimized for large datasets, using chunked and parallel processing suitable for high-performance  
 52 computing environments.

53 Cardiotensor has already been successfully applied in published work to characterize 3D  
 54 cardiomyocyte architecture in healthy and diseased human hearts using synchrotron tomography  
 55 (Brunet et al., 2024) to datasets over a terabyte in size. While cardiotensor was conceived  
 56 for cardiac imaging, the package is modality- and tissue-agnostic. Any volumetric dataset  
 57 exhibiting coherent fibrous microstructure can be analyzed, including brain white matter,  
 58 skeletal muscle, and tendon. This generality makes the library useful for both cardiovascular  
 59 and broader anatomical or histological studies.

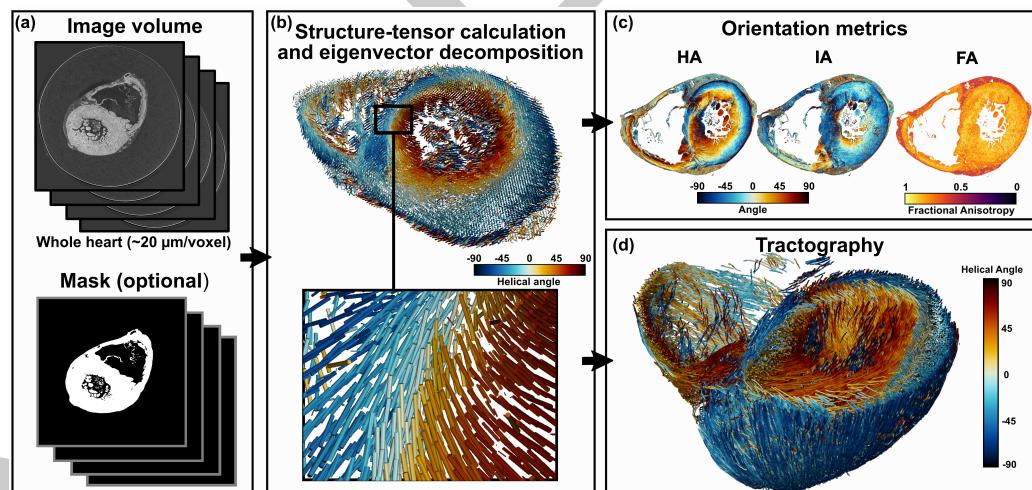

**Figure 1:** Cardiotensor pipeline for 3D cardiac orientation analysis and tractography. (a) Input whole- or partial-heart volume with optional myocardial mask. (b) Local cardiomyocyte orientation estimated via 3D structure tensor and eigenvector decomposition. The third eigenvector field (smallest eigenvalue) is visualized as arrows color-coded by helical angle (HA); inset shows structure tensor orientation in the ventricular septum. (c) Transformation to a cylindrical coordinate system enables computation of voxel-wise helical angle (HA), intrusion angle (IA), and fractional anisotropy (FA) maps. (d) Streamline tractography reconstructs continuous cardiomyocyte trajectories, color-coded by HA.

## 60 Implementation

61 Cardiotensor is implemented in Python and designed to efficiently process very large 3D cardiac  
 62 imaging datasets. It relies primarily on NumPy (Van Der Walt et al., 2011) for numerical  
 63 computation, with I/O accelerated by tifffile (Gohlke, 2025), Glymur (Evans, 2025), and  
 64 OpenCV (Bradski, 2000). Dask (Rocklin, 2015) is used exclusively to parallelize file reading,  
 65 while the core computations rely on Python's multiprocessing module for local parallelism.  
 66 The package builds on the structure-tensor library (Jeppesen et al., 2021) to calculate the 3D  
 67 structure tensor and eigenvector decomposition.

68 The package supports multiple use cases:

- 69     ▪ Command-line workflows, which automate batch processing from a configuration file of  
70       terabyte-scale heart volumes and produce results as live plots or files saved to disk.
- 71     ▪ Embedded use in larger Python analysis workflows, enabling flexible scripting and scalable  
72       execution on cluster environments.

73     Efficient computation is achieved through a chunk-based processing strategy with padding,  
74       which avoids edge artifacts. This architecture allows parallelization across computing clusters by  
75       splitting volumes into independent jobs, enabling cardiotensor to process whole-heart volumes  
76       in hours rather than days while maintaining practical memory requirements.

## 77     Architecture

78     Cardiotensor is organized into five main modules, designed for clarity and scalability:

- 79       ▪ **orientation**: Computes local cardiomyocyte (or other texture feature) orientation using  
80        a chunked 3D structure tensor pipeline, including eigenvalue decomposition, cylindrical  
81        coordinate rotation, and calculation of helical angle (HA), intrusion angle (IA), and  
82        fractional anisotropy (FA).
- 83       ▪ **tractography**: Generates and filters streamlines tracing cardiomyocyte trajectories from  
84        the orientation field for myoaggregate-level reconstruction and analysis.
- 85       ▪ **analysis**: Provides a GUI for regional quantification and plotting transmural profile.
- 86       ▪ **visualization**: Supports interactive 3D visualization of vector fields and streamlines,  
87        HA color-coding, and export to VTK/ParaView for large-scale rendering.
- 88       ▪ **utils**: Contains general utilities for I/O, image preprocessing, configuration parsing,  
89        and vector math, supporting the entire pipeline.

90     This modular architecture ensures reproducibility, maintainability, and easy integration into  
91       larger cardiac imaging workflows.

## 92     Documentation and Usage

93     The documentation for cardiotensor is available online at:

94     <https://josephbrunet.github.io/cardiotensor>

95     The main components of the documentation are:

- 96       ▪ Step-by-step walkthroughs for installation, first steps, and a guided example covering all  
97        available commands. A small example dataset and its corresponding mask are provided  
98        with the package.
- 99       ▪ In-depth explanations of the core algorithms used in cardiotensor, including structure  
100        tensor theory, helical angle calculation, fractional anisotropy (FA), and tractography  
101        integration.
- 102       ▪ Reference guides for the command-line interface, configuration file format, and public  
103        API.

## 104     Acknowledgements

105     The authors would like to thank David Stansby for his guidance on the Python package  
106       structure, documentation framework, and best practices for scientific software development.

107     This work was supported in part by the Chan Zuckerberg Initiative DAF (grant 2022-316777),  
108       the Wellcome Trust (310796/Z/24/Z), and the Additional Ventures Single Ventricle Research  
109       Fund (grant 1019894).

110     The authors gratefully acknowledge ESRF beamtimes md1290 and md1389 on BM18 as sources  
111       of the data.

112 Peter D. Lee is a CIFAR MacMillan Fellow in the Multiscale Human program and acknowledges  
113 funding from a RAEng Chair in Emerging Technologies (CiET1819/10). This research is also  
114 based on work supported by a CIFAR Catalyst Award.

115 AC's research is enabled through the Noé Heart Centre Laboratories, which are gratefully  
116 supported by the Rachel Charitable Trust via Great Ormond Street Hospital Children's Charity  
117 (GOSH Charity). The Noé Heart Centre Laboratories are based in The Zayed Centre for  
118 Research into Rare Disease in Children, which was made possible thanks to Her Highness  
119 Sheikha Fatima bint Mubarak, wife of the late Sheikh Zayed bin Sultan Al Nahyan, founding  
120 father of the United Arab Emirates, as well as other generous funders.

## 121 References

- 122 Bradski, G. (2000). The opencv library. *Dr. Dobb's Journal: Software Tools for the Professional*  
123 *Programmer*, 25(11), 120–123.
- 124 Brunet, J., Cook, A. C., Walsh, C. L., Cranley, J., Tafforeau, P., Engel, K., Arthurs, O.,  
125 Berruyer, C., Burke O'Leary, E., Bellier, A., Torii, R., Werlein, C., Jonigk, D. D., Ackermann,  
126 M., Dollman, K., & Lee, P. D. (2024). Multidimensional Analysis of the Adult Human  
127 Heart in Health and Disease Using Hierarchical Phase-Contrast Tomography. *Radiology*,  
128 312(1), e232731. <https://doi.org/10.1148/radiol.232731>
- 129 Dejea, H., Garcia-Canadilla, P., Cook, A. C., Guasch, E., Zamora, M., Crispi, F., Stampanoni,  
130 M., Bijnens, B., & Bonnin, A. (2019). Comprehensive Analysis of Animal Models of  
131 Cardiovascular Disease using Multiscale X-Ray Phase Contrast Tomography. *Scientific*  
132 *Reports*, 9(1), 6996. <https://doi.org/10.1038/s41598-019-43407-z>
- 133 Dileep, D., Syed, T. A., Sloan, T. F., Dhandapani, P. S., Siddiqi, K., & Sirajuddin, M. (2023).  
134 Cardiomyocyte orientation recovery at micrometer scale reveals long-axis fiber continuum  
135 in heart walls. *The EMBO Journal*, 42(19), e113288. <https://doi.org/10.15252/embj.2022113288>
- 137 Evans, J. G. (2025). *Quintusdias/glymur*. <https://github.com/quintusdias/glymur>
- 138 Garcia-Canadilla, P., Mohun, T. J., Bijnens, B., & Cook, A. C. (2022). Detailed quantification  
139 of cardiac ventricular myocardial architecture in the embryonic and fetal mouse heart  
140 by application of structure tensor analysis to high resolution episcopic microscopic data.  
141 *Frontiers in Cell and Developmental Biology*, 10, 1000684. <https://doi.org/10.3389/fcell.2022.1000684>
- 143 Garyfallidis, E., Brett, M., Amirbekian, B., Rokem, A., Van Der Walt, S., Descoteaux, M.,  
144 Nimmo-Smith, I., & Dipy Contributors. (2014). Dipy, a library for the analysis of diffusion  
145 MRI data. *Frontiers in Neuroinformatics*, 8. <https://doi.org/10.3389/fninf.2014.00008>
- 146 Gohlke, C. (2025). *Tifffile*. <https://github.com/cgohlke/tifffile>
- 147 Jeppesen, N., Mikkelsen, L. P., Dahl, A. B., Christensen, A. N., & Dahl, V. A. (2021). Quantifying  
148 effects of manufacturing methods on fiber orientation in unidirectional composites  
149 using structure tensor analysis. *Composites Part A: Applied Science and Manufacturing*,  
150 149, 106541. <https://doi.org/10.1016/j.compositesa.2021.106541>
- 151 Mekkaoui, C., Reese, T. G., Jackowski, M. P., Bhat, H., & Sosnovik, D. E. (2017). Diffusion  
152 MRI in the heart. *NMR in Biomedicine*, 30(3), e3426. <https://doi.org/10.1002/nbm.3426>
- 153 Navaee, F., Khornian, N., Longet, D., Heub, S., Boder-Pasche, S., Weder, G., Kleger, A.,  
154 Renaud, P., & Braschler, T. (2023). A three-dimensional engineered cardiac in vitro model:  
155 Controlled alignment of cardiomyocytes in 3D microphysiological systems. *Cells*, 12(4),  
156 576.
- 157 Reichardt, M., Töpperwien, M., Khan, A., Alves, F., & Salditt, T. (2020). Fiber orientation

- 158        in a whole mouse heart reconstructed by laboratory phase-contrast micro-CT. *Journal of*  
159        *Medical Imaging*, 7(02), 1. <https://doi.org/10.1117/1.JMI.7.2.023501>
- 160        Rocklin, M. (2015). *Dask: Parallel Computation with Blocked algorithms and Task Scheduling*.  
161        126–132. <https://doi.org/10.25080/Majora-7b98e3ed-013>
- 162        Teh, I., McClymont, D., Zdora, M.-C., Whittington, H. J., Davidoiu, V., Lee, J., Lygate,  
163        C. A., Rau, C., Zanette, I., & Schneider, J. E. (2016). Validation of diffusion tensor  
164        MRI measurements of cardiac microstructure with structure tensor synchrotron radiation  
165        imaging. *Journal of Cardiovascular Magnetic Resonance*, 19(1), 31. <https://doi.org/10.1186/s12968-017-0342-x>
- 166        Tournier, J.-D., Smith, R., Raffelt, D., Tabbara, R., Dhollander, T., Pietsch, M., Christiaens,  
167        D., Jeurissen, B., Yeh, C.-H., & Connelly, A. (2019). MRtrix3: A fast, flexible and open  
168        software framework for medical image processing and visualisation. *NeuroImage*, 202,  
169        116137. <https://doi.org/10.1016/j.neuroimage.2019.116137>
- 170        Van Der Walt, S., Colbert, S. C., & Varoquaux, G. (2011). The NumPy Array: A Structure  
171        for Efficient Numerical Computation. *Computing in Science & Engineering*, 13(2), 22–30.  
172        <https://doi.org/10.1109/MCSE.2011.37>
- 173        Yeh, F.-C. (2025). DSI Studio: An integrated tractography platform and fiber data hub for ac-  
174        celerating brain research. *Nature Methods*. <https://doi.org/10.1038/s41592-025-02762-8>
- 175