

Selftestengine 1z0-803 216q

Number: 1z0-803
Passing Score: 800
Time Limit: 120 min
File Version: 26.5



<http://www.gratisexam.com/>

Oracle 1z0-803

Java SE 7 Programmer I



Nicely written Questions with many corrections inside.

Exam A

QUESTION 1

Given the code fragment:

```
int[][] array2D = { {0,1,2}, {3,4,5,6} };  
System.out.print(array2D[0].length + " ");  
System.out.print(array2D[1].getClass().isArray() + " ");  
System.out.println(array2D[0][1]);
```

What is the result?

- A. 3 false 1
- B. 2 true 3
- C. 2 false 3
- D. 3 true 1
- E. 3 false 3
- F. 2 true 1
- G. 2 false 1

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The length of the element with index 0, {0, 1, 2}, is 3. Output: 3 The element with index 1, {3, 4, 5, 6}, is of type array. Output: true The element with index 0, {0, 1, 2} has the element with index 1: 1. Output: 1

QUESTION 2

View the exhibit:

```

public class Student {
    public String name = "";
    public int age = 0;
    public String major = "Undeclared";
    public boolean fulltime = true;

    public void display(){
        System.out.println("Name: " + name + " Major: " + major);
    }

    public boolean isFulltime(){
        return fulltime;
    }
}

```

Real 2
Oracle 1z0-803 Exam

Given:

```

public class TestStudent {

    public static void main(String[] args) {
        Student bob = new Student();
        Student jian = new Student();

        bob.name = "Bob";
        bob.age = 19;
        jian = bob;
        jian.name = "Jian";
        System.out.println("Bob's Name: " + bob.name);
    }
}

```

What is the result when this program is executed?

- A. Bob's Name: Bob
- B. Bob's Name: Jian
- C. Nothing prints
- D. Bob's name

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

After the statement `jian = bob`; the jian will reference the same object as bob.

QUESTION 3

Given the code fragment:

```
String valid = "true";  
if (valid) System.out.println("valid");  
else      System.out.println("not valid");
```

What is the result?



<http://www.gratisexam.com/>

- A. Valid
- B. Not valid
- C. Compilation fails

D. An IllegalArgumentException is thrown at run time

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Real 3

Oracle 1z0-803 Exam

In segment 'if (valid)' valid must be of type boolean, but it is a string.
This makes the compilation fail.

QUESTION 4

Given:

```
public class ScopeTest {  
    int z;  
    public static void main(String[] args) {  
        ScopeTest myScope = new ScopeTest();  
        int z = 6;  
        System.out.println(z);  
        myScope.doStuff();  
        System.out.println(z);  
        System.out.println(myScope.z);  
    }  
    void doStuff() {  
        int z = 5;  
        doStuff2();  
        System.out.println(z);  
    }  
    void doStuff2() {  
        z = 4;  
    }  
}
```

What is the result?

- A. 6
- B. 6
- C. 6
- D. 6

Real 4

Oracle 1z0-803 Exam

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:


Explanation:

Within main z is assigned 6. z is printed. Output: 6 Within doStuff z is assigned 5. DoStuff2 locally sets z to 4 (but MyScope.z is set to 4), but in doStuff z is still 5. z is printed. Output: 5

Again z is printed within main (with local z set to 6). Output: 6 Finally MyScope.z is printed. MyScope.z has been set to 4 within doStuff2(). Output: 4

QUESTION 5

Which two are valid instantiations and initializations of a multi dimensional array?

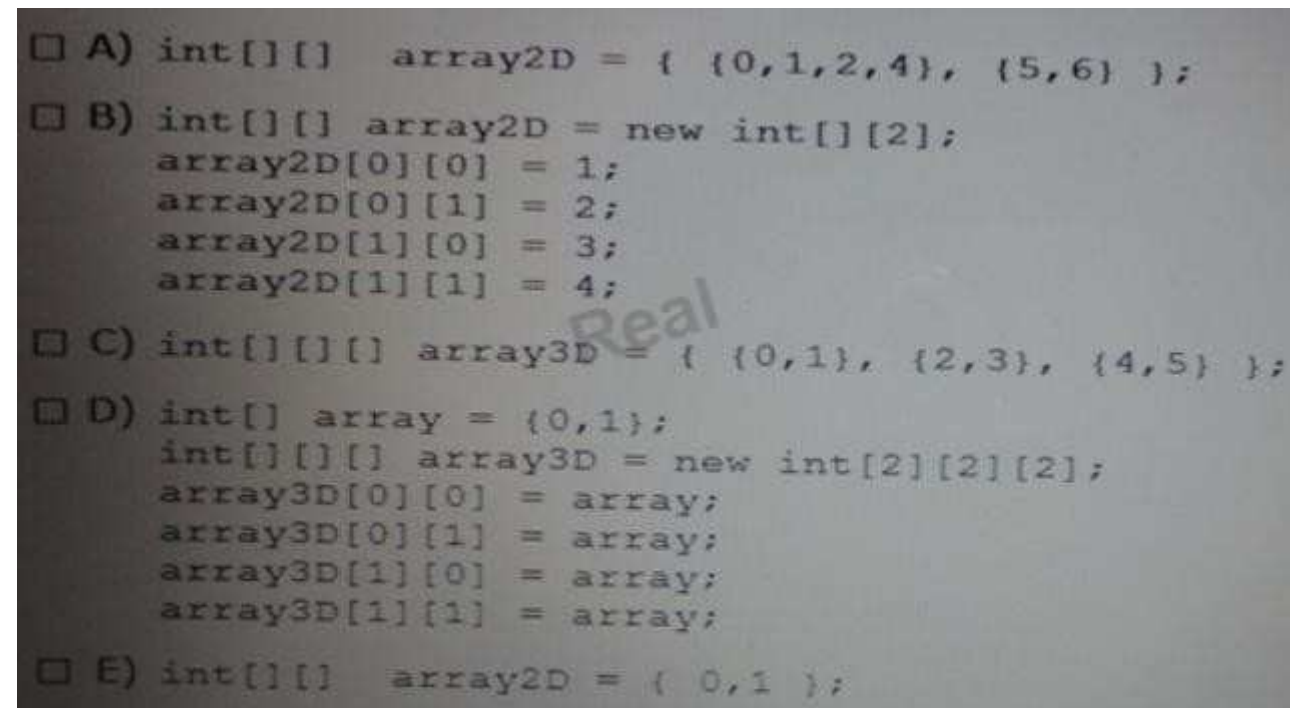

- A. Option A
- B. Option B
- C. Option C
- D. Option D

E. Option E

Correct Answer: BD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

In the Java programming language, a multidimensional array is simply an array whose components are themselves arrays.

Real 5

Oracle 1z0-803 Exam

QUESTION 6

An unchecked exception occurs in a method dosomething()

Should other code be added in the dosomething() method for it to compile and execute?

- A. The Exception must be caught
- B. The Exception must be declared to be thrown.
- C. The Exception must be caught or declared to be thrown.
- D. No other code needs to be added.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Because the Java programming language does not require methods to catch or to specify unchecked exceptions (RuntimeException, Error, and their subclasses), programmers may be tempted to write code that throws only unchecked exceptions or to make all their exception subclasses inherit from RuntimeException. Both of these shortcuts allow programmers to write code without bothering with compiler errors and without bothering to specify or to catch any exceptions. Although this may seem convenient to the programmer, it sidesteps the intent of the catch or specify requirement and can cause problems for others using your classes.

QUESTION 7

Given the code fragment:


```
int b = 4;  
b--;  
System.out.println(--b);  
System.out.println(b);
```

What is the result?

- A. 2
- B. 1
- Real 6
Oracle 1z0-803 Exam
- C. 3
- D. 3

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Variable b is set to 4.

Variable b is decreased to 3.

Variable b is decreased to 2 and then printed. Output: 2 Variable b is printed. Output: 2

QUESTION 8

Given the code fragment:

```
interface SampleClosable {  
  
    public void close () throws java.io.IOException;  
  
}
```

Which three implementations are valid?

☐ A) public class Test implements SampleCloseable {
 public void close() throws java.io.IOException {
 // do something
 }
}

☐ B) public class Test implements SampleCloseable {
 public void close() throws Exception {
 // do something
 }
}

☐ C) public class Test implements SampleCloseable {
 public void close() throws java.io.FileNotFoundException {
 // do something
 }
}

☐ D) public class Test extends SampleCloseable {
 public void close() throws java.io.IOException {
 // do something
 }
}

☐ E) public class Test implements SampleCloseable {
 public void close() {
 // do something
 }
}

Real 7
Oracle 1z0-803 Exam

- A. Option A
- B. Option B
- C. Option C

- D. Option D
- E. Option E

Correct Answer: ACE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

A: Throwing the same exception is fine.

C: Using a subclass of java.io.IOException (here java.io.FileNotFoundException) is fine

E: Not using a throw clause is fine.

QUESTION 9

Given the code fragment:

```
int [][] array = {{0}, {0, 1}, {0, 2, 4}, {0, 3, 6, 9}, {0, 4, 8, 12, 16}};
```

```
System.out.println(array [4] [1]);
```

```
System.out.println (array) [1] [4]);
```

What is the result?

- A. 4
Null
- B. Null
- C. An IllegalArgumentException is thrown at run time
- D. 4
An ArrayIndexOutOfBoundsException is thrown at run time

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The first println statement, `System.out.println(array [4][1]);`, works fine. It selects the element/array with index 4, {0, 4, 8, 12, 16}, and from this array it selects the element with index 1, 4. Output: 4 The second println statement, `System.out.println(array) [1][4]);`, fails. It selects the array/element with index 1, {0, 1}, and from this array it try to select the element with index 4. This causes an exception.

Output:
Real 8
Oracle 1z0-803 Exam

Exception in thread "main" java.lang.ArrayIndexOutOfBoundsException: 4

QUESTION 10

Given:

```
public class DoCompare1 {  
    public static void main(String[] args) {  
        String[] table = {"aa", "bb", "cc"};  
        for (String ss: table) {  
            int ii = 0;  
            while(ii < table.length){  
                System.out.println(ss + ", " + ii);  
                ii++;  
            }  
        }  
    }  
}
```



<http://www.gratisexam.com/>

How many times is 2 printed as a part of the output?

- A. Zero
- B. Once
- C. Twice

- D. Thrice
- E. Compilation fails.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 11

Given:

Real 9

Oracle 1z0-803 Exam

```
import java.io.IOException;

public class Y {
    public static void main(String[] args) {
        try {
            doSomething();
        }
        catch (RuntimeException e) {
            System.out.println(e);
        }
    }
    static void doSomething() {
        if (Math.random() > 0.5) throw new IOException();
        throw new RuntimeException();
    }
}
```

Which two actions, used independently, will permit this class to compile?

- A. Adding throws IOException to the main() method signature
- B. Adding throws IOException to the doSomething() method signature
- C. Adding throws IOException to the main() method signature and to the doSomething() method
- D. Adding throws IOException to the doSomething() method signature and changing the catch argument to IOException
- E. Adding throws IOException to the main() method signature and changing the catch argument to IOException

Correct Answer: CD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The IOException must be caught or be declared to be thrown. We must add a throws exception to the doSomething () method signature (static void doSomething() throws IOException).

Then we can either add the same throws IOException to the main method (public static void main (String[] args) throws IOException), or change the catch statement in main to IOException.

QUESTION 12

Given:

```
class X {  
    String str = "default";  
    X(String s) { str = s; }  
    void print() { System.out.println(str); }  
    public static void main(String[] args) {  
        new X("hello").print();  
    }  
}
```

Real 10

Oracle 1z0-803 Exam

What is the result?

- A. Hello

- B. Default
- C. Compilation fails
- D. The program prints nothing
- E. An exception is thrown at run time

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The program compiles fine.

The program runs fine.

The output is: hello

QUESTION 13

Given:

```
1. public class SampleClass {
2.     public static void main(String[] args){
3.         AnotherSampleClass asc = new AnotherSampleClass();
4.         SampleClass sc = new SampleClass();
5.         //insert code here
6.     }
7. }
8. class AnotherSampleClass extends SampleClass {
9. }
```

Which statement, when inserted into line 5, is valid change?

- A. asc = sc;
- B. sc = asc;
- C. asc = (object) sc;
- D. asc = sc.clone ()

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Works fine.

QUESTION 14

Given the code fragment:

Real 11

Oracle 1z0-803 Exam

```
System.out.println("Result: " + 2 + 3 + 5);
```

```
System.out.println("Result: " + 2 + 3 * 5);
```

What is the result?

- A. Result: 10
Result: 30
- B. Result: 10
Result: 25
- C. Result: 235
Result: 215
- D. Result: 215
Result: 215
- E. Compilation fails

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

First line:

```
System.out.println("Result: " + 2 + 3 + 5);
```

String concatenation is produced.

Second line:

```
System.out.println("Result: " + 2 + 3 * 5);
```


3*5 is calculated to 15 and is appended to string 2. Result 215.

The output is:

Result: 235

Result: 215

Note #1:

To produce an arithmetic result, the following code would have to be used:

```
System.out.println("Result: " + (2 + 3 + 5));
```

```
System.out.println("Result: " + (2 + 1 * 5));
```

run:

Result: 10

Result: 7

Note #2:

If the code was as follows:

```
System.out.println("Result: " + 2 + 3 + 5");
```

```
System.out.println("Result: " + 2 + 1 * 5");
```

Real 12

Oracle 1z0-803 Exam

The compilation would fail. There is an unclosed string literal, 5", on each line.

QUESTION 15

Which code fragment is illegal?

```
C A) class Base1 {  
        abstract class Abs1 { }  
    }  
  
C B) abstract class Abs1 {  
        void doit() { }  
    }  
  
C C) class Base1 { }  
        abstract class Abs1 extends Base1 { }  
  
C D) abstract int var1 = 89;
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The abstract keyword cannot be used to declare an int variable.

The abstract keyword is used to declare a class or method to be abstract[3]. An abstract method has no implementation; all classes containing abstract methods must themselves be abstract, although not all abstract classes have abstract methods.

QUESTION 16

Given the code fragment:

```
int a = 0;
```

Real 13

Oracle 1z0-803 Exam

```
a++;
```

```
System.out.println(a++);
```

```
System.out.println(a);
```

What is the result?

- A.
- B.
- C.
- D.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The first println prints variable a with value 1 and then increases the variable to 2.

QUESTION 17

Given:

```
public class X {  
    public static void main(String[] args){  
        String theString = "Hello World";  
        System.out.println(theString.charAt(11));  
    }  
}
```

What is the result?

- A. There is no output
- B. d is output
- C. A `StringIndexOutOfBoundsException` is thrown at runtime
- D. An `ArrayIndexOutOfBoundsException` is thrown at runtime Real 14
Oracle 1z0-803 Exam
- E. A `NullPointerException` is thrown at runtime
- F. A `StringArrayIndexOutOfBoundsException` is thrown at runtime

Correct Answer: C

Section: (none)

Explanation


Explanation/Reference:

Explanation:

There are only 11 characters in the string "Hello World". The code `theString.charAt(11)` retrieves the 12th character, which does not exist. A `StringIndexOutOfBoundsException` is thrown. Exception in thread "main" `java.lang.StringIndexOutOfBoundsException: String index out of range:`

QUESTION 18

Given a java source file:

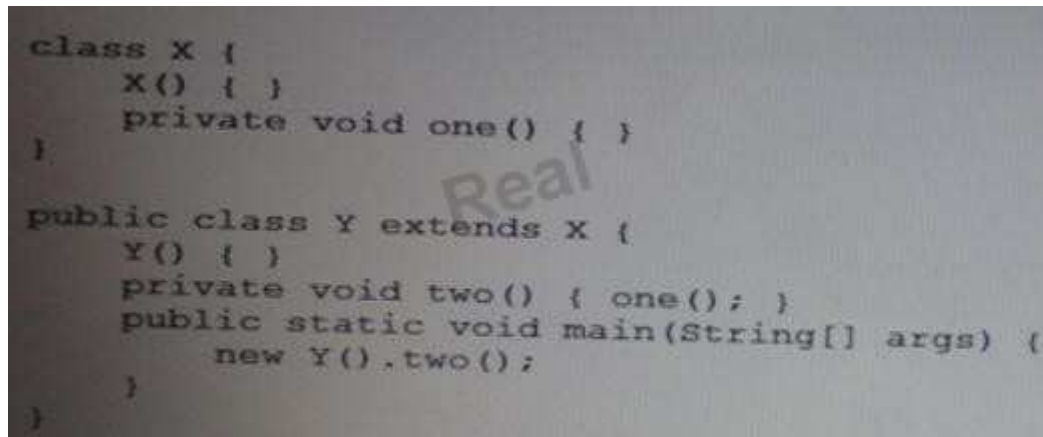

```
class X {  
    X() { }  
    private void one() { }  
}  
  
public class Y extends X {  
    Y() { }  
    private void two() { one(); }  
    public static void main(String[] args) {  
        new Y().two();  
    }  
}
```

What changes will make this code compile? (Select Two)

- A. Adding the public modifier to the declaration of class x
- B. Adding the protected modifier to the x() constructor
- C. Changing the private modifier on the declaration of the one() method to protected
- D. Removing the Y () constructor
- E. Removing the private modifier from the two () method

Correct Answer: CE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Using the private protected, instead of the private modifier, for the declaration of the one() method, would enable the two() method to access the one() method.

Real 15

Oracle 1z0-803 Exam

QUESTION 19

Given:



<http://www.gratisexam.com/>

```
package handy.dandy;
public class Keystroke {
    public void typeExclamation(){
        System.out.println("!");
    }
}
```

and

```
1. package handy;
2. public class Greet {
3.     public static void main(String[] args){
4.         String greeting = "Hello";
5.         System.out.print(greeting);
6.         Keystroke stroke = new Keystroke();
7.         stroke.typeExclamation();
8.     }
9. }
```

What three modifications, made independently, made to class greet, enable the code to compile and run?

- A. line 6 replaced with handy.dandy.keystroke stroke = new KeyStroke ();
- B. line 6 replaced with handy.*.KeyStroke = new KeyStroke ();
- C. line 6 replaced with handy.dandy.KeyStroke Stroke = new handy.dandy.KeyStroke();
- D. import handy.*; added before line 1
- E. import handy.dandy.*; added after line 1
- F. import handy.dandy,KeyStroke; added after line 1
- G. import handy.dandy.KeyStroke.typeException(); added before line 1

Correct Answer: CEF

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Three separate solutions:

C: the full class path to the method must be stated (when we have not imported the package)

D: We can import the hold dandy class

F: we can import the specific method

QUESTION 20

Real 16

Oracle 1z0-803 Exam

Given:

```
String message1 = "Wham bam!";  
String message2 = new String("Wham bam!");  
  
if (message1 == message2)  
    System.out.println("They match");  
  
if (message1.equals(message2))  
    System.out.println("They really match");
```

What is the result?

- A. They match
They really match
- B. They really match
- C. They match
- D. Nothing Prints
- E. They really match
They really match

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The strings are not the same objects so the == comparison fails. See note #1 below. As the value of the strings are the same equals is true. The equals method compares values for equality.

Note: #1 ==

Compares references, not values. The use of == with object references is generally limited to the following:

Comparing to see if a reference is null.

Comparing two enum values. This works because there is only one object for each enum constant.

You want to know if two references are to the same object.

QUESTION 21

Given:

Real 17

Oracle 1z0-803 Exam


```

1.  public class Speak {
2.      public static void main(String[] args){
3.          Speak speakIt = new Tell();
4.          Tell tellIt = new Tell();
5.          speakIt.tellItLikeItIs();
6.          (Truth)speakIt.tellItLikeItIs();
7.          ((Truth)speakIt).tellItLikeItIs();
8.          tellIt.tellItLikeItIs();
9.          (Truth)tellIt.tellItLikeItIs();
10.         ((Truth)tellIt).tellItLikeItIs();
11.     }
12. }
13. class Tell extends Speak implements Truth {
14.     public void tellItLikeItIs() {
15.         System.out.println("Right on!");
16.     }
17. }
18. interface Truth { public void tellItLikeItIs(); }

```

Which three lines will compile and output "right on!"?

- A. Line 5
- B. Line 6
- C. Line 7
- D. Line 8
- E. Line 9
- F. Line 10

Correct Answer: CDF

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 22

Given the code fragment:

```
String h1 = "Bob";
```

```
String h2 = new String ("Bob");
```

What is the best way to test that the values of h1 and h2 are the same?

- A. if (h1 == h2)
- B. if (h1.equals(h2))
- C. if (h1 = h2)
- D. if (h1.same(h2))

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Real 18

Oracle 1z0-803 Exam

Explanation:

The equals method compares values for equality.

QUESTION 23

Which two are valid declarations of a two-dimensional array?

- A. int [] [] array2D;
- B. int [2] [2] array2D;
- C. int array2D [];
- D. int [] array2D [];
- E. int [] [] array2D [];

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

`int[][] array2D;` is the standard convention to declare a 2-dimensional integer array.

`int[] array2D[];` works as well, but it is not recommended.

QUESTION 24

Given the code fragment:

```
System.out.println ("Result: " +3+5);
```

```
System.out.println ("Result: " + (3+5));
```

What is the result?

- A. Result: 8
Result: 8
- B. Result: 35
Result: 8
- C. Result: 8
Result: 35
- D. Result: 35
Result: 35

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Real 19

Oracle 1z0-803 Exam

Explanation:

In the first statement 3 and 5 are treated as strings and are simply concatenated. In the first statement 3 and 5 are treated as integers and their sum is calculated.

QUESTION 25

Given:

```
public class Main {  
    public static void main(String[] args) throws Exception {  
        doSomething();  
    }  
    private static void doSomething() throws Exception {  
        System.out.println("Before if clause");  
        if (Math.random() > 0.5) {  
            throw new Exception();  
        }  
        System.out.println("After if clause");  
    }  
}
```

Which two are possible outputs?

- ☐ A) Before if clause
Exception in thread "main" java.lang.Exception
at Main.doSomething(Main.java:8)
at Main.main(Main.java:3)
- ☐ B) Before if clause
Exception in thread "main" java.lang.Exception
at Main.doSomething(Main.java:8)
at Main.main(Main.java:3)
After if clause
- ☐ C) Exception in thread "main" java.lang.Exception
at Main.doSomething(Main.java:8)
at Main.main(Main.java:3)
- ☐ D) Before if clause
After if clause

- A. Option A
B. Option B
C. Option C
D. Option D

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The first println statement, System.out.println("Before if clause");, will always run.

If `Math.Random() > 0.5` then there is an exception. The exception message is displayed and the program terminates.
If `Math.Random() > 0.5` is false, then the second `println` statement runs as well.

QUESTION 26

A method `doSomething ()` that has no exception handling code is modified to trail a method that throws a checked exception. Which two modifications, made independently, will allow the program to compile?

- A. Catch the exception in the method `doSomething()`.
- B. Declare the exception to be thrown in the `doSomething()` method signature.
- C. Cast the exception to a `RuntimeException` in the `doSomething()` method.
- D. Catch the exception in the method that calls `doSomething()`.

Correct Answer: AB

Section: (none)

Explanation

Explanation/Reference:

Explanation: Valid Java programming language code must honor the Catch or Specify Requirement. This means that code that might throw certain exceptions must be enclosed by either of the following:

- * A try statement that catches the exception. The try must provide a handler for the exception, as described in *Catching and Handling Exceptions*.
- * A method that specifies that it can throw the exception. The method must provide a throws clause that lists the exception, as described in *Specifying the Exceptions Thrown by a Method*.

Code that fails to honor the Catch or Specify Requirement will not compile.

QUESTION 27

Given the code fragment:

Real 21

Oracle 1z0-803 Exam

```
String color = "Red";

switch (color) {
    case "Red":
        System.out.println("Found Red");
    case "Blue":
        System.out.println("Found Blue");
        break;
    case "White":
        System.out.println("Found White");
        break;
    default:
        System.out.println("Found Default");
}
```

What is the result?

- A. Found Red
- B. Found Red
Found Blue
- C. Found Red
Found Blue
Found White
- D. Found Red
Found Blue
Found White
Found Default

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation: As there is no break statement after the case "Red" statement the case Blue statement will run as well.

Note: The body of a switch statement is known as a switch block. A statement in the switch block can be labeled with one or more case or default labels. The switch

statement evaluates its expression, then executes all statements that follow the matching case label.

Each break statement terminates the enclosing switch statement. Control flow continues with the first statement following the switch block. The break statements are necessary because without them, statements in switch blocks fall through: All statements after the matching case label are executed in sequence, regardless of the expression of subsequent case labels, until a break statement is encountered.

Real 22
Oracle 1z0-803 Exam

QUESTION 28

Which two may precede the word 'class' in a class declaration?

- A. local
- B. public
- C. static
- D. volatile
- E. synchronized

Correct Answer: BC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

B: A class can be declared as public or private.

C: You can declare two kinds of classes: top-level classes and inner classes. You define an inner class within a top-level class. Depending on how it is defined, an inner class can be one of the following four types: Anonymous, Local, Member and Nested top-level. A nested top-level class is a member classes with a static modifier. A nested top-level class is just like any other top-level class except that it is declared within another class or interface. Nested top-level classes are typically used as a convenient way to group related classes without creating a new package.

The following is an example:

```
public class Main {  
    static class Killer {
```

QUESTION 29

Which three are bad practices?

- A. Checking for `ArrayIndexOutOfBoundsException` when iterating through an array to determine when all elements have been visited
- B. Checking for Error and. If necessary, restarting the program to ensure that users are unaware problems

- C. Checking for FileNotFoundException to inform a user that a filename entered is not valid
- D. Checking for ArrayIndexOutOfBoundsException and ensuring that the program can recover if one occur
- E. Checking for an IOException and ensuring that the program can recover if one occurs

Correct Answer: ABD

Section: (none)

Explanation

Explanation/Reference:


Explanation:

Real 23

Oracle 1z0-803 Exam

QUESTION 30

Given:

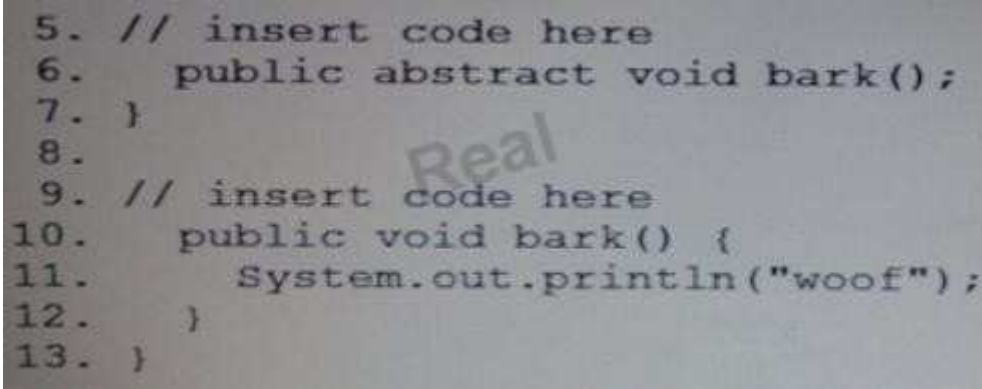

```
5. // insert code here
6.     public abstract void bark();
7. }
8.
9. // insert code here
10.    public void bark() {
11.        System.out.println("woof");
12.    }
13. }
```

What code should be inserted?

☐ A) 5. class Dog {
9. public class Poodle extends Dog {

☐ B) 5. abstract Dog {
9. public class Poodle extends Dog {

☒ C) 5. abstract class Dog {
9. public class Poodle extends Dog {

☐ D) 5. class Dog {
9. public class Poodle implements Dog {

☐ E) 5. abstract Dog {
9. public class Poodle implements Dog {

☐ F) 5. abstract class Dog {
9. public class Poodle implements Dog {

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E
- F. Option F

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Real 24

Oracle 1z0-803 Exam

Dog should be an abstract class. The correct syntax for this is: abstract class Dog { Poodle should extend Dog (not implement).

QUESTION 31

Given:

```
class X {}
```

```
class Y { Y ( ) { } }
```

```
class Z { Z (int i) { } }
```

Which class has a default constructor?

- A. X only
- B. Y only
- C. Z only
- D. X and Y
- E. Y and Z
- F. X and Z
- G. X, Y and Z

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 32

Given:

```
public static void main(String[] args) {  
  
    int a, b, c = 0;  
    int a, b, c;  
    int g, int h, int i = 0;  
    int d, e, F;  
    Int k, l, m = 0;  
}
```

Real 25

Oracle 1z0-803 Exam

Which two declarations will compile?

- A. int a, b, c = 0;
- B. int a, b, c;
- C. int g, int h, int i = 0;
- D. int d, e, F;
- E. int k, l, m; = 0;

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 33

Given the code fragment:

```

int j=0, k=0;

for(int i=0; i < x; i++) {
    do {
        k = 0;
        while (k < z){
            k++;
            System.out.print(k + " ");
        }
        System.out.println(" ");
        j++;
    } while (j < y);
    System.out.println("---");
}

```

What values of x, y, z will produce the following result?

1 2 3 4

1 2 3 4

1 2 3 4



<http://www.gratisexam.com/>

1 2 3 4

Real 26
Oracle 1z0-803 Exam

- A. X = 4, Y = 3, Z = 2
- B. X = 3, Y = 2, Z = 3
- C. X = 2, Y = 3, Z = 3
- D. X = 4, Y = 2, Z = 3
- E. X = 2, Y = 3, Z = 4

Correct Answer: E
Section: (none)
Explanation

Explanation/Reference:

Explanation:

Z is for the innermost loop. Should print 1 2 3 4. So Z must be 4. Y is for the middle loop. Should print three lines of 1 2 3 4. So Y must be set 3. X is for the outmost loop. Should print 2 lines of. So X should be 2.

QUESTION 34

Which statement initializes a stringBuilder to a capacity of 128?

- A. `StringBuilder sb = new String ("128");`
- B. `StringBuilder sb = StringBuilder.setCapacity (128);`
- C. `StringBuilder sb = StringBuilder.getInstance (128);`
- D. `StringBuilder sb = new StringBuilder (128);`

Correct Answer: D
Section: (none)
Explanation

Explanation/Reference:

Explanation:

`StringBuilder(int capacity)`

Constructs a string builder with no characters in it and an initial capacity specified by the capacity argument.

Note: An instance of a `StringBuilder` is a mutable sequence of characters. The principal operations on a `StringBuilder` are the `append` and `insert` methods, which are overloaded so as to accept data of any type. Each effectively converts a given datum to a string and then appends or inserts the characters of that string to the string builder. The `append` method always adds these characters at the end of the builder; the `insert` method adds the characters at a specified point.

QUESTION 35

Given:

Real 27
Oracle 1z0-803 Exam

```
public class DoCompare4 {  
    public static void main(String[] args) {  
        String[] table = {"aa", "bb", "cc"};  
        int ii = 0;  
        do  
            while (ii < table.length)  
                System.out.println(ii++);  
        while (ii < table.length);  
    }  
}
```

What is the result?

- A. 0
- B. 0
- C. 0
- D. Compilation fails

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

table.length is 3. So the do-while loop will run 3 times with ii=0, ii=1 and ii=2. The second while statement will break the do-loop when ii = 3. Note: The Java programming language provides a do-while statement, which can be expressed as follows:

```
do {  
    statement(s)  
} while (expression);
```

QUESTION 36

A method is declared to take three arguments. A program calls this method and passes only two arguments. What is the result?

Real 28
Oracle 1z0-803 Exam

- A. Compilation fails.
- B. The third argument is given the value null.
- C. The third argument is given the value void.
- D. The third argument is given the value zero.
- E. The third argument is given the appropriate false value for its declared type.
- F. An exception occurs when the method attempts to access the third argument.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The problem is noticed at build/compile time. At build you would receive an error message like:

required: int,int,int
found: int,int

QUESTION 37

Given the fragment:

```
int[] array = {1,2,3,4,5};  
System.arraycopy(array, 2, array, 1, 2);  
System.out.print(array[1]);  
System.out.print(array[4]);
```

What is the result?

- A. 14
- B. 15
- C. 24
- D. 25

E. 34

F. 35

Correct Answer: F

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The two elements 3 and 4 (starting from position with index 2) are copied into position index 1 and 2 in the same array.

After the arraycopy command the array looks like:

{1, 3, 4, 4, 5};

Then element with index 1 is printed: 3

Real 29

Oracle 1z0-803 Exam

Then element with index 4 is printed: 5

Note: The System class has an arraycopy method that you can use to efficiently copy data from one array into another:

```
public static void arraycopy(Object src, int srcPos, Object dest, int destPos, int length)
```

The two Object arguments specify the array to copy from and the array to copy to. The three int arguments specify the starting position in the source array, the starting position in the destination array, and the number of array elements to copy.

QUESTION 38

Given the following code fragment:

```

if (value >= 0) {
    if (value != 0)
        System.out.print("the ");
    else
        System.out.print("quick ");
    if (value < 10)
        System.out.print("brown ");
    if (value > 30)
        System.out.print("fox ");
    else if (value < 50)
        System.out.print("jumps ");
    else if (value < 10)
        System.out.print("over ");
    else
        System.out.print("the ");
    if (value > 10)
        System.out.print("lazy ");
} else {
    System.out.print("dog ");
}
System.out.println( "... " );

```

What is the result if the integer value is 33?

- A. The fox jump lazy ...
- B. The fox lazy ...
- C. Quick fox over lazy ...
- D. Quick fox the

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

33 is greater than 0.

33 is not equal to 0.

the is printed.

33 is greater than 30

fox is printed

33 is greater than 10 (the two else if are skipped)

lazy is printed

finally ... is printed.

QUESTION 39

Which three are advantages of the Java exception mechanism?

- A. Improves the program structure because the error handling code is separated from the normal program function
- B. Provides a set of standard exceptions that covers all the possible errors
- C. Improves the program structure because the programmer can choose where to handle exceptions
- D. Improves the program structure because exceptions must be handled in the method in which they occurred
- E. allows the creation of new exceptions that are tailored to the particular program being

Correct Answer: ACE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

A: The error handling is separated from the normal program logic.

C: You have some choice where to handle the exceptions.

E: You can create your own exceptions.

QUESTION 40

Given:

Real 31

Oracle 1z0-803 Exam

```
public class MyFor3 {  
    public static void main(String[] args) {  
        int[] xx = null;  
        for (int ii: xx) {  
            System.out.println(ii);  
        }  
    }  
}
```

What is the result?

- A. null
- B. compilation fails
- C. Java.lang.NullPointerException
- D. 0

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

An array variable (here xx) can very well have the null value.

Note:

Null is the reserved constant used in Java to represent a void reference i.e a pointer to nothing. Internally it is just a binary 0, but in the high level Java language, it is a magic constant, quite distinct from zero, that internally could have any representation.

QUESTION 41

Given:

```
public class Main {  
    public static void main(String[] args) {  
        doSomething();  
    }  
    private static void doSomething() {  
        doSomethingElse();  
    }  
    private static void doSomethingElse() {  
        throw new Exception();  
    }  
}
```

Which approach ensures that the class can be compiled and run?

Real 32

Oracle 1z0-803 Exam

- A. Put the throw new Exception() statement in the try block of try catch
- B. Put the doSomethingElse() method in the try block of a try catch
- C. Put the doSomething() method in the try block of a try catch
- D. Put the doSomething() method and the doSomethingElse() method in the try block of a try catch

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

We need to catch the exception in the doSomethingElse() method.

Such as:

```
private static void doSomethingElse() {  
    try {  
        throw new Exception();  
    } catch (Exception e)  
    {}  
}
```

Note: One alternative, but not an option here, is the declare the exception in doSomethingElse and catch it in the doSomething method.

QUESTION 42

Given:

```
public class ScopeTest1 {  
    public static void main(String[] args) {  
        doStuff();           // line x1  
        int x1 = x2;         // line x2  
        int x2 = j;          // line x3  
    }  
    static void doStuff() {  
        System.out.println(j); // line x4  
    }  
    static int j;  
}
```

Which line causes a compilation error?

- A. line x1
- B. line x2
- C. line x3
- D. line x4

Real 33

Oracle 1z0-803 Exam

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The variable x2 is used before it has been declared.

QUESTION 43

Given:

```
class Overloading {  
    void x(int i) {  
        System.out.println("one");  
    }  
  
    void x(String s) {  
        System.out.println("two");  
    }  
  
    void x(double d) {  
        System.out.println("three");  
    }  
  
    public static void main(String[] args) {  
        new Overloading().x(4.0);  
    }  
}
```

What is the result?

- A. One
- B. Two
- C. Three
- D. Compilation fails

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

In this scenario the overloading method is called with a double/float value, 4.0. This makes the third overload method to run.

Note:

The Java programming language supports overloading methods, and Java can distinguish between methods with different method signatures. This means that methods within a class can have the same name if they have different parameter lists. Overloaded methods are differentiated by the number and the type of the arguments passed into the method.

Real 34

Oracle 1z0-803 Exam

QUESTION 44

Which declaration initializes a boolean variable?



<http://www.gratisexam.com/>

- A. `boolean h = 1;`
- B. `boolean k = 0;`
- C. `boolean m = null;`
- D. `boolean j = (1 < 5);`

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The primitive type boolean has only two possible values: true and false. Here j is set to `(1 < 5)`, which evaluates to true.

QUESTION 45

Given:


```
public class Basic {  
    private static int letter;  
    public static int getLetter();  
    public static void Main(String[] args) {  
        System.out.println(getLetter());  
    }  
}
```

Why will the code not compile?

- A. A static field cannot be private.
- B. The getLetter method has no body.
- C. There is no setLetter method.
- D. The letter field is uninitialized.
- E. It contains a method named Main instead of ma

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The getLetter() method needs a body public static int getLetter() { }; .

Real 35

Oracle 1z0-803 Exam

QUESTION 46

Given:

```

public class Circle {
    double radius;
    public double area;
    public Circle(double r) { radius = r; }
    public double getRadius() { return radius; }
    public void setRadius(double r) { radius = r; }
    public double getArea() { return /* ??? */; }
}

class App {
    public static void main(String[] args) {
        Circle c1 = new Circle(17.4);
        c1.area = Math.PI * c1.getRadius() * c1.getRadius();
    }
}

```

This class is poorly encapsulated. You need to change the circle class to compute and return the area instead.

What three modifications are necessary to ensure that the class is being properly encapsulated?

- A. Change the access modifier of the setradius () method to private
- B. Change the getArea () method
public double getArea () { return area; }
- C. When the radius is set in the Circle constructor and the setRadius () method, recomputed the area and store it into the area field
- D. Change the getRadius () method:
public double getRadius () {
 area = Math.PI * radius * radius;
 return radius;
}

Correct Answer: BCD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 47

Given a code fragment:

Real 36

Oracle 1z0-803 Exam

```
StringBuilder sb = new StringBuilder();
String h1 = "HelloWorld";
sb.append("Hello").append("World");

if (h1 == sb.toString()) {
    System.out.println("They match");
}
if (h1.equals(sb.toString())) {
    System.out.println("They really match");
}
```

What is the result?

- A. They match
They real match
- B. They really match
- C. They match
- D. Nothing is printed to the screen

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 48

Given the following code:

```
1. public class Simple {  
2. public float price;  
3. public static void main(String[] args) {  
4. Simple price = new Simple();  
5. price = 4;  
6. }  
7. }
```

What will make this code compile and run?

- A. Change line 2 to the following:
Public int price
- B. Change line 4 to the following:
int price = new simple ();
- C. Change line 4 to the following:
Float price = new simple ();
- D. Change line 5 to the following:
Real 37
Oracle 1z0-803 Exam
Price = 4f;
- E. Change line 5 to the following:
price.price = 4;
- F. Change line 5 to the following:
Price = (float) 4;
- G. Change line 5 to the following:
Price = (Simple) 4;
- H. The code compiles and runs properly; no changes are necessary

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

Explanation:

price.price =4; is correct, not price=4;

The attribute price of the instance must be set, not the instance itself.

QUESTION 49

Given:

```
public class DoWhile1 {  
    public static void main(String[] args) {  
        int ii = 2;  
        do {  
            System.out.println(ii);  
        } while (--ii);  
    }  
}
```

What is the result?

- A. 2
- B. 2
- C. null
- D. an infinite loop
- E. compilation fails

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The line while (--ii); will cause the compilation to fail.
ii is not a boolean value.

Real 38

Oracle 1z0-803 Exam

A correct line would be while (--ii>0);

QUESTION 50

You are writing a method that is declared not to return a value. Which two are permitted in the method body?

- A. omission of the return statement
- B. return null;
- C. return void;
- D. return;

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Any method declared void doesn't return a value. It does not need to contain a return statement, but it may do so. In such a case, a return statement can be used to branch out of a control flow block and exit the method and is simply used like this:

return;

QUESTION 51

Identify two benefits of using ArrayList over array in software development.

- A. reduces memory footprint
- B. implements the Collection API
- C. is multi.thread safe
- D. dynamically resizes based on the number of elements in the list

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

ArrayList supports dynamic arrays that can grow as needed. In Java, standard arrays are of a fixed length. After arrays are created, they cannot grow or shrink, which means that you must know in advance how many elements an array will hold. But, sometimes, you may not know until run time precisely how large of an array you need. To handle this situation, the collections framework defines ArrayList. In essence, an ArrayList is a variable-length array of object references. That is, an ArrayList can dynamically increase or decrease in size. Array lists are created with an initial size. When this size is exceeded, the collection is automatically enlarged.

Real 39

Oracle 1z0-803 Exam

When objects are removed, the array may be shrunk.

QUESTION 52

Which three are valid types for switch?



<http://www.gratisexam.com/>

- A. int
- B. float
- C. double
- D. integer
- E. String
- F. Float

Correct Answer: ADE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

A switch works with the byte, short, char, and int primitive data types. It also works with enumerated types the String class, and a few special classes that wrap certain primitive types:

Character, Byte, Short, and Integer.

QUESTION 53

Give:

```
public class MyFive {  
    public static void main(String[] args) {  
        short ii;  
        short jj = 0;  
        for (ii = kk; ii > 6; ii -= 1) {    // line x  
            jj++;  
        }  
        System.out.println("jj = " + jj);  
    }  
}
```

What value should replace kk in line x to cause jj = 5 to be output?

- A. -1
- B. 1
- C. 5
- Real 40
- Oracle 1z0-803 Exam
- D. 8
- E. 11

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

Explanation:

We need to get jj to 5. It is initially set to 0. So we need to go through the for loop 5 times. The for loop ends when ii > 6 and ii decreases for every loop. So we need to initially set ii to 11. We set kk to 11.

QUESTION 54

Given the code fragment:

Boolean b1 = true;

Boolean b2 = false;


```
int i = 0;
```

```
while (foo) { }
```

Which one is valid as a replacement for foo?

A. b1.compareTo(b2)

B. i = 1

C. i == 2? -1 : 0

D. "foo".equals("bar")

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Equals works fine on strings equals produces a Boolean value.

QUESTION 55

Given:

Real 41

Oracle 1z0-803 Exam

```
public class SuperTest {  
    public static void main(String args[]) {  
        statement1  
        statement2  
        statement3  
    }  
}  
  
class Shape {  
    public Shape() {  
        System.out.println("Shape: constructor");  
    }  
    public void foo() {  
        System.out.println("Shape: foo");  
    }  
}  
  
class Square extends Shape {  
    public Square() {  
        super();  
    }  
    public Square(String label) {  
        System.out.println("Square: constructor");  
    }  
    public void foo() {  
        super.foo();  
    }  
    public void foo(String label) {  
        System.out.println("Square: foo");  
    }  
}
```

What should statement1, statement2, and statement3, be respectively, in order to produce the result?


Shape: constructor

Square: foo

Shape: foo

Real 42

Oracle 1z0-803 Exam

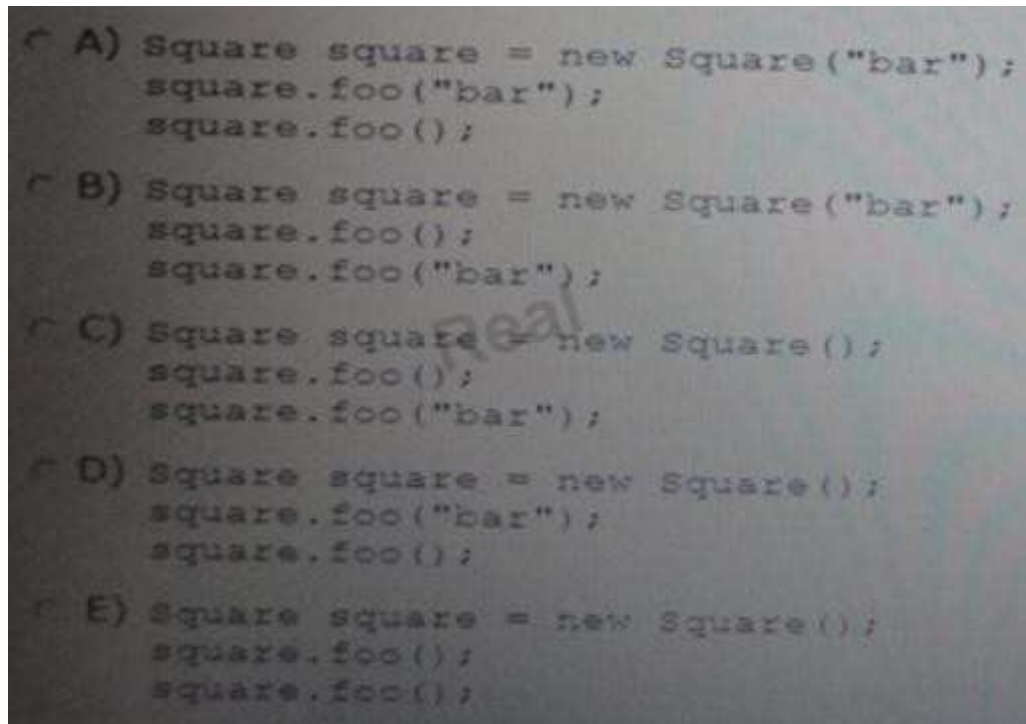

A) `Square square = new Square("bar");`
`square.foo("bar");`
`square.foo();`

B) `Square square = new Square("bar");`
`square.foo();`
`square.foo("bar");`

C) `Square square = new Square();`
`square.foo();`
`square.foo("bar");`

D) `Square square = new Square();`
`square.foo("bar");`
`square.foo();`

E) `Square square = new Square();`
`square.foo();`
`square.foo();`

- A. Option A
- B. Option B
- C. Option C
- D. Option D

E. Option E

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 56

Given:

```
Public Class Test {  
  
}
```

Which two packages are automatically imported into the java source file by the java compiler?

- A. Java.lang
- B. Java.awt
- C. Java.util
- D. Javax.net
- E. Java.*
Real 43
Oracle 1z0-803 Exam
- F. The package with no name

Correct Answer: AF

Section: (none)

Explanation

Explanation/Reference:

Explanation:

For convenience, the Java compiler automatically imports three entire packages for each source file: (1) the package with no name, (2) the java.lang package, and (3) the current package (the package for the current file).

Note: Packages in the Java language itself begin with java. or javax.

QUESTION 57

Given:

```
public class X implements Z {
    public String toString() { return "I am X"; }
    public static void main(String[] args){
        Y myY = new Y();
        X myX = myY;
        Z myZ = myX;
        System.out.println(myZ);
    }
}
class Y extends X {
    public String toString() { return "I am Y"; }
}
interface Z { }
```

What is the reference type of myZ and what is the type of the object it references?

- A. Reference type is Z; object type is Z.
- B. Reference type is Y; object type is Y.
- C. Reference type is Z; object type is Y.
- D. Reference type is X; object type is Z.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 58

Given:

Real 44

Oracle 1z0-803 Exam

```
public class SampleClass {
    public static void main(String[] args){
        AnotherSampleClass asc = new AnotherSampleClass();
        SampleClass sc = new SampleClass();
        sc = asc;
        System.out.println("sc: " + sc.getClass());
        System.out.println("asc: " + asc.getClass());
    }
}
class AnotherSampleClass extends SampleClass {
}
```

What is the result?

- A. sc: class.Object
asc: class.AnotherSampleClass
- B. sc: class.SampleClass
asc: class.AnotherSampleClass
- C. sc: class.AnotherSampleClass
asc: class.SampleClass
- D. sc: class.AnotherSampleClass
asc: class.AnotherSampleClass

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Note: The getClass method Returns the runtime class of an object. That Class object is the object that is locked by static synchronized methods of the represented class.

Note: Because Java handles objects and arrays by reference, classes and array types are known as reference types.

QUESTION 59

Given the code fragment:

```
public static void main(String[] args) {  
    String[] table = {"aa", "bb", "cc"};  
    for (String ss: table) {  
        int ii = 0;  
        while(ii < table.length){  
            System.out.println(ii);  
            ii++;  
            break;  
        }  
    }  
}
```

Real 45
Oracle 1z0-803 Exam
How many times is 2 printed?

- A. Zero
- B. Once
- C. Twice
- D. Thrice
- E. It is not printed because compilation fails

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The outer loop will run three times, one time each for the elements in table. The break statement breaks the inner loop immediately each time. 2 will be printed once only.

Note: If the line `int ii = 0;` is missing the program would not compile.

QUESTION 60

Given:



<http://www.gratisexam.com/>

```
public class SampleClass {
    public static void main(String[] args){
        SampleClass sc, scA, scB;
        sc = new SampleClass();
        scA = new SampleClassA();
        scB = new SampleClassB();
        System.out.println("Hash is : " +
            sc.getHash() + ", " + scA.getHash() + ", " + scB.getHash());
    }
    public int getHash() {
        return 111111;
    }
}
class SampleClassA extends SampleClass {
    public long getHash() {
        return 44444444;
    }
}
class SampleClassB extends SampleClass {
    public long getHash() {
        return 99999999;
    }
}
```


What is the result?

- A. Compilation fails
- B. An exception is thrown at runtime
- C. There is no result because this is not correct way to determine the hash code
- D. Hash is: 111111, 44444444, 99999999
Real 46
Oracle 1z0-803 Exam

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The compilation fails as SampleClassA and SampleClassB cannot override SampleClass because the return type of SampleClass is int, while the return type of SampleClassA and SampleClassB is long.

Note: If all three classes had the same return type the output would be:

Hash is : 111111, 44444444, 99999999

QUESTION 61

Which two will compile, and can be run successfully using the command:

Java fred1 hello walls

☐ A) class fred1 {
 public static void main(String args) {
 System.out.println(args[1]);
 }
}

☐ B) class fred1 {
 public static void main(String[] args) {
 System.out.println(args[2]);
 }
}

☐ C) class fred1 {
 public static void main(String[] args) {
 System.out.println(args);
 }
}

☐ D) class fred1 {
 public static void main(String[] args) {
 System.out.println(args[1]);
 }
}

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Correct Answer: CD
Section: (none)

Explanation

Explanation/Reference:

Explanation:

Real 47

Oracle 1z0-803 Exam

Throws java.lang.ArrayIndexOutOfBoundsException: 2


at certquestions.Fred1.main(Fred1.java:3)

C. Prints out: [Ljava.lang.String;@39341183

D. Prints out: walls

QUESTION 62

Given:

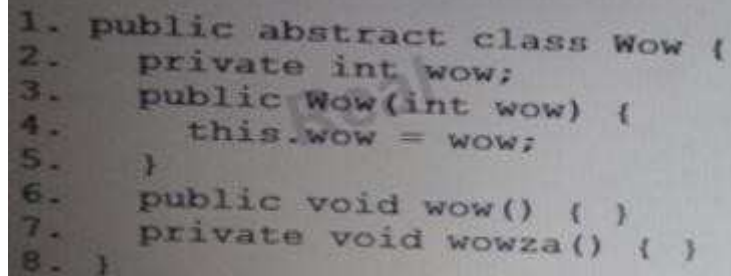

```
1. public abstract class Wow {  
2.     private int wow;  
3.     public Wow(int wow) {  
4.         this.wow = wow;  
5.     }  
6.     public void wow() { }  
7.     private void wowza() { }  
8. }
```

What is true about the class Wow?

- A. It compiles without error.
- B. It does not compile because an abstract class cannot have private methods.
- C. It does not compile because an abstract class cannot have instance variables.
- D. It does not compile because an abstract class must have at least one abstract method.
- E. It does not compile because an abstract class must have a constructor with no arguments.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 63

Given:

Real 48

Oracle 1z0-803 Exam

```
class X {  
    static void m(int i) {  
        i += 7;  
    }  
    public static void main(String[] args) {  
        int j = 12;  
        m(j);  
        System.out.println(j);  
    }  
}
```

What is the result?

- A. 7
- B. 12
- C. 19
- D. Compilation fails
- E. An exception is thrown at run time

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 64

Which two statements are true?

- A. An abstract class can implement an interface.
- B. An abstract class can be extended by an interface.
- C. An interface CANNOT be extended by another interface.
- D. An interface can be extended by an abstract class.
- E. An abstract class can be extended by a concrete class.
- F. An abstract class CANNOT be extended by an abstract class.

Correct Answer: AE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

<http://docs.oracle.com/javase/tutorial/java/landl/abstract.html>

QUESTION 65

Given:

Real 49

Oracle 1z0-803 Exam

```
class Overloading {
    int x(double d) {
        System.out.println("one");
        return 0;
    }

    String x(double d) {
        System.out.println("two");
        return null;
    }

    double x(double d) {
        System.out.println("three");
        return 0.0;
    }

    public static void main(String[] args) {
        new Overloading().x(4.0);
    }
}
```

What is the result?

- A. One
- B. Two
- C. Three
- D. Compilation fails

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 66

The catch clause argument is always of type_____.

- A. Exception
- B. Exception but NOT including RuntimeException
- C. Throwable
- D. RuntimeException
- E. CheckedException
- F. Error

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Because all exceptions in Java are the sub-class of java.lang.Exception class, you can have a

Real 50

Oracle 1z0-803 Exam

single catch block that catches an exception of type Exception only. Hence the compiler is fooled into thinking that this block can handle any exception. See the following example:

```
try
{
// ...
}
catch(Exception ex)
{
// Exception handling code for ANY exception
}
```

You can also use the java.lang.Throwable class here, since Throwable is the parent class for the application-specific Exception classes. However, this is discouraged in Java programming circles. This is because Throwable happens to also be the parent class for the non-application specific Error classes which are not meant to be handled explicitly as they are catered for by the JVM itself.

Note: The Throwable class is the superclass of all errors and exceptions in the Java language. Only objects that are instances of this class (or one of its subclasses) are thrown by the Java Virtual Machine or can be thrown by the Java throw statement. A throwable contains a snapshot of the execution stack of its thread at the time it was created. It can also contain a message string that gives more information about the error.

QUESTION 67

Given the code fragment:

```
1. ArrayList<Integer> list = new ArrayList<>(1);  
2. list.add(1001);  
3. list.add(1002);  
4. System.out.println(list.get(list.size()));
```

What is the result?

Real 51

Oracle 1z0-803 Exam

- A. Compilation fails due to an error on line 1.
- B. An exception is thrown at run time due to error on line 3
- C. An exception is thrown at run time due to error on line 4
- D. 1002

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The code compiles fine.

At runtime an IndexOutOfBoundsException is thrown when the second list item is added.

QUESTION 68

View the Exhibit.

```
public class Hat {
```

```
    public int ID =0;
```



```
public String name = "hat";  
public String size = "One Size Fit All";  
public String color="";  
public String getName() { return name; }  
public void setName(String name) {  
    this.name = name;  
}  
}
```

Given

```
public class TestHat {  
    public static void main(String[] args) {  
        Hat blackCowboyHat = new Hat();  
    }  
}
```

Real 52

Oracle 1z0-803 Exam

Which statement sets the name of the Hat instance?

- A. blackCowboyHat.setName = "Cowboy Hat";
- B. setName("Cowboy Hat");
- C. Hat.setName("Cowboy Hat");
- D. blackCowboyHat.setName("Cowboy Hat");

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 69

```
public class Two {  
  
    public static void main(String[] args) {  
  
        try {  
  
            doStuff();  
  
            system.out.println("1");  
  
        }  
  
        catch {  
  
            system.out.println("2");  
  
        }}  
  
    public static void do Stuff() {  
  
        if (Math.random() > 0.5) throw new RunTimeException(); doMoreStuff();  
  
        System.out.println("3 ");  
  
    }  
  
    public static void doMoreStuff() {  
  
        System.out.println("4");  
  
    }  
  
}
```

Which two are possible outputs?

Real 53

Oracle 1z0-803 Exam

- A. 2
- B. 4
- C. 1
- D. 1

Correct Answer: AB

Section: (none)

Explanation

Explanation/Reference:

Explanation:

A: Output is 2 if Math.random() is greater than 0.5.

B: If Math.random() returns a value less equal to 0.5, the code won't throw an exception, it will continue with the doMore() method which will println "4" after which the program will continue with the doStuff() method and will println "3", after that we will be back in main() and the program will print "1".

QUESTION 70

Given:

```
public class MyFor {  
  
    public static void main(String[] args) {  
  
        for (int ii = 0; ii < 4; ii++) {  
  
            System.out.println("ii = "+ ii);  
  
            ii = ii +1;  
  
        }  
  
    }  
  
}
```

What is the result?

- A. ii = 0
ii = 2

- B. ii = 0
ii = 1
ii = 2
Real 54
Oracle 1z0-803 Exam
ii = 3
- C. ii =
- D. Compilation fails.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 71

Given the code fragment:

```
int [][] array2d = new int[2][3];

System.out.println("Loading the data.");

for ( int x = 0; x < array2d.length; x++) {

    for ( int y = 0; y < array2d[0].length; y++) {

        System.out.println(" x = " + x);

        System.out.println(" y = " + y);

        // insert load statement here.

    }

}

System.out.println("Modify the data. ");

for ( int x = 0; x < array2d.length; x++) {
```

```
for ( int y = 0; y < array2d[0].length; y++) {  
  
    System.out.println(" x = " + x);  
  
    System.out.println(" y = " + y);  
  
    // insert modify statement here.  
  
}  
  
}
```

Which pair of load and modify statement should be inserted in the code?

Real 55

Oracle 1z0-803 Exam

The load statement should set the array's x row and y column value to the sum of x and y

The modify statement should modify the array's x row and y column value by multiplying it by 2

- A. Load statement: `array2d(x, y) = x + y;`
Modify statement: `array2d(x, y) = array2d(x, y) * 2`
- B. Load statement: `array2d[x y] = x + y;`
Modify statement: `array2d[x y] = array2d[x y] * 2`
- C. Load statement: `array2d[x, y] = x + y;`
Modify statement: `array2d[x, y] = array2d[x, y] * 2`
- D. Load statement: `array2d[x][y] = x + y;`
Modify statement: `array2d[x][y] = array2d[x][y] * 2`
- E. Load statement: `array2d[[x][y]] = x + y;`
Modify statement: `array2d[[x][y]] = array2d[[x][y]] * 2`

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 72

Given:

```
public class DoBreak1 {  
    public static void main(String[] args) {  
        String[] table = {"aa", "bb", "cc", "dd"};  
        for (String ss: table) {  
            if ( "bb".equals(ss)) {  
                continue;  
            }  
            System.out.println(ss);  
            if ( "cc".equals(ss)) {  
                break;  
            }  
        }  
        Real 56  
        Oracle 1z0-803 Exam  
    }  
}
```

What is the result?

- A. aa
cc
- B. aa
bb
cc
- C. cc
dd
- D. cc
- E. Compilation fails.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 73

```
1. class StaticMethods {  
2. static void one() {  
3. two();  
4. StaticMethods.two();  
5. three();  
6. StaticMethods.four();  
7. }  
8. static void two() { }  
9. void three() {  
10. one();  
11. StaticMethods.two();  
12. four();  
13. StaticMethods.four();  
14. }  
15. void four() { }  
16. }
```

Which three lines are illegal?

- A. line 3
- B. line 4
- C. line 5
- D. line 6
- E. line 10
- F. line 11
- G. line 12
- H. line 13

Correct Answer: CDH

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 74

Which is a valid abstract class?

- A.

```
public abstract class Car {  
    protected void accelerate();  
}
```
- B.

```
public interface Car {  
    protected abstract void accelerate();  
}
```
- C.

```
public abstract class Car {  
    protected final void accelerate();  
}
```
- D.

```
public abstract class Car {  
    protected abstract void accelerate();  
}
```
- E.

```
public abstract class Car {  
    protected abstract void accelerate() {  
        //more car can do  
    }  
}
```


Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Real 58

Oracle 1z0-803 Exam

Explanation:

QUESTION 75

View the exhibit:

```
public class Student {  
  
    public String name = "";  
  
    public int age = 0;  
  
    public String major = "Undeclared";  
  
    public boolean fulltime = true;  
  
    public void display() {  
  
        System.out.println("Name: " + name + " Major: " + major); }  
  
    public boolean isFullTime() {  
  
        return fulltime;  
  
    }  
  
}
```

Given:

```
Public class TestStudent {  
  
    public static void main(String[] args) {  
  
        Student bob = new Student ();
```

```
bob.name = "Bob";
```

```
bob.age = 18;
```

```
bob.year = 1982;
```

```
}
```

```
}
```

What is the result?

Real 59

Oracle 1z0-803 Exam

- A. year is set to 1982.
- B. bob.year is set to 1982
- C. A runtime error is generated.
- D. A compile time error is generated.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 76

Given the code fragment:

```
String name = "Spot";
```

```
int age = 4;
```

```
String str ="My dog " + name + " is " + age;
```

```
System.out.println(str);
```

And

```
StringBuilder sb = new StringBuilder();
```

Using StringBuilder, which code fragment is the best potion to build and print the following string My dog Spot is 4

- A. sb.append("My dog " + name + " is " + age);
System.out.println(sb);
- B. sb.insert("My dog ").append(name + " is " + age); System.out.println(sb);
- C. sb.insert("My dog ").insert(name).insert(" is ").insert(age); System.out.println(sb);
- D. sb.append("My dog ").append(name).append(" is ").append(age); System.out.println(sb);

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 77

Given:

Real 60

Oracle 1z0-803 Exam

```
public class Main {
```

```
    public static void main(String[] args) {
```

```
        try {
```

```
            doSomething();
```

```
        }
```

```
        catch (SpecialException e) {
```

```
            System.out.println(e);
```

```
        }}
```

```
        static void doSomething() {
```

```
            int [] ages = new int[4];
```

```
ages[4] = 17;

doSomethingElse();

}

static void doSomethingElse() {

throw new SpecialException("Thrown at end of doSomething() method"); }

}
```

What is the output?

- A. SpecialException: Thrown at end of doSomething() method
- B. Error in thread "main" java.lang.
ArrayIndexOutOfBoundsException
- C. Exception in thread "main" java.lang.ArrayIndexOutOfBoundsException: 4 at Main.doSomething(Main.java:12)
at Main.main(Main.java:4)
- D. SpecialException: Thrown at end of doSomething() method at Main.doSomethingElse(Main.java:16)
at Main.doSomething(Main.java:13)
at Main.main(Main.java:4)

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The following line causes a runtime exception (as the index is out of bounds):

```
ages[4] = 17;
```

Real 61

Oracle 1z0-803 Exam

A runtime exception is thrown as an `ArrayIndexOutOfBoundsException`.

Note: The third kind of exception (compared to checked exceptions and errors) is the runtime exception. These are exceptional conditions that are internal to the application, and that the application usually cannot anticipate or recover from. These usually indicate programming bugs, such as logic errors or improper use of an API.

Runtime exceptions are not subject to the Catch or Specify Requirement. Runtime exceptions are those indicated by RuntimeException and its subclasses.

QUESTION 78

View the exhibit:

```
public class Student {  
  
    public String name = "";  
  
    public int age = 0;  
  
    public String major = "Undeclared";  
  
    public boolean fulltime = true;  
  
    public void display() {  
  
        System.out.println("Name: " + name + " Major: " + major); }  
  
    public boolean isFullTime() {  
  
        return fulltime;  
  
    }  
  
}
```

Which line of code initializes a student instance?

- A. Student student1;
- B. Student student1 = Student.new();
- C. Student student1 = new Student();
- D. Student student1 = Student();

Real 62

Oracle 1z0-803 Exam

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 79

```
int [] array = {1,2,3,4,5};
```

```
for (int i: array) {
```

```
    if ( i < 2) {
```

```
        keyword1 ;
```

```
    }
```

```
    System.out.println(i);
```

```
    if ( i == 3) {
```

```
        keyword2 ;
```

```
    }}
```

What should keyword1 and keyword2 be respectively, in order to produce output 2345?

- A. continue, break
- B. break, break
- C. break, continue
- D. continue, continue

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 80

```
int i, j=0;
```

```
i = (3* 2 +4 +5 ) ;
```

```
j = (3 * ((2+4) + 5));
```

```
System.out.println("i: " + i + "\nj": +j);
```

Real 63

Oracle 1z0-803 Exam

What is the result?

- A. i: 16
j: 33
- B. i: 15
j: 33
- C. i: 33
j: 23
- D. i: 15
j: 23

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 81

```
boolean log3 = ( 5.0 != 6.0) && ( 4 != 5);
```

```
boolean log4 = (4 != 4) || (4 == 4);
```

```
System.out.println("log3:" + log3 + "\nlog4" + log4);
```

What is the result?

- A. log3:false
log4:true
- B. log3:true
log4:true
- C. log3:true
log4:false
- D. log3:false
Real 64
Oracle 1z0-803 Exam
log4:false

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 82

Which statement will empty the contents of a StringBuilder variable named sb?

- A. sb.deleteAll();
- B. sb.delete(0, sb.size());
- C. sb.delete(0, sb.length());
- D. sb.removeAll();

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 83

Class StaticField {

static int i = 7;


```
public static void main(String[] args) {  
    StaticFied obj = new StaticField();  
  
    obj.i++;  
  
    StaticField.i++;  
  
    obj.i++;  
  
    System.out.println(StaticField.i + " " + obj.i);  
}  
}
```

What is the result?

- A. 10 10
- B. 8 9
- Real 65
- Oracle 1z0-803 Exam
- C. 9 8
- D. 7 10

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 84

Which two are valid array declaration?

- A. Object array[];
- B. Boolean array[3];
- C. int[] array;
- D. Float[2] array;

Correct Answer: AC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 85

Given:

```
class Overloading {  
  
    int x(double d) {  
  
        System.out.println("one");  
  
        return 0;  
  
    }  
  
    String x(double d) {  
  
        System.out.println("two");  
  
        return null;  
  
    }  
  
    double x(double d) {  
  
        System.out.println("three");  
  
        Real 66  
        Oracle 1z0-803 Exam  
        return 0.0;  
  
    }  
  
    public static void main(String[] args) {  
  
        new Overloading().x(4.0);  
  
    }  
}
```

```
}
```

```
}
```

What is the result?

- A. One
- B. Two
- C. Three
- D. Compilation fails.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 86

Given:

```
public class MainMethod {  
  
    void main() {  
  
        System.out.println("one");  
  
    }  
  
    static void main(String args) {  
  
        System.out.println("two");  
  
    }  
  
    public static void main(String[] args) {  
  
        System.out.println("three");  
  
    }  
}
```

```
void mina(Object[] args) {  
  
    Real 67  
    Oracle 1z0-803 Exam  
    System.out.println("four");  
  
}  
  
}
```

What is printed out when the program is excuted?

- A. one
- B. two
- C. three
- D. four

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 87

Given:

```
public class ScopeTest {  
  
    int j, int k;  
  
    public static void main(String[] args) {  
  
        ew ScopeTest().doStuff(); }  
  
    void doStuff() {  
  
        nt x = 5;  
  
        oStuff2();  
  
    }  
}
```

```
System.out.println("x");  
  
}  
  
void doStuff2() {  
  
    int y = 7;  
  
    System.out.println("y");  
  
    for (int z = 0; z < 5; z++) {  
  
        System.out.println("z");  
  
        Real 68  
        Oracle 1z0-803 Exam  
        System.out.println("y");  
  
    }  
  
}
```

Which two items are fields?

- A. j
- B. k
- C. x
- D. y
- E. z

Correct Answer: AB

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 88

A method is declared to take three arguments. A program calls this method and passes only two arguments. What is the results?

- A. Compilation fails.

- B. The third argument is given the value null.
- C. The third argument is given the value void.
- D. The third argument is given the value zero.
- E. The third argument is given the appropriate falsy value for its declared type. F) An exception occurs when the method attempts to access the third argument.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 89

```
public class ForTest {  
  
    public static void main(String[] args) {  
  
        int[] arrar = {1,2,3};  
  
        for ( foo ) {  
  
        }  
  
        Real 69  
        Oracle 1z0-803 Exam  
    }  
  
}
```

Which three are valid replacements for foo so that the program will compiled and run?

- A. int i: array
- B. int i = 0; i < 1; i++
- C. ;;
- D. ; i < 1; i++
- E. ; i < 1;

Correct Answer: ABC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 90

Given:

```
public class SampleClass {  
  
    public static void main(String[] args) {  
  
        AnotherSampleClass asc = new AnotherSampleClass(); SampleClass sc = new SampleClass();  
  
        sc = asc;  
  
        System.out.println("sc: " + sc.getClass());  
  
        System.out.println("asc: " + asc.getClass());  
  
    }  
  
    class AnotherSampleClass extends SampleClass {  
  
    }  
}
```

What is the result?

- A. sc: class Object
asc: class AnotherSampleClass
- B. sc: class SampleClass
asc: class AnotherSampleClass
- C. sc: class AnotherSampleClass
Real 70
Oracle 1z0-803 Exam
asc: class SampleClass
- D. sc: class AnotherSampleClass
asc: class AnotherSampleClass

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 91

Given the code fragment:

```
int b = 3;

if ( !(b > 3)) {

    System.out.println("square ");

}

System.out.println("circle ");

}

System.out.println("...");
```

What is the result?

- A. square...
- B. circle...
- C. squarecircle...
- D. Compilation fails.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 92

What is the proper way to defined a method that take two int values and returns their sum as an int value?

- A. `int sum(int first, int second) { first + second; }`

Real 71

Oracle 1z0-803 Exam

- B. `int sum(int first, second) { return first + second; }`
- C. `sum(int first, int second) { return first + second; }`
- D. `int sum(int first, int second) { return first + second; }`
- E. `void sum (int first, int second) { return first + second; }`

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 93

Which two are Java Exception classes?

- A. `SercurityException`
- B. `DuplicatePathException`
- C. `IllegalArgumentException`
- D. `TooManyArgumentsException`

Correct Answer: AC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 94

Given the for loop construct:

```
for ( expr1 ; expr2 ; expr3 ) {  
  
statement;  
  
}
```

Which two statements are true?

- A. This is not the only valid for loop construct; there exists another form of for loop constructor.

- B. The expression expr1 is optional. it initializes the loop and is evaluated once, as the loop begin.
- C. When expr2 evaluates to false, the loop terminates. It is evaluated only after each iteration through the loop.
- D. The expression expr3 must be present. It is evaluated after each iteration through the loop.

Correct Answer: BC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Real 72

Oracle 1z0-803 Exam

The for statement have this forms:

```
for (init-stmt; condition; next-stmt) {  
    body  
}
```

There are three clauses in the for statement.

The init-stmt statement is done before the loop is started, usually to initialize an iteration variable. The condition expression is tested before each time the loop is done. The loop isn't executed if the boolean expression is false (the same as the while loop). The next-stmt statement is done after the body is executed. It typically increments an iteration variable.

QUESTION 95

```
public class StringReplace {
```

```
    public static void main(String[] args) {
```

```
        String message = "Hi everyone!";
```

```
        System.out.println("message = " + message.replace("e", "X")); }
```

```
    }
```

What is the result?

- A. message = Hi everyone!
- B. message = Hi XvXryonX!
- C. A compile time error is produced.
- D. A runtime error is produced.

- E. message =
- F. message = Hi Xeveryone!

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 96

Which two statements are true for a two-dimensional array?

- A. It is implemented as an array of the specified element type.
Real 73
Oracle 1z0-803 Exam
- B. Using a row by column convention, each row of a two-dimensional array must be of the same size.
- C. At declaration time, the number of elements of the array in each dimension must be specified.
- D. All methods of the class Object may be invoked on the two-dimensional array.

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 97

Which three statements are benefits of encapsulation?



<http://www.gratisexam.com/>

- A. Allows a class implementation to change without changing the clients

- B. Protects confidential data from leaking out of the objects
- C. Prevents code from causing exceptions
- D. Enables the class implementation to protect its invariants
- E. Permits classes to be combined into the same package
- F. Enables multiple instances of the same class to be created safely

Correct Answer: ABD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 98

The protected modifier on a Field declaration within a public class means that the field _____.

- A. Cannot be modified
- B. Can be read but not written from outside the class
- C. Can be read and written from this class and its subclasses only within the same package
- D. Can be read and written from this class and its subclasses defined in any package

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Reference:

<http://beginnersbook.com/2013/05/java-access-modifiers/>

QUESTION 99

Given:

Real 74

Oracle 1z0-803 Exam

Given:

```
class Caller {  
    private void init() {  
        System.out.println("Initialized");  
    }  
  
    public void start() {  
        init();  
        System.out.println("Started");  
    }  
}  
  
public class TestCall {  
    public static void main(String[] args) {  
        Caller c = new Caller();  
        c.start();  
        c.init();  
    }  
}
```

What is the result?

- A. Initialized
Started
- B. Initialized
Started
Initialized
- C. Compilation fails
- D. An exception is thrown at runtime

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 100

Given:

Real 75

Oracle 1z0-803 Exam

```
public class X implements Z {
    public String toString() {
        return "X ";
    }
    public static void main(String[] args) {
        Y myY = new Y();
        X myX = myY;
        Z myZ = myX;
        System.out.print(myX);
        System.out.print((Y)myX);
        System.out.print(myZ);
    }
}

class Y extends X {
    public String toString() {
        return "Y ";
    }
}
```

A. XXX

B. XYX

C. Y Y X

D. Y Y Y

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 101

Given:

Real 76

Oracle 1z0-803 Exam

```

class Alpha {
    int ns;
    static int s;
    Alpha(int ns) {
        if (s < ns) {
            s = ns;
            this.ns = ns;
        }
    }
    void doPrint() {
        System.out.println("ns = " + ns + " s = " + s);
    }
}

```

And,

```

public class TestA {
    public static void main(String[] args) {
        Alpha ref1 = new Alpha(50);
        Alpha ref2 = new Alpha(125);
        Alpha ref3 = new Alpha(100);
        ref1.doPrint();
        ref2.doPrint();
        ref3.doPrint();
    }
}

```

- A. ns = 50 S = 125
ns = 125 S = 125
ns = 100 S = 125
- B. ns = 50 S = 125
ns = 125 S = 125
ns = 0 S = 125
- C. ns = 50 S = 50
ns = 125 S = 125
ns = 100 S = 100
- D. ns = 50 S = 50

ns = 125 S = 125
ns = 0 S = 125

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 102

Given:

Class A { }

Class B { }

Interface X { }

Real 77

Oracle 1z0-803 Exam

Interface Y { }

Which two definitions of class C are valid?

- A. Class C extends A implements X { }
- B. Class C implements Y extends B { }
- C. Class C extends A, B { }
- D. Class C implements X, Y extends B { }
- E. Class C extends B implements X, Y { }

Correct Answer: AE

Section: (none)

Explanation

Explanation/Reference:

Explanation: extends is for extending a class.

implements is for implementing an interface.

Java allows for a class to implement many interfaces.

QUESTION 103

Given the code fragment

```
class Test2 {  
    int fvar;  
    static int cvar;  
    public static void main(String[] args) {  
        Test2 t = new Test2();  
        // insert code here to write field variables  
    }  
}
```

Which code fragments, inserted independently, enable the code compile?

- A. t.fvar = 200;
- B. cvar = 400;
- C. fvar = 200;
 cvar = 400;
- D. this.fvar = 200;
 this.cvar = 400;
- E. t.fvar = 200;
 Test2.cvar = 400;
- F. this.fvar = 200;
 Real 78
 Oracle 1z0-803 Exam
 Test2.cvar = 400;

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 104

View the exhibit.

```
class MissingInfoException extends Exception { }  
class AgeOutOfRangeException extends Exception { }  
  
class Candidate {  
    String name;  
    int age;  
    Candidate(String name, int age) throws Exception {  
        if (name == null) {  
            throw new MissingInfoException();  
        } else if (age <= 10 || age >= 150) {  
            throw new AgeOutOfRangeException();  
        } else {  
            this.name = name;  
            this.age = age;  
        }  
    }  
    public String toString() {  
        return name + " age: " + age;  
    }  
}
```

Given the code fragment:

```

4. public class Test {
5.     public static void main(String[] args) {
6.         Candidate c = new Candidate("James", 20);
7.         Candidate c1 = new Candidate("Williams", 32);
8.         System.out.println(c);
9.         System.out.println(c1);
10.    }
11. }

```

Which change enables the code to print the following?

James age: 20

Williams age: 32

- A. Replacing line 5 with `public static void main (String [] args) throws MissingInfoException, Real 79 Oracle 1z0-803 Exam AgeOutOfRangeException {`
- B. Replacing line 5 with `public static void main (String [] args) throws.Exception {`
- C. Enclosing line 6 and line 7 within a try block and adding:
`catch(Exception e1) { //code goes here}`
`catch (missingInfoException e2) { //code goes here}`
`catch (AgeOutOfRangeException e3) { //code goes here}`
- D. Enclosing line 6 and line 7 within a try block and adding:
`catch (missingInfoException e2) { //code goes here}`
`catch (AgeOutOfRangeException e3) { //code goes here}`

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 105

Given:

```

public class Test {

    static void dispResult(int[] num) {
        try {
            System.out.println(num[1] / (num[1] - num[2]));
        } catch (ArithmeticException e) {
            System.err.println("first exception");
        }
        System.out.println("Done");
    }

    public static void main(String[] args) {
        try {
            int[] arr = {100, 100};
            dispResult(arr);
        } catch (IllegalArgumentException e) {
            System.err.println("second exception");
        } catch (Exception e) {
            System.err.println("third exception");
        }
    }
}

```

What is the result?

- A. 0
Done
- B. First Exception
Done
- C. Second Exception
- D. Done
Third Exception
- E. Third Exception

Real 80
Oracle 1z0-803 Exam

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 106

Given the code format:

```
class DBConfiguration {  
    String user;  
    String password;  
}  
  
And:  
  
4. public class DBHandler {  
5.     DBConfiguration configureDB(String uname, String password) {  
6.         // insert code here  
7.     }  
8.     public static void main(String[] args) {  
9.         DBHandler r = new DBHandler();  
10.        DBConfiguration dbConf = r.configureDB("manager", "manager");  
11.    }  
12. }
```

Which code fragment must be inserted at line 6 to enable the code to compile?

- A. DBConfiguration f;
return f;
- B. Return DBConfiguration;
- C. Return new DBConfiguration;
- D. Retutn 0;

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 107

Given:

Real 81

Oracle 1z0-803 Exam

```
class Test {  
    int sum = 0;  
    public void doCheck(int number) {  
        if (number % 2 == 0) {  
            break;  
        } else {  
            for (int i = 0; i < number; i++) {  
                sum += i;  
            }  
        }  
    }  
    public static void main(String[] args) {  
        Test obj = new Test();  
        System.out.println("Red " + obj.sum);  
        obj.doCheck(2);  
        System.out.println("Orange " + obj.sum);  
        obj.doCheck(3);  
        System.out.println("Green " + obj.sum);  
    }  
}
```

What is the result?

- A. Red 0
Orange 0
Green 3
- B. Red 0
Orange 0
Green 6
- C. Red 0
Orange 1
- D. Green 4
- E. Compilation fails

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 108

Given the code fragment:

Real 82

Oracle 1z0-803 Exam

```
String color = "teal";  
  
switch (color) {  
    case "Red":  
        System.out.println("Found Red");  
    case "Blue":  
        System.out.println("Found Blue");  
        break;  
    case "Teal":  
        System.out.println("Found Teal");  
        break;  
    default:  
        System.out.println("Found Default");  
}
```


What is the result?

- A. Found Red
Found Default
- B. Found Teal
- C. Found Red
Found Blue
Found Teal
- D. Found Red
Found Blue
Found Teal
Found Default
- E. Found Default

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 109

Given:

Real 83

Oracle 1z0-803 Exam

Given:

```
class X {  
    public void mX() {  
        System.out.println("Xm1");  
    }  
}  
class Y extends X {  
    public void mX() {  
        System.out.println("Xm2");  
    }  
    public void mY() {  
        System.out.println("Ym");  
    }  
}  
  
public class Test {  
    public static void main(String[] args) {  
        X xRef = new Y();  
        Y yRef = (Y) xRef;  
        yRef.mY();  
        xRef.mX();  
    }  
}
```

- A. Ym
Xm2
- B. Ym
Xm1
- C. Compilation fails
- D. A ClassCastException is thrown at runtime

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 110

Given:

```
public class Test2 {  
    public static void main(String[] args) {  
        int ar1[] = {2, 4, 6, 8};  
        int ar2[] = {1, 3, 5, 7, 9};  
        ar2 = ar1;  
        for (int e2 : ar2) {  
            System.out.print(" " + e2);  
        }  
    }  
}
```

Real 84

Oracle 1z0-803 Exam

What is the result?

- A. 2 4 6 8
- B. 2 4 6 8 9
- C. 1 3 5 7
- D. 1 3 5 7 9

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 111

Given:

```
public class MyFor1 {  
    public static void main(String[] args) {  
        int[] x = {6, 7, 8};  
        for (int i : x) {  
            System.out.print(i + " ");  
            i++;  
        }  
    }  
}
```

What is the result?

- A. 6 7 8
- B. 7 8 9
- C. 0 1 2
- D. 6 8 10
- E. Compilation fails

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 112

Given:

Real 85

Oracle 1z0-803 Exam

```
public class Calculator {  
    public static void main(String[] args) {  
        int num = 5;  
        int sum;  
  
        do {  
            sum += num;  
        } while ((num--) > 1);  
  
        System.out.println("The sum is " + sum + ".");  
    }  
}
```

What is the result?

- A. The sum is 2
- B. The sum is 14
- C. The sum is 15
- D. The loop executes infinite times
- E. Compilation fails

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 113

Given:

```

package p1;
public interface DoInterface {
    void m1(int n);
    public void m2(int n);           // line n1
}

package p3;
import p1.DoInterface;
public class DoClass implements DoInterface{
    int x1,x2;
    DoClass(){
        this.x1 = 0;
        this.x2 = 10;
    }
    public void m1(int p1) { x1+=p1; System.out.println(x1); } // line n2
    public void m2(int p1) { x2+=p1; System.out.println(x2); }
}

package p2;
import p1.*;
import p3.*;
class Test {
    public static void main(String[] args){
        DoInterface doi= new DoClass(); // line n3
        doi.method1(100);
        doi.method2(200);
    }
}

```

What is the result?

Real 86

Oracle 1z0-803 Exam

- A. 100
- B. Compilation fails due to an error in line n1

- C. Compilation fails due to an error at line n2
- D. Compilation fails due to an error at line n3

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 114

Given:

```
public class TestTry {  
    public static void main(String[] args) {  
        StringBuilder message = new StringBuilder("hello java!");  
        int pos = 0;  
        try {  
            for ( pos = 0; pos < 12; pos++) {  
                switch (message.charAt(pos)) {  
                    case 'a':  
                    case 'e':  
                    case 'o':  
                        String uc=Character.toString(message.charAt(pos)).toUpperCase();  
                        message.replace(pos, pos+1, uc);  
                }  
            }  
        } catch (Exception e) {  
            System.out.println("Out of limits");  
        }  
        System.out.println(message);  
    }  
}
```

What is the result?

A. hEllojAvA!

- B. Hello java!
- C. Out of limits
hElIOjAvA!
- D. Out of limits

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:


Explanation:

QUESTION 115

Given:

Real 87

Oracle 1z0-803 Exam

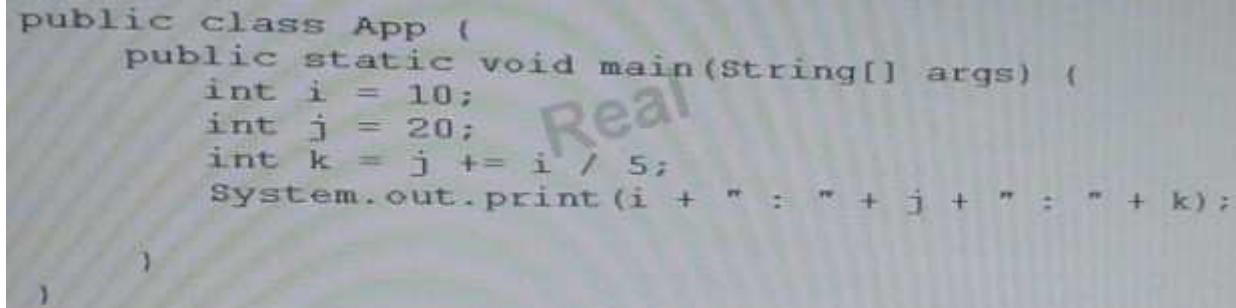A screenshot of a Java code snippet. The code is as follows:

```
public class App {  
    public static void main(String[] args) {  
        int i = 10;  
        int j = 20;  
        int k = j += i / 5;  
        System.out.print(i + " : " + j + " : " + k);  
    }  
}
```

A large, semi-transparent watermark with the word "Real" is visible across the center of the code block.

What is the result?

- A. 10 : 22 : 20
- B. 10 : 22 : 22
- C. 10 : 22 : 6
- D. 10 : 30 : 6

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 116

Given the code fragment:

```
int[] lst = {1, 2, 3, 4, 5, 4, 3, 2, 1};  
int sum = 0;  
for (int frnt = 0, rear = lst.length - 1;  
     frnt < 5 && rear >= 5;  
     frnt++, rear--) {  
    sum = sum + lst[frnt] + lst[rear];  
}  
System.out.print(sum);
```

What is the result?

- A. 20
- B. 25
- C. 29
- D. Compilation fails
- E. AnArrayIndexOutOfBoundsException is thrown at runtime

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Real 88

Oracle 1z0-803 Exam

QUESTION 117

Given:

```
public class X {  
    public static void main(String[] args){  
        String theString = "Hello World";  
        System.out.println(theString.charAt(11));  
    }  
}
```

What is the result?

- A. The program prints nothing
- B. d
- C. A `StringIndexOutOfBoundsException` is thrown at runtime.
- D. An `ArrayIndexOutOfBoundsException` is thrown at runtime.
- E. A `NullPointerException` is thrown at runtime.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 118

Which two statements are true for a two-dimensional array of primitive data type?

- A. It cannot contain elements of different types.
- B. The length of each dimension must be the same.
- C. At the declaration time, the number of elements of the array in each dimension must be specified.
- D. All methods of the class object may be invoked on the two-dimensional array.

Correct Answer: CD

Section: (none)

Explanation

Explanation/Reference:

Explanation: <http://stackoverflow.com/questions/12806739/is-an-array-a-primitive-type-or-an-object-or-something-else-entirely>

QUESTION 119

Real 89
Oracle 1z0-803 Exam
Given the code fragment:

```
String[] colors = {"red", "blue", "green", "yellow", "maroon", "cyan"};
```

Which code fragment prints blue, cyan, ?

```
C A) for (String c:colors){
    if (c.length() != 4) {
        continue;
    }
    System.out.print(c+" ", " ");
}

C B) for (String c:colors[]) {
    if (c.length() <= 4) {
        continue;
    }
    System.out.print(c+" ", " ");
}

C C) for (String c:String[] colors) {
    if (c.length() >= 3) {
        continue;
    }
    System.out.print(c+" ", " ");
}

C D) for (String c:colors){
    if (c.length() != 4) {
        System.out.print(c+" ", " ");
        continue;
    }
}
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Correct Answer: B
Section: (none)

Explanation

Explanation/Reference:

Explanation:

Real 90

Oracle 1z0-803 Exam

QUESTION 120

Given:

```
public class MyFor3 {  
    public static void main(String[] args) {  
        int[] xx = null;  
        for (int ii : xx) {  
            System.out.println(ii);  
        }  
    }  
}
```

What is the result?

- A. Null
- B. Compilation fails
- C. An exception is thrown at runtime
- D. 0

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 121

Given:

```

public class Test3 {
    public static void main(String[] args) {
        String names[] = new String[3];
        names[0] = "Mary Brown";
        names[1] = "Nancy Red";
        names[2] = "Jessy Orange";
        try {
            for(String n: names) {
                try {
                    String pwd = n.substring(0, 3)+n.substring(6,10);
                    System.out.println(pwd);
                }
                catch (StringIndexOutOfBoundsException sie) {
                    System.out.println("string out of limits");
                }
            }
        }
        catch (ArrayIndexOutOfBoundsException e) {
            System.out.println("array out of limits");
        }
    }
}

```

What is the result?

Real 91

Oracle 1z0-803 Exam

- A. Marrown
String out of limits
JesOran
- B. Marrown
String out of limits
Array out of limits
- C. Marrown
String out of limits
- D. Marrown

NanRed
JesOran

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 122

Given:

```
public abstract class Shape {  
    private int x;  
    private int y;  
    public abstract void draw();  
    public void setAnchor(int x, int y) {  
        this.x = x;  
        this.y = y;  
    }  
}
```

Which two classes use the shape class correctly?

Real 92

Oracle 1z0-803 Exam

- ☐ A)

```
public class Circle implements Shape {  
    private int radius;  
}
```
- ☐ B)

```
public abstract class Circle extends Shape {  
    private int radius;  
}
```
- ☐ C)

```
public class Circle extends Shape {  
    private int radius;  
    public void draw();  
}
```
- ☐ D)

```
public abstract class Circle implements Shape {  
    private int radius;  
    public void draw();  
}
```
- ☐ E)

```
public class Circle extends Shape {  
    private int radius;  
    public void draw() { /* code here */ }  
}
```
- ☐ F)

```
public abstract class Circle implements Shape {  
    private int radius;  
    public void draw() { /* code here */ }  
}
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E
- F. Option F

Correct Answer: BE

Section: (none)

Explanation

Explanation/Reference:

Explanation: When an abstract class is subclassed, the subclass usually provides implementations for all of the abstract methods in its parent class (E). However, if it does not, then the subclass must also be declared abstract (B).

Note: An abstract class is a class that is declared abstract--it may or may not include abstract methods. Abstract classes cannot be instantiated, but they can be subclassed.

QUESTION 123

Given the class definitions:

Real 93

Oracle 1z0-803 Exam

```
class Alpha {
    public String doStuff(String msg) {
        return msg;
    }
}
class Beta extends Alpha {
    public String doStuff(String msg) {
        return msg.replace('a', 'e');
    }
}
class Gamma extends Beta {
    public String doStuff(String msg) {
        return msg.substring(2);
    }
}
```

And the code fragment of the main() method,

```
12. List<Alpha> strs = new ArrayList<Alpha>();
13. strs.add(new Alpha());
14. strs.add(new Beta());
15. strs.add(new Gamma());
16. for (Alpha t : strs) {
17.     System.out.println(t.doStuff("Java"));
18. }
```

What is the result?

- A. Java
Java
Java
- B. Java
Jeve
va
- C. Java
Jeve
ve
- D. Compilation fails

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 124

Given:

Real 94

Oracle 1z0-803 Exam

```
public class Msg {  
    public static String doMsg(char x) {  
        return "Good Day!";  
    }  
    public static String doMsg(int y) {  
        return "Good Luck!";  
    }  
    public static void main(String[] args) {  
        char x = 8;  
        int z = '8';  
        System.out.println(doMsg(x));  
        System.out.print(doMsg(z));  
    }  
}
```

What is the result?

- A. Good Day!
Good Luck!
- B. Good Day!
Good Day!
- C. Good Luck!
Good Day!
- D. Good Luck!
Good Luck!
- E. Compilation fails

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 125

Which two items can legally be contained within a java class declaration?

- A. An import statement
- B. A field declaration
- C. A package declaration
- D. A method declaration

Correct Answer: BD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Reference:

<http://docs.oracle.com/javase/tutorial/java/javaOO/methods.html>

Real 95

Oracle 1z0-803 Exam

QUESTION 126

Given the fragments:

```

public class TestA extends Root {
    public static void main(String[] args) {
        Root r = new TestA();
        System.out.println(r.method1());    // line n1
        System.out.println(r.method2());    // line n2
    }
}
class Root {
    private static final int MAX = 20000;
    private int method1() {
        int a = 100 + MAX;                // line n3
        return a;
    }
    protected int method2() {
        int a = 200 + MAX;                // line n4
        return a;
    }
}

```

Which line causes a compilation error?

- A. Line n1
- B. Line n2
- C. Line n3
- D. Line n4

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 127

Given:

```
public class Case {  
    public static void main(String[] args) {  
        String product = "Pen";  
        product.toLowerCase();  
        product.concat(" BOX".toLowerCase());  
        System.out.print(product.substring(4, 6));  
    }  
}
```

Real 96

Oracle 1z0-803 Exam

What is the result?

- A. box
- B. nbo
- C. bo
- D. nb
- E. An exception is thrown at runtime

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 128

Given the code fragments:

```

interface Contract{ }
class Super implements Contract{ }
class Sub extends Super {}

public class Ref {
    public static void main(String[] args) {
        List objs = new ArrayList();

        Contract c1 = new Super();
        Contract c2 = new Sub(); // line n1
        Super s1 = new Sub();

        objs.add(c1);
        objs.add(c2);
        objs.add(s1); // line n2

        for(Object itm: objs) {
            System.out.println(itm.getClass().getName());
        }
    }
}

```

What is the result?

- A. Super
Sub
Sub
- B. Contract
Contract
Super
- C. Compilation fails at line n1
- D. Compilation fails at line n2

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Real 97
Oracle 1z0-803 Exam

QUESTION 129

Given:

```
class Star {
    public void doStuff() {
        System.out.println("Twinkling Star");
    }
}

interface Universe {
    public void doStuff();
}

class Sun extends Star implements Universe {
    public void doStuff() {
        System.out.println("Shining Sun");
    }
}

public class Bob {
    public static void main(String[] args) {
        Sun obj2 = new Sun();
        Star obj3 = obj2;
        ((Sun) obj3).doStuff();
        ((Star) obj2).doStuff();
        ((Universe) obj2).doStuff();
    }
}
```

What is the result?

- A. Shining Sun
Shining Sun
Shining Sun
- B. Shining Sun
Twinkling Star
Shining Sun

- C. Compilation fails
- D. A ClassCastException is thrown at runtime

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 130

Given the code fragment:

Real 98

Oracle 1z0-803 Exam

```

interface Contract{ }
class Super implements Contract{ }
class Sub extends Super {}

public class Ref {
    public static void main(String[] args) {
        List objs = new ArrayList();

        Contract c1 = new Super();
        Contract c2 = new Sub(); // line n1
        Super s1 = new Sub();

        objs.add(c1);
        objs.add(c2);
        objs.add(s1); // line n2

        for(Object itm: objs) {
            System.out.println(itm.getClass().getName());
        }
    }
}

```

- A. Super
Sub
Sub
- B. Contract
Contract
Super
- C. Compilation fails at line n1
- D. Compilation fails at line n2

Correct Answer: D
Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 131

Given the code fragment:

```
public static void main(String[] args) {  
    ArrayList<String> list = new ArrayList<>();  
  
    list.add("SE");  
    list.add("EE");  
    list.add("ME");  
    list.add("SE");  
    list.add("EE");  
  
    list.remove("SE");  
  
    System.out.print("Values are : " + list);  
}
```

What is the result?

Real 99

Oracle 1z0-803 Exam

- A. Values are : [EE, ME]
- B. Values are : [EE, EE, ME]
- C. Values are : [EE, ME, EE]
- D. Values are : [SE, EE, ME, EE]
- E. Values are : [EE, ME, SE, EE]

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 132

Given:

```
abstract class X {  
    public abstract void methodX();  
}  
interface Y {  
    public void methodY();  
}
```

Which two code fragments are valid?

- ☐ A)

```
class Z extends X implements Y {  
    public void methodZ() {}  
}
```
- ☐ B)

```
abstract class Z extends X implements Y {  
    public void methodZ() {}  
}
```
- ☐ C)

```
class Z extends X implements Y {  
    public void methodX() {}  
}
```
- ☐ D)

```
abstract class Z extends X implements Y {  
}
```
- ☐ E)

```
class Z extends X implements Y {  
    public void methodY() {}  
}
```

- A. Option A
 - B. Option B
 - C. Option C
 - D. Option D
 - E. Option E
- Real 100
Oracle 1z0-803 Exam

Correct Answer: BC

Section: (none)

Explanation

Explanation/Reference:

Explanation: When an abstract class is subclassed, the subclass usually provides implementations for all of the abstract methods in its parent class (C). However, if it does not, then the subclass must also be declared abstract (B).

Note: An abstract class is a class that is declared abstract--it may or may not include abstract methods. Abstract classes cannot be instantiated, but they can be subclassed.

QUESTION 133

Which two actions will improve the encapsulation of a class?

- A. Changing the access modifier of a field from public to private
- B. Removing the public modifier from a class declaration
- C. Changing the return type of a method to void
- D. Returning a copy of the contents of an array or ArrayList instead of a direct reference

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Reference:

http://www.tutorialspoint.com/java/java_access_modifiers.htm

QUESTION 134

Given:

```
public class Vowel {  
    private char var;  
    public static void main(String[] args) {  
        char var1 = 'a';  
        char var2 = var1;  
        var2 = 'e';  
  
        Vowel obj1 = new Vowel();  
        Vowel obj2 = obj1;  
        obj1.var = 'i';  
        obj2.var = 'o';  
  
        System.out.println(var1 + ", " + var2);  
        System.out.print(obj1.var + ", " + obj2.var);  
    }  
}
```

Real 101
Oracle 1z0-803 Exam

- A. a, e
i, o
- B. a, e
o, o
- C. e, e
i, o
- D. e, e
o, o

Correct Answer: D
Section: (none)
Explanation

Explanation/Reference:

Explanation:

QUESTION 135

Given:

```
public class Circle {
    double radius;
    public double area;
    public Circle(double r) { radius = r; }
    public double getRadius() { return radius; }
    public void setRadius(double r) { radius = r; }
    public double getArea() { return /* ??? */; }
}

class App {
    public static void main(String[] args) {
        Circle c1 = new Circle(17.4);
        c1.area = Math.PI * c1.getRadius() * c1.getRadius();
    }
}
```

The class is poorly encapsulated. You need to change the circle class to compute and return the area instead.

Which two modifications are necessary to ensure that the class is being properly encapsulated?

- A. Remove the area field.
- B. Change the getArea() method as follows:
public double getArea () { return Math.PI * radius * radius; }
- C. Add the following method:
public double getArea () {area = Math.PI * radius * radius; }
- D. Change the access modifier of the setRadius () method to be protected.

Correct Answer: BD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Real 102

Oracle 1z0-803 Exam

QUESTION 136

Given:

```
1. import java.io.Error;
2.     public class TestApp {
3.     public static void main(String[] args) {
4.         TestApp t = new TestApp();
5.         try {
6.             t.doPrint();
7.             t.doList();
8.
9.         } catch (Exception e2) {
10.            System.out.println("Caught " + e2);
11.        }
12.    }
13.    public void doList() throws Exception {
14.        throw new Error("Error");
15.    }
16.    public void doPrint() throws Exception {
17.        throw new RuntimeException("Exception");
18.    }
19. }
```

What is the result?

- ☐ A) Caught java.lang.RuntimeException: Exception
Exception in thread "main" java.lang.Error: Error
at TestApp.doList(TestApp.java: 14)
at TestApp.main(TestApp.java: 6)
- ☐ B) Exception in thread "main" java.lang.Error: Error
at TestApp.doList(TestApp.java: 14)
at TestApp.main(TestApp.java: 6)
- ☐ C) Caught java.lang.RuntimeException: Exception
Caught java.lang.Error: Error
- ☐ D) Caught java.lang.RuntimeException: Exception

- A. Option A
B. Option B
C. Option C
D. Option D

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 137

Real 103

Oracle 1z0-803 Exam

Given:

```
1. public class TestLoop {  
2.     public static void main(String[] args) {  
3.         float myarray[] = {10.20f, 20.30f, 30.40f, 50.60f};  
4.         int index = 0;  
5.         boolean isFound = false;  
6.         float key = 30.40f;  
7.         // insert code here  
8.         System.out.println(isFound);  
9.     }  
10. }
```

Which code fragment, when inserted at line 7, enables the code print true?

```
C A) while (key == myarray[index++]) {  
    isFound = true;  
}  
  
C B) while (index <= 4) {  
    if (key == myarray[index]) {  
        index++;  
        isFound = true;  
        break;  
    }  
}  
  
C C) while (index++ < 5) {  
    if (key == myarray[index]) {  
        isFound = true;  
    }  
}  
  
C D) while (index < 5) {  
    if (key == myarray[index]) {  
        isFound = true;  
        break;  
    }  
    index++;  
}
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Correct Answer: A

Section: (none)

Explanation


Explanation/Reference:

Explanation:

Real 104
Oracle 1z0-803 Exam

QUESTION 138

Given the code fragment:

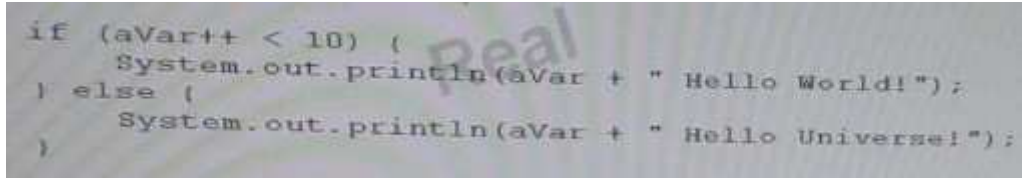

```
if (aVar++ < 10) {  
    System.out.println(aVar + " Hello World!");  
} else {  
    System.out.println(aVar + " Hello Universe!");  
}
```

What is the result if the integer aVar is 9?

- A. 10 Hello world!
- B. 10 Hello universe!
- C. 9 Hello world!
- D. Compilation fails.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 139

Given:

Test.java

```
public class Test {  
    public static void main(String[] args) {  
        Integer num = Integer.parseInt(args[1]);  
        System.out.println("Number is : " + num);  
    }  
}
```

And the commands:



<http://www.gratisexam.com/>

Javac Test.java

Java Test 12345

What is the result?

- A. Number us : 12345
- B. A NullPointerException is thrown at runtime
Real 105
Oracle 1z0-803 Exam
- C. A NumberFormatException is thrown at runtime
- D. AnArrayIndexOutOfBoundsException is thrown at runtime.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 140

Given the code fragment:

```
public class Test {  
    public static List data = new ArrayList();  
  
    // insert code here  
    {  
        for (String x : strs) {  
            data.add(x);  
        }  
        return data;  
    }  
  
    public static void main(String[] args) {  
        String[] d = {"a", "b", "c"};  
        update(d);  
        for (String s : d) {  
            System.out.print(s + " ");  
        }  
    }  
}
```

Which code fragment, when inserted at // insert code here, enables the code to compile and and print a b c?

- A. List update (String[] strs)
- B. Static ArrayListupdate(String [] strs)
- C. Static List update (String [] strs)
- D. Static void update (String[] strs)
- E. ArrayList static update(String [] strs)

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 141

Given the code fragment:

Real 106

Oracle 1z0-803 Exam

```
System.out.println( 28 + 5 <= 4 + 29 );  
System.out.println( ( 28 + 5 ) <= { 4 + 29 } );
```

What is the result?

- A. 28false29
true
- B. 285 < 429
true
- C. true
true
- D. compilation fails

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 142

Given:

```

public class Access {
    private int x = 0;
    private int y = 0;

    public static void main(String[] args) {
        Access accApp = new Access();
        accApp.printThis(1, 2);
        accApp.printThat(3, 4);
    }

    public void printThis(int x, int y) {
        x = x;
        y = y;
        System.out.println("x:" + this.x + " y:" + this.y);
    }

    public void printThat(int x, int y) {
        this.x = x;
        this.y = y;
        System.out.println("x:" + this.x + " y:" + this.y);
    }
}

```

What is the result?

- A. x: 1 y: 2
- B. 3 y: 4
- C. x: 0 y: 0
- D. 3 y: 4

Real 107

Oracle 1z0-803 Exam

- E. x: 1 y: 2
- F. 0 y: 0
- G. x: 0 y: 0
- H. 0 y: 0

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 143

Given the code fragment:

```
class Student {  
    String name;  
    int age;  
}  
  
And,  
  
1. public class Test {  
2.     public static void main(String[] args) {  
3.         Student s1 = new Student();  
4.         Student s2 = new Student();  
5.         Student s3 = new Student();  
6.         s1 = s3;  
7.         s3 = s2;  
8.         s2 = null;  
9.     }  
10. }
```

Which statement is true?

- A. After line 8, three objects are eligible for garbage collection
- B. After line 8, two objects are eligible for garbage collection
- C. After line 8, one object is eligible for garbage collection
- D. After line 8, none of the objects are eligible for garbage collection

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 144

Given:

Real 108

Oracle 1z0-803 Exam

```
class SpecialException extends Exception {
    public SpecialException(String message) {
        super(message);
        System.out.println(message);
    }
}

public class ExceptionTest {
    public static void main(String[] args) {
        try {
            doSomething();
        }
        catch (SpecialException e) {
            System.out.println(e);
        }
    }

    static void doSomething() throws SpecialException {
        int[] ages = new int[4];
        ages[4] = 17;
        doSomethingElse();
    }

    static void doSomethingElse() throws SpecialException {
        throw new SpecialException("Thrown at end of doSomething() method");
    }
}
```

What will be the output?

☐ A) SpecialException: Thrown at end of doSomething() method

☐ B) Error in thread "main" java.lang.ArrayIndexOutOfBoundsException

☐ C) Exception in thread "main" java.lang.ArrayIndexOutOfBoundsException: 4
at ExceptionTest.doSomething(ExceptionTest.java:13)
at ExceptionTest.main(ExceptionTest.java:4)

☐ D) SpecialException: Thrown at end of doSomething() method
at ExceptionTest.doSomethingElse(ExceptionTest.java:16)
at ExceptionTest.doSomething(ExceptionTest.java:13)
at ExceptionTest.main(ExceptionTest.java:4)

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 145

Given the code fragment:

```
9.   int a = -10;
10.  int b = 17;
11.  int c = expression1;
12.  int d = expression2;
13.  c++;
14.  d--;
15.  System.out.print(c + " , " + d);
```

Real 109

Oracle 1z0-803 Exam

What could expression1 and expression2 be, respectively, in order to produce output 8, 16?

- A. ++a, --b
- B. ++a, b--
- C. A++, --b
- D. A++, b--

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 146

Given:

```

public class Test2 {
    public static void doChange(int[] arr) {
        for(int pos = 0; pos < arr.length; pos++){
            arr[pos] = arr[pos] + 1;
        }
    }
    public static void main(String[] args) {
        int[] arr = {10, 20, 30};
        doChange(arr);
        for(int x: arr) {
            System.out.print(x + ", ");
        }
        doChange(arr[0], arr[1], arr[2]);
        System.out.print(arr[0] + ", " + arr[1] + ", " + arr[2]);
    }
}

```

What is the result?

- A. 11, 21, 31, 11, 21, 31
- B. 11, 21, 31, 12, 22, 32
- C. 12, 22, 32, 12, 22, 32
- D. 10, 20, 30, 10, 20, 30

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 147

Given:

Real 110

Oracle 1z0-803 Exam

```
public class Palindrome {  
    public static int main(String[] args) {  
        System.out.print(args[1]);  
        return 0;  
    }  
}
```

And the commands:

```
javac Palindrome.java  
java Palindrome Wow Mom
```

What is the result?

- A. Compilation fails
- B. The code compiles, but does not execute.
- C. Paildrome
- D. Wow
- E. Mom

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 148

Given:

```
class Jump {  
    static String args[] = {"lazy", "lion", "is", "always"};  
    public static void main(String[] args) {  
        System.out.println(  
            args[1] + " " + args[2] + " " + args[3] + " jumping");  
    }  
}
```

And the commands:

Javac Jump.java

Java Jump crazy elephant is always

What is the result?

- A. Lazy lion is jumping
Real 111
Oracle 1z0-803 Exam
- B. Lion is always jumping
- C. Crazy elephant is jumping
- D. Elephant is always jumping
- E. Compilation fails

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 149

Which code fragment cause a compilation error?

- A. flat flt = 100F;

- B. float flt = (float) 1_11.00;
- C. float flt = 100;
- D. double y1 = 203.22;
float flt = y1
- E. int y2 = 100;
float flt = (float) y2;

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 150

Given:

```
class Test {  
    public static void main(String[] args) {  
        int numbers[];  
        numbers = new int[2];  
        numbers[0] = 10;  
        numbers[1] = 20;  
  
        numbers = new int[4];  
        numbers[2] = 30;  
        numbers[3] = 40;  
        for (int x : numbers) {  
            System.out.print(" " + x);  
        }  
    }  
}
```

Real 112

Oracle 1z0-803 Exam

What is the result?

- A. 10 20 30 40

- B. 0 0 30 40
- C. Compilation fails
- D. An exception is thrown at runtime

Correct Answer: A

Section: (none)


Explanation

Explanation/Reference:

Explanation:

QUESTION 151

Given:

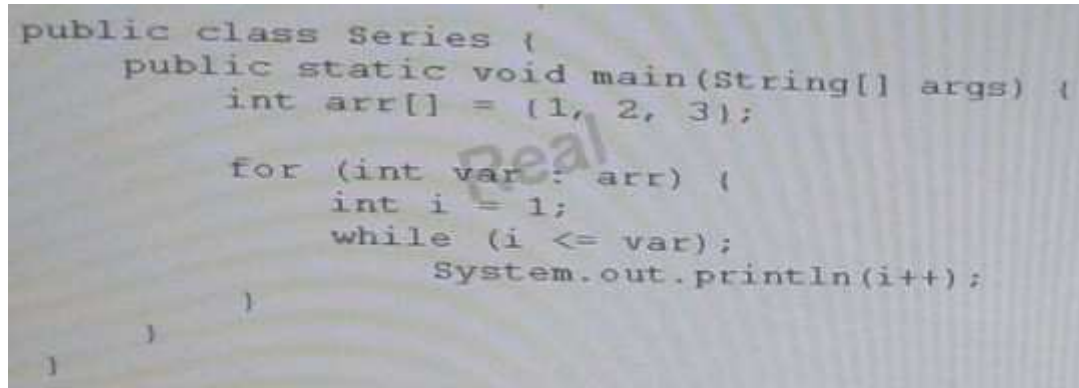

```
public class Series {  
    public static void main(String[] args) {  
        int arr[] = {1, 2, 3};  
  
        for (int var : arr) {  
            int i = 1;  
            while (i <= var);  
                System.out.println(i++);  
        }  
    }  
}
```

What is the result?

- A. 1
- B. 1
- C. 2
- D. Compilation fails
- E. The loop executes infinite times

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Real 113

Oracle 1z0-803 Exam

QUESTION 152

Given:

```
class Patient {  
    String name;  
    public Patient(String name) {  
        this.name = name;  
    }  
}
```

And the code fragment:

```
8. public class Test {  
9.     public static void main(String[] args) {  
10.         List ps = new ArrayList();  
11.         Patient p2 = new Patient("Mike");  
12.         ps.add(p2);  
13.  
14.         // insert code here  
15.  
16.         if (f >= 0) {  
17.             System.out.print("Mike Found");  
18.         }  
19.     }  
20. }
```

Which code fragment, when inserted at line 14, enables the code to print Mike Found?

A. `int f = ps.indexOf (new patient ("Mike"));`

- B. `int f = ps.indexOf (patient("Mike"));`
- C. `patient p = new Patient ("Mike");`
`int f = pas.indexOf(P)`
- D. `int f = ps.indexOf(p2);`

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 153

Give:

Real 114

Oracle 1z0-803 Exam

```
class Alpha {
    public String[] main = new String[2];
    Alpha(String[] main) {
        for (int ii = 0; ii < main.length; ii++) {
            this.main[ii] = main[ii] + 5;
        }
    }
    public void main() {
        System.out.print(main[0] + main[1]);
    }
}

public class Test {
    public static void main(String[] args) {
        Alpha main = new Alpha(args);
        main.main();
    }
}

And the commands:

javac Test.java
java Test 1 2
```

What is the result?

- A. 1525
- B. 13
- C. Compilation fails
- D. An exception is thrown at runtime
- E. The program fails to execute due to runtime error

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 154

Given:

```
public class Test {  
    public static void main(String[] args) {  
        Test ts = new Test();  
        System.out.print(isAvailable + " ");  
        isAvailable= ts.doStuff();  
        System.out.println(isAvailable);  
    }  
    public static boolean doStuff() {  
        return !isAvailable;  
    }  
    static boolean isAvailable = false;  
}
```

Real 115

Oracle 1z0-803 Exam

What is the result?

- A. true true
- B. true false
- C. false true
- D. false false
- E. Compilation fails

Correct Answer: E

Section: (none)


Explanation

Explanation/Reference:

Explanation:

QUESTION 155

Given the code in a file Traveler.java:

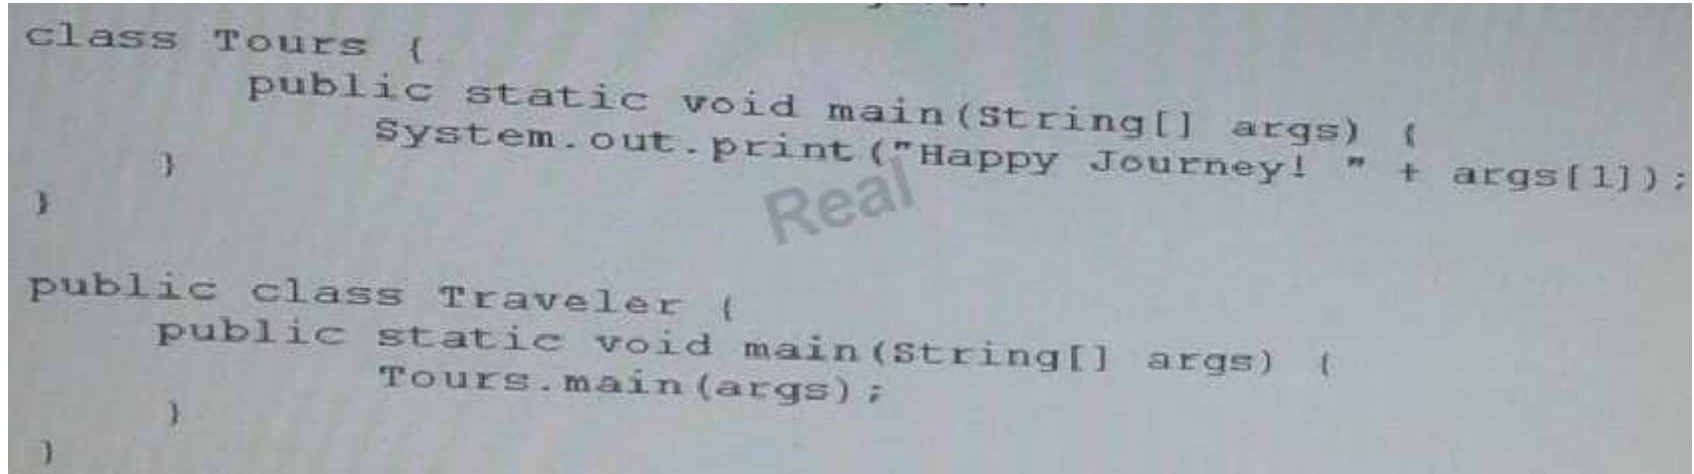

```
class Tours {  
    public static void main(String[] args) {  
        System.out.print("Happy Journey! " + args[1]);  
    }  
}  
  
public class Traveler {  
    public static void main(String[] args) {  
        Tours.main(args);  
    }  
}
```

And the commands:

Javac Traveler.java

Java Traveler Java Duke

What is the result?

- A. Happy Journey! Duke
- B. Happy Journey! Java
- C. An exception is thrown at runtime
- D. The program fails to execute due to a runtime error

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Real 116
Oracle 1z0-803 Exam

QUESTION 156

Given:

```
class X {  
    int x1, x2, x3;  
}  
class Y extends X {  
    int y1;  
    Y() {  
        x1 = 1;  
        x2 = 2;  
        y1 = 10;  
    }  
}
```

```
class Z extends Y {  
    int z1;  
    Z() {  
        x1 = 3;  
        y1 = 20;  
        z1 = 100;  
    }  
}
```

And,

```
public class Test3 {  
    public static void main(String[] args) {  
        Z obj = new Z();  
        System.out.println(obj.x3 + ", " + obj.y1 + ", " + obj.z1);  
    }  
}
```

Which constructor initializes the variable x3?

- A. Only the default constructor of class X
- B. Only the no-argument constructor of class Y
- C. Only the no-argument constructor of class Z
- D. Only the default constructor of object class

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 157

Given:

Real 117

Oracle 1z0-803 Exam

Given:

```
class Dog {
    Dog() {
        try {
            throw new Exception();
        } catch (Exception e) { }
    }
}

class Test {
    public static void main(String[] args) {
        Dog d1 = new Dog();
        Dog d2 = new Dog();
        Dog d3 = d2;
        // do complex stuff
    }
}
```

How many objects have been created when the line // do complex stuff is reached?

- A. Two
- B. Three
- C. Four
- D. Six

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 158

Given:

```
public class CharToStr {  
    public static void main(String[] args) {  
        String str1 = "Java";  
        char str2[] = { 'J', 'a', 'v', 'a' };  
        String str3 = null;  
        for (char c : str2) {  
            str3 = str3 + c;  
        }  
        if (str1.equals(str3))  
            System.out.print("Successful");  
        else  
            System.out.print("Unsuccessful");  
    }  
}
```

Real 118

Oracle 1z0-803 Exam

What is result?

- A. Successful
- B. Unsuccessful
- C. Compilation fails
- D. An exception is thrown at runtime

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 159

Given:

```
public class Series {
    private boolean flag;

    public void displaySeries() {
        int num = 2;
        while (flag) {
            if (num % 7 == 0)
                flag = false;
            System.out.print(num);
            num += 2;
        }
    }

    public static void main(String[] args) {
        new Series().displaySeries();
    }
}
```

What is the result?

- A. 2 4 6 8 10 12
- B. 2 4 6 8 10 12 14
- C. Compilation fails
- D. The program prints multiple of 2 infinite times
- E. The program prints nothing

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Real 119

Oracle 1z0-803 Exam

QUESTION 160

Given the fragment:

```
24. float var1 = (12_345.01 >= 123_45.00) ? 12_456 : 124_56.02f;  
25. float var2 = var1 + 1024;  
26. System.out.print(var2);
```

What is the result?

- A. 13480.0
- B. 13480.02
- C. Compilation fails
- D. An exception is thrown at runtime

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 161

Given:

```
7.  StringBuilder sb1 = new StringBuilder("Duke");  
8.  String str1 = sb1.toString();  
9.  // insert code here  
10. System.out.print(str1 == str2);
```

Which code fragment, when inserted at line 9, enables the code to print true?

- A. String str2 = str1;
- B. String str2 = new String(str1);
- C. String str2 = sb1.toString();
- D. String str2 = "Duke";

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 162

Real 120

Oracle 1z0-803 Exam

Given the code fragment:

12. int row = 10;
13. for (; row > 0 ;) {
14. int col = row;
15. while (col >= 0) {
16. System.out.print(col + " ");
17. col -= 2;
18. }
19. row = row / col;
20. }

What is the result?

- A. 10 8 6 4 2 0
- B. 10 8 6 4 2
- C. AnArithmeticException is thrown at runtime
- D. The program goes into an infinite loop outputting: 10 8 6 4 2 0. . .
- E. Compilation fails

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 163

Given the classes:

- * AssertionError
- * ArithmeticException
- * ArrayIndexOutOfBoundsException
- * FileNotFoundException
- * IllegalArgumentException
- * IOError
- * IOException
- * NumberFormatException
- * SQLException

Real 121

Oracle 1z0-803 Exam

Which option lists only those classes that belong to the unchecked exception category?

- A. AssertionError, ArrayIndexOutOfBoundsException, ArithmeticException
- B. AssertionError, IOError, IOException
- C. ArithmeticException, FileNotFoundException, NumberFormatException
- D. FileNotFoundException, IOException, SQLException
- E. ArrayIndexOutOfBoundsException, IllegalArgumentException, FileNotFoundException

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation: Not B: IOError and IOException are both checked errors. Not C, not D, not E: FileNotFoundException is a checked error.

Note:

Checked exceptions:

- * represent invalid conditions in areas outside the immediate control of the program (invalid user input, database problems, network outages, absent files)
- * are subclasses of Exception
- * a method is obliged to establish a policy for all checked exceptions thrown by its implementation (either pass the checked exception further up the stack, or handle it somehow)

Note:

Unchecked exceptions:

* represent defects in the program (bugs) - often invalid arguments passed to a non-private method. To quote from The Java Programming Language, by Gosling, Arnold, and Holmes:

"Unchecked runtime exceptions represent conditions that, generally speaking, reflect errors in your program's logic and cannot be reasonably recovered from at run time."

* are subclasses of RuntimeException, and are usually implemented using IllegalArgumentException, NullPointerException, or IllegalStateException

* method is not obliged to establish a policy for the unchecked exceptions thrown by its implementation (and they almost always do not do so)

QUESTION 164

Given:

```
public class Test1 {  
  
    static void doubling (Integer ref, int pv) {  
  
        ref =20;  
  
        pv = 20;  
  
        Real 122  
        Oracle 1z0-803 Exam  
    }  
  
    public static void main(String[] args) {  
  
        Integer iObj = new Integer(10);  
  
        int iVar = 10;  
  
        doubling(iObj++, iVar++);  
  
        System.out.println(iObj+ " , "+iVar);  
    }  
}
```

What is the result?

- A. 11, 11
- B. 10, 10
- C. 21, 11
- D. 20, 20

E. 11, 12

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation: The code doubling(iObj++, iVar++); increases both variables from 10 to 11.

QUESTION 165

Given:

```
class Mid {  
  
    public int findMid(int n1, int n2) {  
  
        return (n1 + n2) / 2;  
  
    }  
  
}  
  
public class Calc extends Mid {  
  
    public static void main(String[] args) {  
  
        int n1 = 22, n2 = 2;  
  
        // insert code here  
  
        System.out.print(n3);  
  
        Real 123  
        Oracle 1z0-803 Exam  
    }  
  
}
```

Which two code fragments, when inserted at // insert code here, enable the code to compile and print 12?

A. Calc c = new Calc();
 int n3 = c.findMid(n1,n2);

- B. `int n3 = super.findMid(n1,n3);`
- C. `Calc c = new Mid();`
`int n3 = c.findMid(n1, n2);`
- D. `Mid m1 = new Calc();`
`int n3 = m1.findMid(n1, n2);`
- E. `int n3 = Calc.findMid(n1, n2);`

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Incorrect:

Not B: circular definition of n3.

Not C: Compilation error. line `Calc c = new Mid();`

required: Calc

found: Mid

Not E: Compilation error. line `int n3 = Calc.findMid(n1, n2);` non-static method `findMid(int,int)` cannot be referenced from a static context

QUESTION 166

Given:

```
import java.util.*;
```

```
public class Ref {
```

```
    public static void main(String[] args) {
```

```
        StringBuilder s1 = new StringBuilder("Hello Java!");
```

```
        String s2 = s1.toString();
```

```
        List<String> lst = new ArrayList<String>();
```

```
        lst.add(s2);
```

```
    }
```

```
    }
```

```
    System.out.println(s1.getClass());
```

```
System.out.println(s2.getClass());

System.out.println(lst.getClass());

}

}
```

What is the result?

- A. class java.lang.String
class java.lang.String
class java.util.ArrayList
- B. class java.lang.Object
class java.lang. Object
class java.util.Collection
- C. class java.lang.StringBuilder
class java.lang.String
class java.util.ArrayList
- D. class java.lang.StringBuilder
class java.lang.String
class java.util.List

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation: class java.lang.StringBuilder
class java.lang.String
class java.util.ArrayList

QUESTION 167

Given:

```
public class ComputeSum {

public int x;

public int y;
```

```

public int sum;

public ComputeSum (int nx, int ny) {

x = nx; y =ny;

Real 125
Oracle 1z0-803 Exam
updateSum();

}

public void setX(int nx) { x = nx; updateSum();}

public void setY(int ny) { x = ny; updateSum();}

void updateSum() { sum = x + y;}

}

```

This class needs to protect an invariant on the sum field.

Which three members must have the private access modifier to ensure that this invariant is maintained?

- A. The x field
- B. The y field
- C. The sum field
- D. The ComputerSum () constructor
- E. The setX () method
- F. The setY () method

Correct Answer: CEF

Section: (none)

Explanation

Explanation/Reference:

Explanation: The sum field and the two methods (setX and SetY) that updates the sum field.

QUESTION 168

Given the following four Java file definitions:

```
// Foo.java
```

```
package facades;
```

```
public interface Foo { }
```

```
// Boo.java
```

```
package facades;
```

```
public interface Boo extends Foo { }
```

```
// Woofy.java
```

```
Real 126
```

```
Oracle 1z0-803 Exam
```

```
package org.domain
```

```
// line n1
```

```
public class Woofy implements Boo, Foo { }
```

```
// Test.java
```

```
package.org;
```

```
public class Test {
```

```
public static void main(String[] args) {
```

```
Foo obj=new Woofy();
```

Which set modifications enable the code to compile and run?

- A. At line n1, Insert: import facades;At line n2, insert:import facades;import org.domain;
- B. At line n1, Insert: import facades.*;At line n2, insert:import facades;import org.*;
- C. At line n1, Insert: import facades.*;At line n2, insert:import facades.Boo;import org.*;
- D. At line n1, Insert: import facades.Foo, Boo;At line n2, insert:import org.domain.Woofy;
- E. At line n1, Insert: import facades.*;At line n2, insert:import facades;import org.domain.Woofy;

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 169

Given:

Given:

```
public class SuperTest {  
  
    public static void main(String[] args) {  
  
        statement1  
  
        statement2  
  
        statement3  
  
        Real 127  
        Oracle 1z0-803 Exam  
    }  
  
}  
  
class Shape {  
  
    public Shape() {  
  
        System.out.println("Shape: constructor");  
  
    }  
  
    public void foo() {  
  
        System.out.println("Shape: foo");  
  
    }  
  
}
```

```
class Square extends Shape {  
    public Square() {  
        super();  
    }  
    public Square(String label) {  
        System.out.println("Square: constructor");  
    }  
    public void foo() {  
        super.foo();  
    }  
    public void foo(String label) {  
        System.out.println("Square: foo");  
    }  
}  
}
```

Real 128

Oracle 1z0-803 Exam

What should statement1, statement2, and statement3, be respectively, in order to produce the result?

Shape: constructor

Square: foo

Shape: foo

- A. `Square square = new Square ("bar");`
`square.foo ("bar");`
`square.foo();`
- B. `Square square = new Square ("bar");`
`square.foo ("bar");`
`square.foo ("bar");`
- C. `Square square = new Square ();`
`square.foo ();`
`square.foo(bar);`
- D. `Square square = new Square ();`
`square.foo ();`
`square.foo("bar");`
- E. `Square square = new Square ();`
`square.foo ();`
`square.foo ();`
- F. `Square square = new Square();`
`square.foo("bar");`
`square.foo();`

Correct Answer: F

Section: (none)

Explanation

Explanation/Reference:

QUESTION 170

Given:

```
public class Marklist {  
  
    int num;  
  
    public static void graceMarks(Marklist obj4) {  
  
        obj4.num += 10;  
  
    }  
  
    public static void main(String[] args) {
```

Real 129

Oracle 1z0-803 Exam

```
MarkList obj1 = new MarkList();
```

```
MarkList obj2 = obj1;
```

```
MarkList obj1 = null;
```

```
obj2.num = 60;
```

```
graceMarks(obj2);
```

```
}
```

```
}
```

How many objects are created in the memory runtime?

A. 1

B. 2

C. 3

D. 4

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation: obj1 and obj3.

when you do e2 = e1 you're copying object references - you're not making a copy of the object - and so the variables e1 and e2 will both point to the same object.

QUESTION 171

Given:

```
class Cake {
```

```
int model;
```

```
String flavor;
```



```
Cake() {  
    model = 0;  
    flavor = "Unknown";  
}  
}
```

Real 130

Oracle 1z0-803 Exam

```
public class Test {  
    public static void main(String[] args) {  
        Cake c = new Cake();  
        bake1(c);  
        System.out.println(c.model + " " + c.flavor);  
        bake2(c);  
        System.out.println(c.model + " " + c.flavor);  
    }  
    public static Cake bake1(Cake c) {  
        A. flavor = "Strawberry";  
        B. model = 1200;  
           return c;  
        }  
        public static void bake2(Cake c) {  
        C. flavor = "Chocolate";  
        D. model = 1230;  
           return;  
        }  
    }
```

What is the result?

- E. 0 unknown
0 unknown
- F. 1200 Strawberry
1200 Strawberry
- G. 1200 Strawberry
1230 Chocolate
- H. Compilation fails

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation: 1200 Strawberry

Real 131

Oracle 1z0-803 Exam

1230 Chocolate

QUESTION 172

Given:

```
public class Painting {  
  
    private String type;  
  
    public String getType() {  
  
        return type;  
  
    }  
  
    public void setType(String type) {  
  
        this.type = type;  
  
    }  
  
    public static void main(String[] args) {
```

```
Painting obj1 = new Painting();  
Painting obj2 = new Painting();  
obj1.setType(null);  
obj2.setType("Fresco");  
System.out.print(obj1.getType() + " : " + obj2.getType());  
}  
}
```

What is the result?

- A. : Fresco
- B. null : Fresco
- C. Fresco : Fresco
- D. A NullPointerException is thrown at runtime

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Real 132

Oracle 1z0-803 Exam

Explanation:

QUESTION 173

Given:

```
class Base {  
  
// insert code here  
}
```

```

public class Derived extends Base{

public static void main(String[] args) {

Derived obj = new Derived();

obj.setNum(3);

System.out.println("Square = " + obj.getNum() * obj.getNum());

}

}

```

Which two options, when inserted independently inside class Base, ensure that the class is being properly encapsulated and allow the program to execute and print the square of the number?

- A. private int num; public int getNum() { return num; }public void setNum(int num) { this.num = num;}
- B. public int num; protected public int getNum() { return num; }protected public void setNum(int num) { this.num = num;}
- C. private int num;public int getNum() {return num;} private void setNum(int num) { this.num = num;}
- D. protected int num; public int getNum() { return num; } public void setNum(int num) { this.num = num;}
- E. protected int num; private int getNum() { return num; } public void setNum(int num) { this.num = num;}

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Incorrect:

Not B: illegal combination of modifiers: protected and public

Real 133

Oracle 1z0-803 Exam

not C: setNum method cannot be private.

not E: getNum method cannot be private.

QUESTION 174

Given:

```
public class Test {  
    public static void main(String[] args) {  
        int arr[] = new int[4];  
        arr[0] = 1;  
        arr[1] = 2;  
        arr[2] = 4;  
        arr[3] = 5;  
        int sum = 0;  
        try {  
            for (int pos = 0; pos <= 4; pos++) {  
                sum = sum + arr[pos];  
            }  
        } catch (Exception e) {  
            System.out.println("Invalid index");  
        }  
        System.out.println(sum);  
    }  
}
```

What is the result?

- A. 12
 - B. Invalid Index
- Real 134
Oracle 1z0-803 Exam

- C. Invalid Index
- D. Compilation fails

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation: The loop (for (int pos = 0; pos <= 4; pos++) { }, it should be pos <= 3, causes an exception, which is caught. Then the correct sum is printed.

QUESTION 175

Given:

```
public class Equal {  
  
    public static void main(String[] args) {  
  
        String str1 = "Java";  
  
        String[] str2 = {"J", "a", "v", "a"};  
  
        String str3 = "";  
  
        for (String str : str2) {  
  
            str3 = str3+str;  
  
        }  
  
        boolean b1 = (str1 == str3);  
  
        boolean b2 = (str1.equals(str3));  
  
        System.out.print(b1+", "+b2);  
  
    }  
}
```

What is the result?

- A. true, false
- B. false, true

- C. true, true
- D. false, false

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation: == strict equality.

Real 135

Oracle 1z0-803 Exam

equals compare state, not identity.

QUESTION 176

Given the code fragment:

```
public static void main(String[] args) {  
  
    int iArray[] = {65, 68, 69};  
  
    iArray[2] = iArray[0];  
  
    iArray[0] = iArray[1];  
  
    iArray[1] = iArray[2];  
  
    for (int element : iArray) {  
  
        System.out.print(element + " ");  
  
    }  
}
```

- A. 68, 65, 69
- B. 68, 65, 65
- C. 65, 68, 65
- D. 65, 68, 69
- E. Compilation fails

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation: 68 65 65

QUESTION 177

Given:

```
public class TestLoop1 {  
  
    public static void main(String[] args) {  
  
        int a = 0, z=10;  
  
        while (a < z) {  
  
            a++;  
  
            Real 136  
            Oracle 1z0-803 Exam  
            --z;  
  
        }  
  
        System.out.print(a + " : " + z);  
  
    }  
  
}
```

What is the result?

- A. 5 : 5
- B. 6 : 4
- C. 6 : 5
- D. 5 : 4

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation: 5 : 5

QUESTION 178

Given:

```
public class MyClass {  
  
    public static void main(String[] args) {  
  
        while (int ii = 0; ii < 2) {  
  
            ii++;  
  
            System.out.println("ii = " + ii);  
  
        }  
  
    }  
  
}
```

What is the result?

- A. ii = 1
ii = 2
Real 137
Oracle 1z0-803 Exam
- B. Compilation fails
- C. The program prints nothing
- D. The program goes into an infinite loop with no output
- E. The program goes to an infinite loop outputting:
ii = 1
ii = 1

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation: The while statement is incorrect. It has the syntax of a for statement.

The while statement continually executes a block of statements while a particular condition is true.

Its syntax can be expressed as:

```
while (expression) {  
    statement(s)  
}
```

The while statement evaluates expression, which must return a boolean value. If the expression evaluates to true, the while statement executes the statement(s) in the while block. The while statement continues testing the expression and executing its block until the expression evaluates to false.

Reference: The while and do-while Statements

QUESTION 179

Given:

```
public class String1 {  
  
    public static void main(String[] args) {  
  
        String s = "123";  
  
        if (s.length() >2)
```

```
            A. concat("456");  
               for(int x = 0; x <3; x++)  
                   s += "x";  
               System.out.println(s);  
            }  
        Real 138  
        Oracle 1z0-803 Exam  
    }  
    What is the result?
```

- B. 123
- C. 123xxx
- D. 123456
- E. 123456xxx
- F. Compilation fails

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation: 123xxx

The if clause is not applied.

Note: Syntax of if-statement:

```
if ( Statement ) {  
}
```

QUESTION 180

Given the code fragment:

```
float x = 22.00f % 3.00f;
```

```
int y = 22 % 3;
```

```
System.out.print(x + ", " + y);
```

What is the result?

- A. 1.0, 1
- B. 1.0f, 1
- C. 7.33, 7
- D. Compilation fails
- E. An exception is thrown at runtime

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation: 1.0, 1

Real 139

Oracle 1z0-803 Exam

QUESTION 181

Which three statements are true about the structure of a Java class?

- A. A class can have only one private constructor.
- B. A method can have the same name as a field.
- C. A class can have overloaded static methods.
- D. A public class must have a main method.
- E. The methods are mandatory components of a class.
- F. The fields need not be initialized before use.

Correct Answer: ABC

Section: (none)

Explanation

Explanation/Reference:

Explanation: A: Private constructors prevent a class from being explicitly instantiated by its callers.

If the programmer does not provide a constructor for a class, then the system will always provide a default, public no-argument constructor. To disable this default constructor, simply add a private no-argument constructor to the class. This private constructor may be empty.

B: The following works fine:

```
int cake() {  
    int cake=0;  
    return (1);  
}
```

C: We can overload static method in Java. In terms of method overloading static method are just like normal methods and in order to overload static method you need to provide another static method with same name but different method signature.

Incorrect:

Not D: Only a public class in an application need to have a main method.

Not E:

Example:

```
class A  
{  
    public string something;  
    public int a;  
}
```

Q: What do you call classes without methods?

Most of the time: An anti pattern.

Why? Because it facilitates procedural programming with "Operator" classes and data structures. You separate data and behaviour which isn't exactly good OOP.

Oracle 1z0-803 Exam

Often times: A DTO (Data Transfer Object)

Read only datastructures meant to exchange data, derived from a business/domain object.

Sometimes: Just data structure.

Well sometimes, you just gotta have those structures to hold data that is just plain and simple and has no operations on it.

Not F: Fields need to be initialized. If not the code will not compile.

Example:

Uncompilable source code - variable x might not have been initialized

QUESTION 182

Given:

```
class MarksOutOfBoundsException extends IndexOutOfBoundsException { }
```

```
public class GradingProcess {
```

```
void verify(int marks) throws IndexOutOfBoundsException {
```

```
if (marks > 100) {
```

```
throw new MarksOutOfBoundsException();
```

```
}
```

```
if (marks > 50) {
```

```
System.out.print("Pass");
```

```
} else {
```

```
System.out.print("Fail");
```

```
}
```

```
}
```

```
public static void main(String[] args) {
```

Real 141

Oracle 1z0-803 Exam

```
int marks = Integer.parseInt(args[2]);
```

```
try {  
    new GradingProcess().verify(marks);  
} catch(Exception e) {  
    System.out.print(e.getClass());  
}  
}  
}
```

And the command line invocation:

Java grading process 89 50 104

What is the result?

- A. Pass
- B. Fail
- C. Class MarketOutOfBoundsException
- D. Class IndexOutOfBoundsException
- E. Class Exception

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation: The value 104 will cause a MarketOutOfBoundsException

QUESTION 183

Given the code fragment:

```
StringBuilder sb = new StringBuilder ( ) ;
```

```
Sb.append ("world");
```

Which code fragment prints Hello World?

- A. sb.insert(0,"Hello ");
Real 142
Oracle 1z0-803 Exam
System.out.println(sb);
- B. sb.append(0,"Hello ");
System.out.println(sb);
- C. sb.add(0,"Hello ");
System.out.println(sb);
- D. sb.set(0,"Hello ");
System.out.println(sb);D

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation: The java.lang.StringBuilder.insert(int offset, char c) method inserts the string representation of the char argument into this sequence. The second argument is inserted into the contents of this sequence at the position indicated by offset. The length of this sequence increases by one. The offset argument must be greater than or equal to 0, and less than or equal to the length of this sequence.

Reference: Java.lang.StringBuilder.insert() Method

QUESTION 184

Given:

```
package p1;
```

```
public interface DoInterface {
```

```
void method1(int n1); // line n1
```

```
}
```

```
package p3;
```

```

import p1.DoInterface;

public class DoClass implements DoInterface {

public DoClass(int p1) { }

public void method1(int p1) { } // line n2

private void method2(int p1) { } // line n3

}

public class Test {

Real 143
Oracle 1z0-803 Exam
public static void main(String[] args) {

DoInterface doi= new DoClass(100); // line n4

doi.method1(100);

doi.method2(100);

}

}

```

Which change will enable the code to compile?

- A. Adding the public modifier to the declaration of method1 at line n1
- B. Removing the public modifier from the definition of method1 at line n2
- C. Changing the private modifier on the declaration of method 2 public at line n3
- D. Changing the line n4 DoClass doi = new DoClass ();

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation: Private members (both fields and methods) are only accessible inside the class they are declared or inside inner classes. private keyword is one of

four access modifier provided by Java and its a most restrictive among all four e.g. public, default(package), protected and private.

Read more: <http://javarevisited.blogspot.com/2012/03/private-in-java-why-should-you-always.html#ixzz3Sh3mOc4D>

QUESTION 185

Given the fragment:

```
String[][] arra = new String[3][];  
  
arra[0] = new String[]{"rose", "lily"};  
  
arra[1] = new String[]{"apple", "berry", "cherry", "grapes"};  
  
arra[0] = new String[]{"beans", "carrot", "potato"};  
  
// insert code fragment here
```

Which code fragment when inserted at line '// insert code fragment here', enables the code to successfully change arra elements to uppercase?

Real 144

Oracle 1z0-803 Exam

- A.

```
String[][] arra = new String[3][];  
arra[0] = new String[]{"rose", "lily"};  
arra[1] = new String[]{"apple", "berry", "cherry", "grapes"}; arra[0] = new String[]{"beans", "carrot", "potato"};  
for (int i = 0; i < arra.length; i++) {  
    for (int j=0; j < arra[i].length; j++) {  
        arra[i][j] = arra[i][j].toUpperCase();  
    }  
}
```
- B.

```
for (int i = 0; i < 3; i++) {  
    for (int j=0; j < 4; j++) {  
        arra[i][j] = arra[i][j].toUpperCase();  
    }  
}
```
- C.

```
for (String a[]:arra[]) {  
    for (String x:a[]) {
```
- D.

```
toUpperCase();  
}  
}
```
- E.

```
for (int i:arra.length) {
```

```
for (String x:arra) {  
    arra[i].toUpperCase();  
}  
}
```

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Incorrect:

not A: arra.length is 3, but the subarrays have 2, 3 and 4 elements. Index will be out of bound. not B: The subarrays are of different lengths. Index will be out of bound.

not D: Compile error.

QUESTION 186

Given the code fragment:

```
public class Test {  
  
    static String[][] arr =new String[3][];  
  
    private static void doPrint() {
```



<http://www.gratisexam.com/>

```
//insert code here
```

```
Real 145
```

```
Oracle 1z0-803 Exam
```

```
}
```

```
public static void main(String[] args) {
```

```
String[] class1 = {"A","B","C"};
```

```
String[] class2 = {"L","M","N","O"};
```

```
String[] class3 = {"I","J"};
```

```
arr[0] = class1;
```

```
arr[1] = class2;
```

```
arr[2] = class3;
```

```
Test.doPrint();
```

```
}
```

```
}
```

Which code fragment, when inserted at line //insert code here, enables the code to print COJ?

- A.

```
int i = 0;
for (String[] sub: arr) {
    int j = sub.length - 1;
    for (String str: sub) {
        System.out.println(str[j]);
        i++;
    }
}
```
- B.

```
private static void doPrint() {
    for (int i = 0; i < arr.length; i++) {
        int j = arr[i].length - 1;
        System.out.print(arr[i][j]);
    }
}
```
- C.

```
int i = 0;
for (String[] sub: arr[0]) {
    int j = sub.length;
    System.out.print(arr[i][j]);
    i++;
}
```
- D.

```
for (int i = 0; i < arr.length - 1; i++) {
    int j = arr[i].length - 1;
```

```
System.out.print(arr[i][j]);  
i++;  
Real 146  
Oracle 1z0-803 Exam  
}
```

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Incorrect:

not A: The following line causes a compile error:

```
System.out.println(str[j]);
```

Not C: Compile error line:

```
for (String[] sub: arr[i])
```

not D: Output: C

QUESTION 187

Given:

```
public class FieldInit {
```

```
    char c;
```

```
    boolean b;
```

```
    float f;
```

```
    void printAll() {
```

```
        System.out.println("c = " + c);
```

```
        System.out.println("c = " + b);
```

```
        System.out.println("c = " + f);
```

```
    }
```

```
    public static void main(String[] args) {
```

```
FieldInit f = new FieldInit();
```

```
A. printAll();  
    }  
    }
```

What is the result?

Real 147

Oracle 1z0-803 Exam

```
B. c = null  
   b = false  
   f = 0.0F
```

```
C. c = 0  
   b = false  
   f = 0.0f
```

```
D. c = null  
   b = true  
   f = 0.0
```

```
E. c =  
   b = false  
   f = 0.0
```

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 188

Given the code fragment:

```
String[] cartoons = {"tom","jerry","micky","tom"};
```

```
int counter =0;
```

```
if ("tom".equals(cartoons[0])) {
```

```
    counter++;
```

```
} else if ("tom".equals(cartoons[1])) {
```

```
counter++;  
  
} else if ("tom".equals(cartoons[2])) {  
  
counter++;  
  
} else if ("tom".equals(cartoons[3])) {  
  
counter++;  
  
}  
  
System.out.print(counter);
```

What is the result?

Real 148
Oracle 1z0-803 Exam

- A. 1
- B. 2
- C. 4
- D. 0

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation: Counter++ will be executed only once because of the else if constructs.

QUESTION 189

Given:

```
public class Test {  
  
public static void main(String[] args) {  
  
int day = 1;  
  
switch (day) {
```

```

case "7": System.out.print("Uranus");
case "6": System.out.print("Saturn");
case "1": System.out.print("Mercury");
case "2": System.out.print("Venus");
case "3": System.out.print("Earth");
case "4": System.out.print("Mars");
case "5": System.out.print("Jupiter");
}
}
}

```

Which two modifications, made independently, enable the code to compile and run?

- A. Adding a break statement after each print statement
- B. Adding a default section within the switch code-block
- C. Changing the string literals in each case label to integer Real 149
Oracle 1z0-803 Exam
- D. Changing the type of the variable day to String
- E. Arranging the case labels in ascending order

Correct Answer: AC

Section: (none)

Explanation

Explanation/Reference:

Explanation: The following will work fine:

```

public class Test {
public static void main(String[] args) {
int day = 1;
switch (day) {

```

```
case 7: System.out.print("Uranus"); break;
case 6: System.out.print("Saturn"); break;
case 1: System.out.print("Mercury"); break;
case 2: System.out.print("Venus"); break;
case 3: System.out.print("Earth"); break;
case 4: System.out.print("Mars"); break;
case 5: System.out.print("Jupiter"); break;
}
}
}
```

QUESTION 190

Given:

```
public class Test {

    public static void main(String[] args) {

        try {

            String[] arr =new String[4];

            arr[1] = "Unix";

            arr[2] = "Linux";

            arr[3] = "Solaris";

            for (String var : arr) {

                System.out.print(var + " ");

                Real 150
                Oracle 1z0-803 Exam
            }

        } catch(Exception e) {

            System.out.print (e.getClass());

        }

    }

}
```



```
}
```

```
}
```

What is the result?

- A. Unix Linux Solaris
- B. Null Unix Linux Solaris
- C. Class java.lang.Exception
- D. Class java.lang.NullPointerException

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation: null Unix Linux Solaris

The first element, arr[0], has not been defined.

QUESTION 191

Given the code fragment

```
int var1 = -5;
```

```
int var2 = var1--;
```

```
int var3 = 0;
```

```
if (var2 < 0) {
```

```
var3 = var2++;
```

```
} else {
```

```
var3 = --var2;
```

```
}
```

```
System.out.println(var3);
```

Real 151
Oracle 1z0-803 Exam
What is the result?

- A. 6
- B. 4
- C. 5
- D. 5
- E. 4
- F. Compilation fails

Correct Answer: C
Section: (none)
Explanation

Explanation/Reference:
Explanation:

QUESTION 192
Given the code fragment:

```
List colors = new ArrayList();
```

```
colors.add("green");
```

```
colors.add("red");
```

```
colors.add("blue");
```

```
colors.add("yellow");
```

```
colors.remove(2);
```

```
colors.add(3, "cyan");
```

```
System.out.print(colors);
```

What is the result?

- A. [green, red, yellow, cyan]

- B. [green, blue, yellow, cyan]
- C. [green, red, cyan, yellow]
- D. An IndexOutOfBoundsException is thrown at runtime

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation: First the list [green, red, blue, yellow] is build.

The blue element is removed:

[green, red, yellow]

Finally the element cyan is added at the end of the list (index 3).

Real 152

Oracle 1z0-803 Exam

[green, red, yellow, cyan]

QUESTION 193

Given:

```
public class TestOperator {  
  
    public static void main(String[] args) {  
  
        int result = 30 - 12 / (2*5)+1;  
  
        System.out.print("Result = " + result);  
  
    }  
  
}
```

What is the result?

- A. Result = 2
- B. Result = 3
- C. Result = 28
- D. Result = 29

E. Result = 30

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 194

Given:

```
class Sports {  
  
    int num_players;  
  
    String name, ground_condition;  
  
    Sports(int np, String sname, String sground){  
  
        Real 153  
        Oracle 1z0-803 Exam  
        num_players = np;  
  
        name = sname;  
  
        ground_condition = sground;  
  
    }  
  
}
```

```
class Cricket extends Sports {
```

```
    int num_umpires;
```

```
    int num_substitutes;
```

Which code fragment can be inserted at line //insert code here to enable the code to compile?

A. Cricket() {
 super(11, "Cricket", "Condidtion OK");

```
num_umpires =3;
num_substitutes=2;
}
```

B. Cricket() {
super.ground_condition = "Condition OK";
super.name="Cricket";
super.num_players = 11;
num_umpires =3;
num_substitutes=2;
}

C. Cricket() {
this(3,2);
super(11, "Cricket", "Condidtion OK");
}
Cricket(int nu, ns) {
this.num_umpires =nu;
this.num_substitutes=ns;
}

D. Cricket() {
this.num_umpires =3;
this.num_substitutes=2;
super(11, "Cricket", "Condidtion OK");
}

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Real 154

Oracle 1z0-803 Exam

Incorrect:

not C, not D: call to super must be the first statement in constructor.

QUESTION 195

Given:

```
public class X {
```

```
static int i;  
  
int j;  
  
public static void main(String[] args) {  
    X x1 = new X();  
    X x2 = new X();  
  
    x1.i = 3;  
    x1.j = 4;  
    x2.i = 5;  
    x2.j = 6;  
  
    System.out.println(  
        x1.i + " "+  
        x1.j + " "+  
        x2.i + " "+  
        x2.j);  
    }  
}
```

What is the result?

- A. 3 4 5 6
- B. 3 4 3 6
- C. 5 4 5 6
- D. 3 6 4 6

Real 155

Oracle 1z0-803 Exam

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 196

Which statement is true about the default constructor of a top-level class?

- A. It can take arguments.
- B. It has private access modifier in its declaration.
- C. It can be overloaded.
- D. The default constructor of a subclass always invokes the no-argument constructor of its superclass.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation: In both Java and C#, a "default constructor" refers to a nullary constructor that is automatically generated by the compiler if no constructors have been defined for the class. The default constructor is also empty, meaning that it does nothing. A programmer-defined constructor that takes no parameters is also called a default constructor.

QUESTION 197

Given the code fragment?

```
public class Test {  
  
    public static void main(String[] args) {  
  
        Test t = new Test();  
  
        int[] arr = new int[10];  
  
        arr = t.subArray(arr,0,2);  
  
    }  
}
```

// insert code here

```
}
```

Which method can be inserted at line // insert code here to enable the code to compile?

Real 156

Oracle 1z0-803 Exam

- A.

```
public int[] subArray(int[] src, int start, int end) { return src;
}
```
- B.

```
public int subArray(int src, int start, int end) {
return src;
}
```
- C.

```
public int[] subArray(int src, int start, int end) { return src;
}
```
- D.

```
public int subArray(int[] src, int start, int end) { return src;
}
```

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 198

Given:

```
public class TestField {

int x;

int y;

public void doStuff(int x, int y) {

this.x = x;

y =this.y;

}
```



```
public void display() {  
    System.out.print(x + " " + y + " : ");  
}  
  
public static void main(String[] args) {  
    TestField m1 = new TestField();  
    m1.x = 100;  
    m1.y = 200;  
  
    Real 157  
    Oracle 1z0-803 Exam  
    TestField m2 = new TestField();  
  
    m2.doStuff(m1.x, m1.y);  
  
    m1.display();  
    m2.display();  
}  
}
```

What is the result?

- A. 100 200 : 100 200
- B. 100 0 : 100 0 :
- C. 100 200 : 100 0 :
- D. 100 0 : 100 200 :

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 199

Given:

```
package p1;

public class Test {

    static double dvalue;

    static Test ref;

    public static void main(String[] args) {

        System.out.println(ref);

        System.out.println(dvalue);

    }

}
```

What is the result?

Real 158

Oracle 1z0-803 Exam

- A. p1.Test.class
0.0
- B. <the summary address referenced by ref>
0.000000
- C. Null
0.0
- D. Compilation fails
- E. A NullPointerException is thrown at runtime

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation: null

0.0

QUESTION 200

Given:

```
public class Natural {  
  
    private int i;  
  
    void disp() {  
  
        while (i <= 5) {  
  
            for (int i=1; i <=5;) {  
  
                System.out.print(i + " ");  
  
                i++;  
  
            }  
  
            i++;  
  
        }  
  
    }  
  
    public static void main(String[] args) {  
  
        new Natural().disp();  
  
    }  
  
}
```

Real 159

Oracle 1z0-803 Exam

What is the result?

A. Prints 1 2 3 4 5 once

- B. Prints 1 3 5 once
- C. Prints 1 2 3 4 5 five times
- D. Prints 1 2 3 4 5 six times
- E. Compilation fails

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation: 1 2 3 4 5 1 2 3 4 5 1 2 3 4 5 1 2 3 4 5 1 2 3 4 5 1 2 3 4 5

QUESTION 201

Given:

```
public class Test {  
  
    static boolean bVar;  
  
    public static void main(String[] args) {  
  
        boolean bVar1 = true;  
  
        int count =8;  
  
        do {  
  
            System.out.println("Hello Java! " +count);  
  
            if (count >= 7) {  
  
                bVar1 = false;  
  
            }  
  
        } while (bVar != bVar1 && count > 4);  
  
        count -= 2;  
  
    }  
}
```

```
}
```

What is the result?

- A. Hello Java! 8
Real 160
Oracle 1z0-803 Exam
Hello Java! 6
Hello Java! 4
- B. Hello Java! 8
Hello Java! 6
- C. Hello Java! 8
- D. Compilation fails

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation: Hello Java! 8

QUESTION 202

Given the code fragment:

```
System.out.println(2 + 4 * 9 - 3); //Line 21
```

```
System.out.println((2 + 4) * 9 - 3); // Line 22
```

```
System.out.println(2 + (4 * 9) - 3); // Line 23
```

```
System.out.println(2 + 4 * (9 - 3)); // Line 24
```

```
System.out.println((2 + 4 * 9) - 3); // Line 25
```

Which line of codes prints the highest number?

- A. Line 21
- B. Line 22
- C. Line 23
- D. Line 24

E. Line 25

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation: The following is printed:

Real 161

Oracle 1z0-803 Exam

QUESTION 203

Given:

```
class Base {  
  
    public static void main(String[] args) {  
  
        System.out.println("Base " + args[2]);  
  
    }  
  
}  
  
public class Sub extends Base{  
  
    public static void main(String[] args) {  
  
        System.out.println("Overriden " + args[1]);  
  
    }  
  
}
```

And the commands:

```
javac Sub.java
```

```
java Sub 10 20 30
```

What is the result?

- A. Base 30
- B. Overridden 20
- C. Overridden 20
Base 30
- D. Base 30
Overridden 20

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 204

Given:

Real 162

Oracle 1z0-803 Exam

```
interface Pet { }
```

```
class Dog implements Pet { }
```

```
public class Beagle extends Dog{ }
```

Which three are valid?

- A. Pet a = new Dog();
- B. Pet b = new Pet();
- C. Dog f = new Pet();
- D. Dog d = new Beagle();
- E. Pet e = new Beagle();
- F. Beagle c = new Dog();

Correct Answer: ADE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Incorrect:

Not B, not C: Pet is abstract, cannot be instantiated. Not F: incompatible type. Required Beagle, found Dog.

QUESTION 205

Given the code fragment:

```
// insert code here
```

```
arr[0] = new int[3];
```

```
arr[0][0] = 1;
```

```
arr[0][1] = 2;
```

```
arr[0][2] = 3;
```

```
arr[1] = new int[4];
```

```
arr[1][0] = 10;
```

```
arr[1][1] = 20;
```

```
arr[1][2] = 30;
```

Real 163

Oracle 1z0-803 Exam

```
arr[1][3] = 40;
```

Which two statements, when inserted independently at line // insert code here, enable the code to compile?

- A. `int [] arr = null;`
- B. `int [] arr = new int [2];`
- C. `int [] arr = new int [2] [];`
- D. `int [] arr = new int [] [4];`
- E. `int [] arr = new int [2] [0];`
- F. `int [] arr = new int [0] [4];`

Correct Answer: CE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 206

Given:

```
public class Test {  
  
    public static void main(String[] args) {  
  
        int ax = 10, az = 30;  
  
        int aw = 1, ay = 1;  
  
        try {  
  
            aw = ax % 2;  
  
            ay = az / aw;  
  
        } catch (ArithmeticException e1) {  
  
            System.out.println("Invalid Divisor");  
  
        } catch (Exception e2) {  
  
            aw = 1;  
  
            System.out.println("Divisor Changed");  
  
        }  
  
        ay = az /aw; // Line 14  
  
        Real 164  
        Oracle 1z0-803 Exam  
        System.out.println("Succesful Division " + ay);  
  
    }  
  
}
```

What is the result?

- A. Invalid Divisor
Divisor Changed
Successful Division 30
- B. Invalid Divisor
Successful Division 30
- C. Invalid Divisor
Exception in thread "main" java.lang.ArithmeticException: / by zero at test.Teagle.main(Teagle.java:14)
- D. Invalid Divisor
Exception in thread "main" java.lang.ArithmeticException: / by zero at test.Teagle.main(Teagle.java:14)
Successful Division 1

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 207

Given the code fragment:

```
for (int ii = 0; ii < 3; ii++) {  
  
    int count = 0;  
  
    for (int jj = 3; jj > 0; jj--) {  
  
        if (ii == jj) {  
  
            ++count;  
  
            break;  
  
        }  
    }  
}
```

Real 165

Oracle 1z0-803 Exam

}

```
System.out.print(count);  
  
continue;  
  
}
```

What is the result?

- A. 011
- B. 012
- C. 123
- D. 000

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 208

Given the code fragment:

```
class Student {  
  
    int rollnumber;  
  
    String name;  
  
    List courses = new ArrayList();  
  
    // insert code here  
  
    public String toString() {  
  
        return rollnumber + " : " + name + " : " + courses;  
  
    }  
  
}
```

And,

```
public class Test {
```

Real 166

Oracle 1z0-803 Exam

```
public static void main(String[] args) {
```

```
List cs = new ArrayList();
```

```
cs.add("Java");
```

```
cs.add("C");
```

```
Student s = new Student(123,"Fred", cs);
```

```
System.out.println(s);
```

```
}
```

```
}
```

Which code fragment, when inserted at line // insert code here, enables class Test to print 123 :
Fred : [Java, C]?

- A.

```
private Student(int i, String name, List cs) {  
    /* initialization code goes here */  
}
```
- B.

```
public void Student(int i, String name, List cs) {  
    /* initialization code goes here */  
}
```
- C.

```
Student(int i, String name, List cs) {  
    /* initialization code goes here */  
}
```
- D.

```
Student(int i, String name, ArrayList cs) {  
    /* initialization code goes here */  
}
```

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Incorrect:

Not A: Student has private access line: Student s = new Student(123,"Fred", cs); Not D: Cannot be applied to given types. Line: Student s = new Student (123,"Fred", cs);

QUESTION 209

Given the code fragment:

Real 167

Oracle 1z0-803 Exam

```
public class ForTest {
```

```
    public static void main(String[] args) {
```

```
        int[] array = {1, 2, 3};
```

```
        for ( foo ) {
```

```
        }
```

```
    }
```

Which three code fragments, when replaced individually for foo, enables the program to compile?

- A. `int i : array`
- B. `int i = 0; i < 1;`
- C. `;;`
- D. `; i < 1; i++`
- E. `i = 0; i < 1;`

Correct Answer: ABC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 210

Given:

```
abstract class A1 {  
    public abstract void m1();  
    public void m2() { System.out.println("Green"); }  
}
```

```
abstract class A2 extends A1 {  
    public abstract void m3();  
    public void m1() { System.out.println("Cyan"); }  
    public void m2() { System.out.println("Blue"); }  
}
```

```
public class A3 extends A2 {
```

Real 168

Oracle 1z0-803 Exam

```
    public void m1() { System.out.println("Yellow"); }  
  
    public void m2() { System.out.println("Pink"); }  
  
    public void m3() { System.out.println("Red"); }  
  
    public static void main(String[] args) {  
  
        A2 tp = new A3();  
  
        tp.m1();  
  
        tp.m2();  
  
        tp.m3();  
  
    }
```

}

What is the result?

- A. Yellow
Pink
Red
- B. Cyan
Blue
Red
- C. Cyan
Green
Red
- D. Compilation Fails

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation: Yellow

Pink

Red

QUESTION 211

Which two statements correctly describe checked exception?

- A. These are exceptional conditions that a well-written application should anticipate and recover from.
- B. These are exceptional conditions that are external to the application, and that the application Real 169
Oracle 1z0-803 Exam
usually cannot anticipate or recover from.
- C. These are exceptional conditions that are internal to the application, and that the application usually cannot anticipate or recover from.
- D. Every class that is a subclass of RuntimeException and Error is categorized as checked exception.
- E. Every class that is a subclass of Exception, excluding RuntimeException and its subclasses, is categorized as checked exception.

Correct Answer: BD

Section: (none)

Explanation

Explanation/Reference:

Explanation: Checked exceptions:

* (B) represent invalid conditions in areas outside the immediate control of the program (invalid user input, database problems, network outages, absent files)

* are subclasses of Exception

It's somewhat confusing, but note as well that RuntimeException (unchecked) is itself a subclass of Exception (checked).

* a method is obliged to establish a policy for all checked exceptions thrown by its implementation (either pass the checked exception further up the stack, or handle it somehow)

Reference: Checked versus unchecked exceptions

QUESTION 212

Given:

```
public class ColorTest {  
  
    public static void main(String[] args) {  
  
        String[] colors = {"red", "blue", "green", "yellow", "maroon", "cyan"};  
  
        int count = 0;  
  
        for (String c : colors) {  
  
            if (count >= 4) {  
  
                break;  
  
            }  
  
            else {  
  
                continue;  
  
            }  
  
            Real 170  
            Oracle 1z0-803 Exam  
        }  
  
        if (c.length() >= 4) {  
  
            colors[count] = c.substring(0,3);  
  
        }  
    }  
}
```



```
}  
  
count++;  
  
}  
  
System.out.println(colors[count]);  
  
}  
  
}
```

What is the result?

- A. Yellow
- B. Maroon
- C. Compilation fails
- D. A `StringIndexOutOfBoundsException` is thrown at runtime.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation: The line, `if (c.length() >= 4) {`, is never reached. This causes a compilation error.

Note: The `continue` statement skips the current iteration of a `for`, `while`, or `do-while` loop. An unlabeled `break` statement terminates the innermost `switch`, `for`, `while`, or `do-while` statement, but a labeled `break` terminates an outer statement.

QUESTION 213

Given:

```
public class App {  
  
    // Insert code here  
  
    System.out.print("Welcome to the world of Java");  
  
}  
  
}
```

Real 171

Oracle 1z0-803 Exam

Which two code fragments, when inserted independently at line // Insert code here, enable the program to execute and print the welcome message on the screen?

- A. `static public void main (String [] args) {`
- B. `static void main (String [] args) {`
- C. `public static void Main (String [] args) {`
- D. `public static void main (String [] args) {`
- E. `public void main (String [] args) {`

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Incorrect:

Not B: No main class found.

Not C: Main method not found

not E: Main method is not static.

QUESTION 214

Given the code fragment:

```
public class Test {  
  
    public static void main(String[] args) {  
  
        boolean isChecked = false;  
  
        int array[] = {1,3,5,7,8,9};  
  
        int index = array.length;  
  
        while ( <code1> ) {  
  
            if (array[index-1] % 2 ==0) {  
  
                isChecked = true;  

```

```

}
<code2>
}
System.out.print(array[index] + ", " + isChecked));
}

Real 172
Oracle 1z0-803 Exam
}

```

Which set of changes enable the code to print 1, true?

- A. Replacing <code1> with index > 0 and replacing <code2> with index--;
- B. Replacing <code1> with index > 0 and replacing <code2> with --index;
- C. Replacing <code1> with index > 5 and replacing <code2> with --index ;
- D. Replacing <code1> with index and replacing <code2> with --index ;

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Note: Code in B (code2 is --index;). also works fine.

QUESTION 215

Given:

```

public class TestLoop {

    public static void main(String[] args) {

        int array[] = {0, 1, 2, 3, 4};

        int key = 3;

        for (int pos = 0; pos < array.length; ++pos) {

```

```
if (array[pos] == key) {  
    break;  
}  
}  
  
System.out.print("Found " + key + "at " + pos);  
  
}  
}
```

What is the result?

Real 173
Oracle 1z0-803 Exam

- A. Found 3 at 2
- B. Found 3 at 3
- C. Compilation fails
- D. An exception is thrown at runtime

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation: The following line does not compile:
System.out.print("Found " + key + "at " + pos);

The variable pos is undefined at this line, as its scope is only valid in the for loop. Any variables created inside of a loop are LOCAL TO THE LOOP.

QUESTION 216

Given:

```
public class MyClass {  
  
    public static void main(String[] args) {
```

```
String s = " Java Duke ";  
int len = s.trim().length();  
System.out.print(len);  
}  
}
```

What is the result?

- A. 8
- B. 9
- C. 11
- D. 10
- E. Compilation fails

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation: Java - String trim() Method

This method returns a copy of the string, with leading and trailing whitespace omitted.



<http://www.gratisexam.com/>