**ROLL NUMBER: 210701098** 

### Ex No: 5 TRANSFER LEARNING WITH CNN AND VISUALIZATION

#### AIM:

To build a convolutional neural network with transfer learning and perform visualization

#### **PROCEDURE:**

- 1. Download and load the dataset.
- 2. Perform analysis and preprocessing of the dataset.
- 3. Build a simple neural network model using Keras/TensorFlow.
- 4. Compile and fit the model.
- 5. Perform prediction with the test dataset.
- 6. Calculate performance metrics.

### **PROGRAM:**

import tensorflow as tf

```
from tensorflow.keras import datasets, layers, models
import matplotlib.pyplot as plt
(train_images, train_labels), (test_images, test_labels) = datasets.cifar10.load_data()
# Normalize pixel values to be between 0 and 1
train_images, test_images = train_images / 255.0, test_images / 255.0
model = models.Sequential()
model.add(layers.Conv2D(32, (3, 3), activation='relu', input_shape=(32, 32, 3)))
model.add(layers.MaxPooling2D((2, 2)))
model.add(layers.Conv2D(64, (3, 3), activation='relu'))
model.add(layers.MaxPooling2D((2, 2)))
model.add(layers.Conv2D(64, (3, 3), activation='relu'))
model.summary()
model.add(layers.Flatten())
model.add(layers.Dense(64, activation='relu'))
model.add(layers.Dense(10))
model.summary()
```

**ROLL NUMBER: 210701098** 

## **OUTPUT:**


Model: "sequential"

Layer (type)	Output Shape	Param #
conv2d (Conv2D)	(None, 30, 30, 32)	896
max_pooling2d (MaxPooling2D)	(None, 15, 15, 32)	0
conv2d_1 (Conv2D)	(None, 13, 13, 64)	18,496
max_pooling2d_1 (MaxPooling2D)	(None, 6, 6, 64)	0
conv2d_2 (Conv2D)	(None, 4, 4, 64)	36,928
flatten (Flatten)	(None, 1024)	0
dense (Dense)	(None, 64)	65,600
dense_1 (Dense)	(None, 10)	650

Total params: 122,570 (478.79 KB)

Trainable params: 122,570 (478.79 KB)

Non-trainable params: 0 (0.00 B)

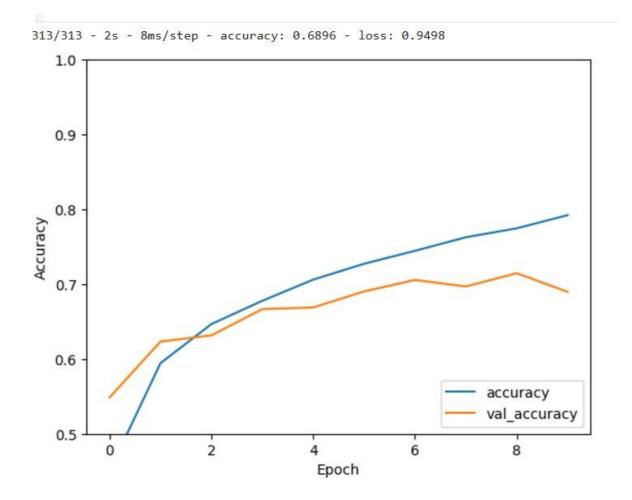

# **RESULT:**

Thus a convolutional neural network with transfer learning and perform visualization is built.