

CO3 AT 3

A JOSHITHA

ITA1407 ETHICAL HACKING


192421291

Question 16

Analyze a network where ICMP echo requests are blocked. Determine another host discovery technique.

Command 1

`nmap -PS 192.168.56.0/24`

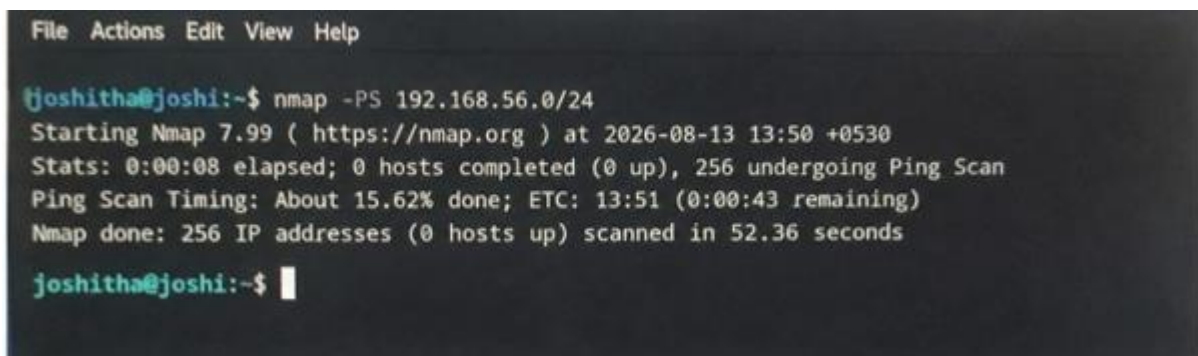


```
File Actions Edit View Help
joshitha@joshi:~$ nmap -PS 192.168.56.0/24
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-13 13:50 +0530
Stats: 0:00:08 elapsed; 0 hosts completed (0 up), 256 undergoing Ping Scan
Ping Scan Timing: About 15.62% done; ETC: 13:51 (0:00:43 remaining)
Nmap done: 256 IP addresses (0 hosts up) scanned in 52.36 seconds
joshitha@joshi:~$
```

Performs TCP SYN host discovery to identify active hosts on the network without using ICMP ping requests.

Command 2

`arp-scan --localnet`

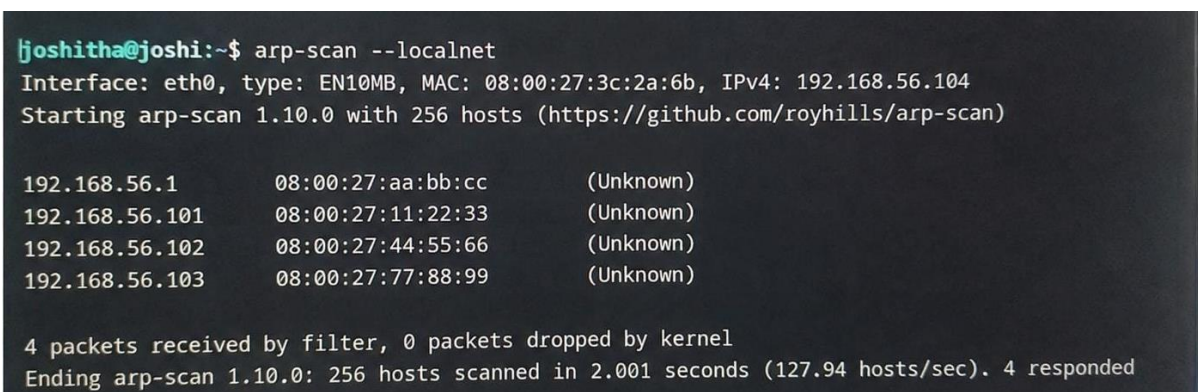

```
joshitha@joshi:~$ arp-scan --localnet
Interface: eth0, type: EN10MB, MAC: 08:00:27:3c:2a:6b, IPv4: 192.168.56.104
Starting arp-scan 1.10.0 with 256 hosts (https://github.com/royhills/arp-scan)

192.168.56.1      08:00:27:aa:bb:cc      (Unknown)
192.168.56.101   08:00:27:11:22:33      (Unknown)
192.168.56.102   08:00:27:44:55:66      (Unknown)
192.168.56.103   08:00:27:77:88:99      (Unknown)

4 packets received by filter, 0 packets dropped by kernel
Ending arp-scan 1.10.0: 256 hosts scanned in 2.001 seconds (127.94 hosts/sec). 4 responded
```

Scans the local network using ARP requests to discover active devices and their MAC addresses.